



Bridge Design Details 9.1 January 2023


The GIRDER LAYOUT sheet provides specific details for the girder layout, camber diagram and end diaphragm section. For more details regarding girders and end diaphragms, see *Bridge Design Details: 14 Prestressed Post-Tensioned Concrete*.

Plan

1. Orient the PLAN view the same as the GENERAL PLAN. Combine the GIRDER LAYOUT and TYPICAL SECTION sheets when possible.
2. Preferred scale $\frac{1}{8}" = 1'-0"$; on larger structures $1" = 20'$ may be used to show line diagram type GIRDER LAYOUT sheets. For widenings it may be necessary to use larger $\frac{1}{4}" = 1'-0"$ scale to show additional details.
3. Show North Arrow. If several GIRDER LAYOUT sheets are used, such as in long curved structure, show North Arrow on all layouts.
4. Do not show stations and layout information given on GENERAL PLAN or FOUNDATION PLAN.
5. Dimension girder spacing along centerline of support from station line to centerline of exterior girders, but do not show intermediate girder spacing unless it differs from the TYPICAL SECTION.
6. Show centerlines of girders. Designate girders with lettered callouts (A, B, C, etc.).
7. Show the bearing layout of the girders, do not repeat alignment layout information shown elsewhere. Lengths of precast girders are tabulated on precast girder standard detail sheets.
8. Show girders with solid lines (main view is of concrete section including girders, bent caps, end diaphragms, and hinges prior to deck placement). If edge of deck is shown use dashed line.
9. Show portion of transverse deck reinforcement on skewed bridges, see *Bridge Design Details: 8.8 Typical Transverse Reinforcement*. Not required for skews less than 20 degrees. Label epoxy-coated reinforcement.
10. Detail deck corners on skewed bridge abutments or hinges, see *Bridge Design Details: 8.9 Skewed Deck Corner Reinforcement*. Label epoxy-coated reinforcement.
11. Show intermediate diaphragms parallel to transverse deck reinforcement in concrete box girders. Intermediate diaphragms in concrete box girders are uncommon and locations should be specified by Designer, if required. For precast girders intermediate diaphragms should be normal, skewed, or staggered depending on girder length and skew.



12. Dimension locations of the field splices of precast or steel girders.
13. Dimension locations and spacing of lateral bracings, cross frames, and diaphragms along the layout line or centerline of structure.
14. Show locations of bearing stiffeners and spacing of intermediate stiffeners along the centerline of steel girders. Also show thickness and widths of bearing and intermediate stiffeners.
15. Show concrete box girder flare lengths and stem thickness at both ends of flares.
 - i. Sloped exterior girders must be flared to 18" web thickness at the end diaphragms over a minimum of 16-foot length. Designate girder width symbol (12) in inches.
16. Place "DETAIL A" for curved box girders on TYPICAL SECTION sheet. "DETAIL A" can also be placed on GIRDER LAYOUT sheet if there is not enough room on TYPICAL SECTION. For "DETAIL A", see *Bridge Design Memo 5.27*.

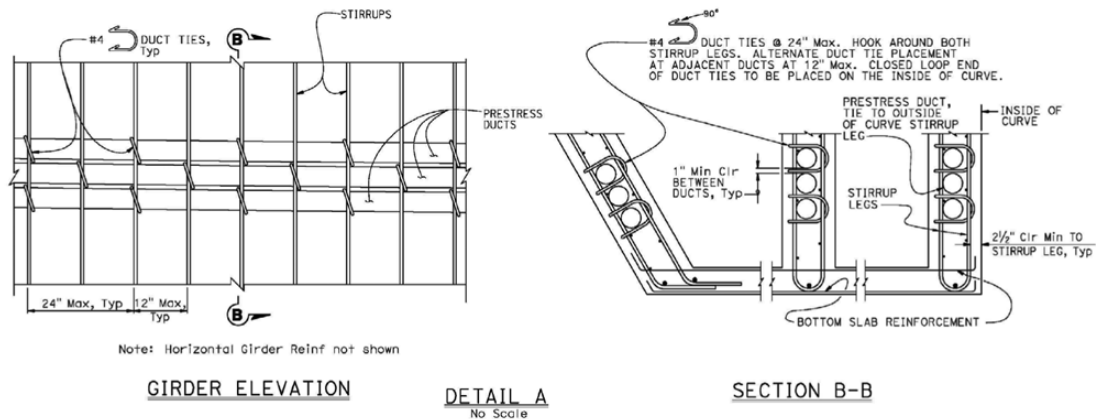

17. Show soffit slab flare locations.
18. Show vertical fillets (not required for skews less than 20 degrees).
19. Show utility opening and future utility locations and call out type per *Standard Plan: B7-10 Utility Openings Box Girder* or *Standard Plan: B6-10 Utility Openings T-Beam*.
20. Show location of soffit and deck access openings, see *Standard Plan: B14-5 Water Supply Line (Details) (Pipe Sizes Less Than 4")*. A minimum of one opening per span should be placed for bays that contain utilities for future access. Dimension from centerline of support.
21. Show deck drain locations and drainpipes. Additional DECK DRAINAGE sheet may be used to provide additional drainage details.
22. Show concrete box vents and call out *Standard Plan: B7-1 Box Girder Details (Detail V-1)*. Soffit vents should be placed per notes on standard details.
23. Do not show prestressing ducts or duct vents.



Longitudinal Section

1. Draw LONGITUDINAL SECTION not to scale. Typically place as a projection from the PLAN view. Exaggerate vertically to show details more clearly.
2. Show stirrup spacing. Combine callouts on similar girders to save space.
 - i. Provide stirrups at no more than 12-inch spacing for a minimum of 8 feet at supports and anchor ends.
3. Show soffit flare thickness and lengths. Show non-typical soffit and deck thickness along the bridge LONGITUDINAL SECTION (e.g., soffit thickness near in-span hinge seat).
4. Show cable path for prestressed bridges. Note control dimensions to center of gravity of prestressing force at centerline of supports and locate inflection points of cable path. Dimension high points, low points, points of inflection and cable ends from bottom of soffit. The cable path should be labeled as parabolic between points shown.
5. Add standard cell for PRESTRESSING NOTES.
 - i. Give type of strands (e.g., 270 ksi low relaxation strands).
 - ii. Specify P_{jack} (kips) and the number of girders for which it applies.
 - iii. Include all assumptions for prestress losses (assumed K and μ as well as assumed long term loss stress).
 - iv. Include the final force ratio allowed between any two girders.
 - v. Clearly identify the physical location of the point of no movement along the cable path in the LONGITUDINAL SECTION view. Indicate the force coefficient at the point of no movement \boxtimes in decimal form (rounded to nearest 0.001). Add symbol description to LEGEND.
 - vi. Specify either one end or two end stressing. If one end stressing, specify which end is to be the stressing end.
 - vii. Give concrete strength (ksi) at 28 days f'_c and at time of stressing f'_{ci} .



Camber Diagram

1. Draw proportionally correct, but not to scale.
2. Add note: "Does not include allowance for falsework settlement".
3. Use one diagram for all girders except unusual conditions.
4. Avoid negative camber values especially in conjunction with flat bridge profiles
5. Camber units shown in feet and to the nearest 0.01'.
 - i. Camber values for precast girders are tabulated on precast girder standard detail sheets.
 - ii. Camber values for steel girders should be detailed on GIRDER DETAIL sheets.

End Diaphragm Section

1. Use scale $\frac{1}{2}'' = 1'-0''$ minimum.
2. END DIAPHRAGM section should be taken from PLAN view on the GIRDER LAYOUT sheet. SECTION may be shown on TYPICAL SECTION sheet if space is limited.
3. Show width of diaphragm.
4. Show approximate prestress blockout location. For prestressing Grillage, reference *Standard Plan B8-5*. For reinforcement, see *Bridge Design Memo 5.26*
5. Label all reinforcement. Show limits of transverse deck reinforcement.
6. Show sealed joint ($MR \leq 2''$) or joint seal blockout ($MR > 2''$).
7. Only show lines that intersect the section cut plane (do not show lines and reinforcement that are beyond the section cut plane).
8. In some cases, multiple SECTIONS may be required. If multiple SECTIONS are required, then consider adding END DIAPHRAGM DETAILS sheet.