

FOR CONTRACT NO.: 02-390904

INFORMATION HANDOUT

MATERIALS INFORMATION

OPTIONAL DISPOSAL

ROUTE: 02-LAS-395-PM 50.7/51.5

INFORMATIONAL HANDOUT

**FOR CONSTRUCTION CONTRACT
IN LASSEN COUNTY
NEAR JOHNSTONVILLE
ON ROUTE 395**

**Project Location
LAS-395-R61.1/61.5**

**OPTIONAL DISPOSAL SITE
LAS-395-PM R60.3**

Note: The records from which this compilation was made may be inspected in the District Office at 1657 Riverside Drive Redding, CA 96001 or Contact the Disposal Site Coordinator, Linda Garner, (530) 225-3375, e-mail: Linda_s_garner@dot.ca.gov

Facts stated herein are as known to the State of California, Caltrans, and are to be verified by the Contractor as per Section 6-2 of the Standard Specifications.

Table of Contents

General Provisions.....2
Location Map.....3
Site Plan.....4

General Provisions

This disposal site is provided by Caltrans, at the option of the contractor, for the disposal of excess materials generated at the Johnstonville Project located on Route 395 in Lassen County, from post mile R61.1 to post mile 61.5.

Earthen material will be deposited into an existing disposal site area on an undeveloped lot located adjacent to the Susanville Maintenance Station located on Diane Drive. Usable grindings will be stockpiled at the direction of the Susanville Maintenance Superintendent.

This site is used by Caltrans Maintenance and other contractors for various purposes, without exclusive use to anyone. All safety precautions must be observed, as well as coordination with Maintenance.

Buried man-made objects may exist within areas designated for excavation.

- The State assumes no liability for damage to Contractor's equipment. No compensation will be made to the contractor for the handling of non-hazardous man-made objects.
- Hazardous materials will be the responsibility of the State upon notification to the State Engineer.

Existing facilities at the disposal site shall be protected from damage by the Contractor in accordance with Section 7-1.11 "Preservation of Property", of the standard specifications.

The only materials to be disposed at this site are:

- Earthen material, rock, aggregate from project.
- Asphalt concrete grindings and rubble from project, not exceeding 1.5 feet in any dimension.
- Portland Cement Concrete rubble from project site without reinforcing steel, not exceeding 1.5 feet in any dimension.

Placement of disposed material.


- All concrete material being disposed at the site shall be incorporated into earthen material.
- The outer 1.5 feet of finished slopes shall not contain any concrete material.
- Materials shall be compacted to the extent that it will firmly support rubber tired equipment, and there is no visible evidence of further consolidation of the material being compacted.
- The finished surface shall be uniformly graded.

Construction Storm Water Best Management Practices shall apply to this site. No additional compensation shall be made for placement of the erosion control measures at the disposal site.

Final Erosion Control on newly finished slopes shall be the same as those for the project. Seed, fertilizer, and fiber may be eliminated on surfaces less than 20 % slope.

Location Map

Disposal Site LAS-395-PM R60.3

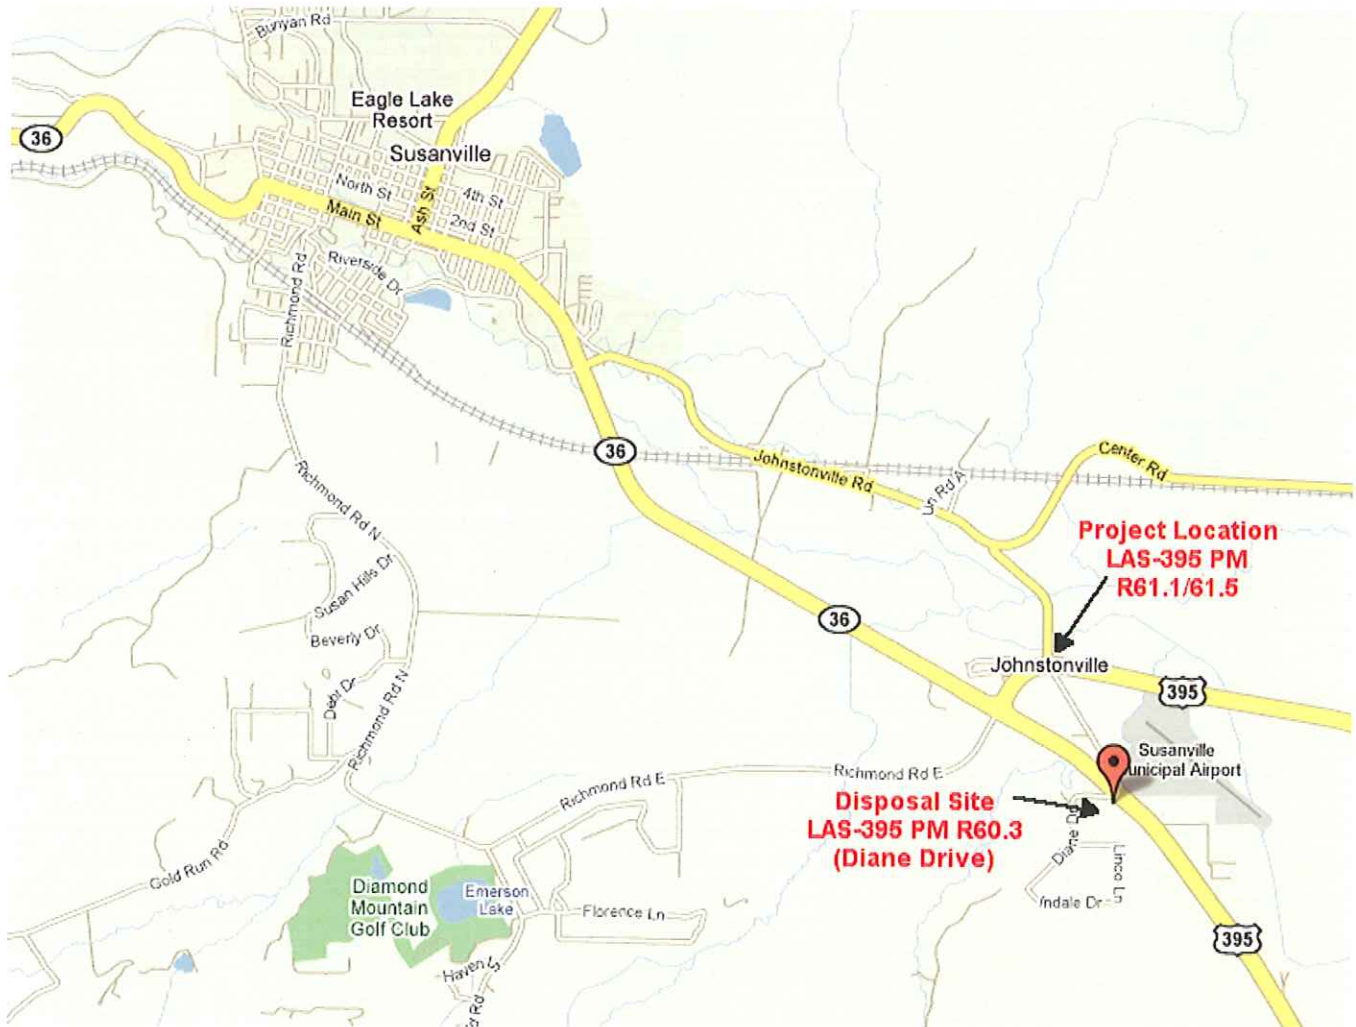

Site Plan

Approved Disposal Site LAS-395-PM R60.3

