

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	101	140

*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER


May 20, 2011  
PLANS APPROVAL DATE

*The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.*


To accompany plans dated 4-9-12

**NOTES:**

1. When necessary to place dike in front of face of guard railing, only Type C dike may be used. For dike details, see Standard Plan A87B.
2. For standard railing post embedment, see Standard Plans A77C3.
3. Guard railing delineation to be used where shown on the Project Plans.
4. When dike or curb is placed under guard railing, the maximum height of the dike or curb shall be 4". Mountable dike should not be used. For dike and curb details, see Standard Plans A87A and A87B.
5. For details of typical distance between the face of rail and hinge point, see Standard Plan A77C3.
6. For steel line posts, use 1/4" - 20 self-tapping screws in 0.22" diameter holes or 1/4" bolts in 3/32" diameter holes.

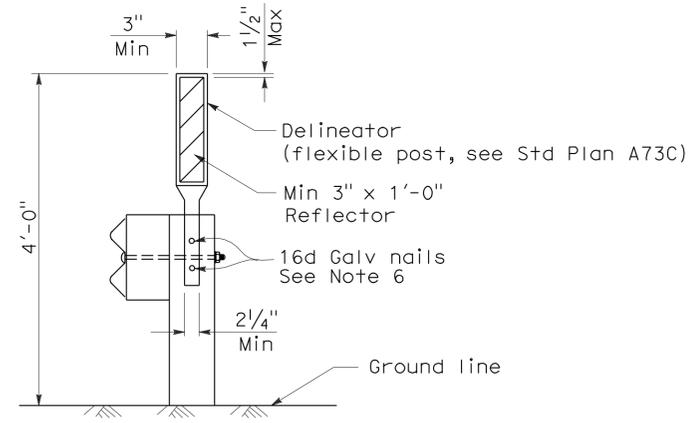

**GUARD RAILING DELINEATION**  
See Note 3

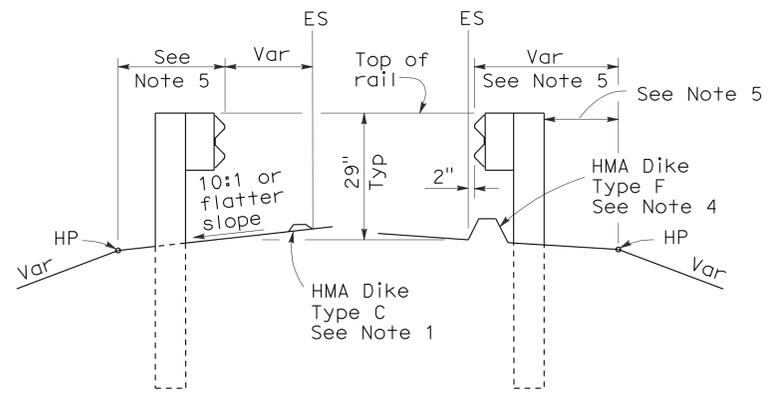

**DIKE POSITIONING**  
See Note 1

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**METAL BEAM GUARD RAILING  
TYPICAL RAILING DELINEATION  
AND DIKE POSITIONING DETAILS**

NO SCALE

RSP A77C4 DATED MAY 20, 2011 SUPERSEDES RSP A77C4 DATED JUNE 6, 2008 AND STANDARD PLAN A77C4 DATED MAY 1, 2006 - PAGE 47 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP A77C4**

2006 REVISED STANDARD PLAN RSP A77C4


DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	102	140

*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER


October 20, 2006  
PLANS APPROVAL DATE

*The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.*

To accompany plans dated 4-9-12

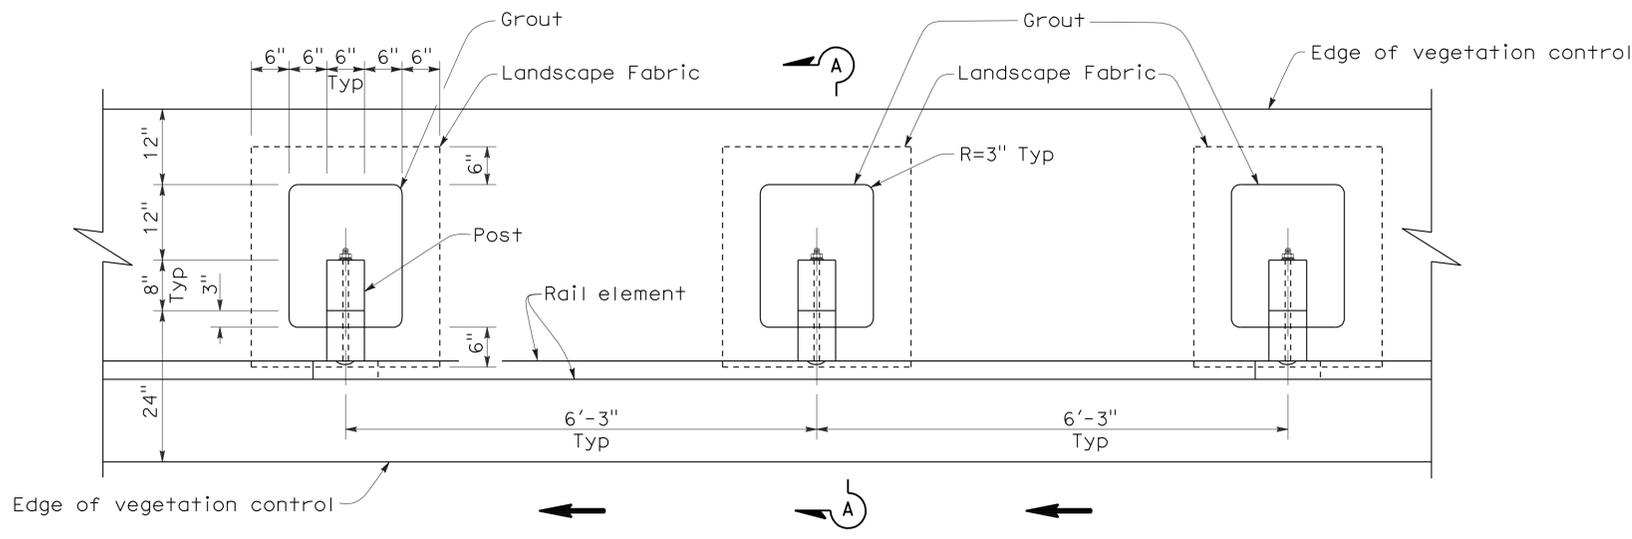

PLAN

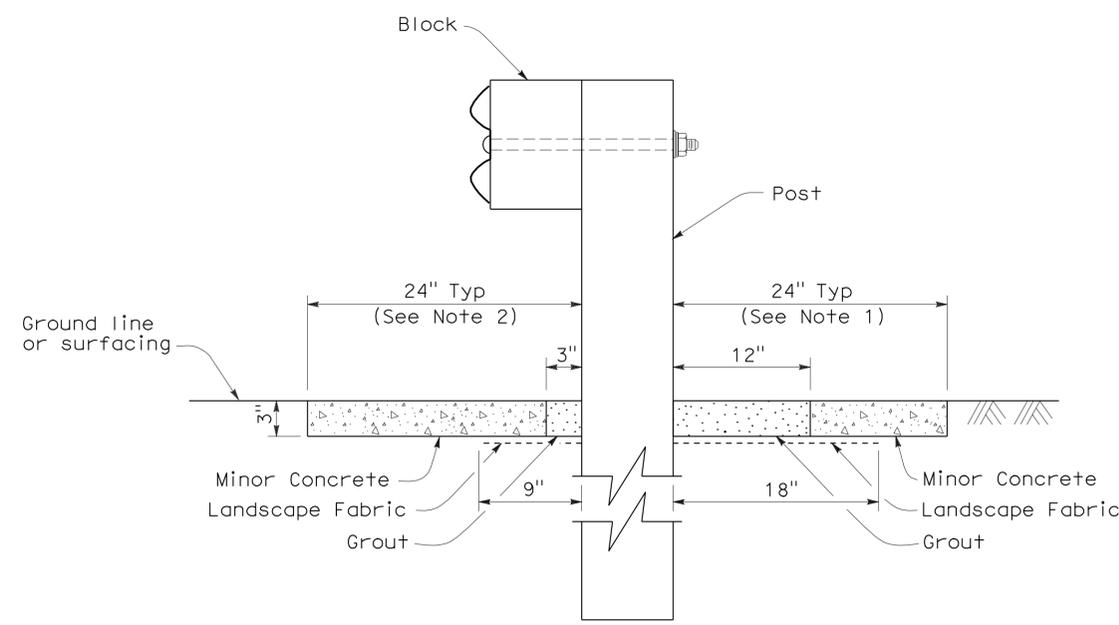

SECTION A-A

NOTES:

1. Where the distance between back of post and hinge point is less than 24", vegetation control to be constructed flush with the back edge of the post.
2. Where dike is constructed under railing, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 24" in front of the post, construct vegetation control to the edge of paved shoulder.
3. Direction of adjacent traffic indicated by ←.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**METAL BEAM GUARD RAILING  
TYPICAL VEGETATION CONTROL  
STANDARD RAILING SECTION**

NO SCALE

NSP A77C5 DATED OCTOBER 20, 2006 SUPPLEMENTS THE STANDARD PLANS BOOK DATED MAY 2006.

**NEW STANDARD PLAN NSP A77C5**

2006 NEW STANDARD PLAN NSP A77C5

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	103	140


Randell D. Hiatt  
REGISTERED CIVIL ENGINEER

October 20, 2006  
PLANS APPROVAL DATE

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

To accompany plans dated 4-9-12


REGISTERED PROFESSIONAL ENGINEER  
Randell D. Hiatt  
No. C50200  
Exp. 6-30-07  
CIVIL  
STATE OF CALIFORNIA

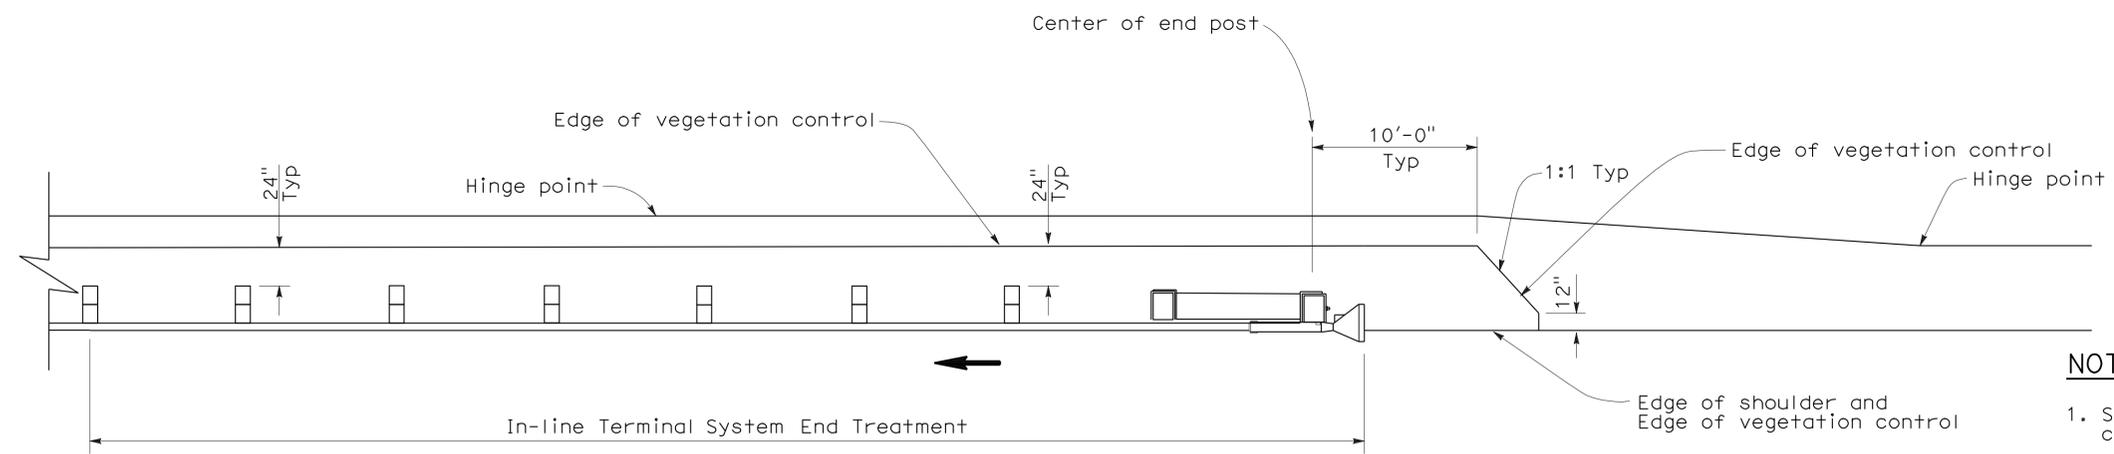


PLAN

**NOTES:**

1. See New Standard Plan NSP A77C5 for additional vegetation control details.
2. Where the distance between back of post and hinge point is less than 24", vegetation control to be constructed flush with the back edge of the post.
3. Where dike is constructed under railing, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 24" in front of the post, construct vegetation control to the edge of paved shoulder.
4. Direction of adjacent traffic indicated by ←.

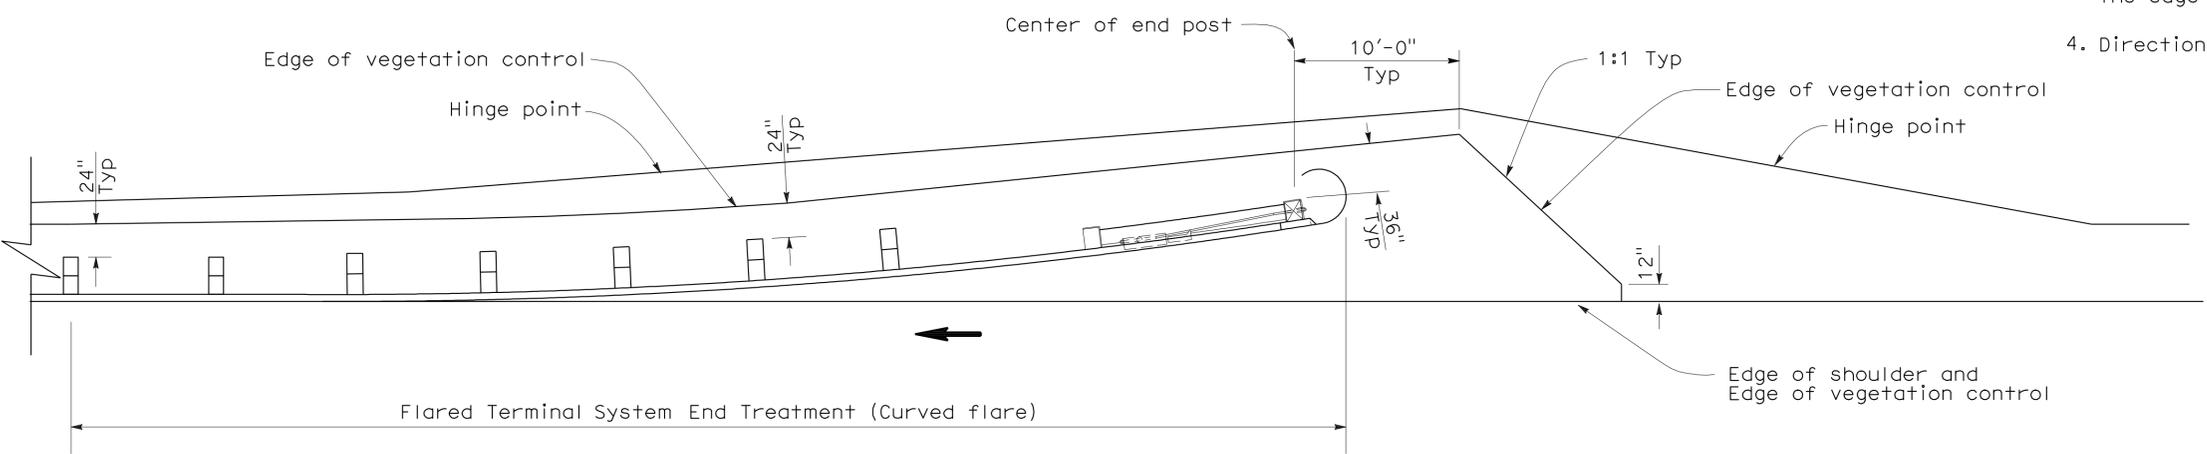

PLAN

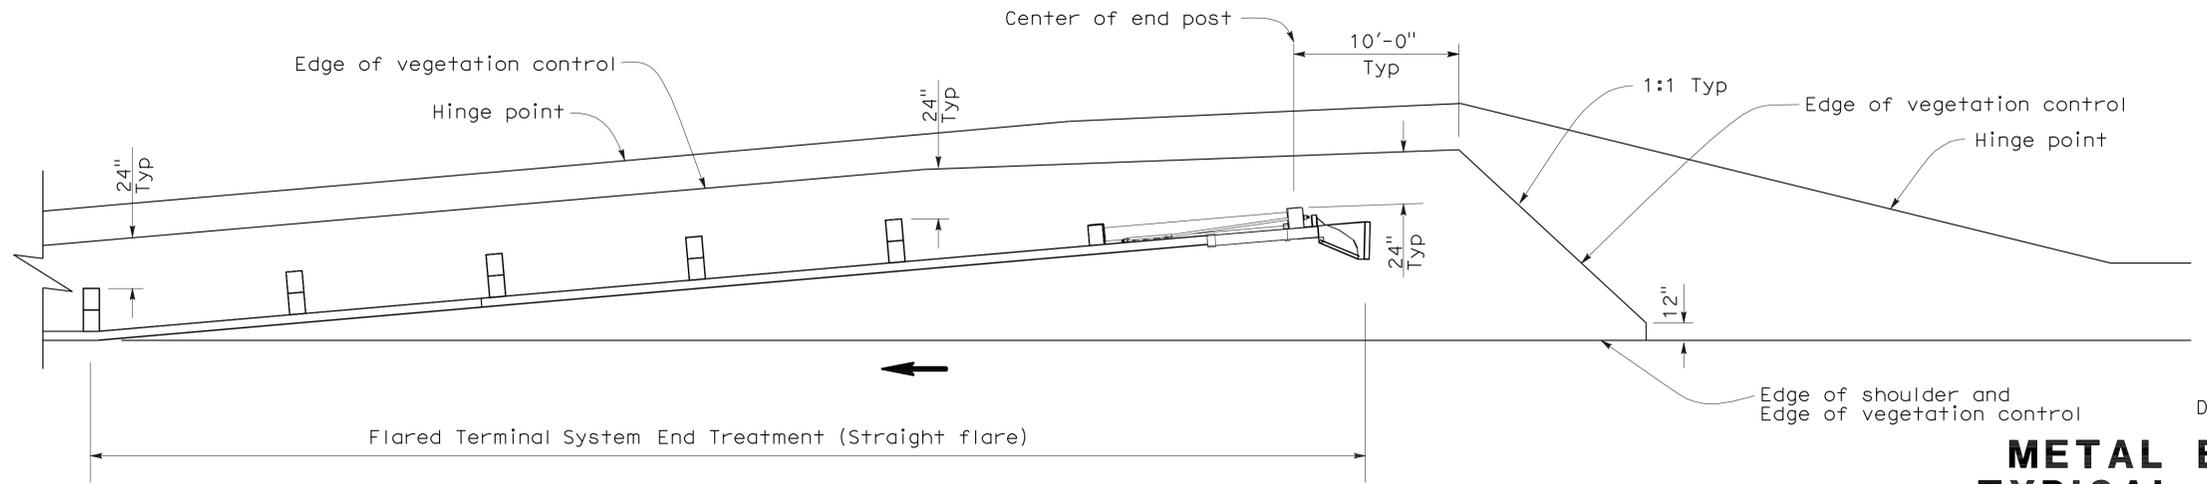

PLAN

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**METAL BEAM GUARD RAILING  
TYPICAL VEGETATION CONTROL  
FOR TERMINAL SYSTEM END TREATMENTS**

NO SCALE  
NSP A77C6 DATED OCTOBER 20, 2006 SUPPLEMENTS THE STANDARD  
PLANS BOOK DATED MAY 2006.

2006 NEW STANDARD PLAN NSP A77C6



DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	104	140

*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER


October 20, 2006  
PLANS APPROVAL DATE

*The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.*

To accompany plans dated 4-9-12

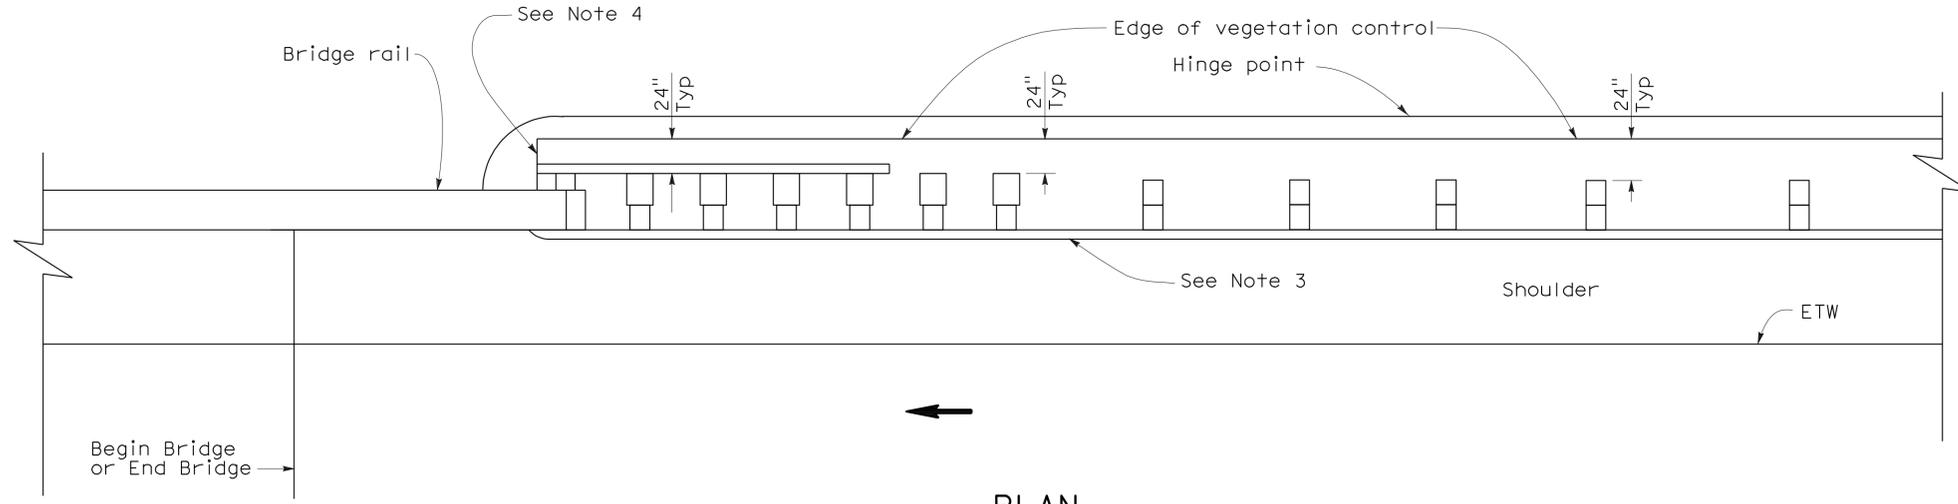


PLAN

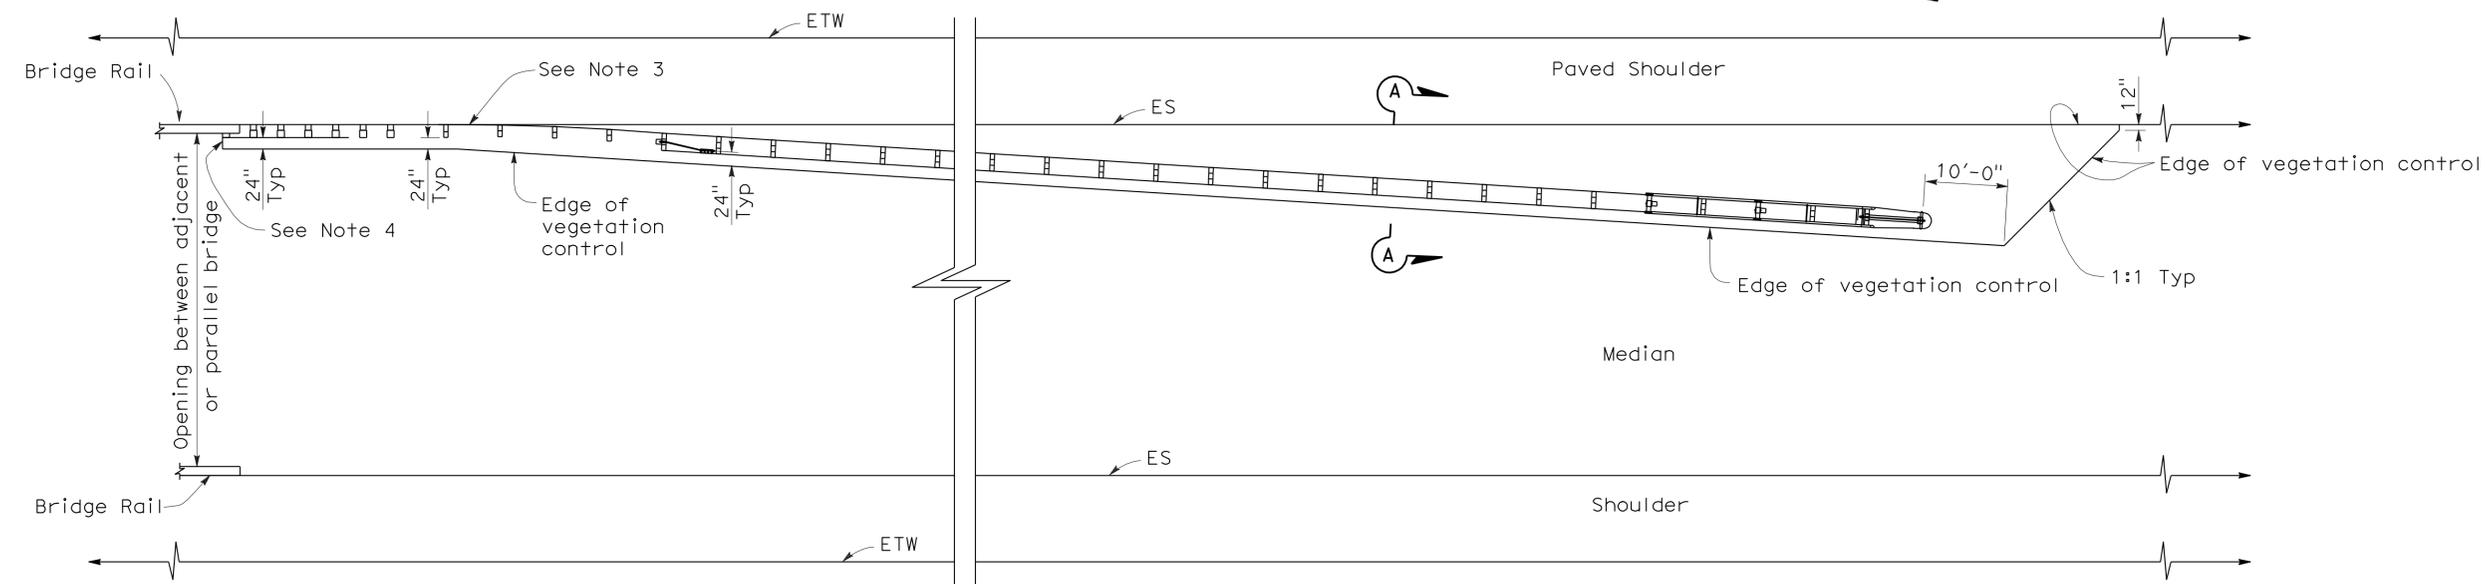

PLAN

NOTES:

1. See New Standard Plan NSP A77C5 for additional vegetation control details.
2. Where the distance between back of post and hinge point is less than 24", vegetation control to be constructed flush with the back edge of the post.
3. Where dike is constructed under railing, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 24" in front of the post, construct vegetation control to the edge of paved shoulder.
4. End vegetation control at end of backside rail element.
5. Direction of adjacent traffic indicated by ←.

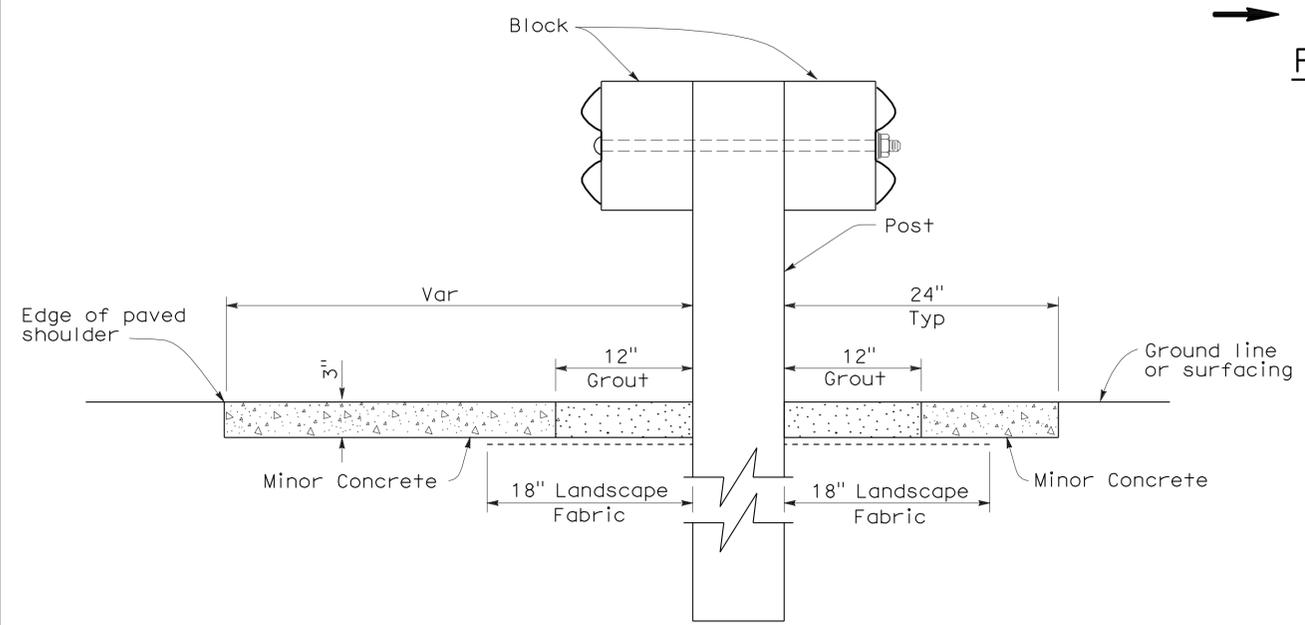

SECTION A-A

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**METAL BEAM GUARD RAILING  
TYPICAL VEGETATION CONTROL  
AT STRUCTURE APPROACH  
AND DEPARTURE**

NO SCALE  
NSP A77C7 DATED OCTOBER 20, 2006 SUPPLEMENTS THE STANDARD  
PLANS BOOK DATED MAY 2006.

2006 NEW STANDARD PLAN NSP A77C7

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	105	140

Randell D. Hiatt  
REGISTERED CIVIL ENGINEER


October 20, 2006  
PLANS APPROVAL DATE

*The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.*

To accompany plans dated 4-9-12

**NOTES:**

1. See New Standard Plan NSP A77C5 for additional vegetation control details.
2. Where the distance between back of post and hinge point is less than 24", vegetation control to be constructed flush with the back edge of the post.
3. Where dike is constructed under railing, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 24" in front of the post, construct vegetation control to the edge of paved shoulder.
4. Direction of adjacent traffic indicated by ←.

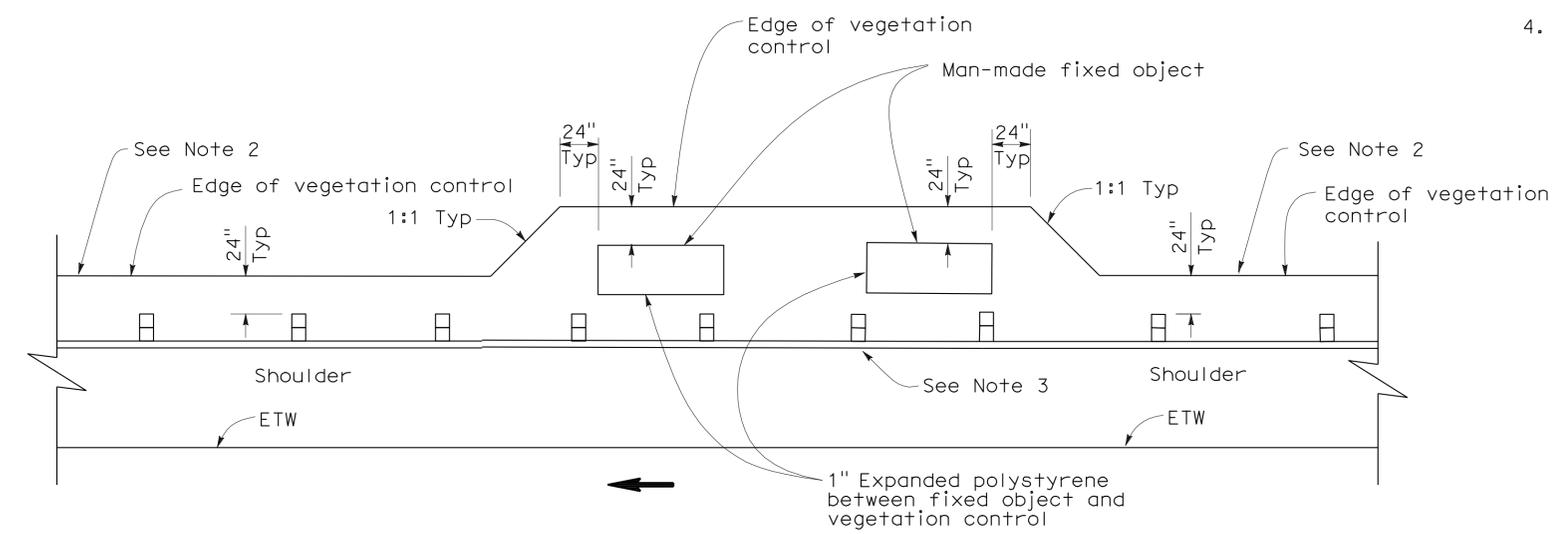

**PLAN**  
FIXED OBJECT(S) ON SHOULDER

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**METAL BEAM GUARD RAILING  
TYPICAL VEGETATION CONTROL  
AT FIXED OBJECT**

NO SCALE  
NSP A77C8 DATED OCTOBER 20, 2006 SUPPLEMENTS THE STANDARD  
PLANS BOOK DATED MAY 2006.

**NEW STANDARD PLAN NSP A77C8**

2006 NEW STANDARD PLAN NSP A77C8

**NOTES:**

1. See New Standard Plan NSP A77C5 for additional vegetation control details.
2. Where dike is constructed under railing, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 24" in front of the post, construct vegetation control to the edge of paved shoulder.
3. Direction of adjacent traffic indicated by ←.

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	106	140


*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER

October 20, 2006  
PLANS APPROVAL DATE


*Randell D. Hiatt*  
No. C50200  
Exp. 6-30-07  
CIVIL  
STATE OF CALIFORNIA

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.


To accompany plans dated 4-9-12

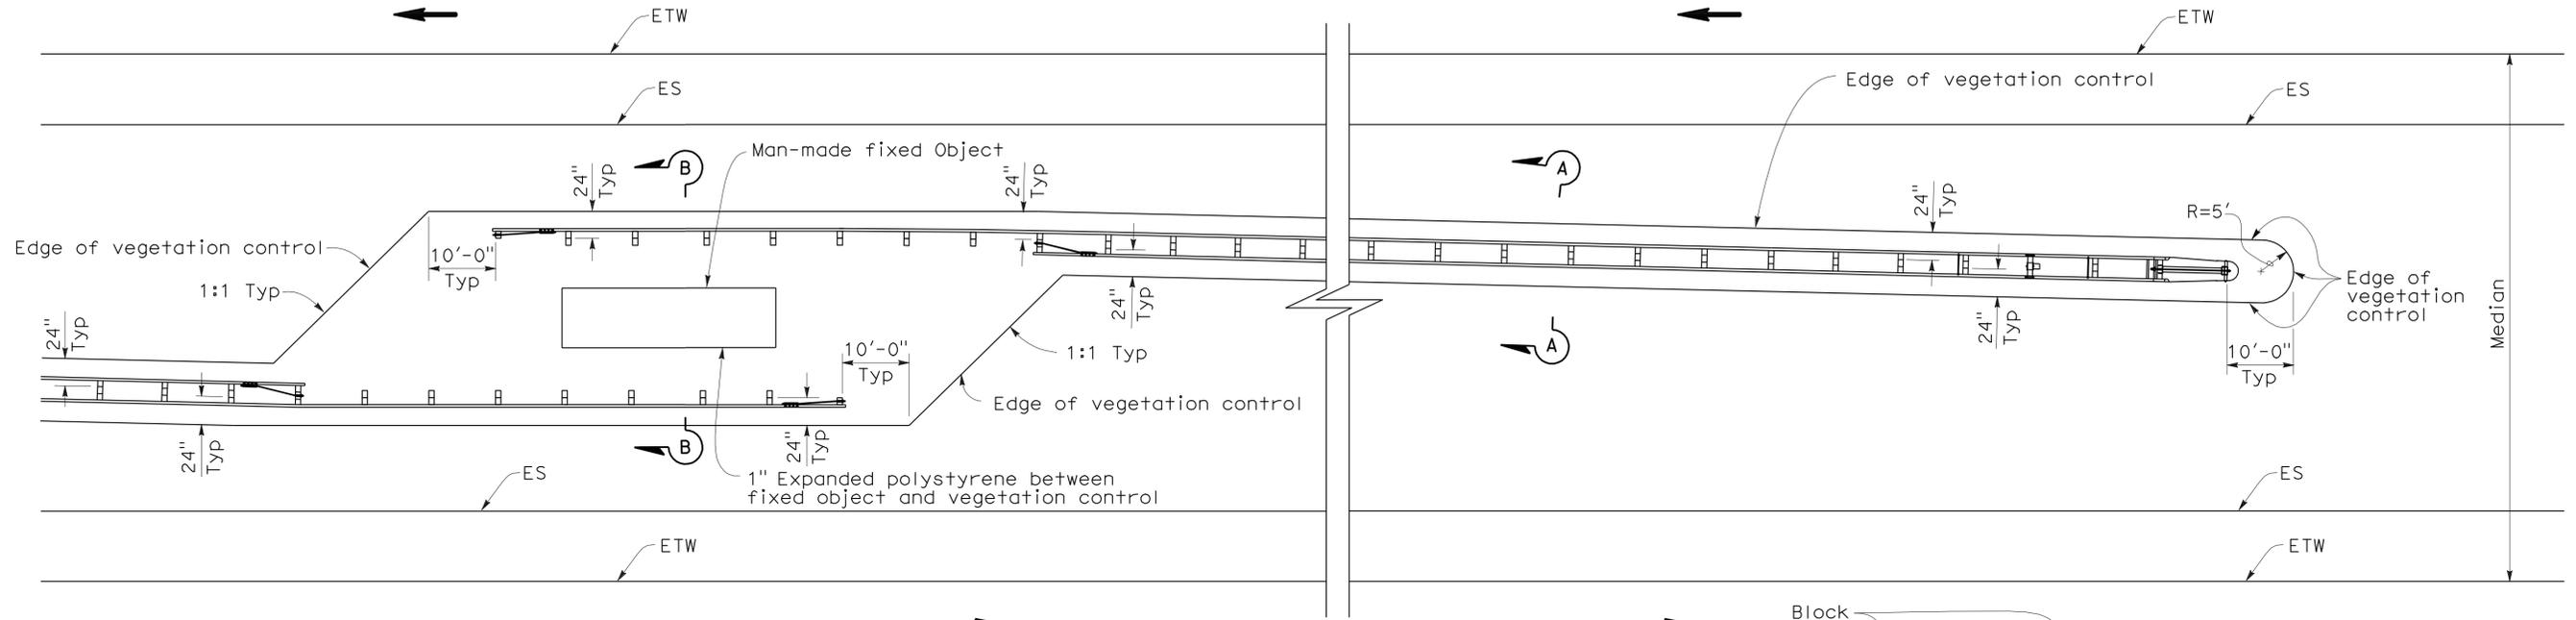

**PLAN**  
FIXED OBJECT(S) IN MEDIAN

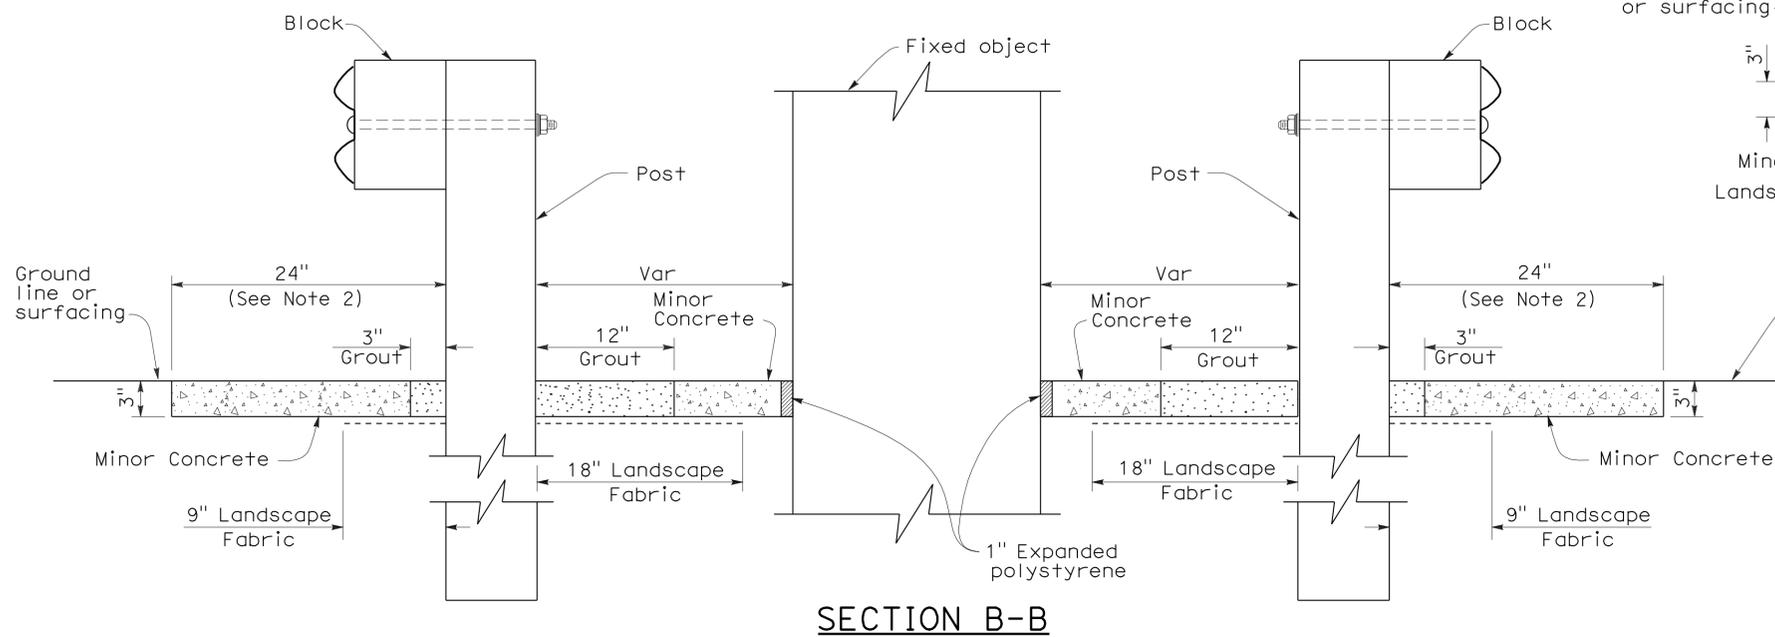

**SECTION B-B**

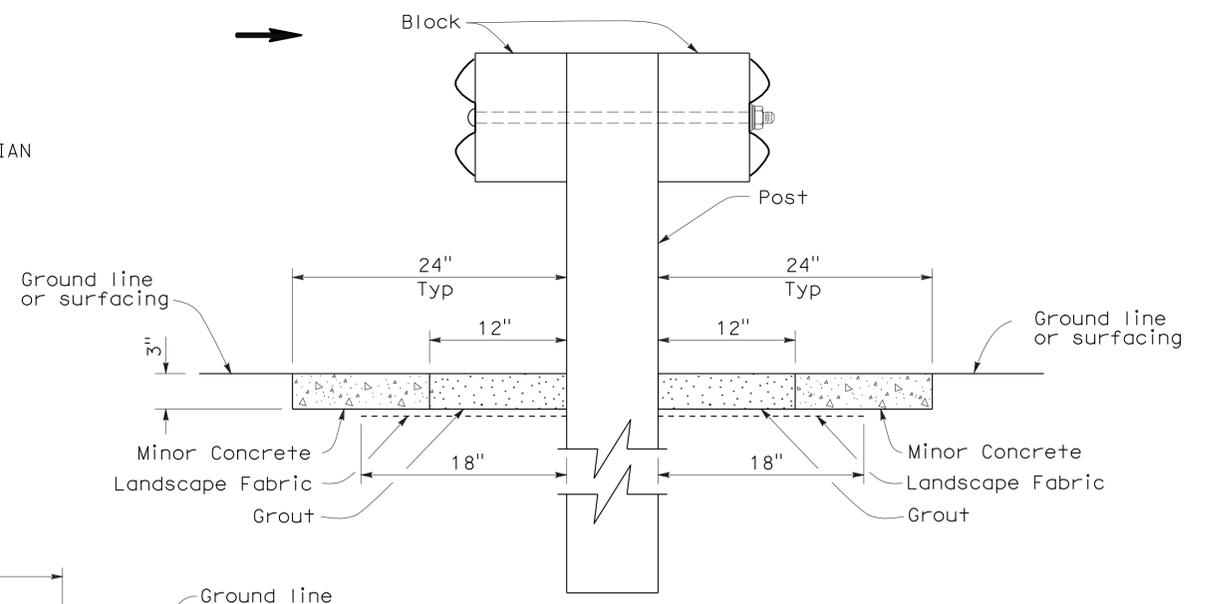

**SECTION A-A**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**METAL BEAM GUARD RAILING  
TYPICAL VEGETATION CONTROL  
AT FIXED OBJECT**

NO SCALE  
NSP A77C9 DATED OCTOBER 20, 2006 SUPPLEMENTS THE STANDARD  
PLANS BOOK DATED MAY 2006.

**NOTES:**

1. See New Standard Plan NSP A77C5 for additional vegetation control details.
2. Where dike is constructed under railing, construct vegetation control to back edge of dike. Where paved shoulder is constructed within 24" in front of the post, construct vegetation control to the edge of paved shoulder.
3. Direction of adjacent traffic indicated by ←.


DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	107	140

*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER


October 20, 2006  
PLANS APPROVAL DATE

*Randell D. Hiatt*  
No. C50200  
Exp. 6-30-07  
CIVIL  
STATE OF CALIFORNIA


The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

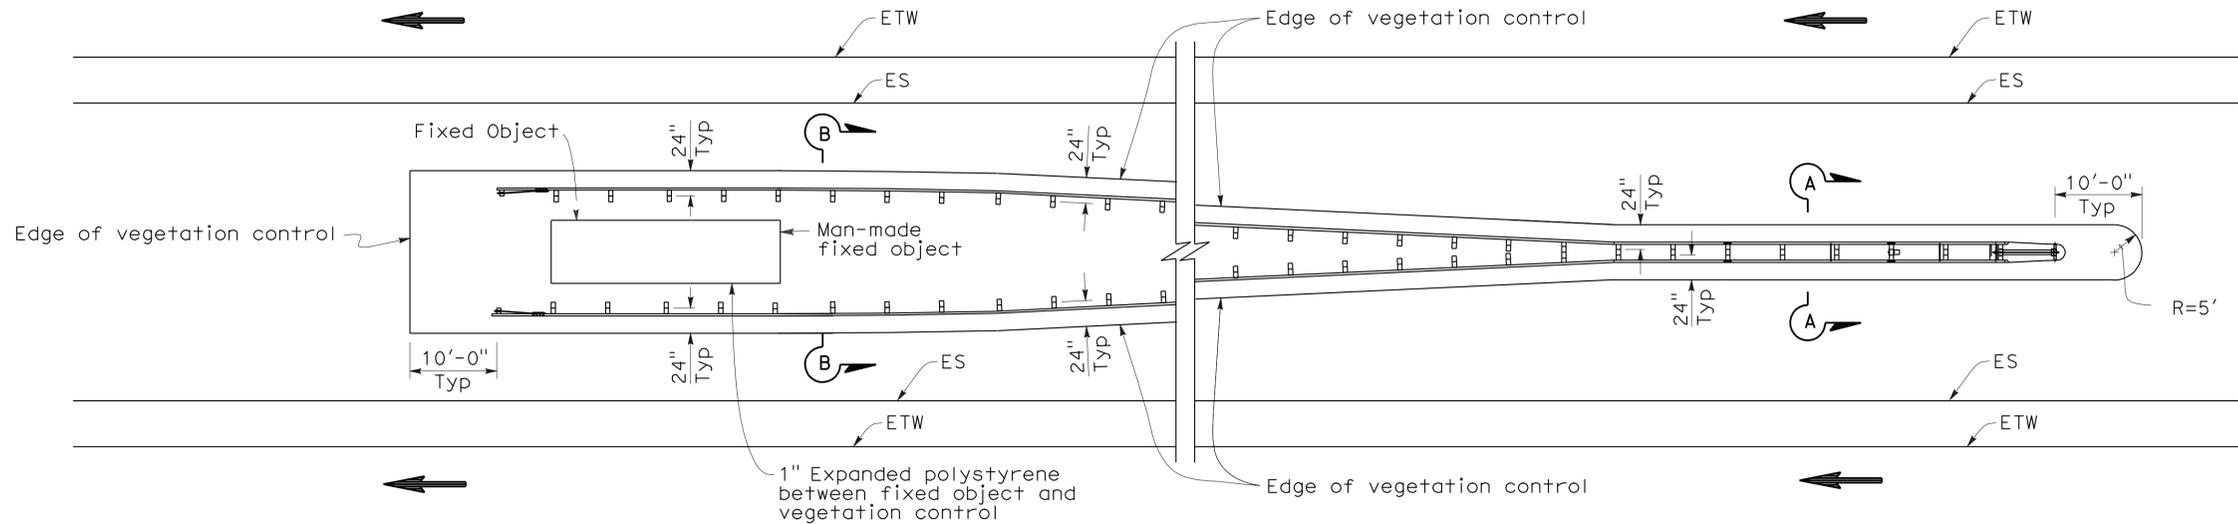

**PLAN**  
FIXED OBJECT(S) BETWEEN SEPARATE ROADBEDS  
(ONE-WAY TRAFFIC)

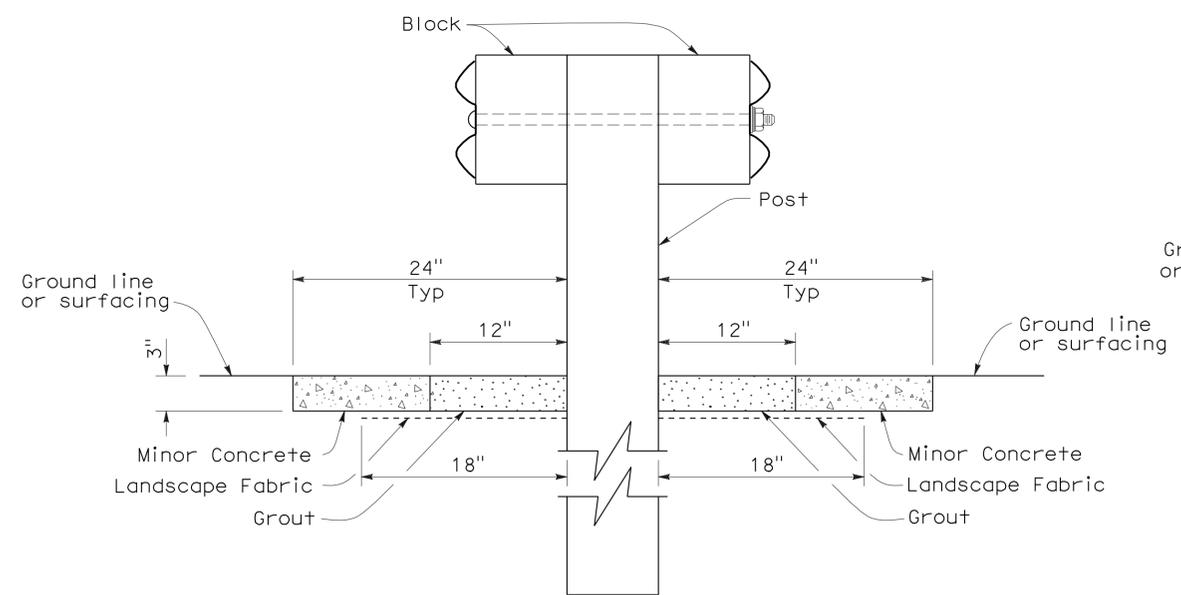

**SECTION A-A**

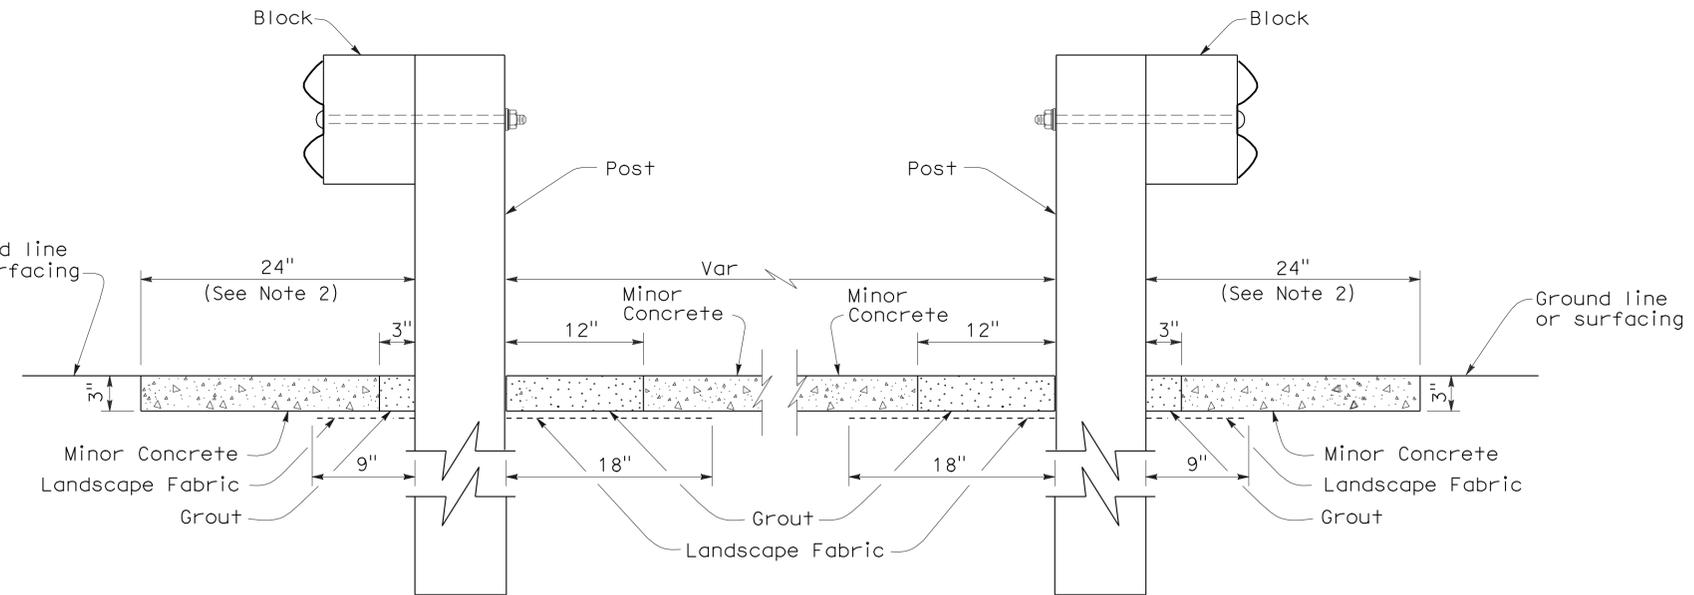

**SECTION B-B**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**METAL BEAM GUARD RAILING  
TYPICAL VEGETATION CONTROL  
AT FIXED OBJECT**

NO SCALE  
NSP A77C10 DATED OCTOBER 20, 2006 SUPPLEMENTS THE STANDARD  
PLANS BOOK DATED MAY 2006.

2006 NEW STANDARD PLAN NSP A77C10

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	108	140


Randell D. Hiatt  
REGISTERED CIVIL ENGINEER

May 20, 2011  
PLANS APPROVAL DATE


The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

REGISTERED PROFESSIONAL ENGINEER  
Randell D. Hiatt  
No. C50200  
Exp. 6-30-11  
CIVIL  
STATE OF CALIFORNIA


To accompany plans dated 4-9-12

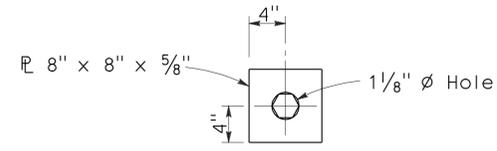


**DETAIL A**  
**CABLE CONNECTION**  
**END PLATE**

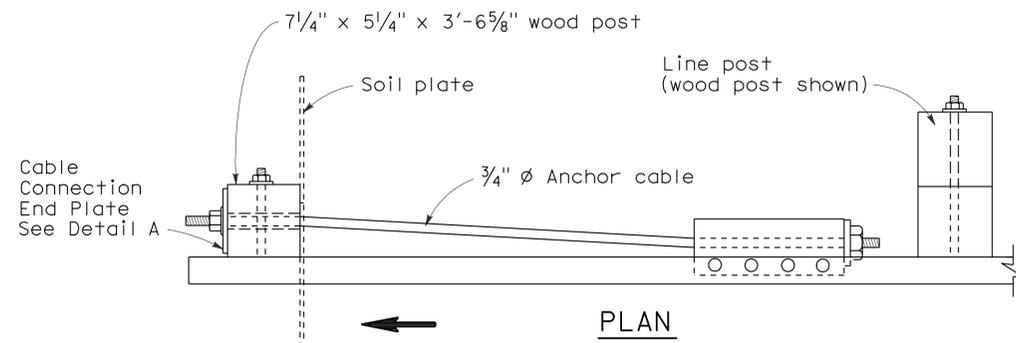

**PLAN**

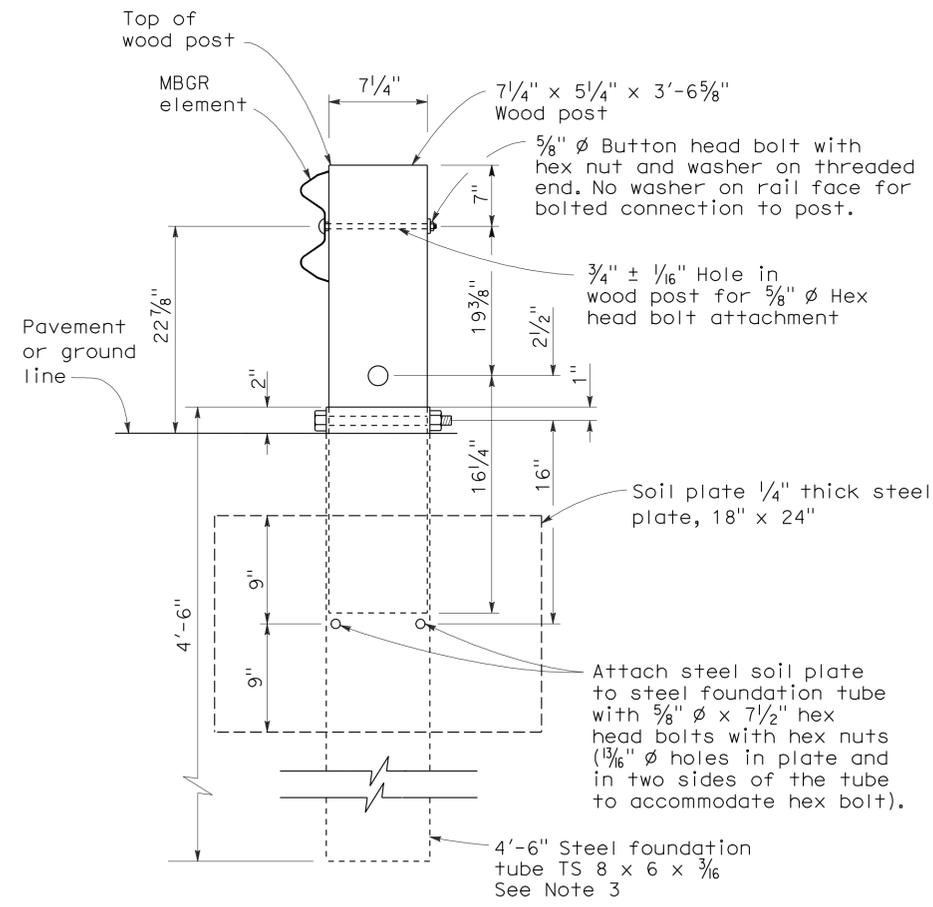

**SECTION A-A**

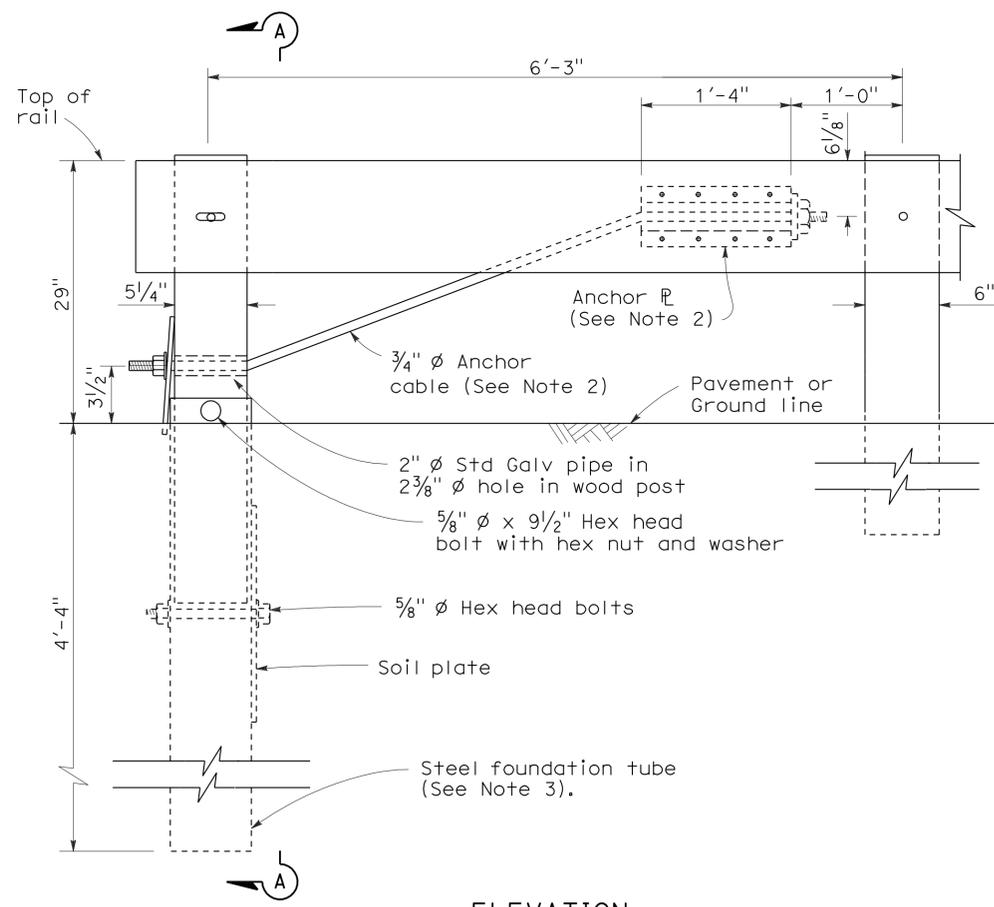

**ELEVATION**  
**END ANCHOR**  
**ASSEMBLY (TYPE SFT)**  
See Note 1

**NOTES:**

1. See the A77E, A77F and A77G series of Standard Plans for typical use of End Anchor Assembly (Type SFT).
2. For details of the anchor plate and 3/4" cable, see Standard Plan A77H3.
3. A 6'-0" length steel foundation tube, TS 8 x 6 x 3/16, without a soil plate, may be furnished and installed in place of the 4'-6" length steel foundation tube and soil plate shown. Minimum embedment of the 6'-0" length tube shall be 5'-9". A 5/8" diameter hex head bolt and nut shall be installed in the hole in the 6'-0" length tube to keep the wood post from dropping into the tube.
4. Direction of traffic indicated by →.
5. Install line post, steel foundation tube and soil plate in soil.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**METAL RAILING**  
**END ANCHOR ASSEMBLY**  
**(TYPE SFT)**

NO SCALE

RSP A77H1 DATED MAY 20, 2011 SUPERSEDES STANDARD PLAN A77H1  
DATED MAY 1, 2006 - PAGE 67 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP A77H1**

2006 REVISED STANDARD PLAN RSP A77H1

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	109	140


*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER

May 20, 2011  
PLANS APPROVAL DATE

*The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.*

REGISTERED PROFESSIONAL ENGINEER  
No. C50200  
Exp. 6-30-11  
CIVIL  
STATE OF CALIFORNIA


To accompany plans dated 4-9-12

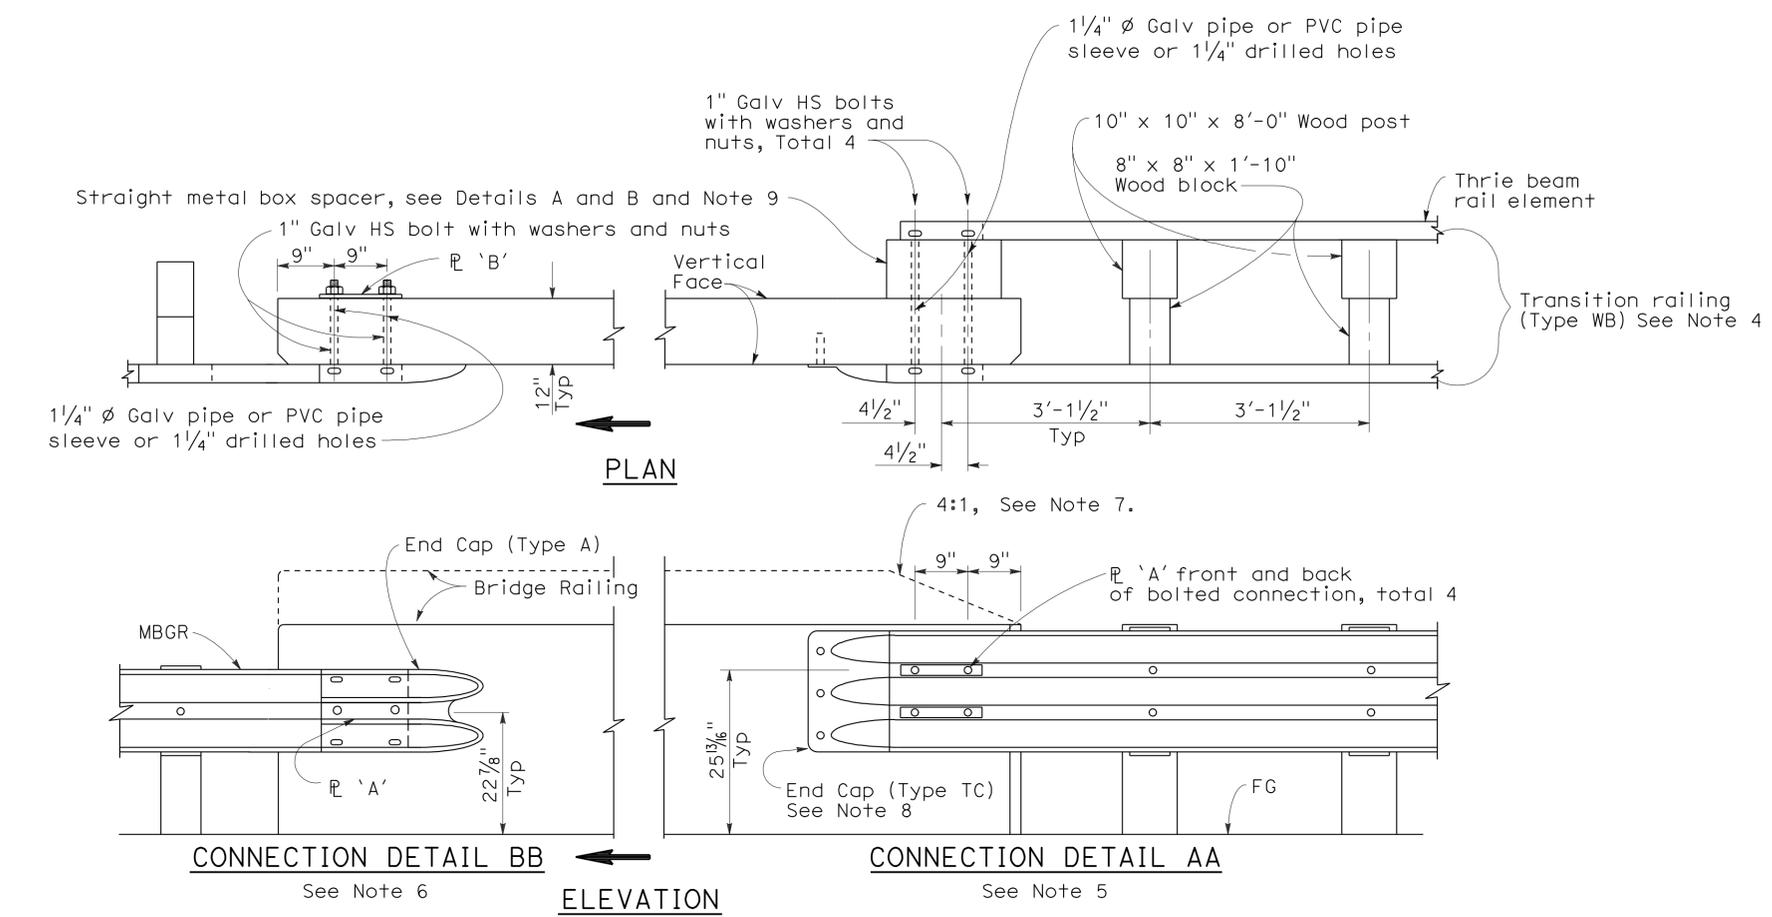

**NOTES:**

1. See Revised Standard Plan RSP A77J2 for additional connection details to bridges without sidewalks.
2. Additional details of posts, blocks and hardware are shown on Standard Plan A77B1, A77C1 and A77C2.
3. Direction of adjacent traffic indicated by  $\rightarrow$ .
4. For additional details of Transition Railing (Type WB), see Standard Plan A77J4. Transition Railing (Type WB) transitions the 12 gage w-beam standard railing section of guard railing to a heavier gage nested thrie beam railing section which is connected to the concrete bridge railing.
5. For typical use of Connection Detail AA, see Layout Types 12A and 12B on Revised Standard Plan RSP A77F1, Layout Types 12C and 12D on Standard Plan A77F2, and Layout Type 12E on Revised Standard Plan RSP A77F3.
6. For typical use of Connection Detail BB, see Layout Type 12D (structure departure railing connection) on Standard Plan A77F2 and Layout Type 12DD on Standard Plan A77F5.
7. Where the height of the bridge railing exceeds the height of the thrie beam railing by more than 1" at Connection Detail AA, taper the top of the end of the bridge railing at 4:1 to match the top elevation of the thrie beam rail.
8. For details of End Cap (Type TC), see Standard Plan A77J4.
9. See Standard Plan A77J4 for additional details regarding depth dimension for straight metal box spacer.

**GUARD RAILING CONNECTION TO BRIDGE RAILING WITHOUT SIDEWALK**

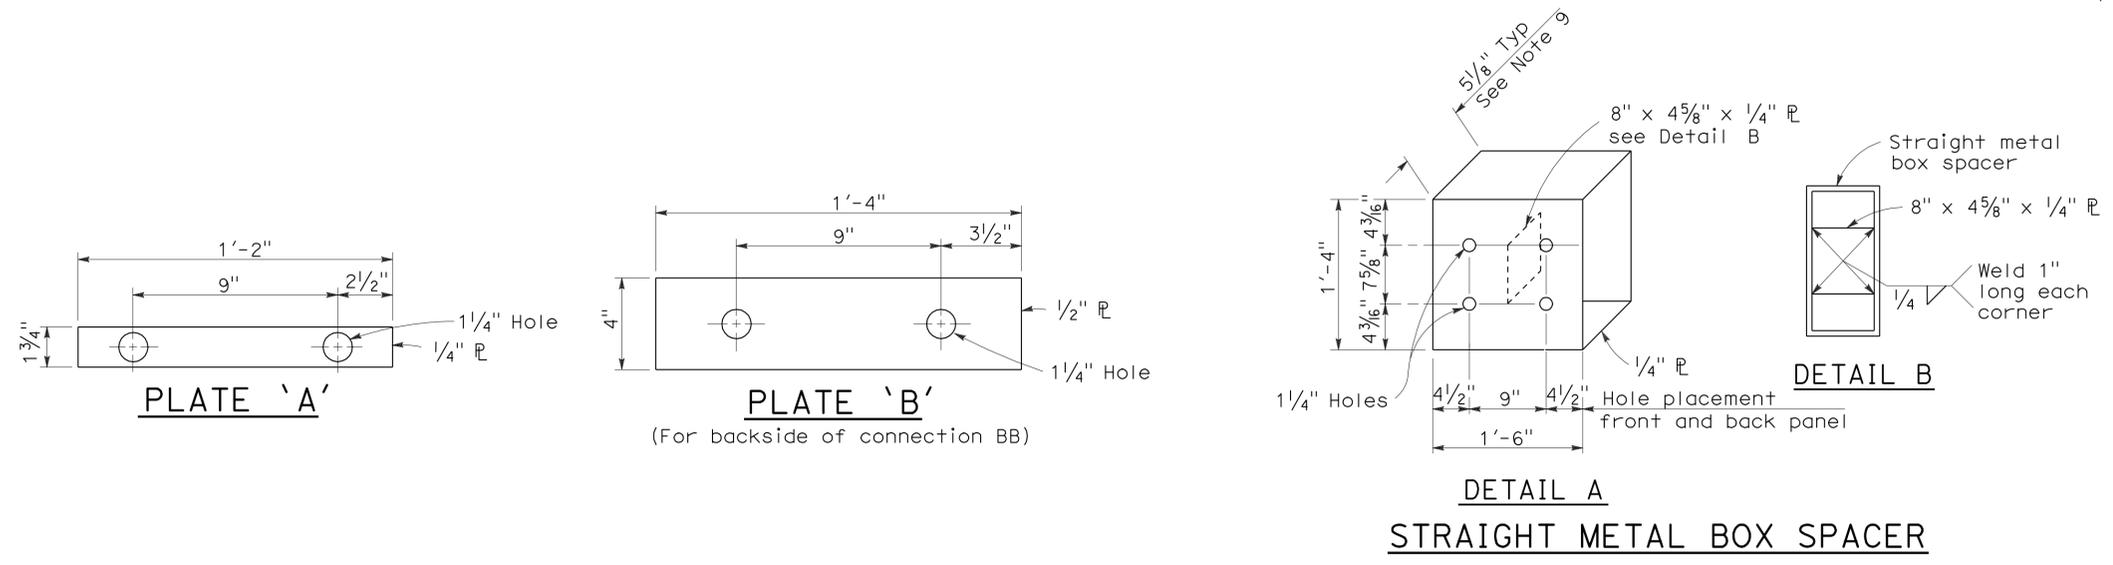

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**METAL BEAM GUARD RAILING CONNECTIONS TO BRIDGE RAILINGS WITHOUT SIDEWALKS DETAILS No.1**

NO SCALE

RSP A77J1 DATED MAY 20, 2011 SUPERSEDES RSP A77J1 DATED JUNE 6, 2008 AND STANDARD PLAN A77J1 DATED MAY 1, 2006 - PAGE 72 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP A77J1**

2006 REVISED STANDARD PLAN RSP A77J1

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1'	110	140



**Randell D. Hiatt**  
REGISTERED CIVIL ENGINEER

June 6, 2008  
PLANS APPROVAL DATE

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

REGISTERED PROFESSIONAL ENGINEER  
No. C50200  
Exp. 6-30-09  
CIVIL  
STATE OF CALIFORNIA




To accompany plans dated 4-9-12

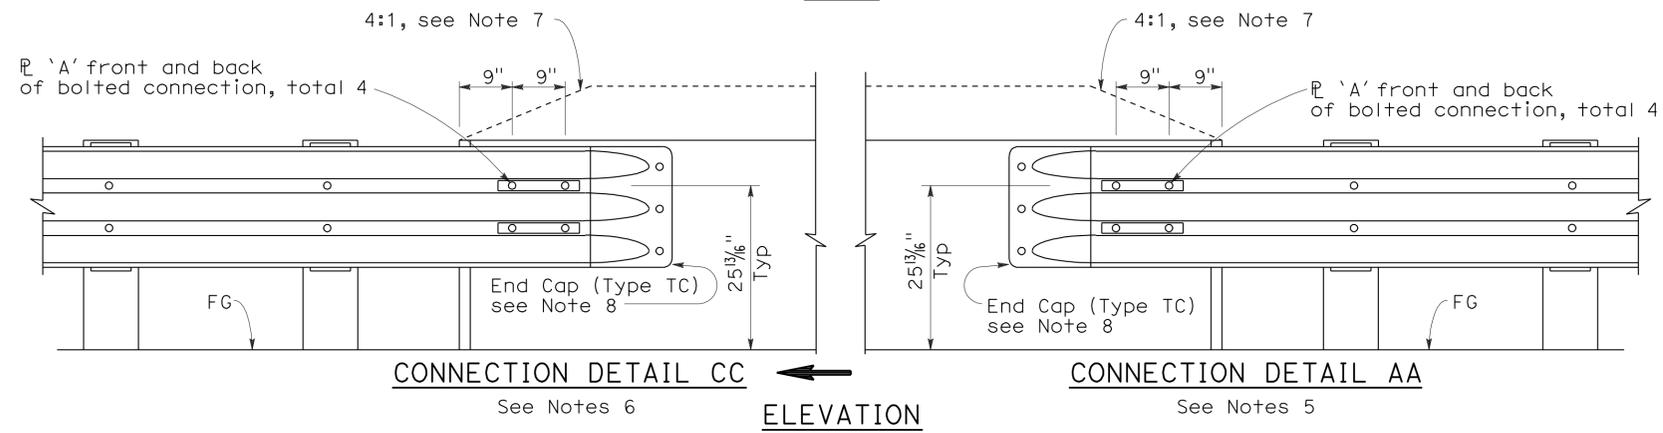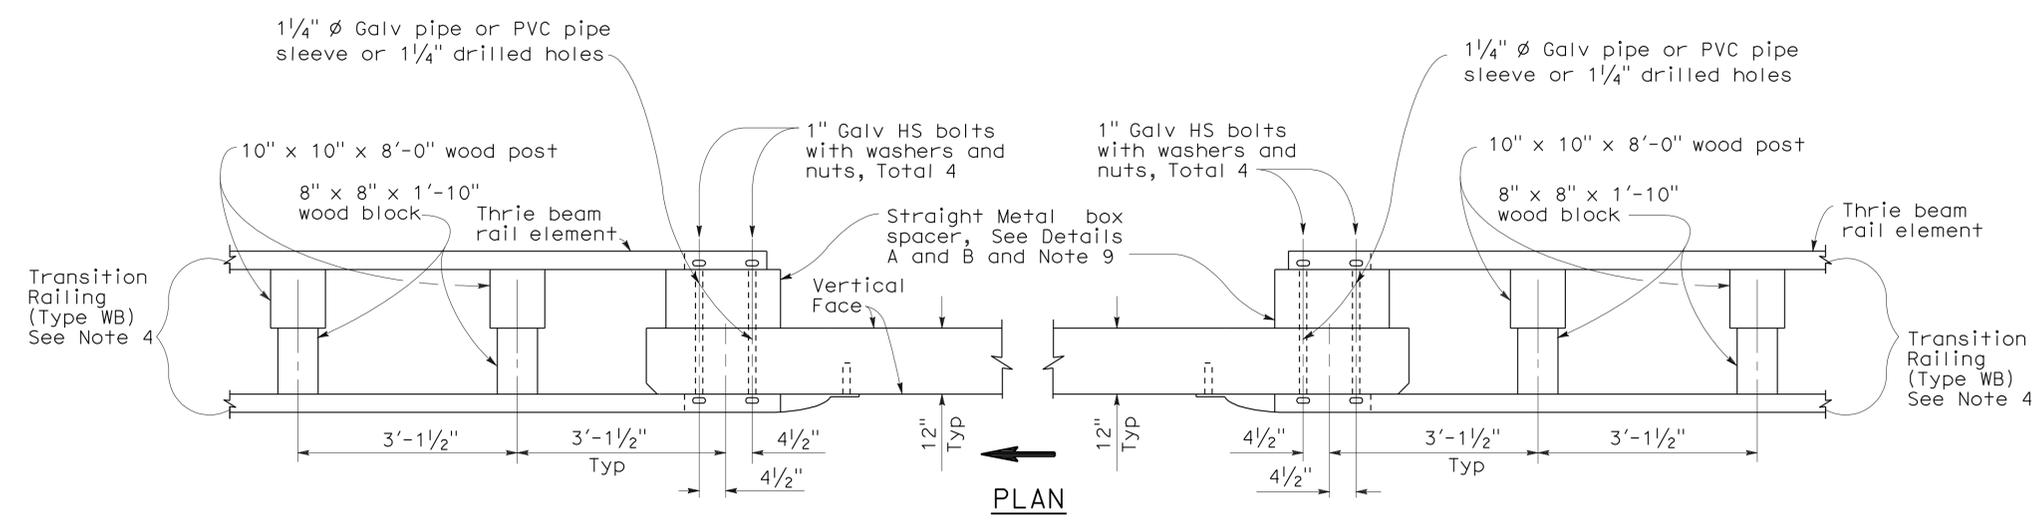

**GUARD RAILING CONNECTION TO BRIDGE RAILING WITHOUT SIDEWALK**

**NOTES:**

1. See Revised Standard Plan RSP A77J1 for additional connection details to bridges without sidewalks.
2. Additional details of posts, blocks and hardware are shown on Standard Plan A77B1, A77C1 and A77C2.
3. Direction of adjacent traffic indicated by →.
4. For additional details of Transition Railing (Type WB), see Standard Plan A77J4. Transition Railing (Type WB) transitions the 12 gage w-beam standard railing section of guard railing to a heavier gage nested thrie beam railing section which is connected to the concrete bridge railing.
5. For typical use of Connection Detail AA, see Layout Types 12A and 12B on Revised Standard Plan RSP A77F1, Layout Types 12C and 12D on Standard Plan A77F2, and Layout Type 12E on Revised Standard Plan RSP A77F3.
6. For typical use of Connection Detail CC, see Layout Types 12AA and 12BB on Standard Plan A77F4 and Layout Type 12CC on Standard Plan A77F5.
7. Where the height of the bridge railing exceeds the height of the thrie beam railing by more than 1" at Connection Detail AA and connection Detail CC, taper the top of the end of the bridge railing at 4:1 to match the top elevation of the thrie beam railing.
8. For details of End Cap (Type TC), see Standard Plans A77J4.
9. See Standard Plans A77J4 for additional details regarding depth dimension for straight metal box spacer.

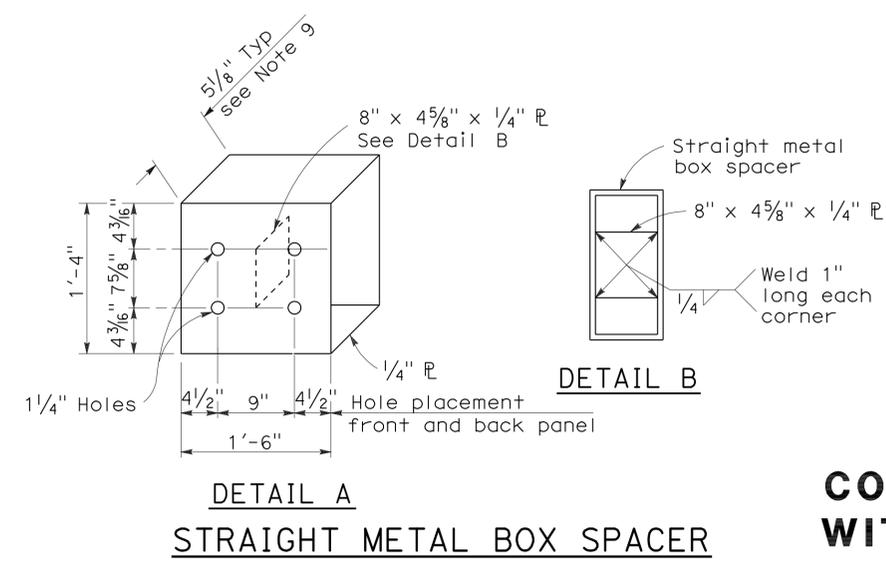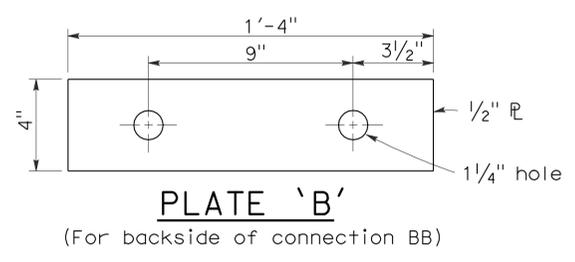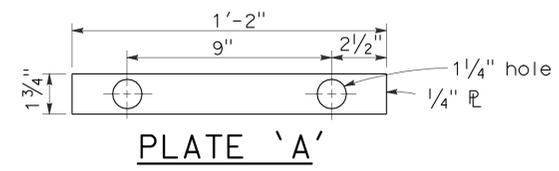

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**METAL BEAM GUARD RAILING CONNECTIONS TO BRIDGE RAILINGS WITHOUT SIDEWALKS DETAILS No.2**

NO SCALE  
RSP A77J2 DATED JUNE 6, 2008 SUPERSEDES STANDARD PLAN A77J2  
DATED MAY 1, 2006 - PAGE 73 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP A77J2**

2006 REVISED STANDARD PLAN RSP A77J2

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	111	140


Randell D. Hiatt  
REGISTERED CIVIL ENGINEER

May 20, 2011  
PLANS APPROVAL DATE

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

REGISTERED PROFESSIONAL ENGINEER  
Randell D. Hiatt  
No. C50200  
Exp. 6-30-11  
CIVIL  
STATE OF CALIFORNIA




To accompany plans dated 4-9-12

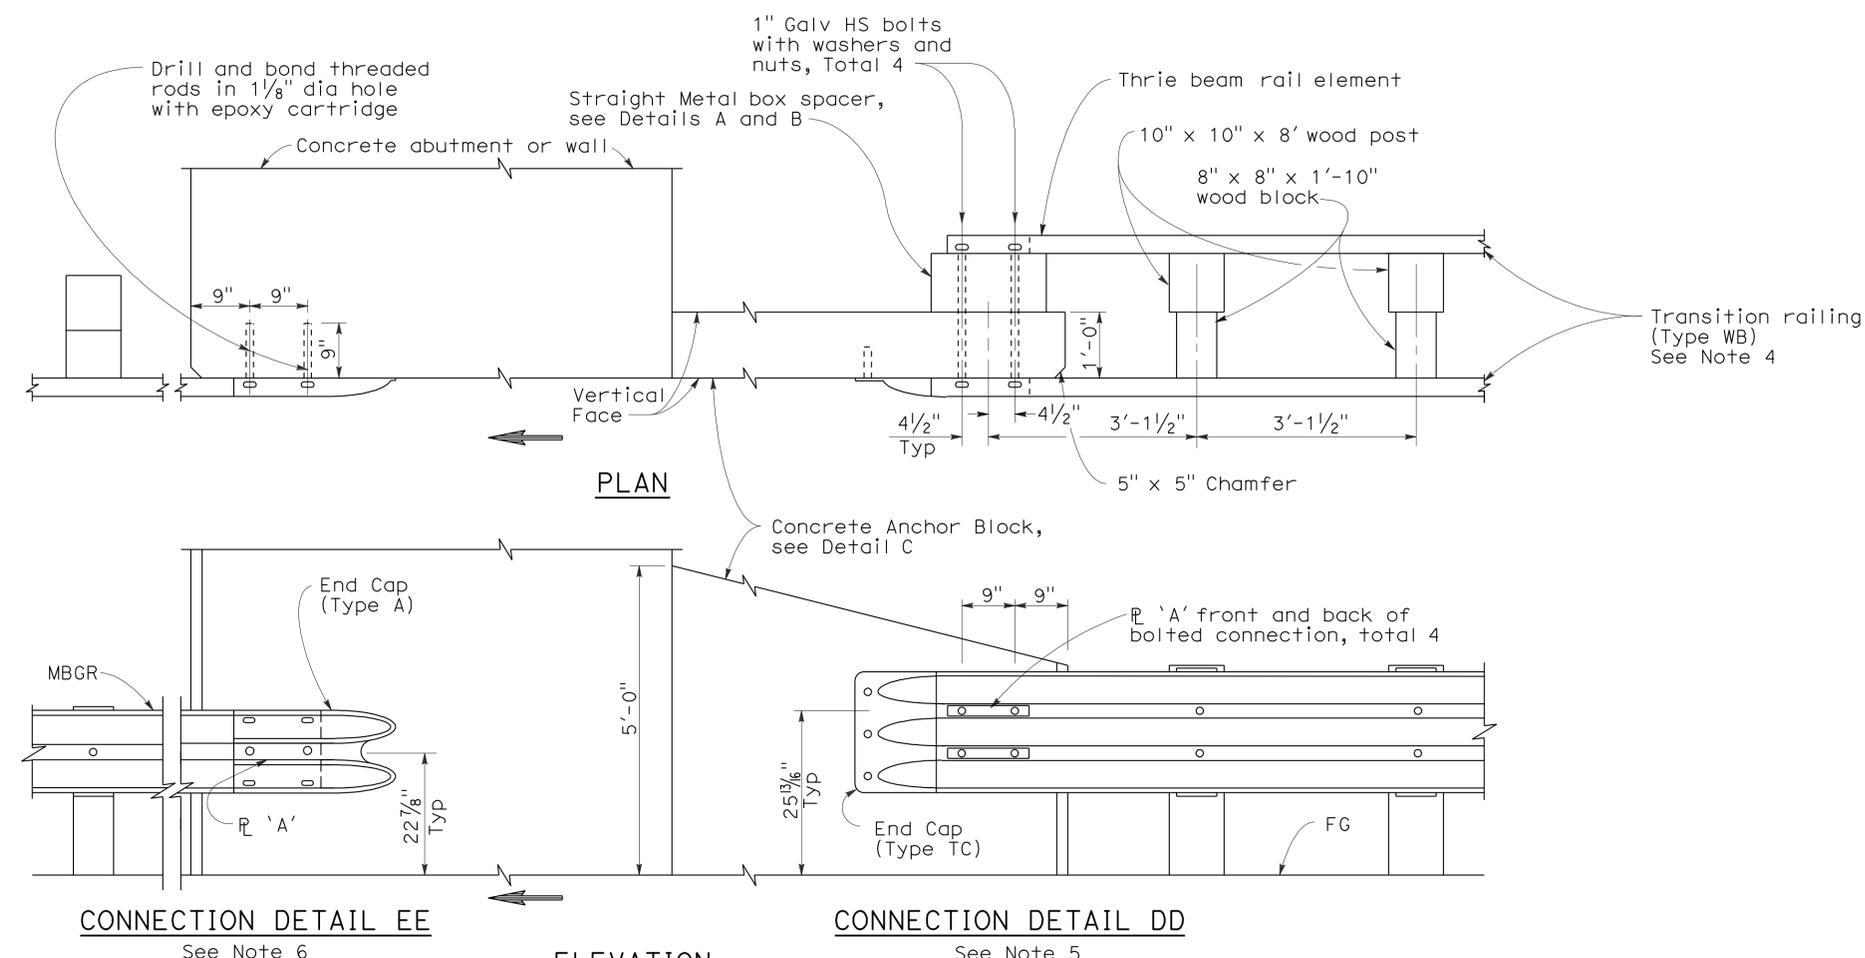

**NOTES:**

1. These connection details apply to abutments and walls.
2. Additional details of posts, blocks and hardware are shown on Standard Plans A77B1, A77C1 and A77C2.
3. Direction of adjacent traffic indicated by →.
4. For additional details of Transition Railing (Type WB), see Standard Plan A77J4 Transition Railing (Type WB) transitions the 12 gage w-beam standard railing section of guard railing to a heavier gage nested thrie beam railing section which is connected to the concrete anchor block.
5. For typical use of Connection Details DD, See Layout Types 12A and 12B on Standard Plan A77F1 and Layout Types 12C and 12D on Standard Plan A77F2.
6. For typical use of Connection Detail EE, see Layout Type 12D on Standard Plan A77F2 and Layout Type 12DD on Standard Plan A77F5.

**GUARD RAILING CONNECTION TO ABUTMENT OR WALL**

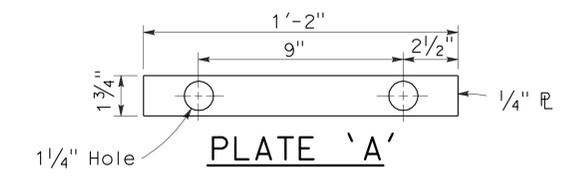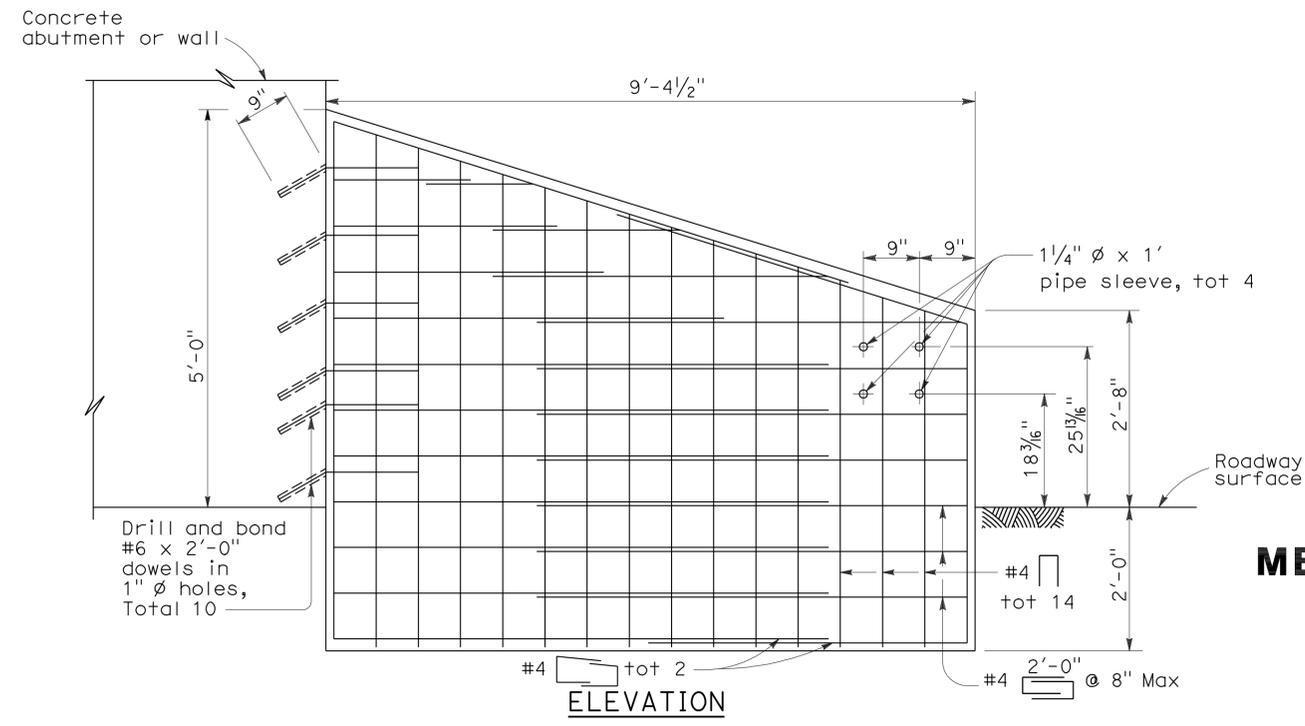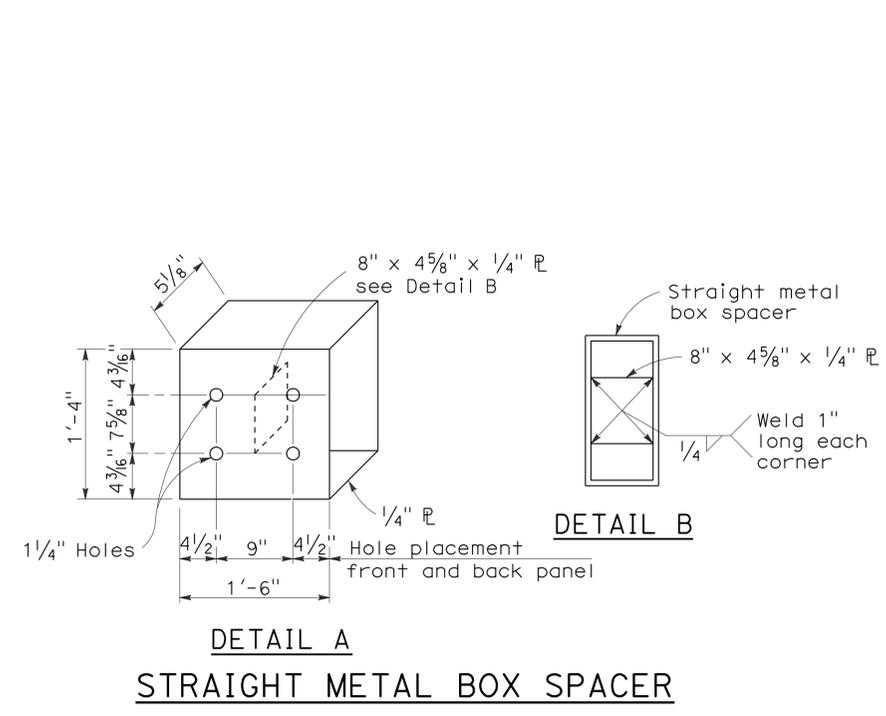

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**METAL BEAM GUARD RAILING CONNECTIONS TO ABUTMENTS AND WALLS**

NO SCALE






RSP A77J3 DATED MAY 20, 2011 SUPERSEDES STANDARD PLAN A77J3 DATED MAY 1, 2006 - PAGE 74 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP A77J3**

2006 REVISED STANDARD PLAN RSP A77J3



Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	112	140

RANDALL D. HIATT  
 REGISTERED CIVIL ENGINEER  
 No. C50200  
 Exp. 6-30-11  
 STATE OF CALIFORNIA

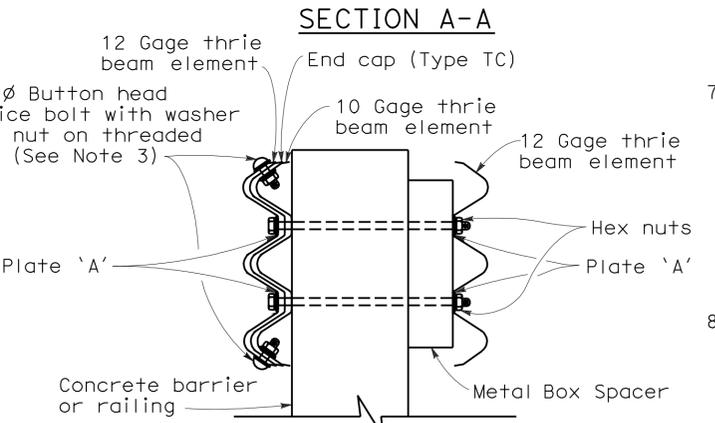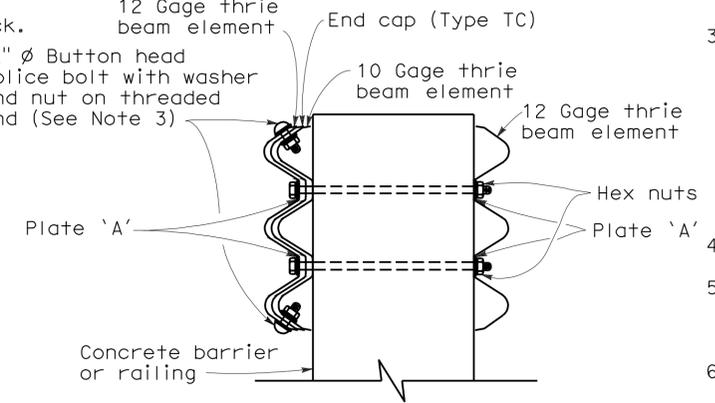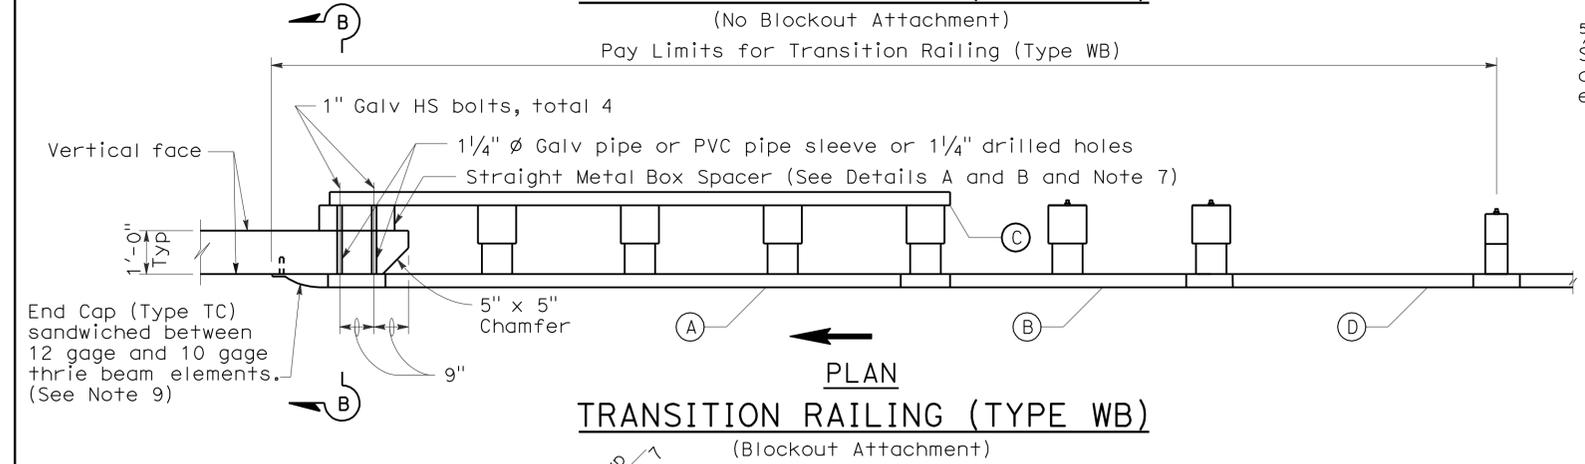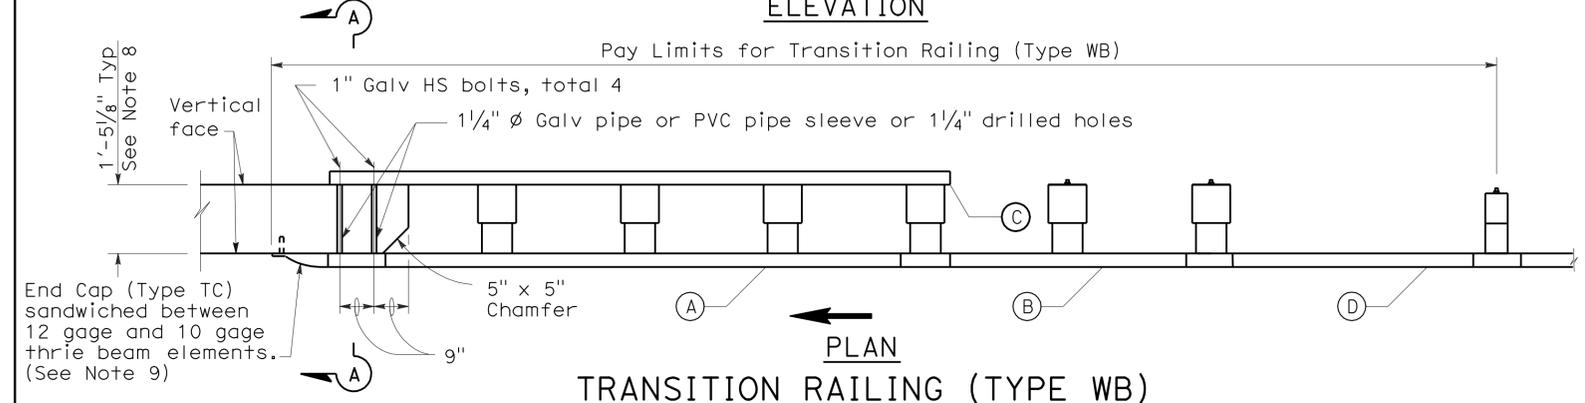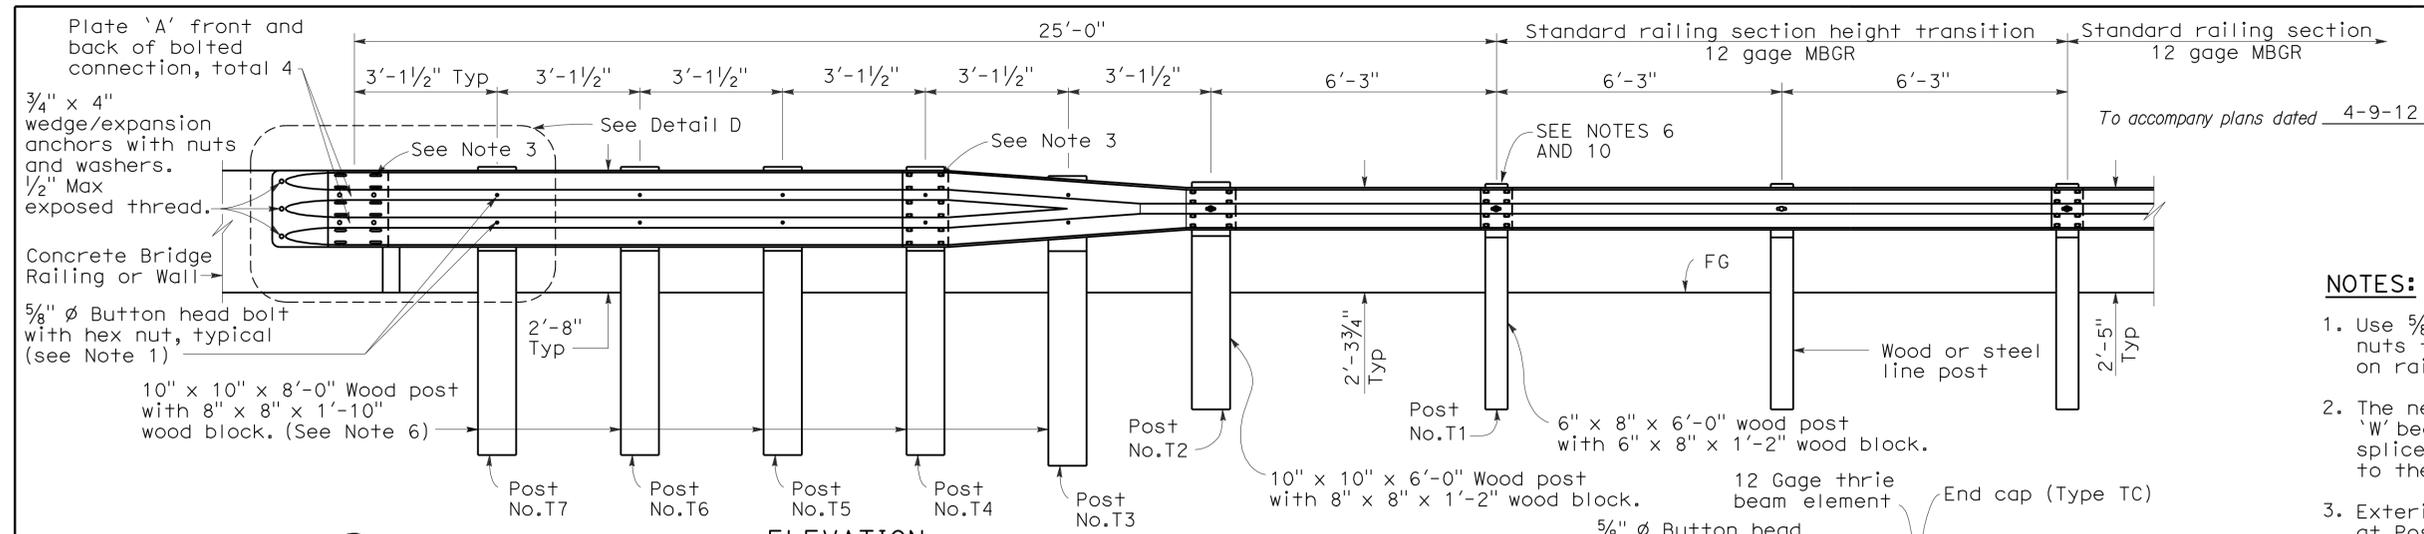

- NOTES:**
- Use 5/8" Ø Button head bolts and hex nuts for connections to posts. No washer on rail face for bolted connections to post.
  - The nested rail elements, end cap, and "W" beam to thrie beam element may be spliced together prior to bolting the elements to the wood post and concrete barrier or railing.
  - Exterior splice bolt holes for rail element splices at Post No. T4 and the connection to the concrete barrier or railing shall be the standard 7/32" x 1/8" slot size. Interior splice bolt holes at these locations may be increased up to 1/4" Ø. Only the top 2 and the bottom 2 splice bolts with washers and nuts are required for rail splices at Post No. T4 and the connection to the concrete barrier or railing.
  - Direction of adjacent traffic indicated by →.
  - The top elevation of Posts No. T2 through No. T7 shall not project more than 1" above the top elevation of the rail element.
  - Typically, the railing connected to Transition Railing (Type WB) will be either standard railing section of metal beam guard railing with height transition ratio of 120:1 or an approved Caltrans end treatment attached to Post No. T1.
  - The depth of the metal box spacer varies from the 5/8" to 1/2" and is dependent on the width of the concrete railing or wall. The combined dimension for the depth of the metal box spacer plus the width of railing or wall is typically 17/8". Where the space between the backside of the concrete railing or wall and the rear thrie beam element is less than 1/2", metal plates similar to Plate 'A' are to be used as spacers.
  - Where the width of the concrete railing or wall is greater than 17/8", wood blocks are to be used to fill the space created between the backside of Posts No. T4 through No. T7 and the rear thrie beam element. These wood blocks shall be 8" in width and 1'-2" in length. The dimension between the front thrie beam element and the rear thrie beam element is to match the width of the concrete railing or wall.
  - End cap may be installed over 12 gage and 10 gage thrie beam elements where transition railing is installed on the departure end of bridge railing.
  - Conform standard railing section height to 2'-3 3/4" at Post No. T1 using height transition ratio of 120:1.

- LEGEND**
- (A) Nested thrie beam elements (one 12 gage element nested over one 10 gage element).
  - (B) One 10 gage "W" beam to thrie beam element.
  - (C) One 12 gage thrie beam element.
  - (D) One 10 gage "W" beam rail element (7'-3 1/2" length)
- 10 gage = 0.135" thick  
 12 gage = 0.108" thick

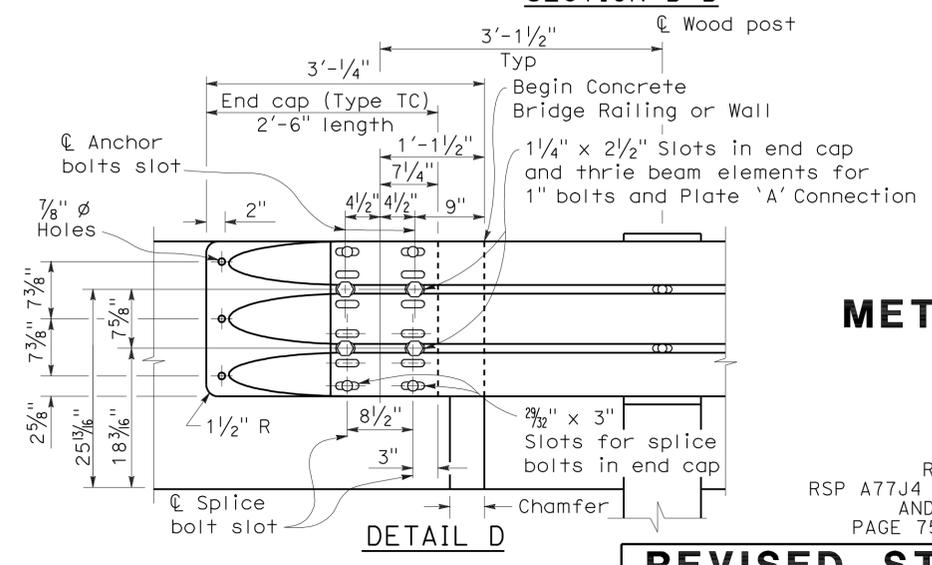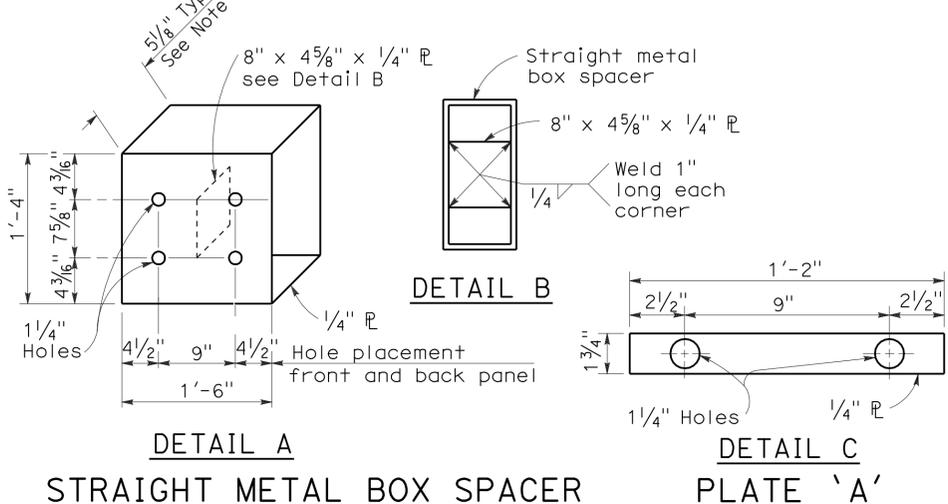

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**METAL BEAM GUARD RAILING  
 TRANSITION RAILING  
 (TYPE WB)**  
 NO SCALE  
 RSP A77J4 DATED MAY 20, 2011 SUPERSEDES  
 RSP A77J4 DATED JUNE 5, 2009, RSP A77J4 DATED JUNE 6, 2008  
 AND STANDARD PLAN A77J4 DATED MAY 1, 2006 -  
 PAGE 75 OF THE STANDARD PLANS BOOK DATED MAY 2006.

2006 REVISED STANDARD PLAN RSP A77J4

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	113	140



*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER

May 20, 2011  
PLANS APPROVAL DATE

*The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.*

REGISTERED PROFESSIONAL ENGINEER  
Randell D. Hiatt  
No. C50200  
Exp. 6-30-11  
CIVIL  
STATE OF CALIFORNIA





To accompany plans dated 4-9-12

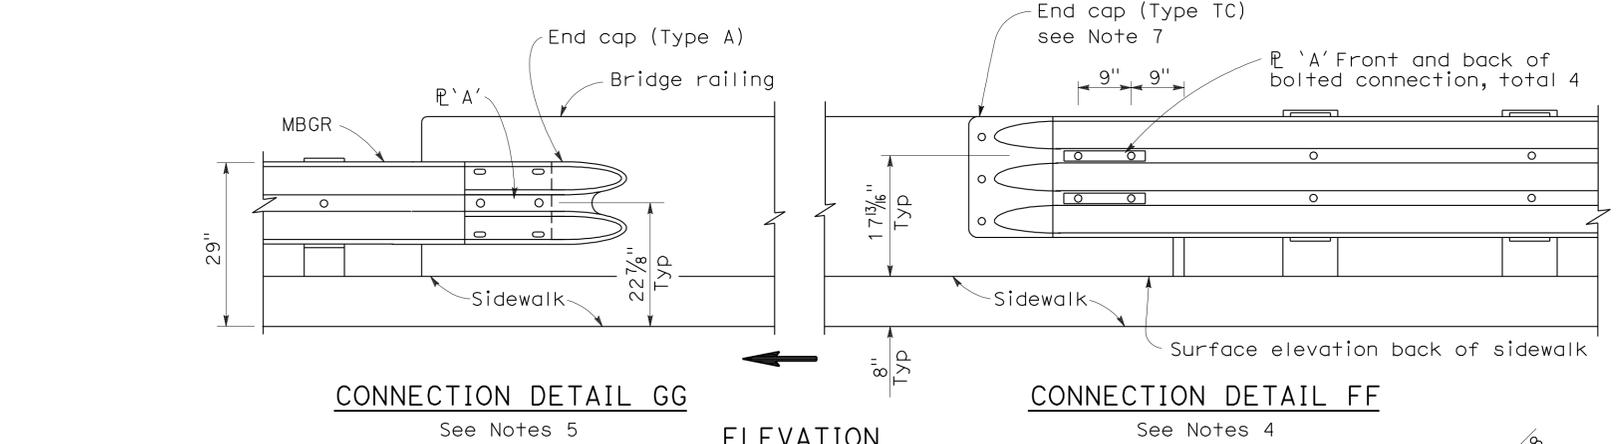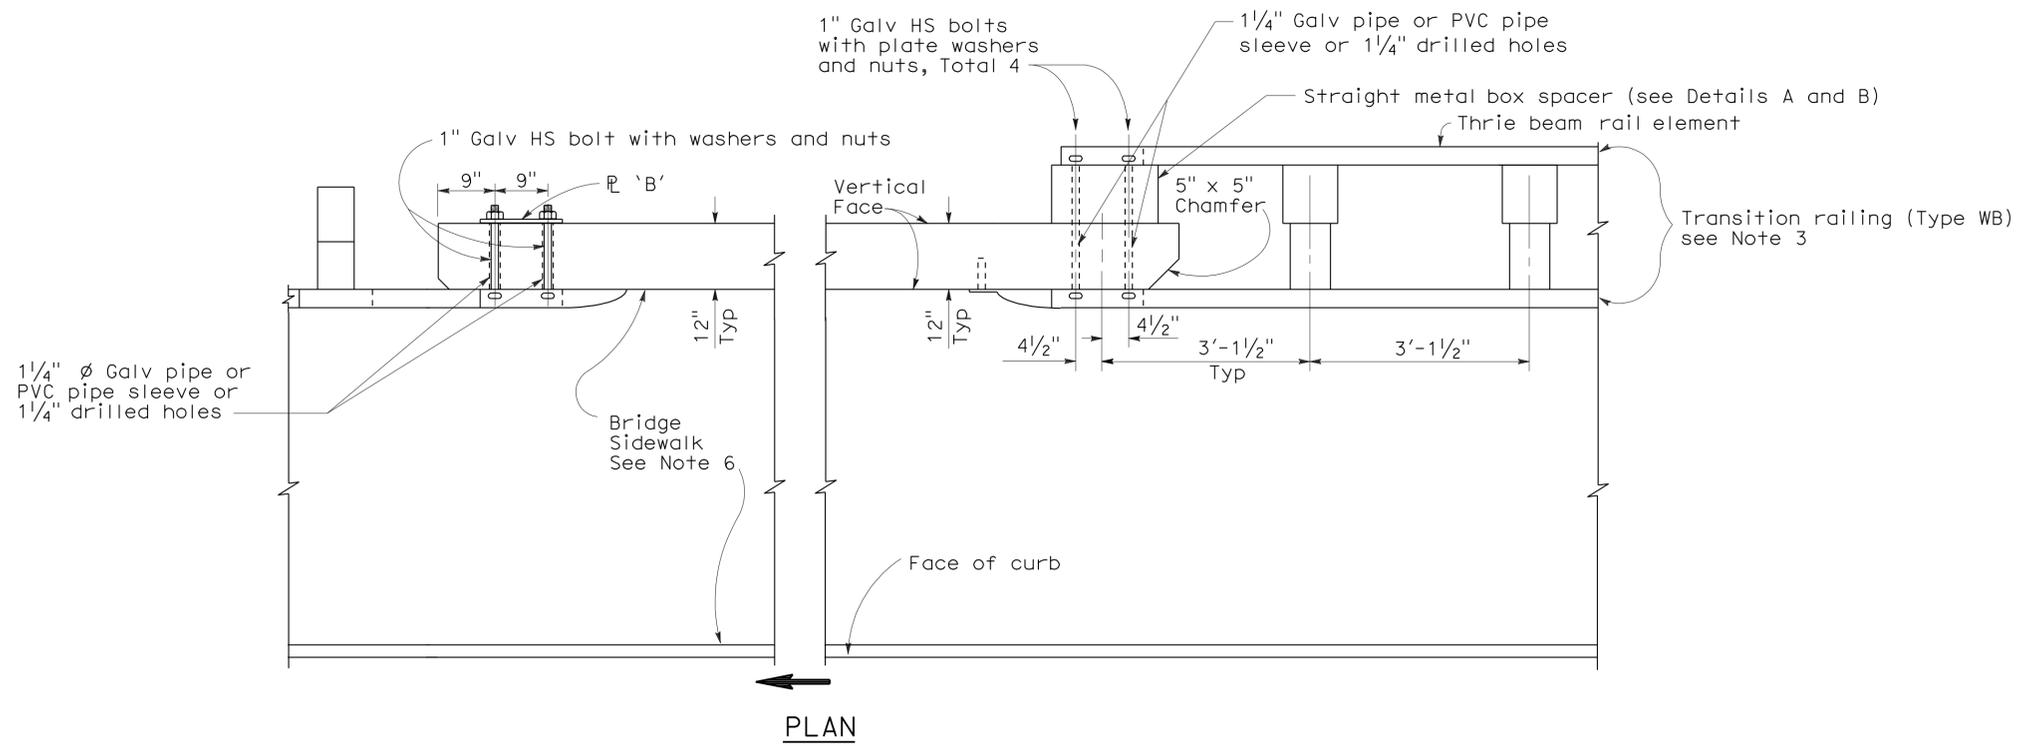

**GUARD RAILING CONNECTION TO BRIDGE RAILING WITH SIDEWALKS**

**NOTES:**

1. See Standard Plan A77K2 for additional connection details to bridges with sidewalks.
2. Direction of adjacent traffic indicated by
3. For additional details of Transition Railing (Type WB), see Standard Plan A77J4. Transition Railing (Type WB) transitions the 12 gage w-beam standard railing section of guard railing to a heavier gage nested three beam railing which is connected to the concrete bridge railing.
4. For typical use of Connection Detail FF, see Layout Types 12A and 12B on Standard Plan A77F1.
5. For typical use of Connection Detail GG, see Layout Type 12D on Standard Plan A77F2 and Layout Type 12DD on Standard Plan A77F5.
6. Where the bridge sidewalk is not continued beyond the end of the bridge railing, the portion of the sidewalk beyond each end of the bridge railing shall be transitioned down from the top elevation of the sidewalk, for its entire width, to the finished grade of the adjacent roadbed. The longitudinal slope of each sidewalk elevation transition shall not exceed 8.33 percent.
7. For details of End Cap (Type TC), see Standard Plan A77J4.
8. See Standard Plan A77J4 for additional details regarding depth dimension for straight metal box spacer.

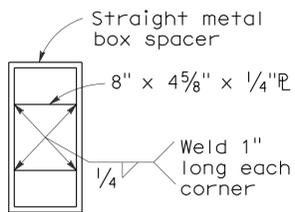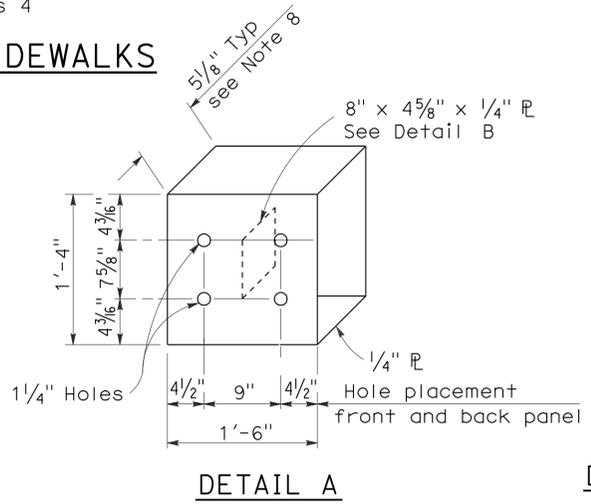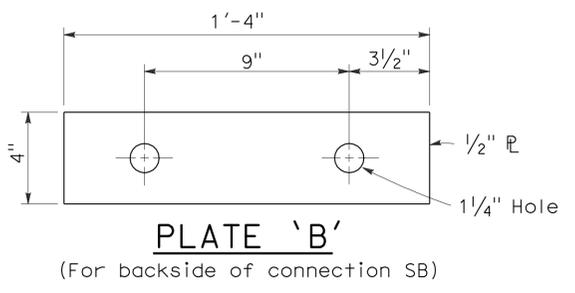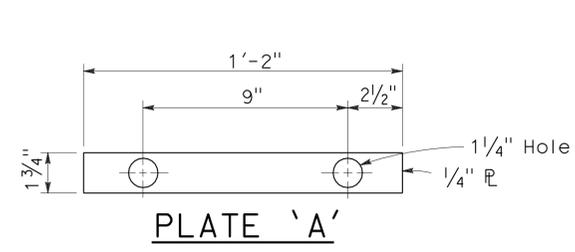

**METAL BEAM GUARD RAILING CONNECTIONS TO BRIDGE RAILINGS WITH SIDEWALKS DETAILS No.1**


NO SCALE

2006 REVISED STANDARD PLAN RSP A77K1

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	114	140

William K. Farnbach  
 REGISTERED CIVIL ENGINEER  
 May 15, 2009  
 PLANS APPROVAL DATE  
 The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.  
 REGISTERED PROFESSIONAL ENGINEER  
 William K. Farnbach  
 No. C49042  
 Exp. 9-30-10  
 CIVIL  
 STATE OF CALIFORNIA

To accompany plans dated 4-9-12

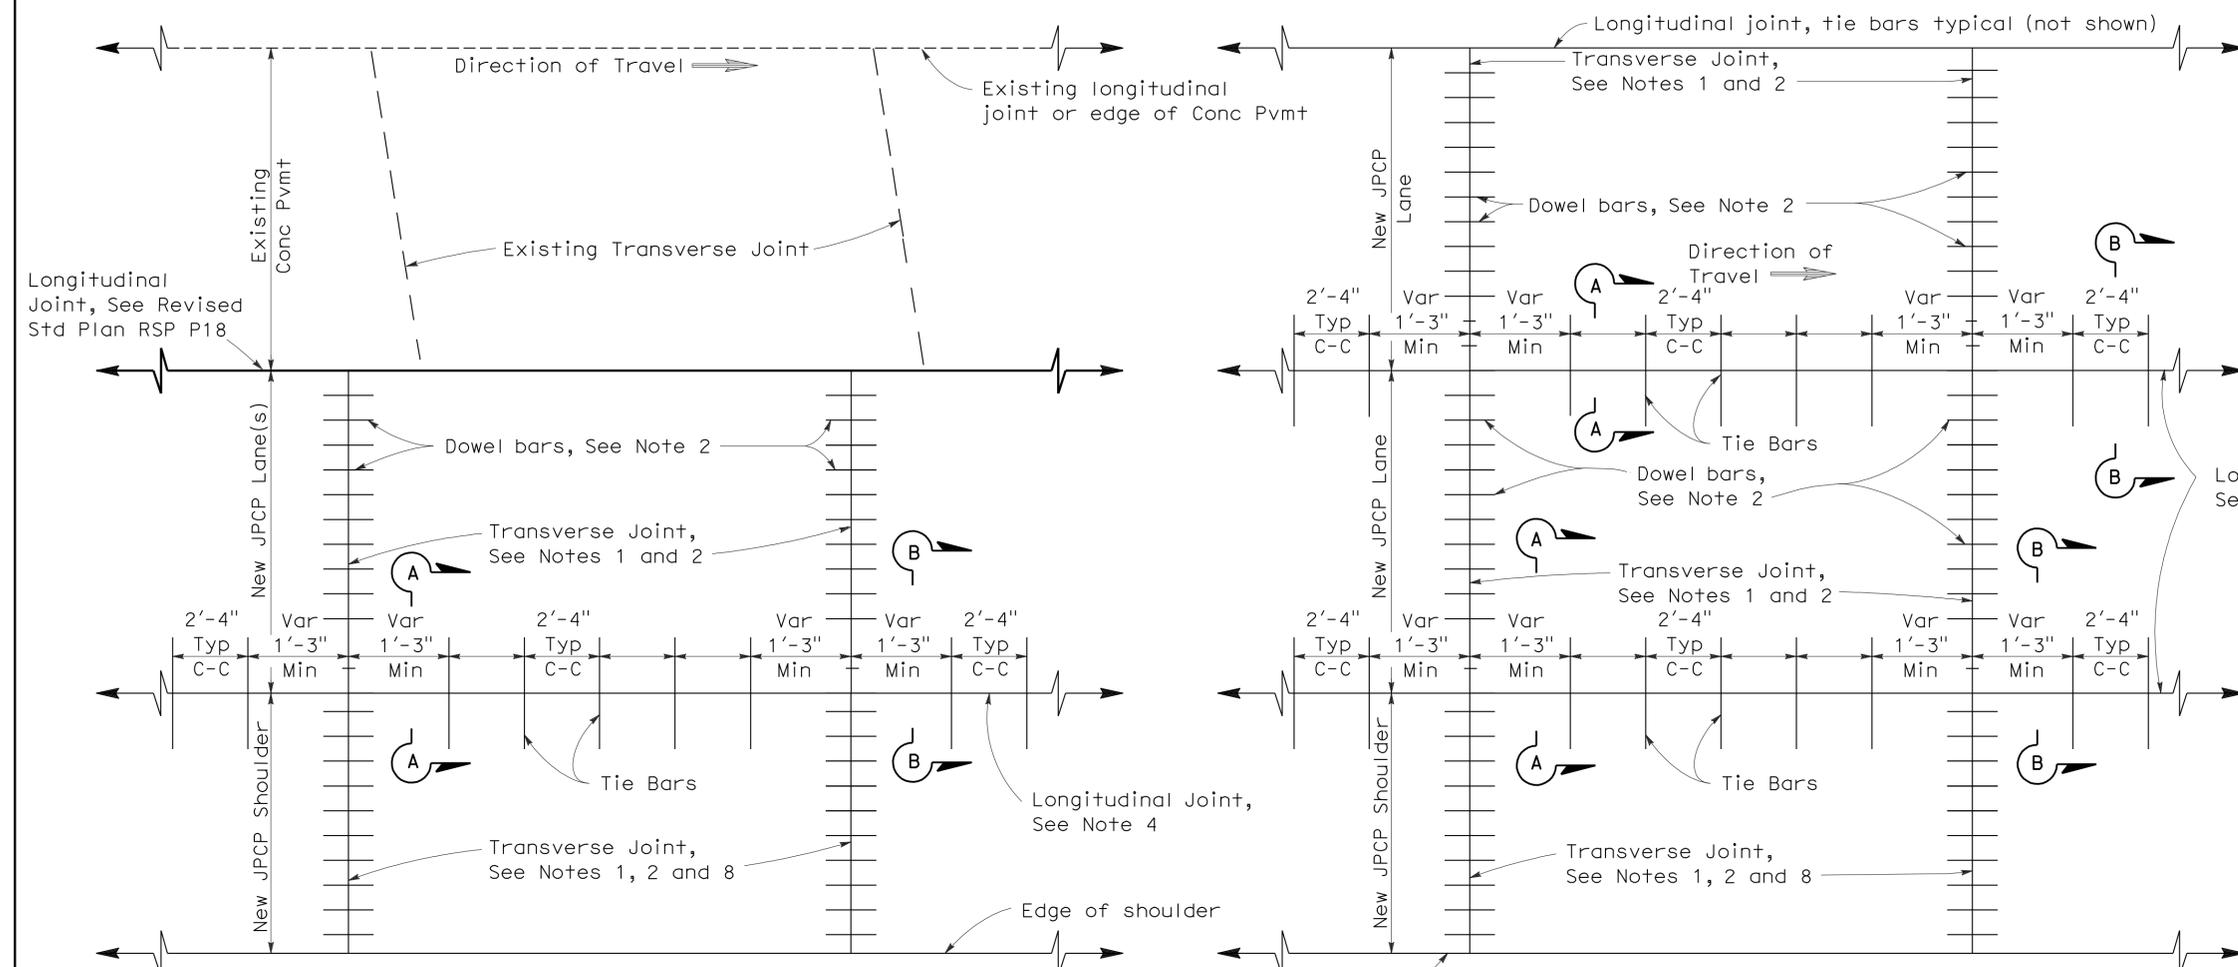

**PLAN**  
**LANE/SHOULDER ADDITION OR RECONSTRUCTION**


See Notes 6 and 7

**PLAN**  
**NEW CONSTRUCTION**


See Notes 6 and 7

**NOTES:**


1. Transverse joints shall be constructed at right angles to the longitudinal pavement joints in new jointed plain concrete pavement and spaced at successive repeated intervals of 12', 15', 13' and 14'.
2. For transverse joint and dowel bar details not shown, See Revised Standard Plan RSP P10.
3. Construct longitudinal contraction joints as shown in Section A-A when more than one lane or shoulder widths are placed at one time. If constructing one lane at a time, use longitudinal construction joint, as shown in Section B-B.
4. For additional longitudinal joint details, see Revised Standard Plan RSP P18.
5. If fresh concrete is placed adjacent to existing concrete, the top corner of the new hardened concrete does not need to be rounded to the 1/4" radius as shown.
6. Joint spacing patterns do not apply to intersections.
7. Details can also apply to inside widening.
8. Dowel bars may be omitted from shoulders when the shoulder cross slope is not the same as the adjacent traffic lane.

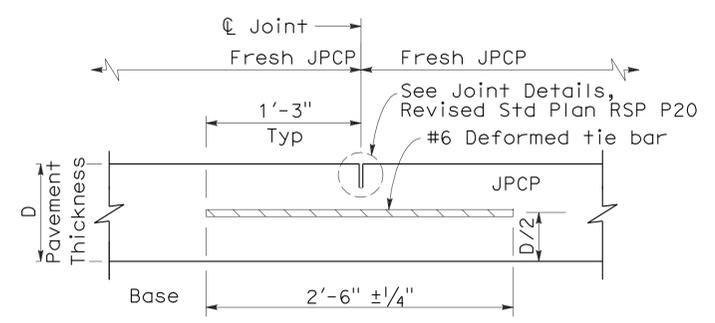

**SECTION A-A**  
**LONGITUDINAL CONTRACTION JOINT**

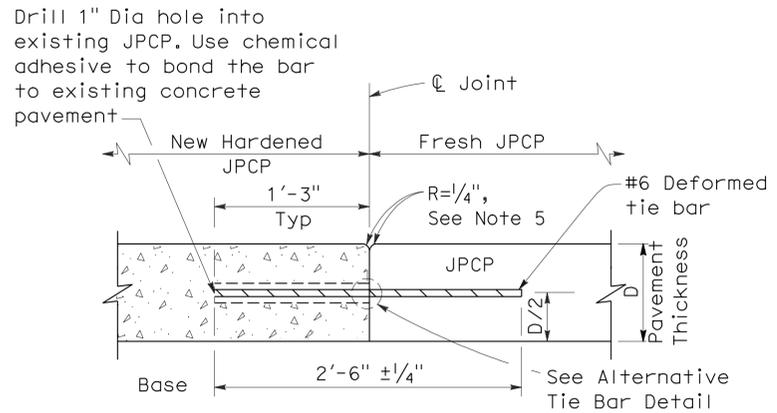

**SECTION B-B**  
**LONGITUDINAL CONSTRUCTION JOINT**

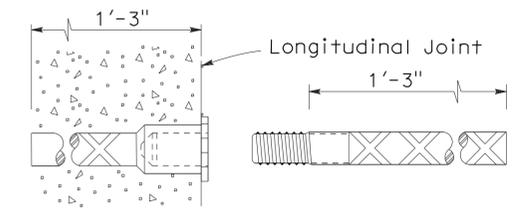

**ALTERNATIVE TIE BAR SPLICE DETAIL**  
(Splice Coupler)

**TIE BAR DETAILS**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**JOINTED PLAIN CONCRETE PAVEMENT**


NO SCALE

RSP P1 DATED MAY 15, 2009 SUPERSEDES STANDARD PLAN P1  
DATED MAY 1, 2006 - PAGE 119 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP P1**

2006 REVISED STANDARD PLAN RSP P1

2006 REVISED STANDARD PLAN RSP P3

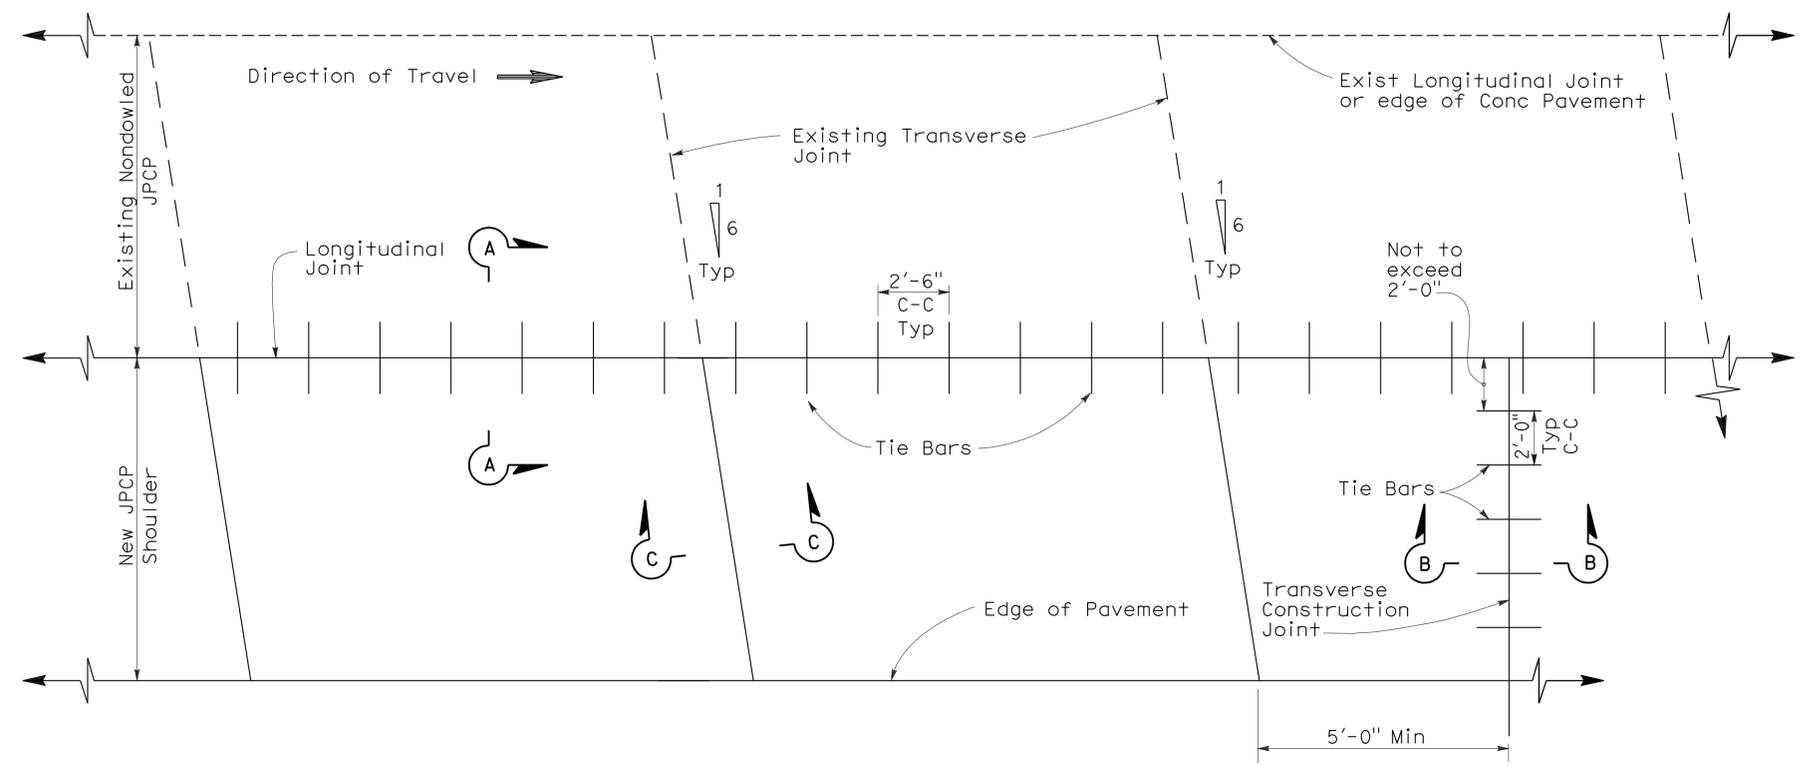

PLAN


NOTES:

1. New transverse contraction joints shall match the skewed offset and spacing of the adjacent existing contraction joints, as shown.
2. Transverse construction joints, with tie bars spaced as shown, shall be installed at the end of paving operations. Transverse construction joints shall be placed at least 5'-0" from any contraction joint.
3. This Standard Plan only applicable for constructing a nondoweled Jointed Plain Concrete Pavement shoulder next to existing nondoweled Jointed Plain Concrete Pavement lane.
4. If fresh concrete is placed adjacent to existing concrete, the top corner of the new hardened concrete does not need to be rounded to the 1/4" radius as shown.

TABLE A

Tie Bar Spacing		
Slab Length	Total Tie Bars per Slab	Clearance Tie Bar to Transverse Joint
9'-0"	3	1'-3"
9'-6"	3	1'-4 1/2"
12'-0"	5	1'-4"
13'-0"	5	1'-10"
14'-0"	5	2'-3 3/4"
15'-0"	6	1'-8"


Drill 1" Dia hole into existing JPCP. Use chemical adhesive to bond tie bar to existing concrete pavement.

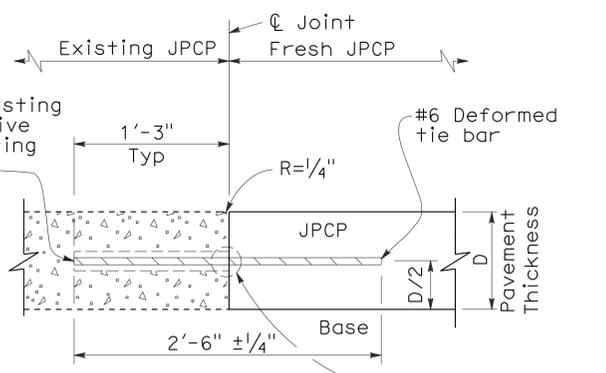

SECTION A-A


LONGITUDINAL JOINT

(Between fresh and hardened concrete)

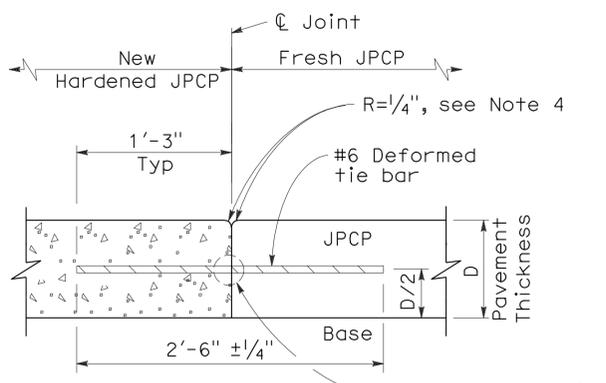

SECTION B-B

TRANSVERSE CONSTRUCTION JOINT

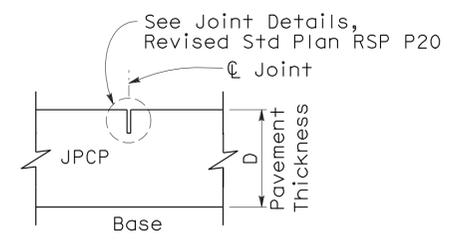

SECTION C-C

TRANSVERSE CONTRACTION JOINT

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**JOINTED PLAIN CONCRETE PAVEMENT-NONDOWELED SHOULDER ADDITION/RECONSTRUCTION**

NO SCALE

RSP P3 DATED MAY 15, 2009 SUPERSEDES RSP P3 DATED NOVEMBER 17, 2006 AND STANDARD PLAN P3 DATED MAY 1, 2006 - PAGE 121 OF THE STANDARD PLANS BOOK DATED MAY 2006.


**REVISED STANDARD PLAN RSP P3**

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	116	140


William K. Farnbach  
 REGISTERED CIVIL ENGINEER  
 June 5, 2009  
 PLANS APPROVAL DATE  
 The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

REGISTERED PROFESSIONAL ENGINEER  
 William K. Farnbach  
 No. C49042  
 Exp. 9-30-10  
 CIVIL  
 STATE OF CALIFORNIA


To accompany plans dated 4-9-12

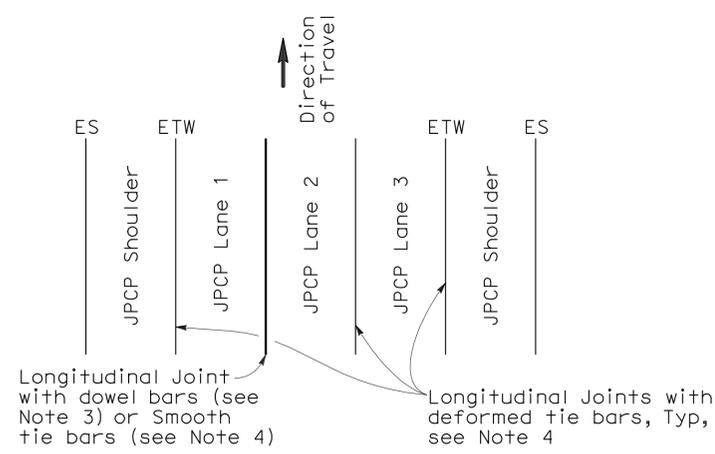

**3 LANES WITH TIED CONCRETE SHOULDERS**  
**PLAN**

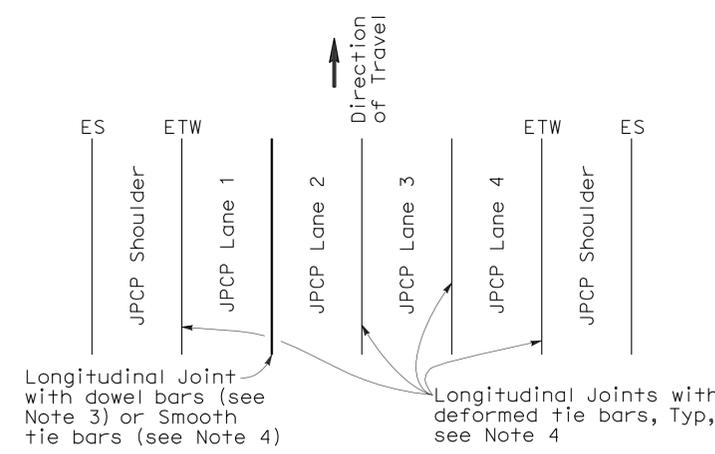


**4 LANES WITH TIED CONCRETE SHOULDERS**  
**PLAN**

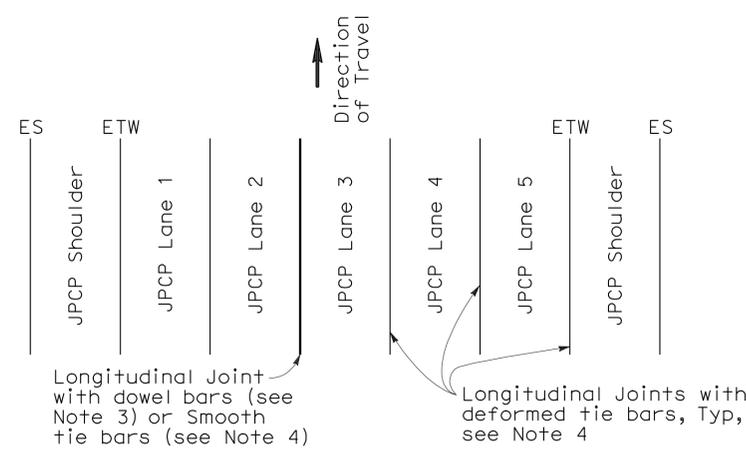


**5 LANES WITH TIED CONCRETE SHOULDERS**  
**PLAN**

**NOTES:**

1. Where Lean Concrete Base is not used as base material, the joint filler material used for the longitudinal isolation joint shall only extend to the bottom of the new concrete slab. See Detail A.
2. Use 5/8" ± 1/16" dimension for silicone sealant.
3. See Revised Standard Plan RSP P10 for longitudinal joint with dowel bars.
4. See Revised Standard Plan RSP P1.
5. See Revised Standard Plan RSP P2.

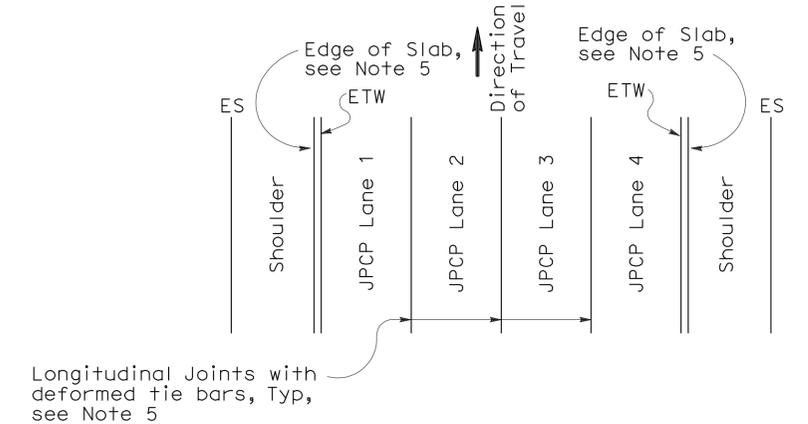


**4 LANES OR LESS WITH WIDENED SLAB**  
**PLAN**

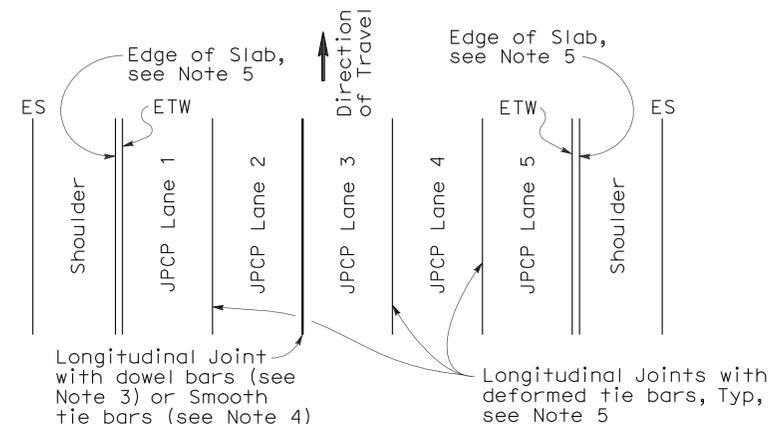

**5 LANES WITH WIDENED SLAB**  
**PLAN**


**NEW CONSTRUCTION**

Location of Longitudinal Joints (For JPCP)

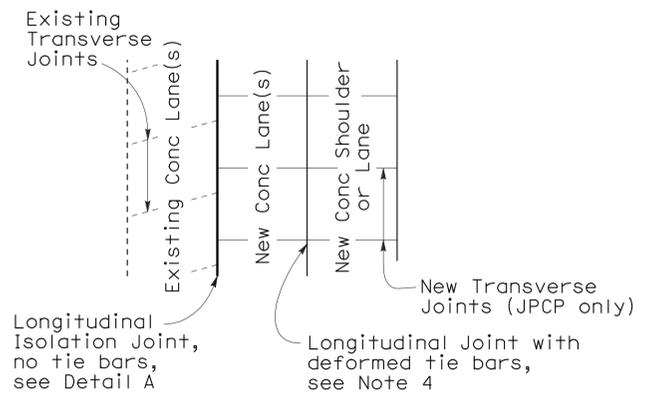


**CASE 1**  
**PLAN**

Transverse Joints do not align between new and existing

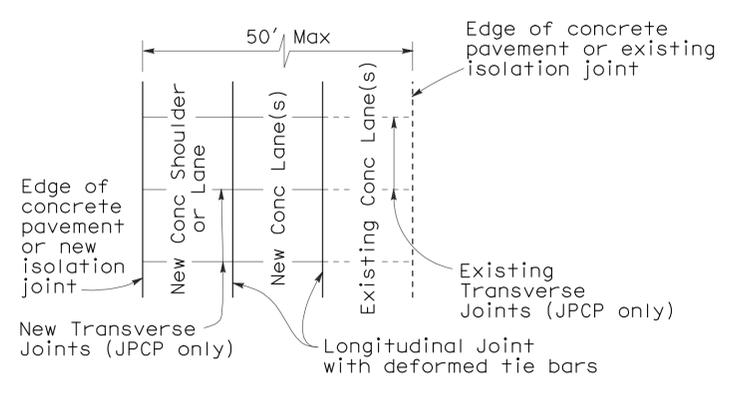

**CASE 2**  
**PLAN**


Transverse Joints align between new and existing

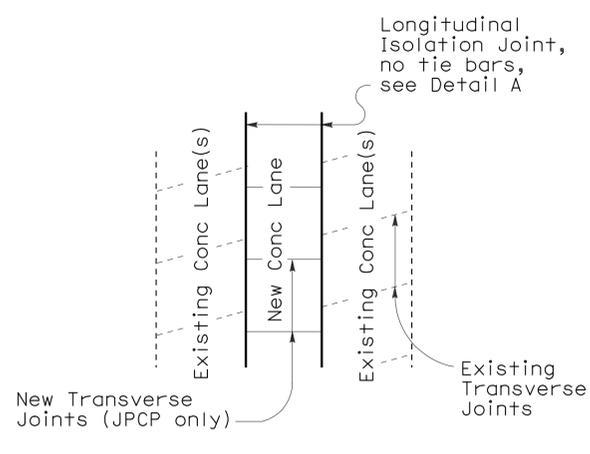

**CASE 3 (INTERIOR LANE REPLACEMENT)**  
**PLAN**

Transverse Joints do not align between new and existing

**LANE/SHOULDER ADDITION OR RECONSTRUCTION**  
(For JPCP and CRCP)

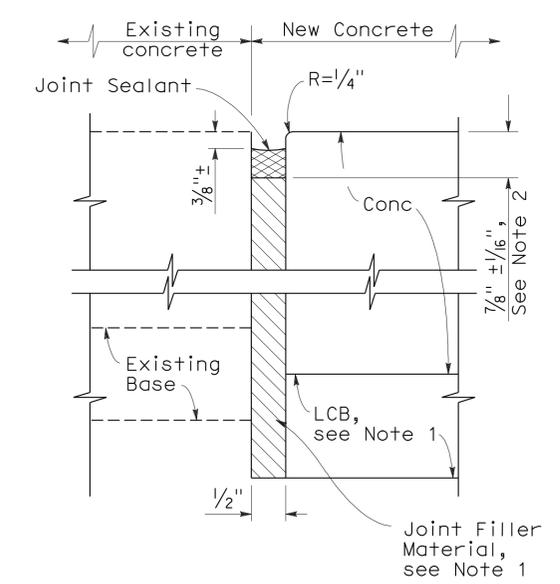

**DETAIL A**  
**ISOLATION JOINT**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**CONCRETE PAVEMENT-LANE SCHEMATICS AND ISOLATION JOINT DETAIL**  
NO SCALE

RSP P18 DATED JUNE 5, 2009 SUPERSEDES RSP P18 DATED MAY 15, 2009, RSP P18 DATED NOVEMBER 17, 2006 AND STANDARD PLAN P18 DATED MAY 1, 2006 - PAGE 127 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP P18**

2006 REVISED STANDARD PLAN RSP P18

**NOTE:**

1. Tie bars, dowel bars, and reinforcement are not shown in joint seal details, see Revised Standard Plans RSP P1, RSP P3, RSP P10, RSP P35, RSP P45, or RSP P46 as applicable.


DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	117	140

*William K. Farnbach*  
 REGISTERED CIVIL ENGINEER  
 May 15, 2009  
 PLANS APPROVAL DATE

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

REGISTERED PROFESSIONAL ENGINEER  
 William K. Farnbach  
 No. C49042  
 Exp. 9-30-10  
 CIVIL  
 STATE OF CALIFORNIA

To accompany plans dated 4-9-12

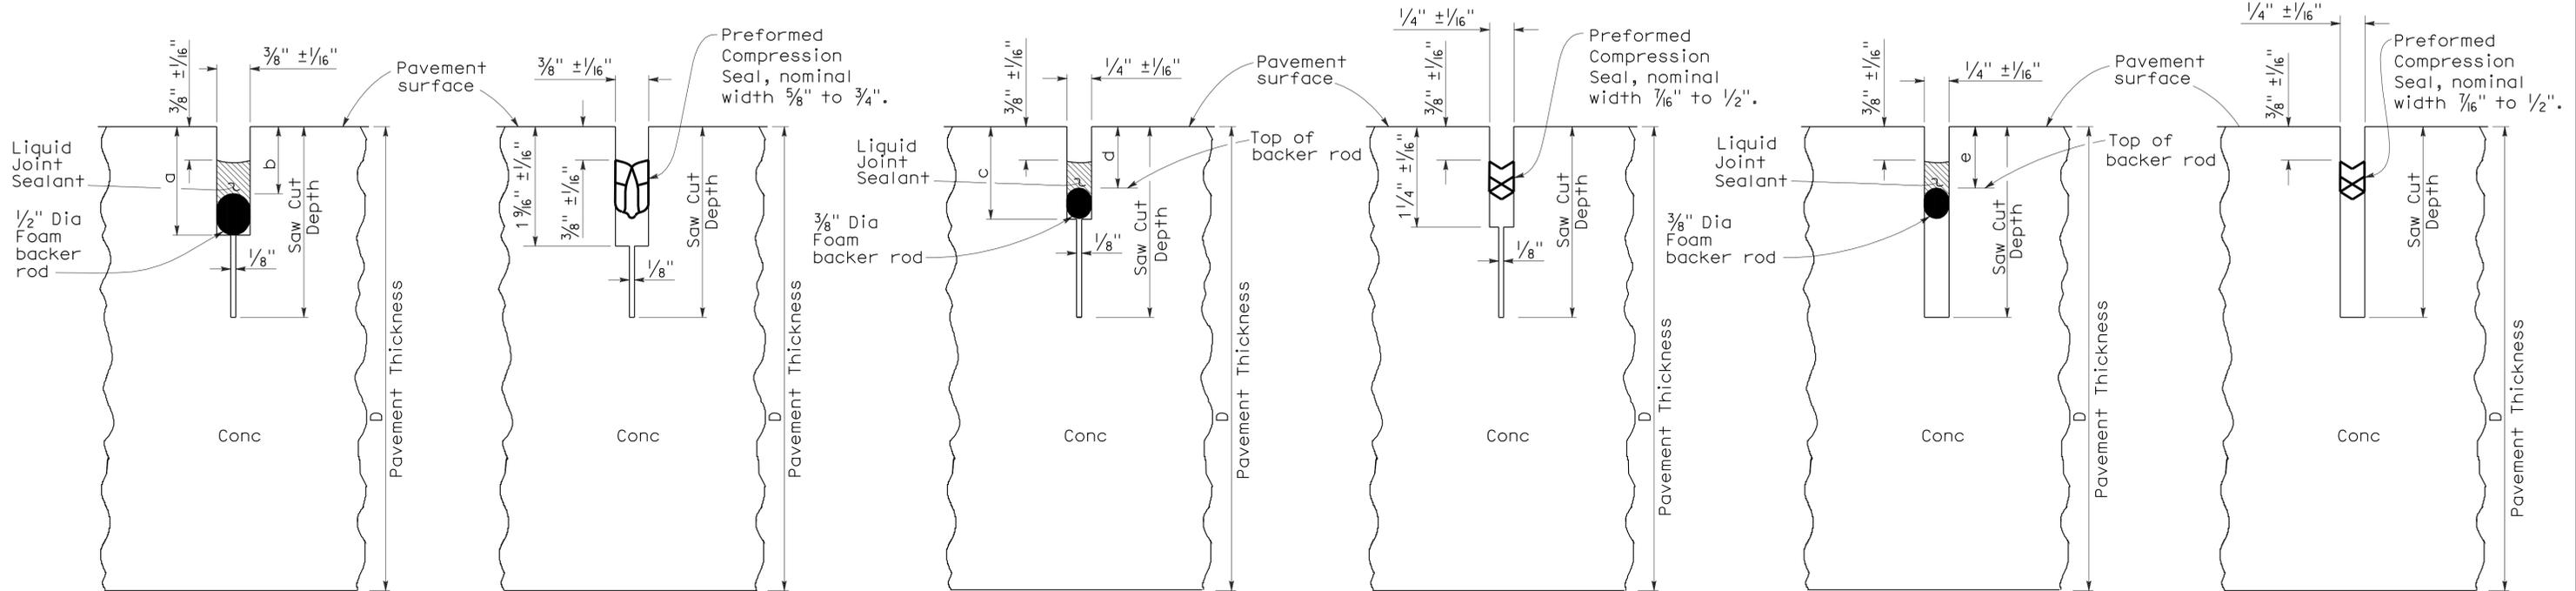

**LIQUID SEALANT**

**COMPRESSION SEAL**

**LIQUID SEALANT**

**COMPRESSION SEAL**

**LIQUID SEALANT**

**COMPRESSION SEAL**

**TYPE A1**

**TYPE A2**

**TYPE B**

Transverse Contraction Joints

Longitudinal Contraction Joints


Longitudinal or Transverse Contraction Joint

**LIQUID SEALANT RESERVOIR DEPTH**

LIQUID SEALANT MATERIAL	3/8" Joint Width Type A1		1/4" Joint Width Type A2		1/4" Joint Width Type B
	DIMENSION		DIMENSION		DIMENSION
	a	b	c	d	e
SILICONE	1" ± 1/16"	5/8" ± 1/16"	15/16" ± 1/16"	9/16" ± 1/16"	9/16" ± 1/16"
ASPHALT RUBBER	1 3/16" ± 1/16"	3/4" ± 1/16"	1 1/16" ± 1/16"	11/16" ± 1/16"	11/16" ± 1/16"

**TABLE A (TYPE R JOINT)**

Sawn Joint Width	Backer Rod Diameter ± 1/16"	DIMENSION "f"	DIMENSION "g"
1"	1 5/16"	7/8"	2 1/4"
7/8"	1 3/16"	13/16"	2"
3/4"	1"	3/4"	1 3/4"
5/8"	7/8"	11/16"	1 1/2"
1/2"	11/16"	5/8"	1 1/4"

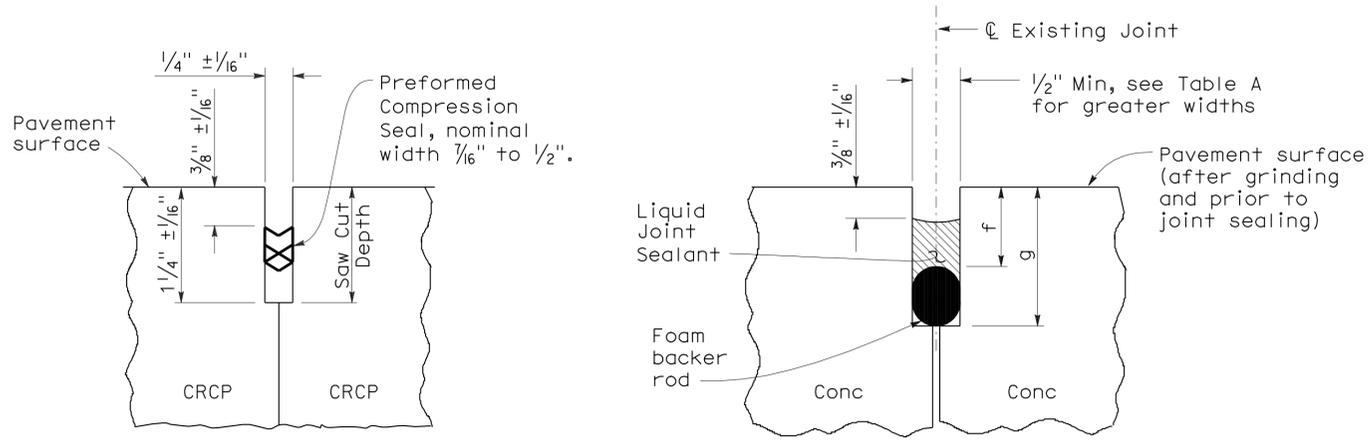

**COMPRESSION SEAL**

**LIQUID SEALANT**

**TYPE C**

**TYPE R**

Transverse and Longitudinal Construction Joints (For CRCP)

Retrofit Transverse and Longitudinal Joints

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**CONCRETE PAVEMENT-JOINT DETAILS**

NO SCALE

RSP P20 DATED MAY 15, 2009 SUPERSEDES STANDARD PLAN P20 DATED MAY 1, 2006 - PAGE 128 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP P20**

2006 REVISED STANDARD PLAN RSP P20

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	118	140

*Gregory A. Balzer*  
 LICENSED LANDSCAPE ARCHITECT  
 June 5, 2009  
 PLANS APPROVAL DATE  
The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

To accompany plans dated 4-9-12

2006 REVISED STANDARD PLAN RSP H1

**A**

AB aggregate base  
 ABS acrylonitrile-butadiene-styrene  
 AC asphalt concrete  
 Adj adjacent/adjustable  
 AIC auxiliary irrigation controller  
 Alt alternative  
 AMEND amendment  
 ARV air release valve  
 AUTO automatic  
 AUX auxiliary  
 AVB atmospheric vacuum breaker

**B**

B&B balled and burlapped  
 B/B brass/bronze  
 B/B/PL brass/bronze/plastic  
 B/PL brass/plastic  
 BFM bonded fiber matrix  
 Bit C+D bituminous coated  
 BP booster pump  
 BPA backflow preventer assembly  
 BPAE backflow preventer assembly in enclosure  
 BPE backflow preventer enclosure  
 BV ball valve

**C**

CAP corrugated aluminum pipe  
 CARV combination air release valve  
 CCA cam coupler assembly  
 CEC controller enclosure cabinet  
 CHDPE corrugated high density polyethylene  
 CL chain link  
 CNC control and neutral conductors  
 Conc concrete  
 Cond conduit  
 CSP corrugated steel pipe  
 CST center strip  
 CV check valve

**D**

Dia diameter  
 DIP ductile iron pipe  
 DN diameter nominal

**E**

EA each  
 Elect electric/electrical  
 Elev elevation  
 ENCL enclosure  
 EP edge of pavement  
 ES edge of shoulder  
 EST end strip  
 ESTB establishment  
 ETW edge of traveled way

**F**

F full circle  
 F/P full/part circle  
 FAU filter assembly unit  
 FCV flow control valve  
 FERT fertilizer  
 FG finished grade  
 FIPT female iron pipe thread  
 FIS fertilizer injector system  
 FL flow line  
 FM flow monitor  
 FS flow sensor  
 Ft foot/feet  
 FV flush valve

**G**

GAL Gallon(s)  
 Galv galvanized  
 GARV garden valve  
 GPH gallons per hour  
 GPM gallons per minute  
 GSP galvanized steel pipe  
 GV gate valve

**H**

H half circle  
 HB hose bib  
 HDPE high density polyethylene  
 HP horsepower/hinge point  
 HPL high pressure line  
 Hwy highway

**I**

IC irrigation controller  
 ICC irrigation controller(s) in controller enclosure cabinet  
 ID inside diameter  
 In inches  
 IFS irrigation filtration system  
 IPS iron pipe size  
 IPT iron pipe thread  
 Irr irrigation

**L**

L length  
 LF linear foot

**M**

Max maximum  
 MBGR metal beam guard railing  
 MCV manual control valve  
 MIC master irrigation controller  
 Min minimum  
 MIPT male iron pipe thread  
 Misc miscellaneous  
 M+I material  
 MVP maintenance vehicle pullout

**N**

NCN no common name  
 NL nozzle line  
 No. number  
 NPT national pipe thread

**O**

O/C on center  
 OD outside diameter  
 Oz ounce

**P**

P part circle  
 PB pull box  
 PCC portland cement concrete  
 PE polyethylene  
 PK+ packet  
 PL plastic  
 PLT plant/planting  
 PLT ESTB plant establishment  
 PM post mile  
 PR pressure rated  
 PRLV pressure relief valve  
 PSFM polymer stabilized fiber matrix  
 PSI pounds per square inch  
 PRV pressure reducing valve  
 PVC polyvinyl chloride  
 Pvmt pavement

**Q**

Q quarter circle  
 QCV quick coupling valve

**R**

R radius  
 RCP reinforced concrete pipe  
 RCV remote control valve  
 RCVM remote control valve (master)  
 RCVMF remote control valve (master) w/ flow meter  
 RCW recycled/reclaimed water  
 RECP rolled erosion control product  
 REQ required  
 R/W right of way

**S**

S slip  
 SCC sprinkler control conduit  
 SCH schedule  
 SF state-furnished  
 Shld shoulder  
 SQFT square foot/feet  
 SQYD square yard(s)  
 SST side strip  
 Sta station  
 Std standard  
 SW sidewalk/sound wall

**T**

T third circle/thread  
 TLS truck loading standpipe  
 TQ three quarter circle  
 TRM turf reinforcement mat  
 TRVD traveled  
 TT two third circle  
 Typ typical

**U**

UG underground

**V**

VAU valve assembly unit

**W**

W width  
 W/ with  
 WM water meter  
 WS wye strainer  
 WSP welded steel pipe  
 WWM welded wire mesh

**NOTE:**  
 FOR ADDITIONAL ABBREVIATIONS,  
 SEE STANDARD PLANS A10A AND A10B.

**PLANTING AND IRRIGATION ABBREVIATIONS**


NO SCALE

RSP H1 DATED JUNE 5, 2009 SUPERSEDES STANDARD PLAN H1  
 DATED MAY 1, 2006 - PAGE 201 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP H1**

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	119	140

*Gregory A. Balzer*  
 LICENSED LANDSCAPE ARCHITECT  
 June 5, 2009  
 PLANS APPROVAL DATE  
The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.





To accompany plans dated 4-9-12

EXISTING	PROPOSED	ITEM DESCRIPTION
		WATER METER (WM)
		BACKFLOW PREVENTER ASSEMBLY (BPA)
		BACKFLOW PREVENTER ASSEMBLY IN ENCLOSURE (BPAE)
		BACKFLOW PREVENTER ENCLOSURE (BPE)
		BOOSTER PUMP (BP)
		TRUCK LOADING STANDPIPE (TLS)
		FLOW SENSOR (FS)
		MASTER IRRIGATION CONTROLLER (MIC)
		AUXILIARY IRRIGATION CONTROLLER (AIC)
		IRRIGATION CONTROLLER (IC)/ IRRIGATION CONTROLLER (IC) (BATTERY) IRRIGATION CONTROLLER (IC) (SOLAR)
		IRRIGATION CONTROLLER(S) IN CONTROLLER ENCLOSURE CABINET (ICC)
		CONTROL AND NEUTRAL CONDUCTORS (CNC)
		SPRINKLER CONTROL CONDUIT (SCC)
		IRRIGATION CROSSOVER
		EXTEND IRRIGATION CROSSOVER
		IRRIGATION SLEEVE
		DUCTILE IRON PIPE (SUPPLY LINE) (MAIN) (DIP)
		GALVANIZED STEEL PIPE (SUPPLY LINE) (MAIN) (GSP)
		GALVANIZED STEEL PIPE (SUPPLY LINE) (LATERAL) (GSP)
		PLASTIC PIPE (PR 200) (SUPPLY LINE) (MAIN)
		PLASTIC PIPE (PR 200) (SUPPLY LINE) (LATERAL)
		PLASTIC PIPE (IRRIGATION LINE)
		REMOTE CONTROL VALVE (RCV) REMOTE CONTROL VALVE (MASTER) (RCVM) REMOTE CONTROL VALVE (MASTER) W/FLOW METER (RCVMF)
		MANUAL CONTROL VALVE (MCV)
		VALVE ASSEMBLY UNIT (VAU)
		WYE STRAINER (WS)
		FILTER ASSEMBLY UNIT (FAU)
		GATE VALVE (GV)
		BALL VALVE (BV)

EXISTING	PROPOSED	ITEM DESCRIPTION
		QUICK COUPLING VALVE (QCV)
		CAM COUPLER ASSEMBLY (CCA)
		PRESSURE REDUCING VALVE (PRV)
		PRESSURE RELIEF VALVE (PRLV)
		FLOW CONTROL VALVE (FCV)
		COMBINATION AIR RELEASE VALVE (CARV)
		CHECK VALVE (CV)
		FLUSH VALVE (FV)
		NOZZLE LINE W/TURNING UNION
		IRRIGATION SYSTEM
		IRRIGATION SYSTEM TO BE REMOVED
		CHAIN LINK GATE
		QUICK COUPLING VALVE W/SPRINKLER PROTECTOR
		SPRINKLER W/SPRINKLER PROTECTOR
		CONNECT TO EXISTING SYSTEM
		CAP
		CAP EXISTING

**VALVE CODE**

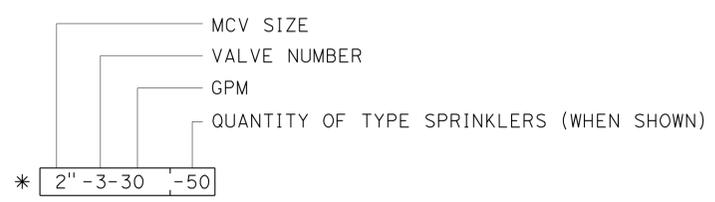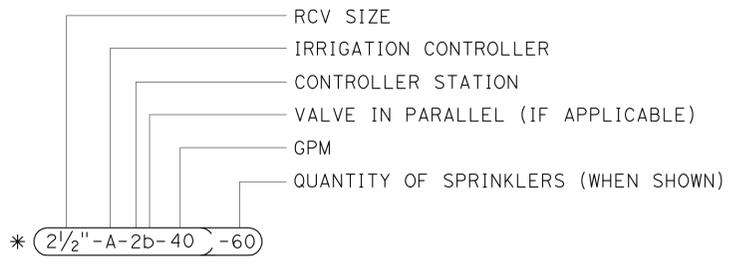

\* VALVE CODES FOR EXISTING VALVES ARE SHOWN IN A DASHED ENCLOSURE.

**PLANTING AND IRRIGATION SYMBOLS**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

NO SCALE


RSP H2 DATED JUNE 5, 2009 SUPERSEDES RSP H2 DATED MARCH 7, 2008 AND STANDARD PLAN H2 DATED MAY 1, 2006 - PAGE 202 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP H2**

2006 REVISED STANDARD PLAN RSP H2


DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	120	140

*Gregory A. Balzer*  
 LICENSED LANDSCAPE ARCHITECT  
 June 5, 2009  
 PLANS APPROVAL DATE  
The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.




To accompany plans dated 4-9-12


2006 REVISED STANDARD PLAN RSP H5

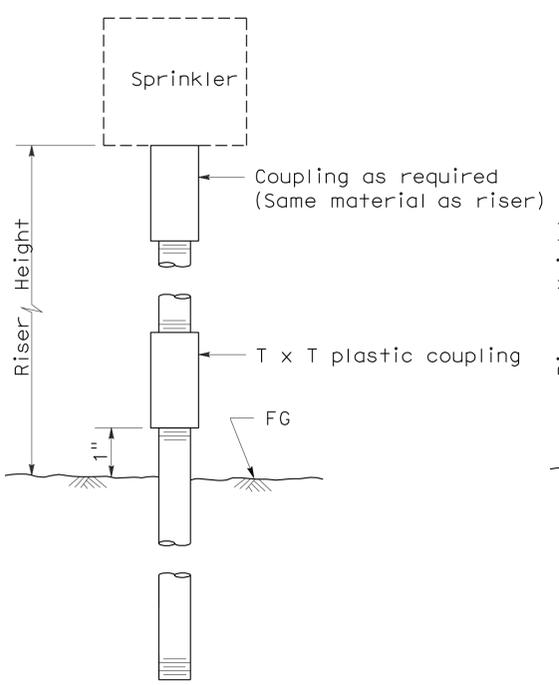


ELEVATION  
RISER TYPE I

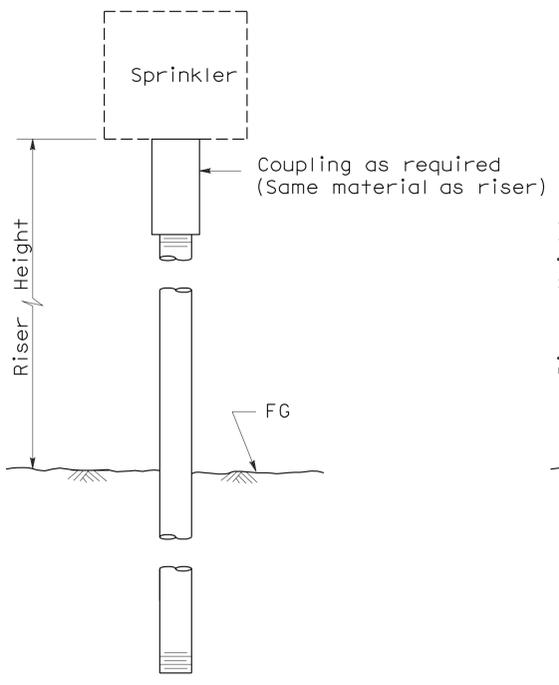


ELEVATION  
RISER TYPE II

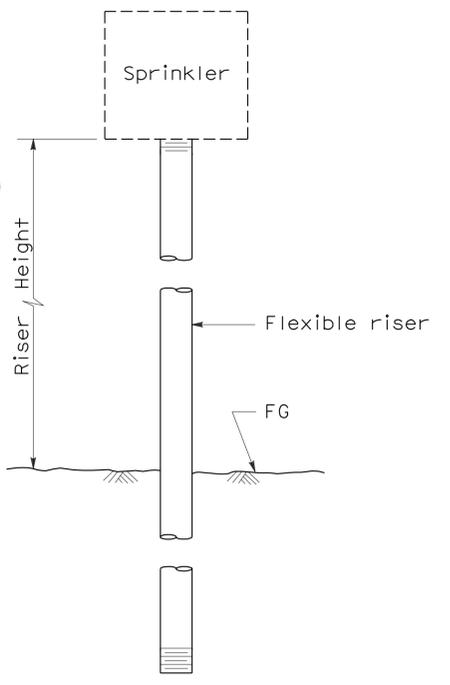


ELEVATION  
RISER TYPE III

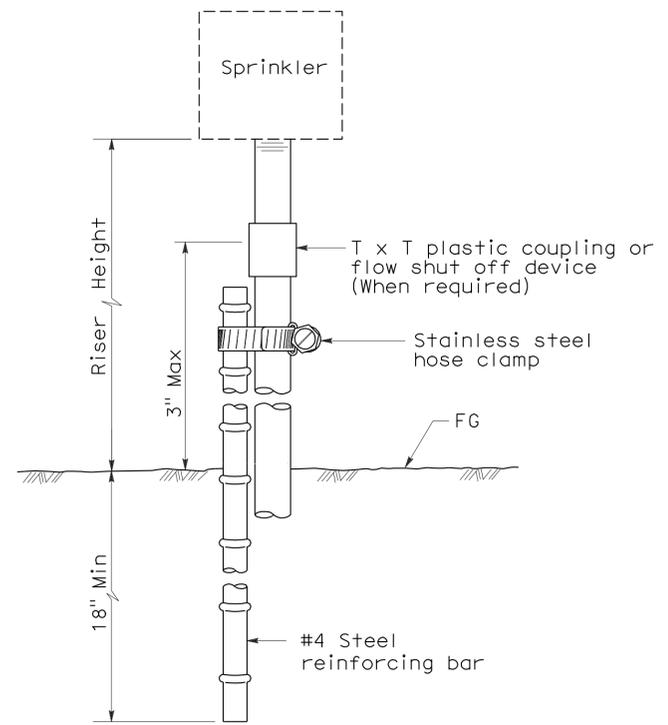

ELEVATION  
RISER TYPE IV

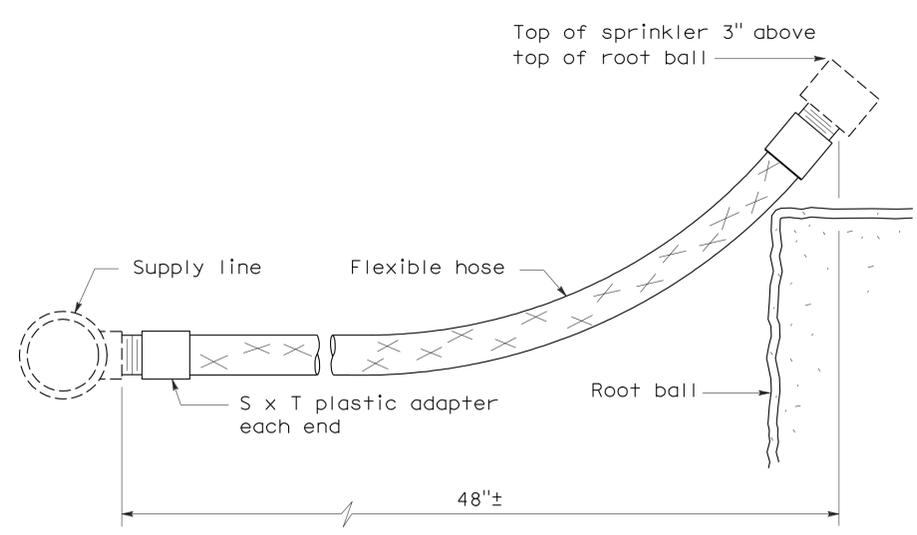

ELEVATION  
RISER TYPE V

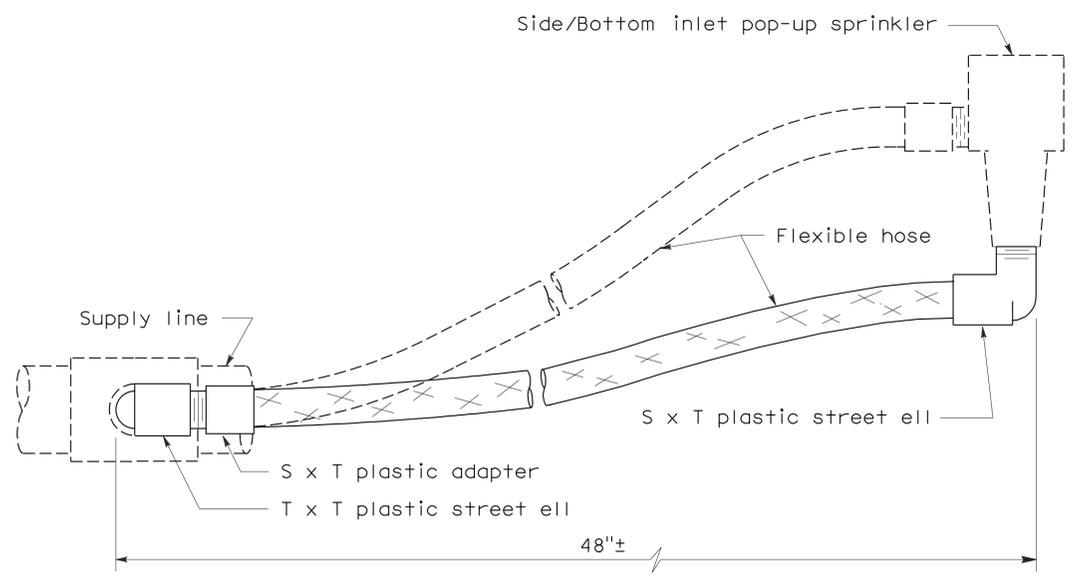

ELEVATION  
RISER TYPE VI

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**PLANTING AND IRRIGATION  
DETAILS**  
NO SCALE


RSP H5 DATED JUNE 5, 2009 SUPERSEDES STANDARD PLAN H5  
DATED MAY 1, 2006 - PAGE 205 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP H5**


DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	121	140

*Gregory A. Balzer*  
 LICENSED LANDSCAPE ARCHITECT  
 License No. 226  
 Signature Date: 2-28-11  
 Renewal Date: 5-14-09  
 State of California


June 5, 2009  
 PLANS APPROVAL DATE  
 The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

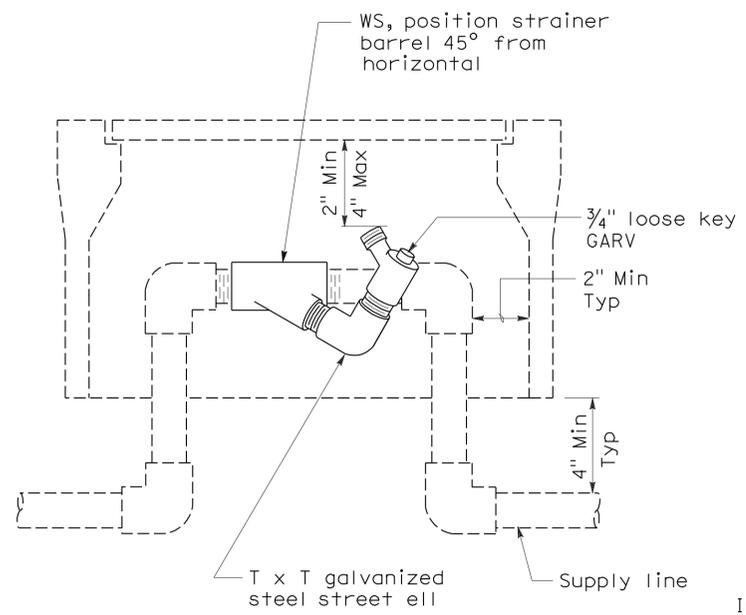


**ELEVATION  
WYE STRAINER**

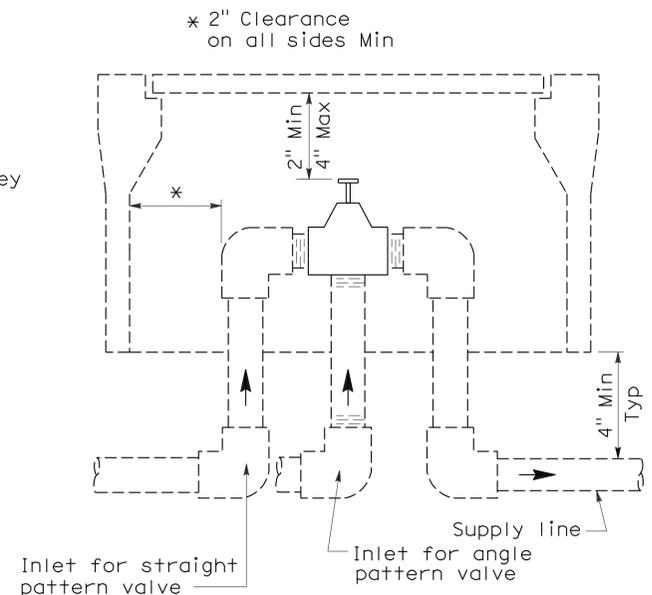


**ELEVATION  
VALVE**

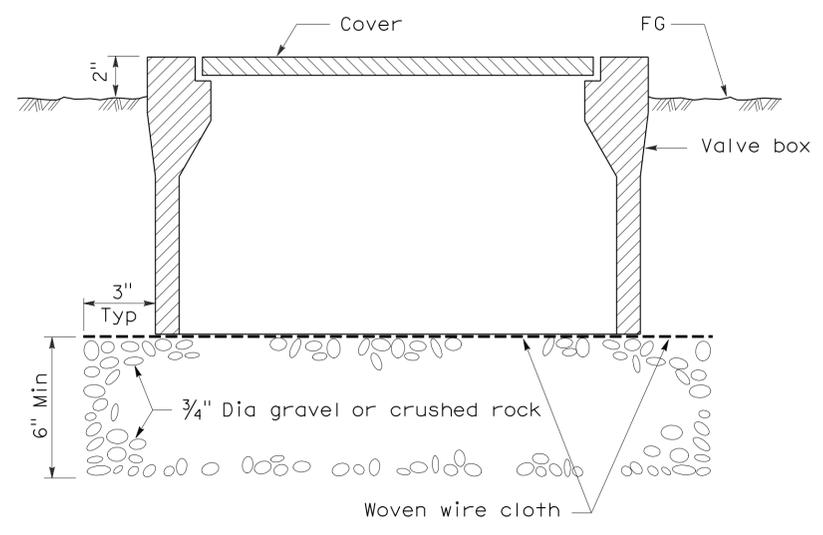

**SECTION  
VALVE BOX**

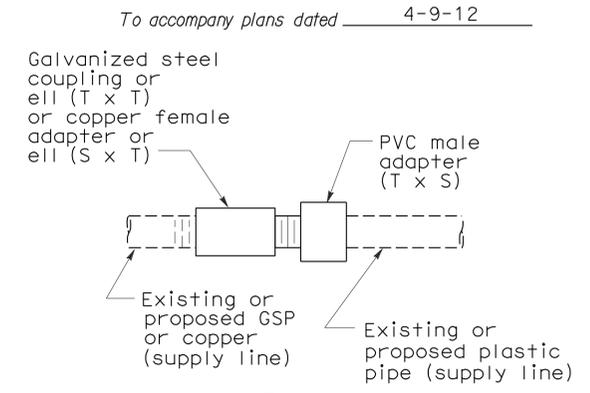


**PLAN  
GALVANIZED OR COPPER PIPE  
CONNECTION TO PLASTIC PIPE**

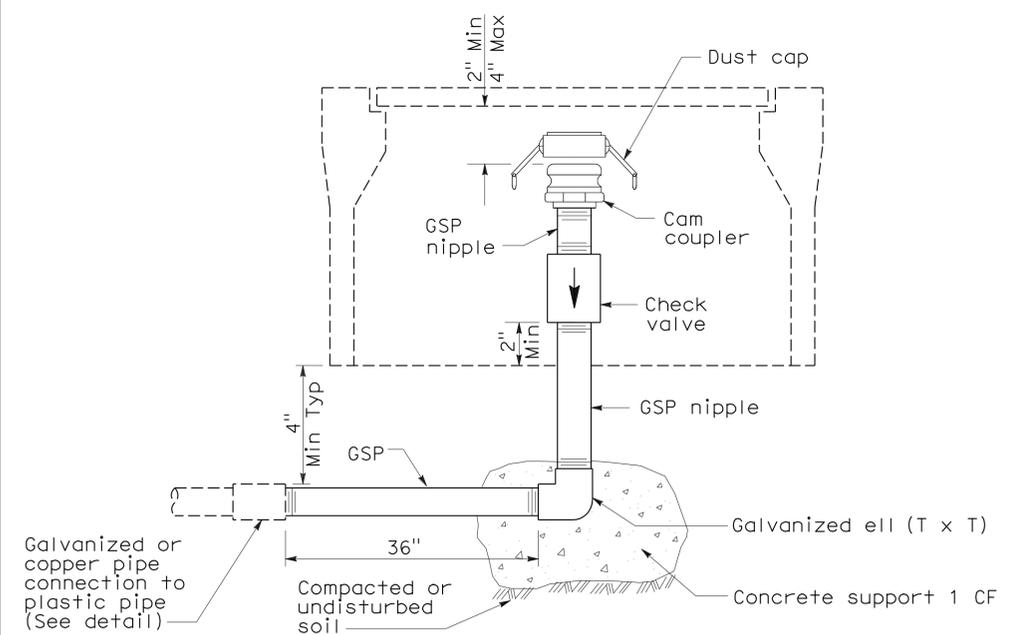


**ELEVATION  
CAM COUPLER ASSEMBLY**


Identification label:  
 For abbreviations see Revised Standard Plans H1 and H2.  
 For controller and station number see project plans.

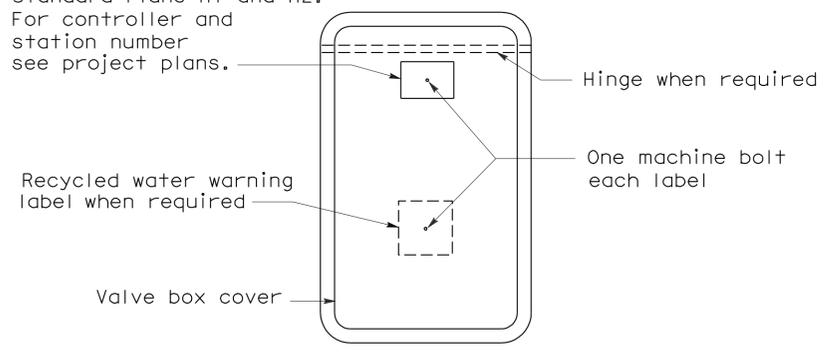

**PLAN**

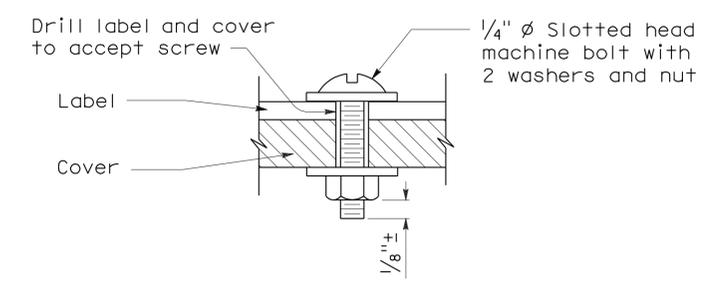

**SECTION  
VALVE BOX IDENTIFICATION**

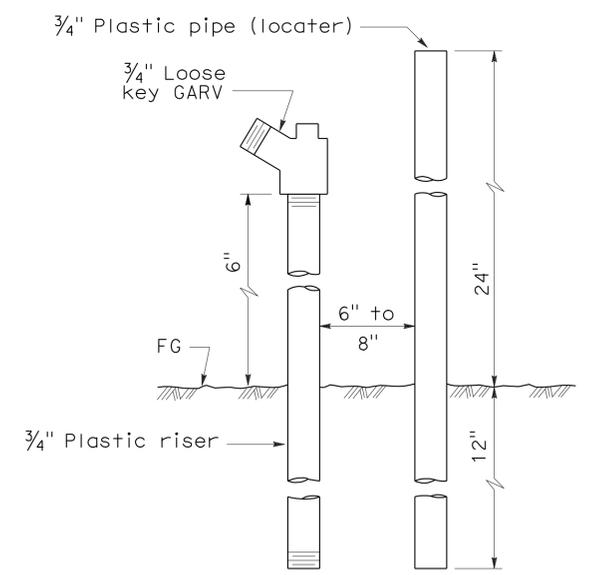

**ELEVATION  
FLUSH VALVE**

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION

**PLANTING AND IRRIGATION  
DETAILS**

NO SCALE

RSP H7 DATED JUNE 5, 2009 SUPERSEDES STANDARD PLAN H7  
 DATED MAY 1, 2006 - PAGE 207 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP H7**

2006 REVISED STANDARD PLAN RSP H7

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	122	140


*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER

June 6, 2008  
PLANS APPROVAL DATE

*Randell D. Hiatt*  
REGISTERED PROFESSIONAL ENGINEER  
No. C50200  
Exp. 6-30-09  
CIVIL  
STATE OF CALIFORNIA


The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

To accompany plans dated 4-9-12

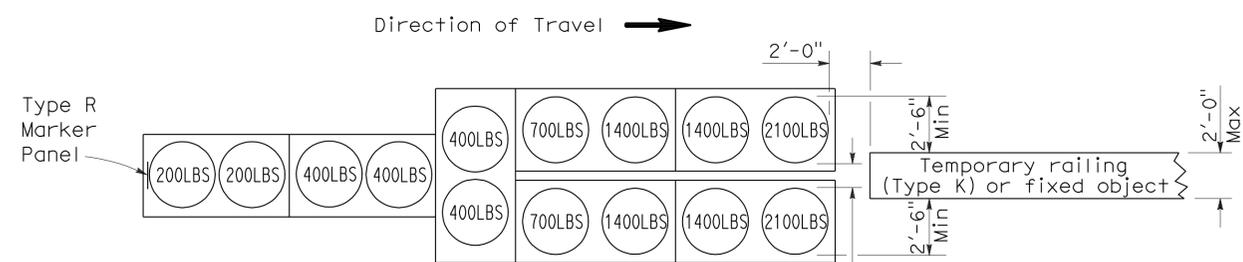


**ARRAY 'TU14'**

Approach speed 45 mph or more

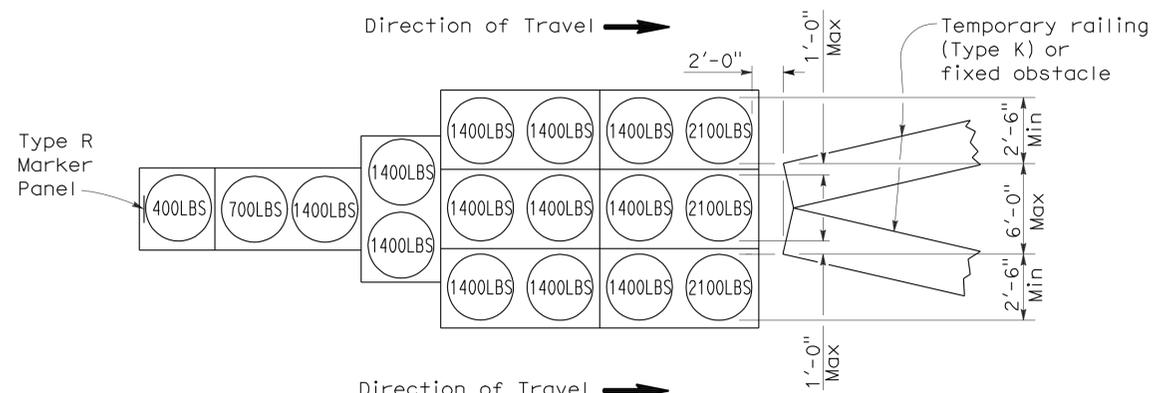


**ARRAY 'TU17'**

Approach speed less than 45 mph

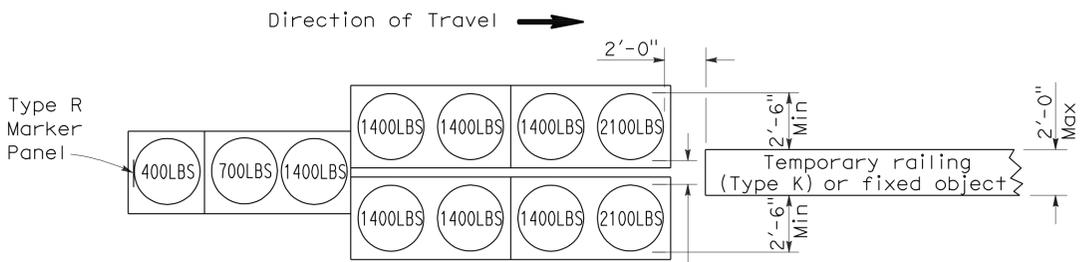


**ARRAY 'TU11'**

Approach speed less than 45 mph

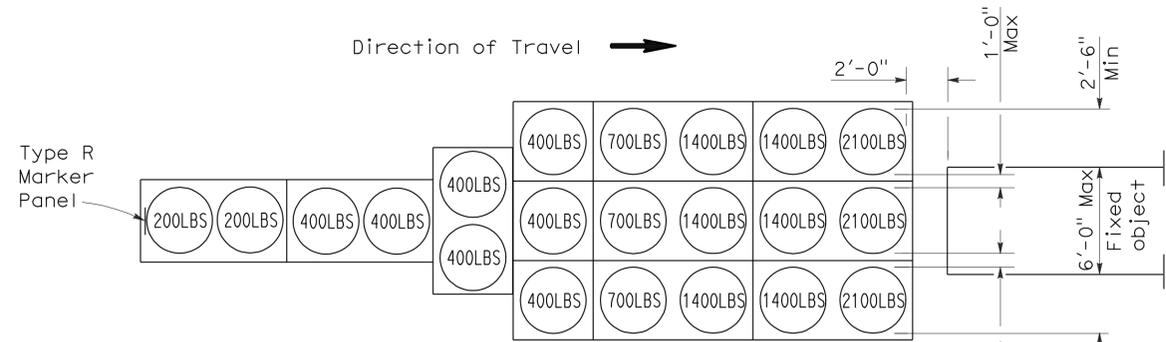


**ARRAY 'TU21'**

Approach speed 45 mph or more

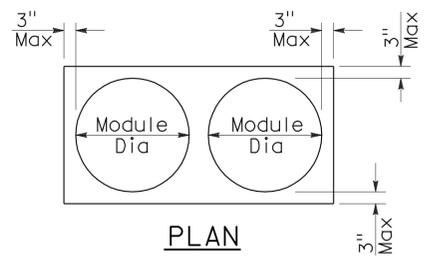

**PLAN**

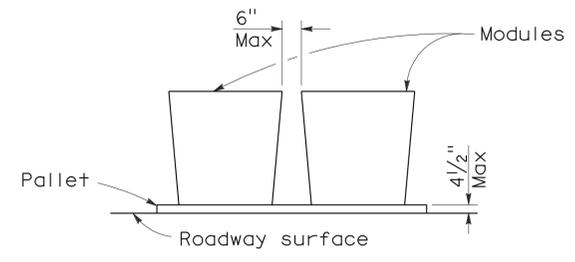

**ELEVATION**

**CRASH CUSHION PALLET DETAIL**

See Note 7

**NOTES:**

1. (XXX) Indicates sand filled module location and weight of sand in pounds for each module. Module spacing is based on the greater diameter of the module.
2. All sand weights are nominal.
3. Temporary crash cushion arrays shall not encroach on the traveled way.
4. Place the top of Type R marker panel 1" below the module lid.
5. Refer to Standard Plan A73B for marker details.
6. Approach speeds indicated conform to NCHRP 350 Report criteria.
7. Use of pallets is optional.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**TEMPORARY CRASH CUSHION,  
SAND FILLED  
(UNIDIRECTIONAL)**

NO SCALE

RSP T1A DATED JUNE 6, 2008 SUPERSEDES STANDARD PLAN T1A  
DATED MAY 1, 2006 - PAGE 211 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP T1A**

2006 REVISED STANDARD PLAN RSP T1A

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	123	140


Randell D. Hiatt  
REGISTERED CIVIL ENGINEER

June 6, 2008  
PLANS APPROVAL DATE

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.


REGISTERED PROFESSIONAL ENGINEER  
Randell D. Hiatt  
No. C50200  
Exp. 6-30-09  
CIVIL  
STATE OF CALIFORNIA

To accompany plans dated 4-9-12

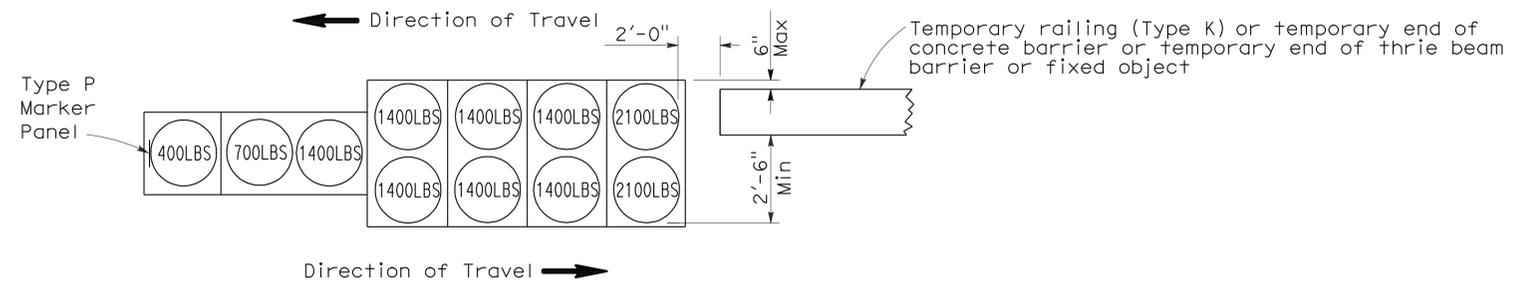


**ARRAY 'TB11'**

Approach speed less than 45 mph

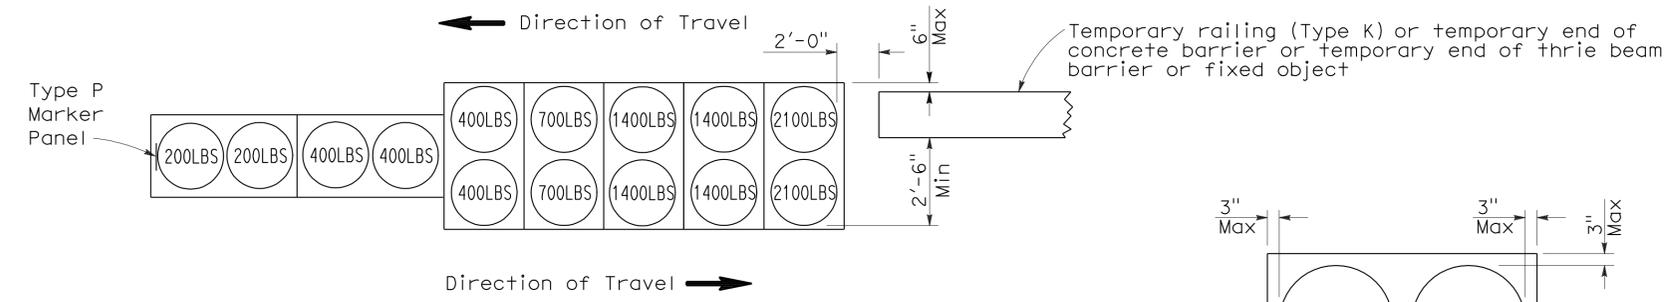


**ARRAY 'TB14'**

Approach speed 45 mph or more

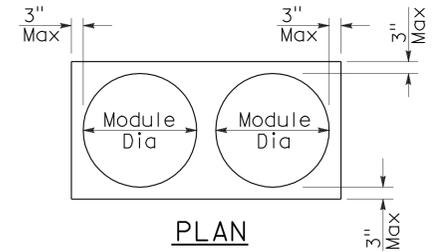

PLAN

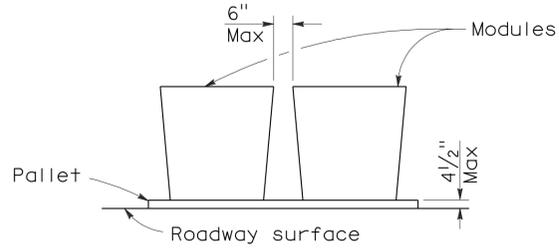

ELEVATION

**CRASH CUSHION PALLET DETAIL**

See Note 7

**NOTES:**

1. (XXX) Indicates sand filled module location and weight of sand in pounds for each module. Module spacing is based on the greater diameter of the module.
2. All sand weights are nominal.
3. Temporary crash cushion arrays shall not encroach on the traveled way.
4. Place the Type P marker panel so that the bottom of the panel rests upon the pallet.
5. Refer to Standard Plan A73B for marker details.
6. Approach speeds indicated conform to NCHRP 350 Report criteria.
7. Use of pallets is optional.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**TEMPORARY CRASH CUSHION,  
SAND FILLED  
(BIDIRECTIONAL)**

NO SCALE

RSP T1B DATED JUNE 6, 2008 SUPERSEDES STANDARD PLAN T1B  
DATED MAY 1, 2006 - PAGE 212 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP T1B**

2006 REVISED STANDARD PLAN RSP T1B


DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	124	140

*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER


June 6, 2008  
PLANS APPROVAL DATE

*The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.*


To accompany plans dated 4-9-12

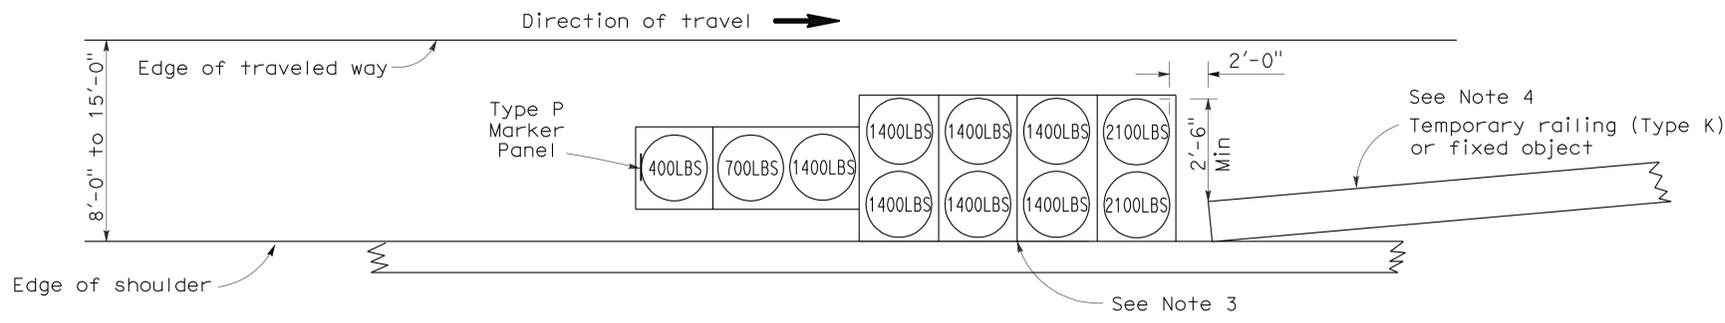

**ARRAY 'TS11'**  
Approach speed less than 45 mph  
See Note 9

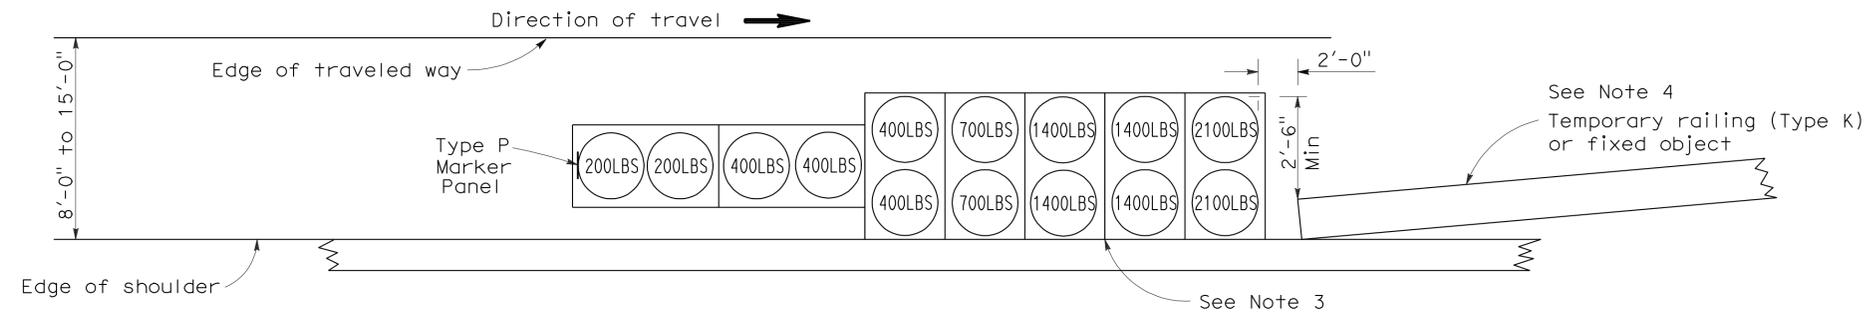

**ARRAY 'TS14'**  
Approach speed 45 mph or more  
See Note 9

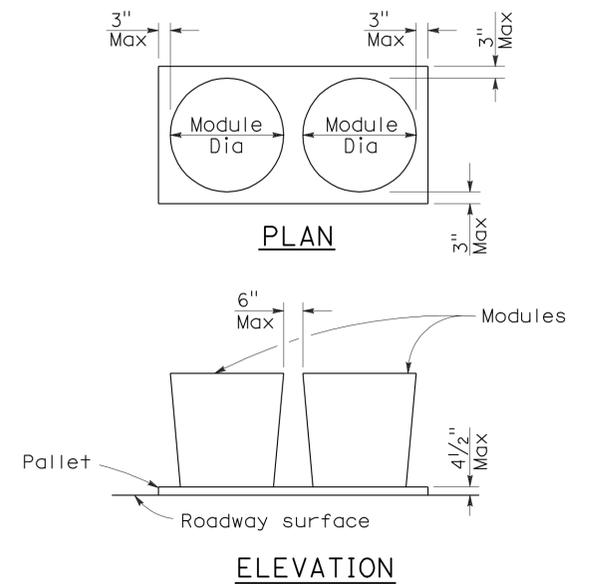

**CRASH CUSHION PALLET DETAIL**  
See Note 11

**NOTES:**

- (XXX) Indicates sand filled module location and weight of sand in pounds for each module. Module spacing is based on the greater diameter of the module.
- All sand weights are nominal.
- The temporary crash cushion arrays shown on this plan shall be used only in locations where there will be traffic on one side of the temporary crash cushion array.
- If the fixed object or approach end of the temporary railing is less than 15'-0" from the edge of traveled way, a temporary crash cushion is required in a construction or work zone.
- Temporary crash cushion arrays shall not encroach on the traveled way.
- Arrays for median shoulders shall conform to details shown on this plan for outside shoulders.
- Place the Type P marker panel so that the bottom of the panel rests upon the pallet and faces traffic.
- Refer to Standard Plan A73B for marker details.
- For shoulder widths less than 8'-0", appropriate approved crash cushion protection, other than sand filled modules, shall be provided at fixed objects and at approach ends of temporary railing. The specific type of crash cushion shall be as shown on the project plans or as specified in the Special Provisions, or if not shown on the project plans or specified in the Special Provisions, shall be as approved by the Engineer.
- Approach speeds indicated conform to NCHRP 350 Report criteria.
- Use of pallets is optional.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**TEMPORARY CRASH CUSHION,  
SAND FILLED  
(SHOULDER INSTALLATIONS)**

NO SCALE

RSP T2 DATED JUNE 6, 2008 SUPERSEDES STANDARD PLAN T2  
DATED MAY 1, 2006 - PAGE 213 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP T2**

2006 REVISED STANDARD PLAN RSP T2


Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	125	140

*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER


May 20, 2011  
PLANS APPROVAL DATE

*The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.*

To accompany plans dated 4-9-12

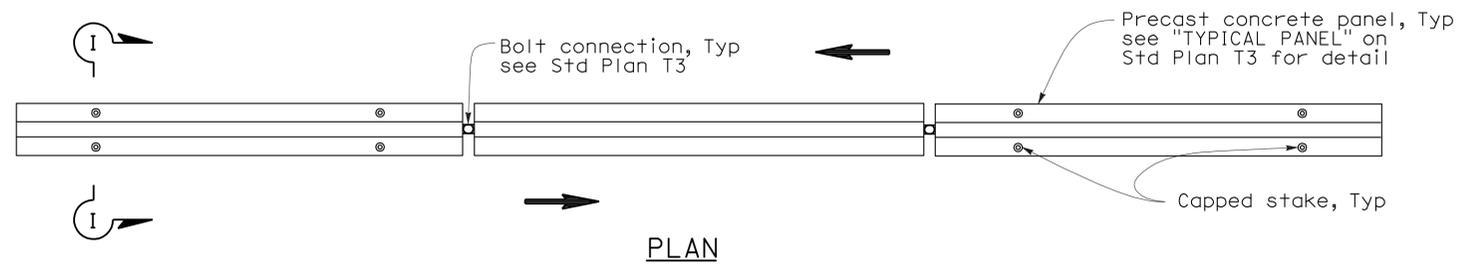


**RAILING STAKING CONFIGURATION FOR TWO-WAY TRAFFIC**  
See Note 1


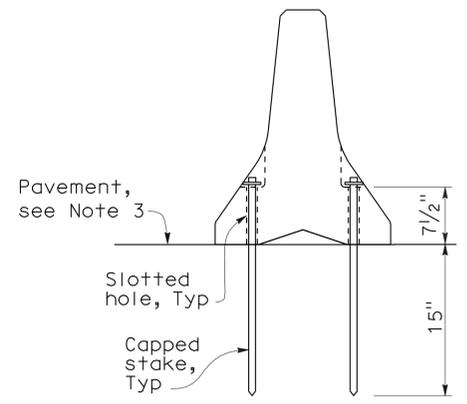


**NOTES:**

1. Where Type K Temporary Railing is placed as a temporary or long term barrier in two-way traffic on highways with less than 24" from the edge of traveled way, use four capped stakes per every other panel with end panels staked.
2. Where Type K Temporary Railing is placed 3" to 24" from the edge of an excavation on highways, use two capped stakes per panel along the traffic side.
3. Staked Type K Temporary Railing must be supported by at least 4" thick concrete, hot mix asphalt or existing asphalt concrete pavement.
4. The minimum yield strength for the washer must be 60,000 psi.
5. Direction of adjacent traffic indicated by  $\Rightarrow$ .

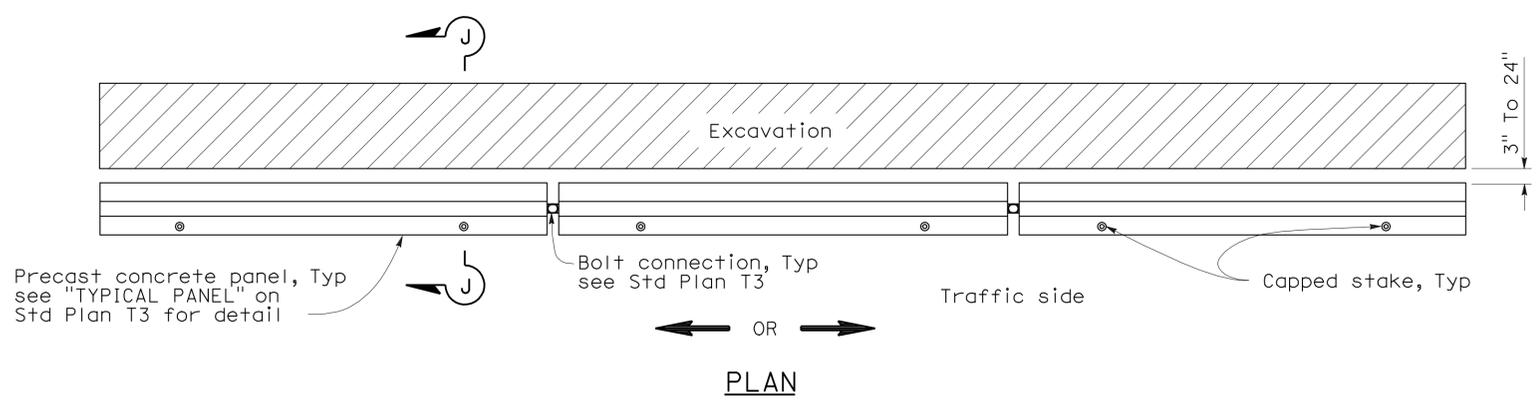

**RAILING STAKING CONFIGURATION ADJACENT TO AN EXCAVATION**  
See Note 2

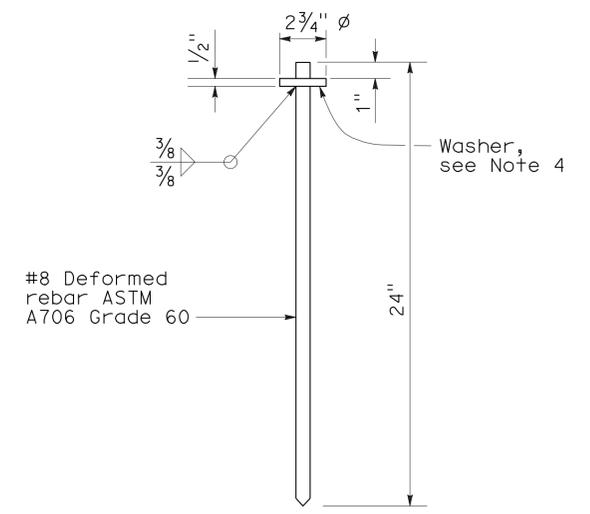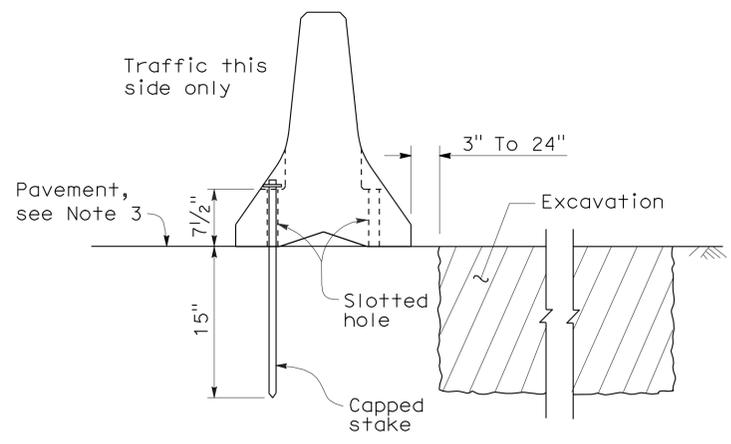

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**TEMPORARY RAILING  
(TYPE K)**

NO SCALE


NSP T3A DATED MAY 20, 2011 SUPPLEMENTS  
THE STANDARD PLANS BOOK DATED MAY 2006.

2006 NEW STANDARD PLAN NSP T3A




DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	127	140


*Robert B. Schott*  
 LICENSED LANDSCAPE ARCHITECT  
 April 3, 2009  
 PLANS APPROVAL DATE  
The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.




To accompany plans dated 4-9-12

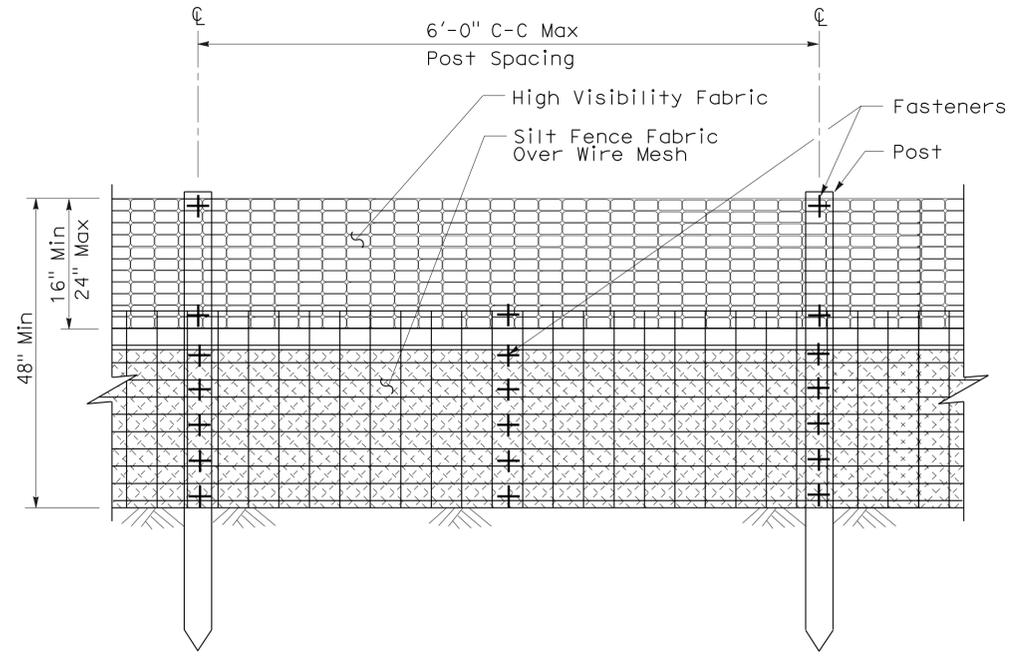


ELEVATION

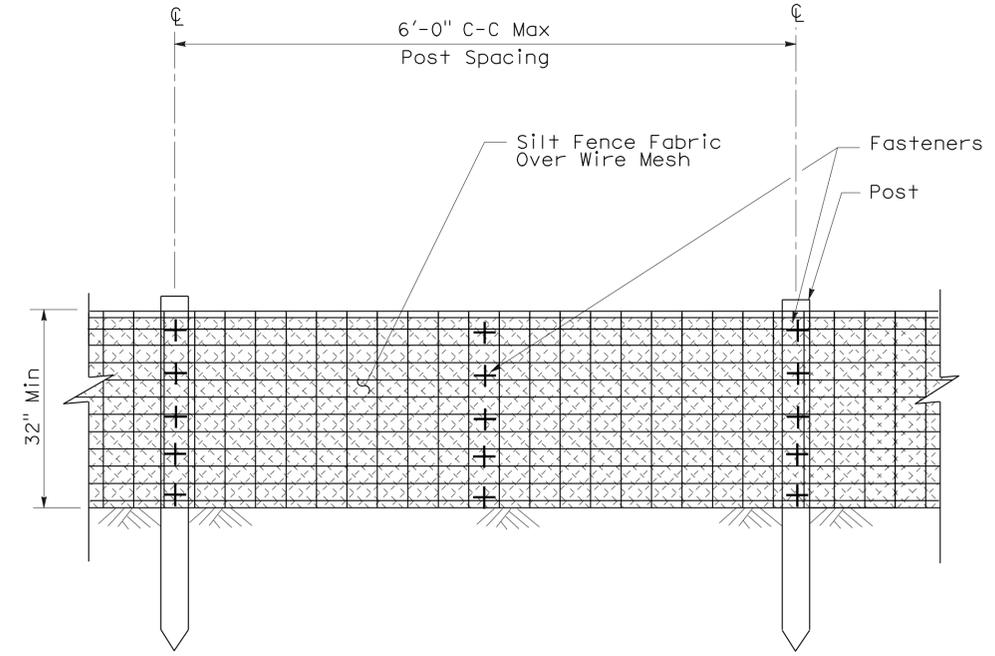

ELEVATION

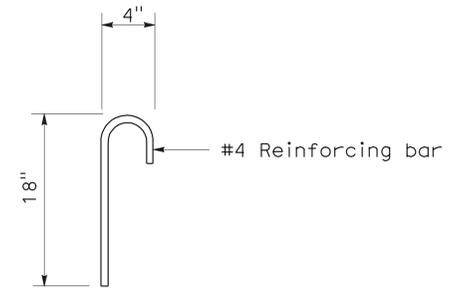


ANCHOR

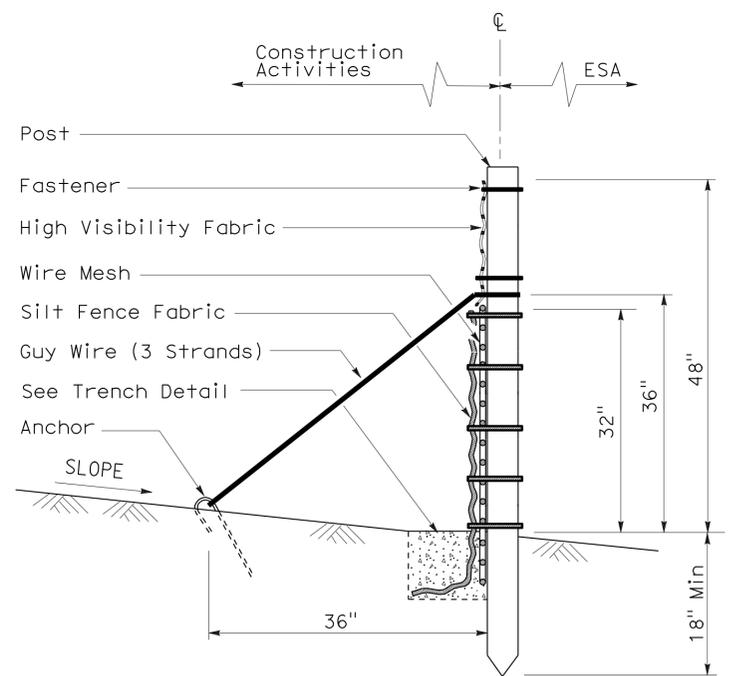


SECTION

TEMPORARY REINFORCED SILT FENCE (TYPE 1)

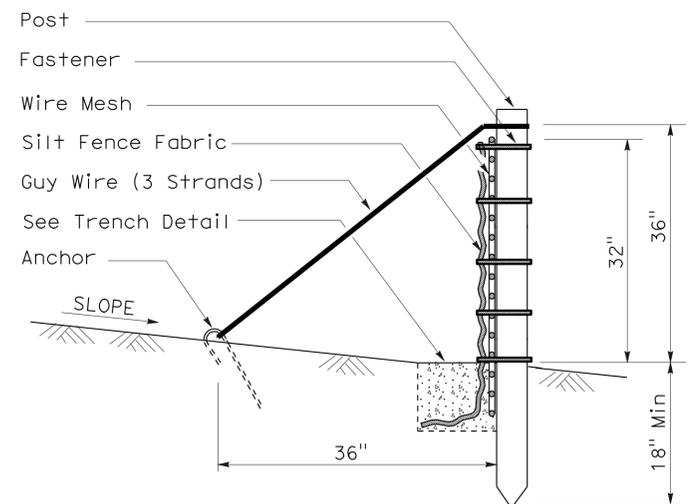

SECTION

TEMPORARY REINFORCED SILT FENCE (TYPE 2)

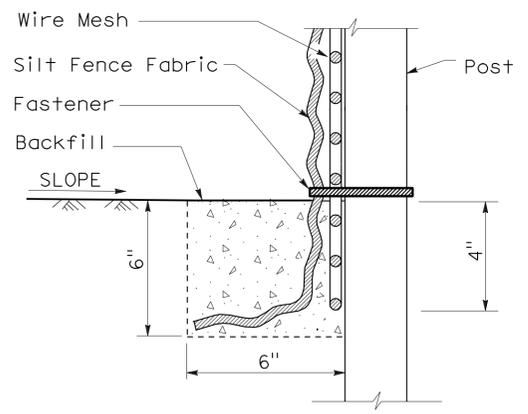


SECTION  
TRENCH DETAIL

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**TEMPORARY WATER POLLUTION CONTROL DETAILS**  
**(TEMPORARY REINFORCED SILT FENCE)**  
 NO SCALE  
 NSP T60 DATED APRIL 3, 2009 SUPPLEMENTS  
 THE STANDARD PLANS BOOK DATED MAY 2006.


2006 NEW STANDARD PLAN NSP T60

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	128	140


Robert B. Schott  
 LICENSED LANDSCAPE ARCHITECT  
 August 15, 2008  
 PLANS Approval DATE  
The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.



To accompany plans dated 4-9-12

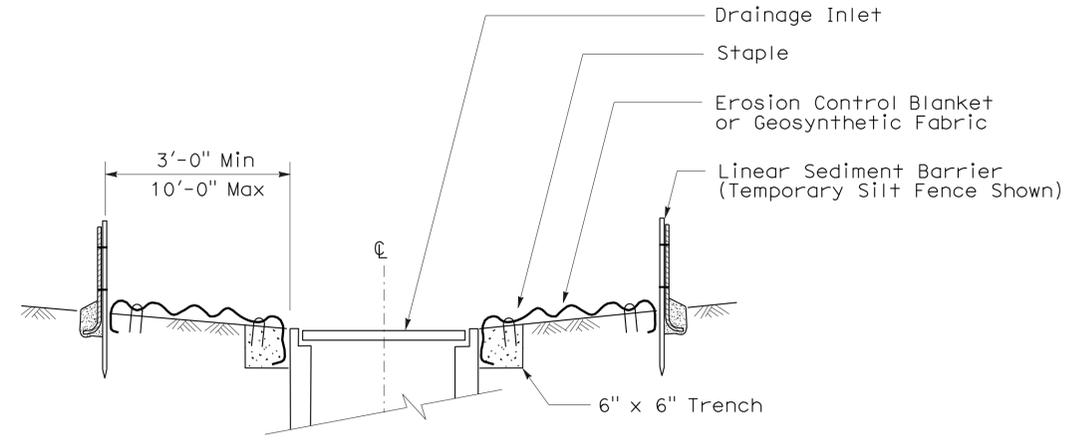


SECTION A-A

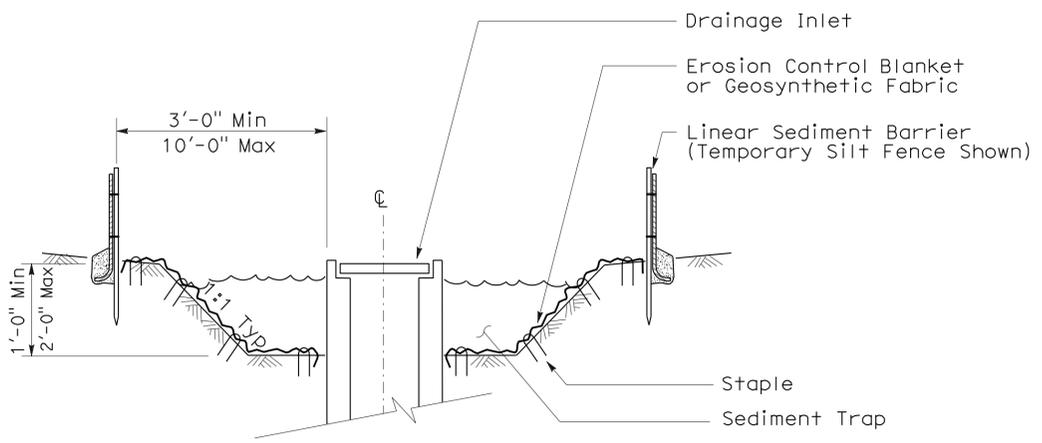


SECTION B-B


- NOTES:**
- See Standard Plan T51 for Temporary Silt Fence.
  - Dimensions may vary to fit field conditions.

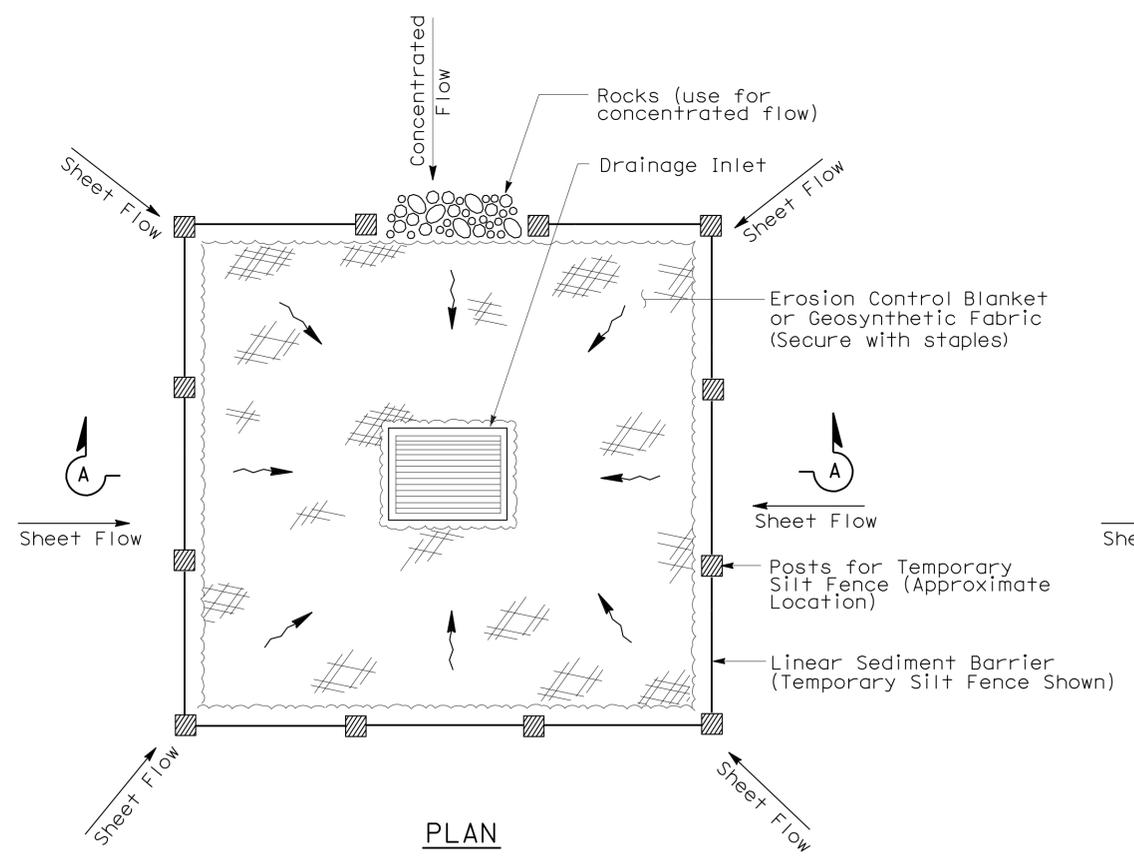

TEMPORARY DRAINAGE INLET PROTECTION (TYPE 1)

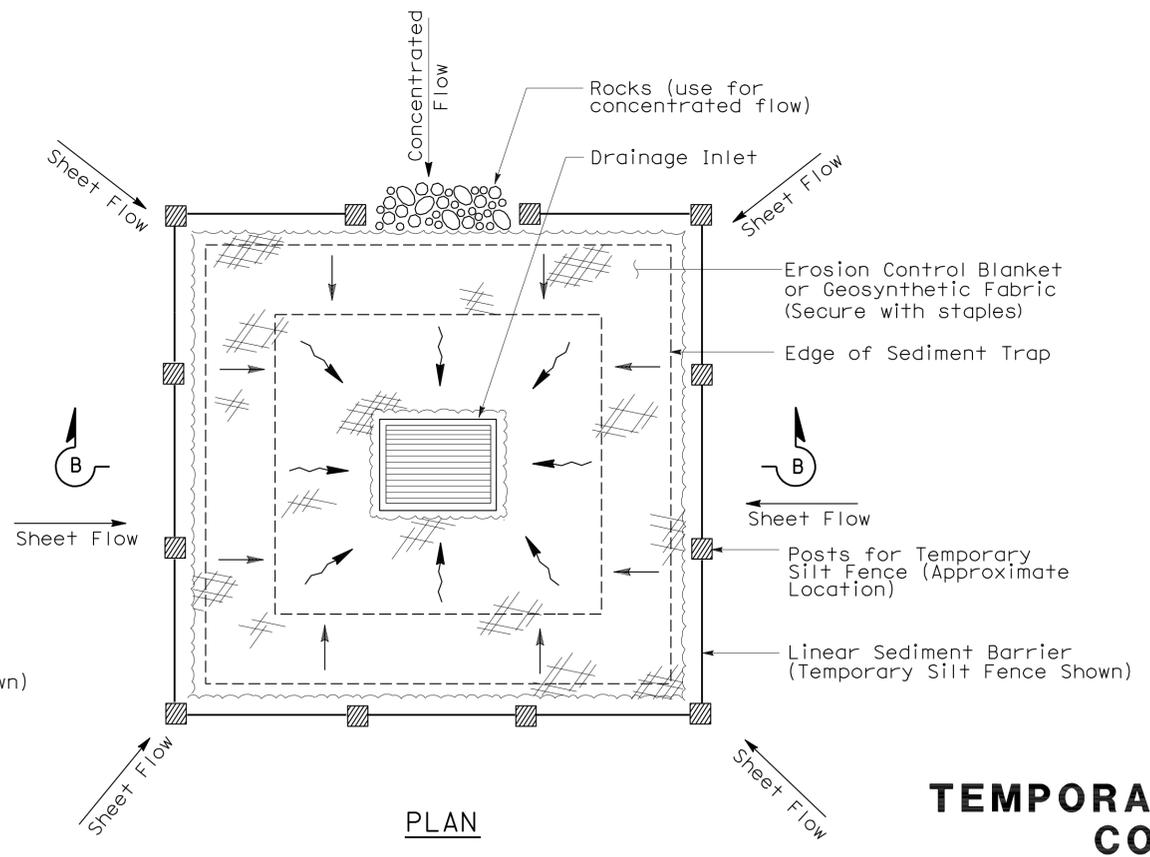

TEMPORARY DRAINAGE INLET PROTECTION (TYPE 2) (EXCAVATED SEDIMENT TRAP)

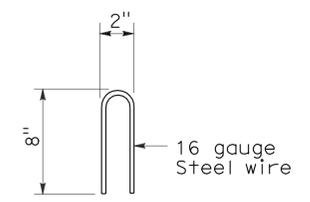

STAPLE DETAIL

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

## TEMPORARY WATER POLLUTION CONTROL DETAILS (TEMPORARY DRAINAGE INLET PROTECTION)

NO SCALE

NSP T61 DATED AUGUST 15, 2008 SUPPLEMENTS THE STANDARD PLANS BOOK DATED MAY 2006.


2006 NEW STANDARD PLAN NSP T61

2006 NEW STANDARD PLAN NSP T62


**GRAVEL BAG BERM (TYPE 3A) SPACING TABLE**

SLOPE OF ROADWAY (PERCENT)	1 to 3.9	4 to 5.9	6 to 7.9	8 to 10	10+
INTERVAL BETWEEN BERM	100'	75'	50'	25'	12'

For slope of less than 1%, install barriers only if erosion/sediment is prevalent

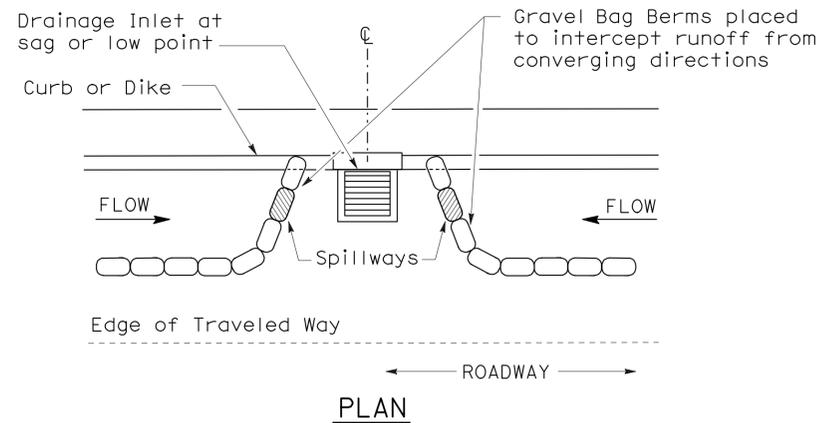

**PLAN**  
**CONFIGURATION FOR SAG POINT INLET**  
**(GRAVEL BAG BERM)**

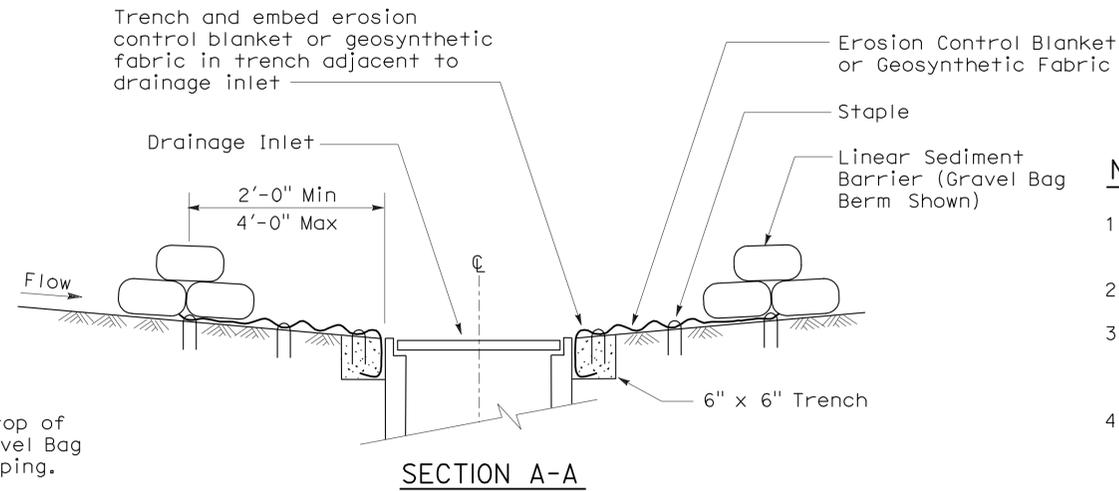


**SECTION A-A**


**NOTES:**

1. Place safety cones adjacent to drainage inlet protection.
2. Dimensions may vary to fit field conditions.
3. Install a minimum of 3 gravel bag berms upstream of each drainage inlet to be protected.
4. Position erosion control blanket or geosynthetic fabric at edge of concrete apron and secure in trench.
5. Erosion control blanket or geosynthetic fabric is not required if the area adjacent to the drainage inlet is vegetated or paved.


To accompany plans dated 4-9-12

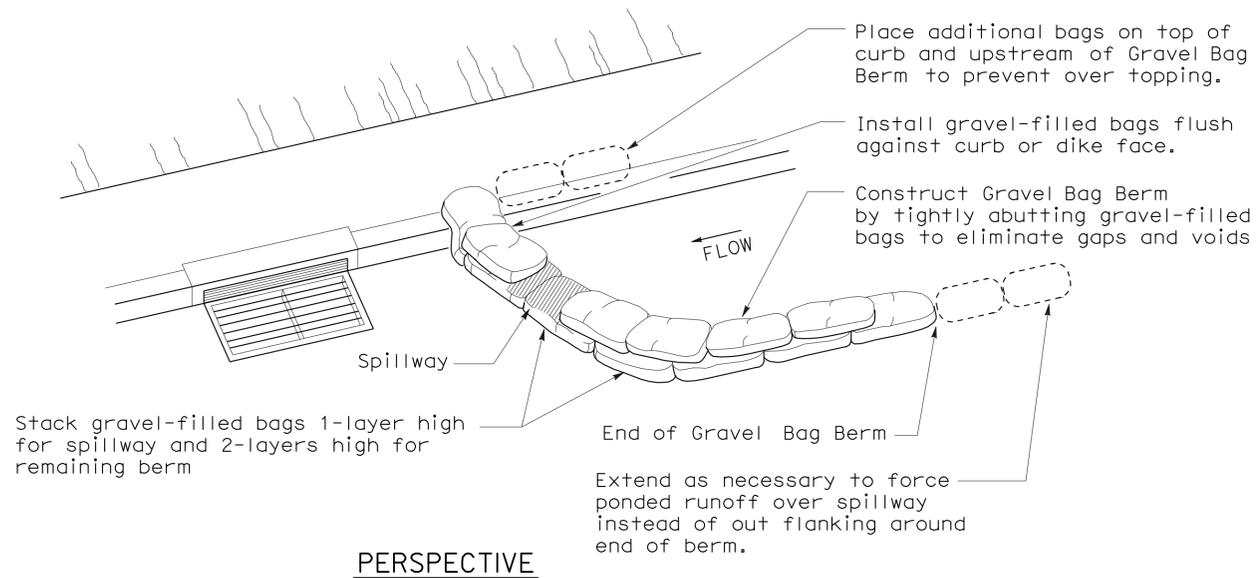


**PERSPECTIVE**

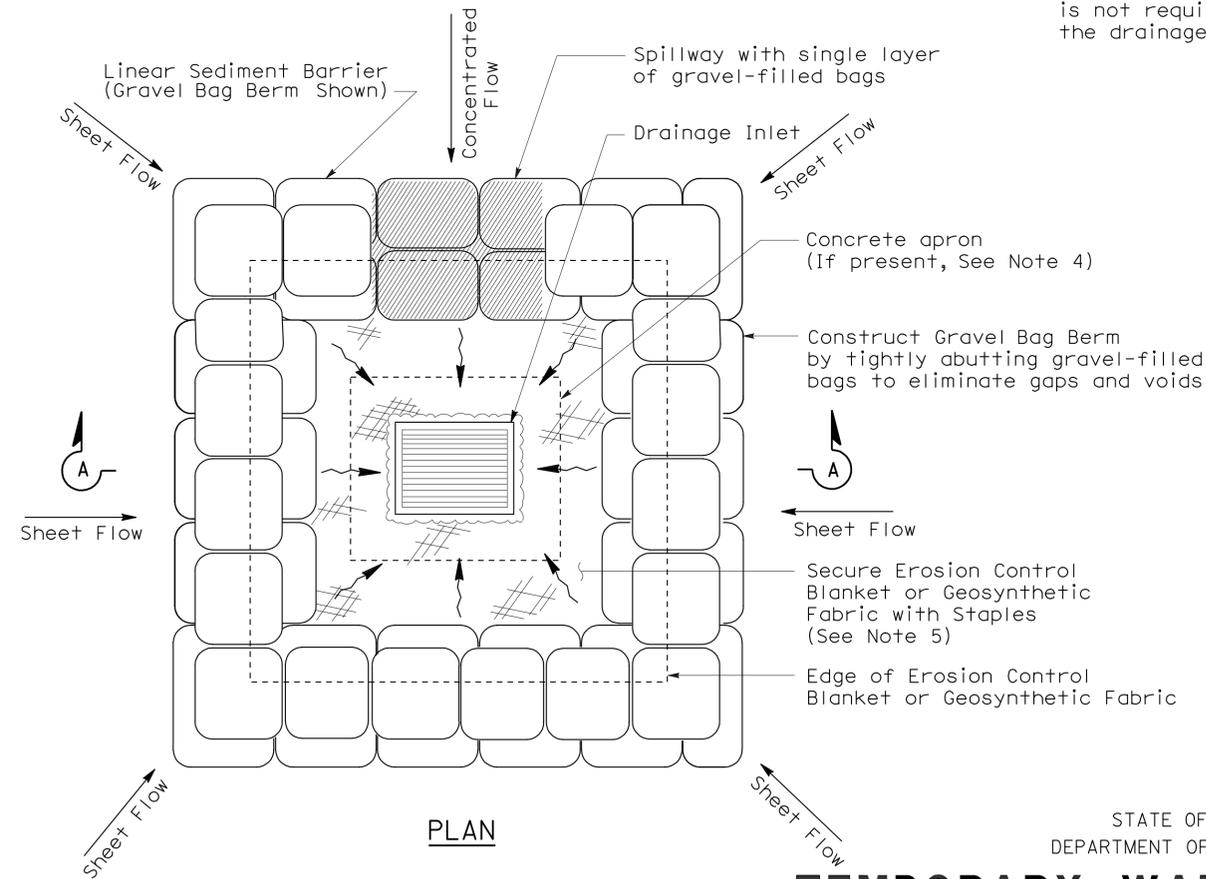

**PLAN**  
**TEMPORARY DRAINAGE**  
**INLET PROTECTION (TYPE 3B)**

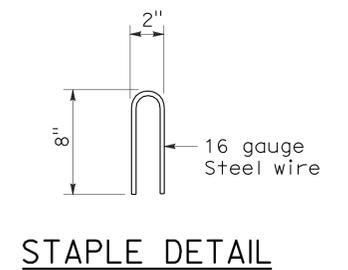

**STAPLE DETAIL**

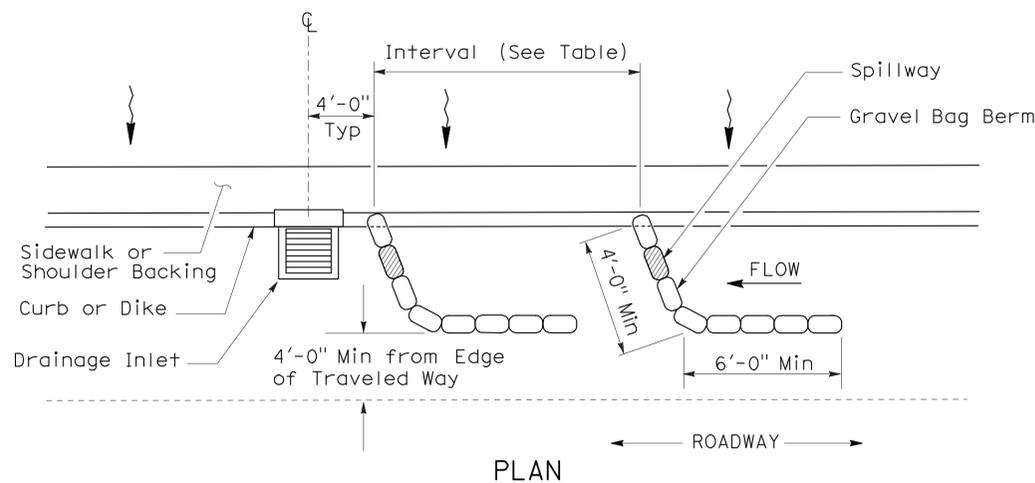


**PLAN**  
**TEMPORARY DRAINAGE**  
**INLET PROTECTION (TYPE 3A)**  
**(GRAVEL BAG BERM)**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**TEMPORARY WATER POLLUTION**  
**CONTROL DETAILS**  
**(TEMPORARY DRAINAGE**  
**INLET PROTECTION)**


NO SCALE  
NSP T62 DATED AUGUST 15, 2008 SUPPLEMENTS  
THE STANDARD PLANS BOOK DATED MAY 2006.

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	130	140


*Robert B. Schott*  
 LICENSED LANDSCAPE ARCHITECT  
 August 15, 2008  
 PLANS APPROVAL DATE  
The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.




To accompany plans dated 4-9-12

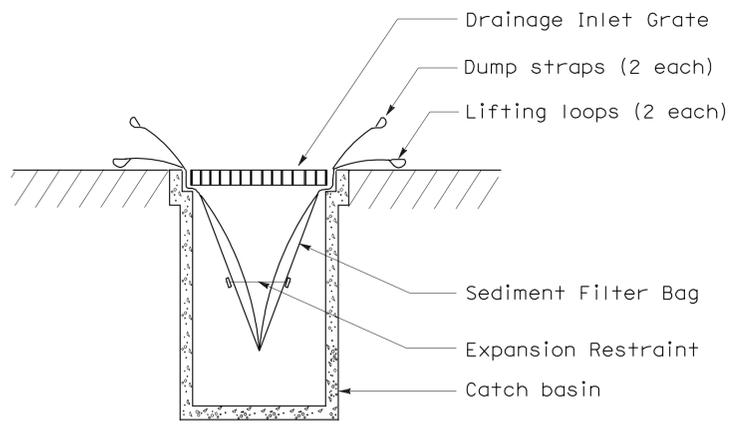


**SECTION B-B**  
**SEDIMENT FILTER BAG DETAIL**

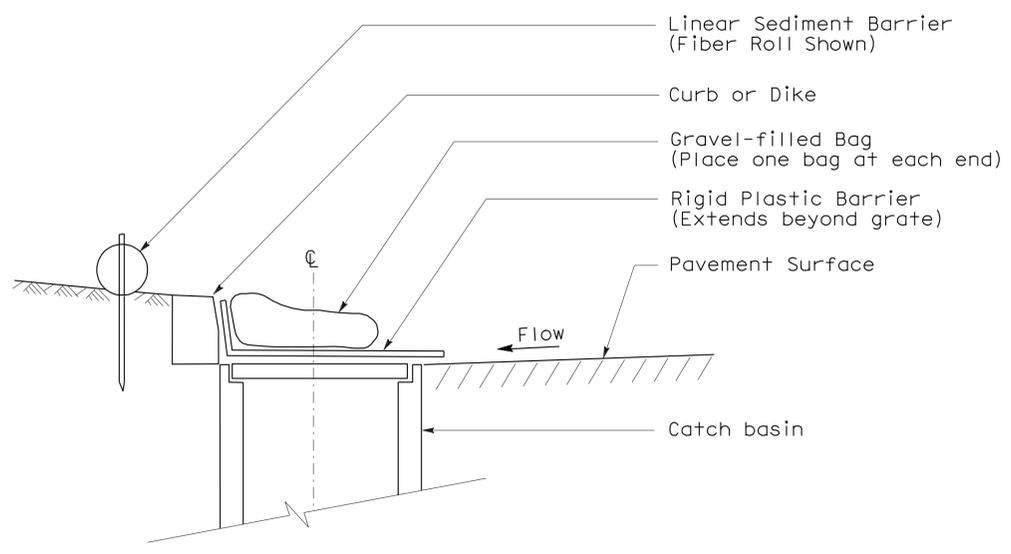


**SECTION**  
**TEMPORARY DRAINAGE INLET PROTECTION (TYPE 6A)**  
**(CATCH BASIN WITH GRATE)**

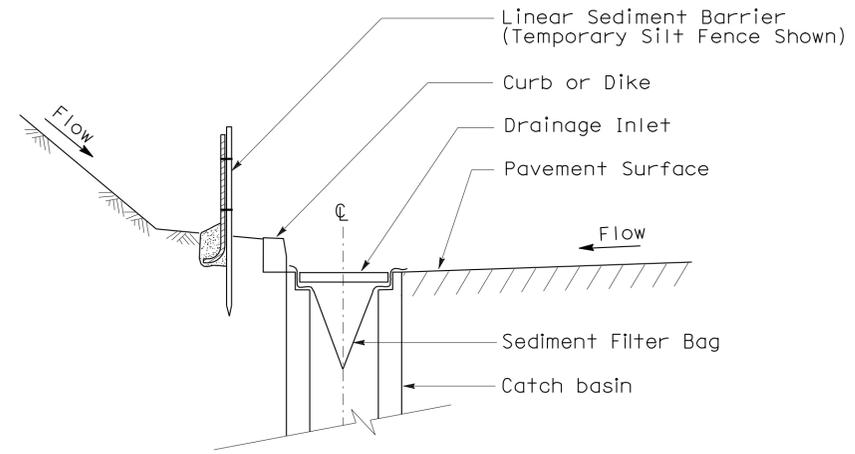

**SECTION A-A**

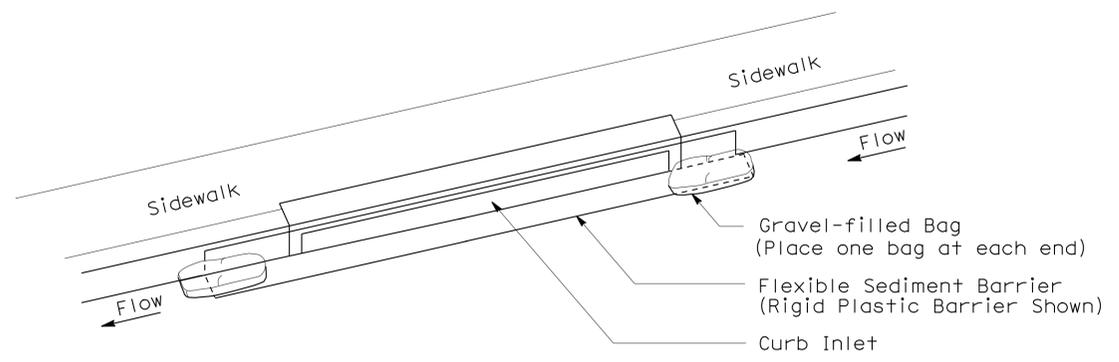

**PERSPECTIVE**  
**TEMPORARY DRAINAGE INLET PROTECTION (TYPE 6B)**  
**(CURB INLET WITHOUT GRATE)**

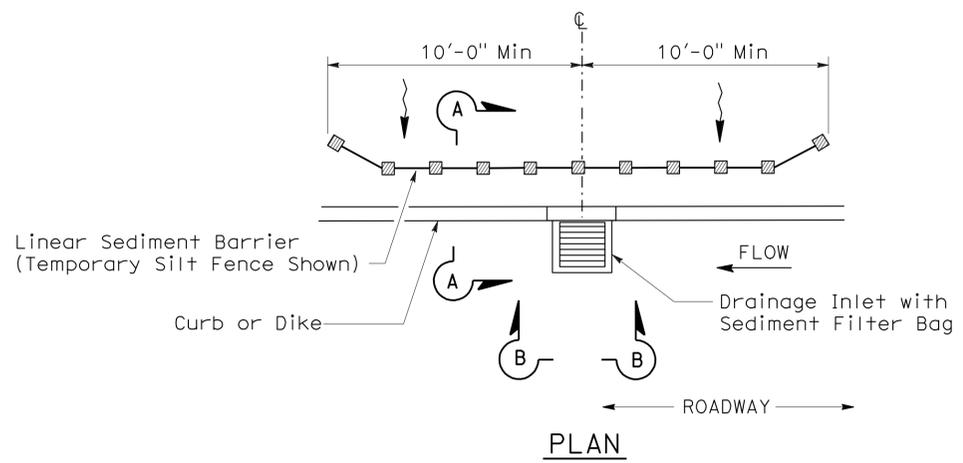

**PLAN**  
**TEMPORARY DRAINAGE INLET PROTECTION (TYPE 5)**  
**(SEDIMENT FILTER BAG)**

**NOTES:**



1. See Standard Plan T51 for Temporary Silt Fence.
2. Dimensions may vary to fit field conditions.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**TEMPORARY WATER POLLUTION CONTROL DETAILS (TEMPORARY DRAINAGE INLET PROTECTION)**

NO SCALE  
NSP T64 DATED AUGUST 15, 2008 SUPPLEMENTS THE STANDARD PLANS BOOK DATED MAY 2006.

**2006 NEW STANDARD PLAN NSP T64**

# ELECTROLIERS

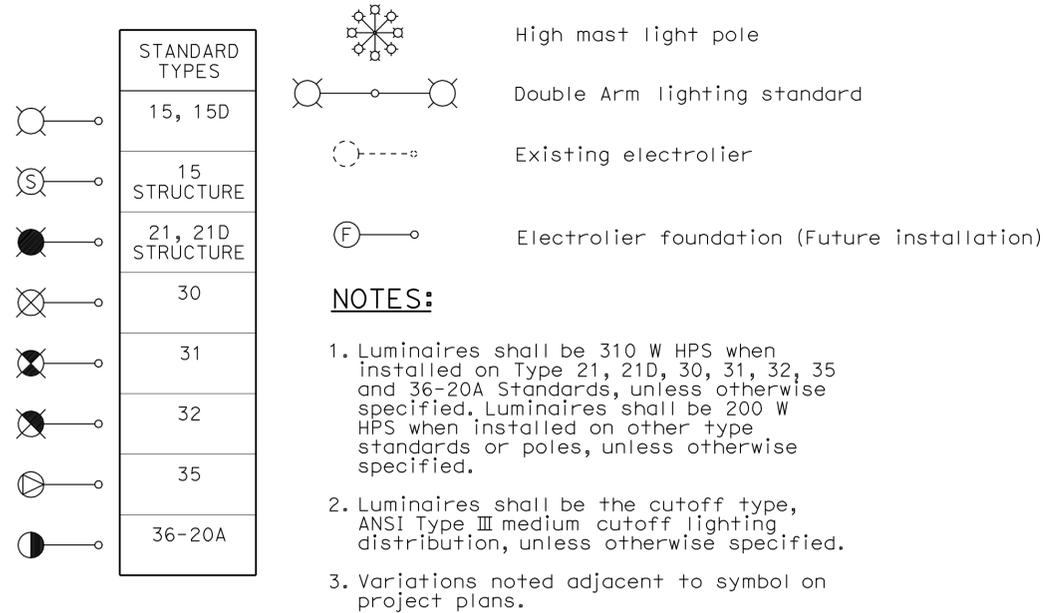

## STANDARD NOTES:

- AB** Abandon. If applied to conduit, remove conductors.
- BC** Install pull box in existing conduit run.
- BP** Pedestrian barricade, type as indicated on plan.
- CB** Install conduit into existing pull box.
- CC** Connect new and existing conduit. Remove existing conductors and install conductors as indicated.
- CF** Conduit to remain for future use. Remove conductors. Install pull wire or rope.
- DH** Detector handhole.
- FA** Foundation to be abandoned.
- IS** Install sign on signal mast arm.
- NS** No slip base on standard.
- PEC** Photoelectric control.
- PEU** Photoelectric unit.
- RC** Equipment or material to be removed and become the property of the Contractor.
- RE** Remove electrolier, fuses and ballast. Tape ends of conductors.
- RL** Relocate equipment.
- RR** Remove and reuse equipment.
- RS** Remove and salvage equipment.
- SC** Splice new to existing conductors.
- SD** Service disconnect.
- SF** Standard to remain for future use. Remove luminaire, pole conductors, fuses and ballast.
- TSP** Telephone service point.

# ABBREVIATIONS AND EQUIPMENT DESIGNATIONS

## PROPOSED EXISTING

BBS	bbs	Battery backup system
BC	bc	Bolt circle
C	C	Conduit
CCTV	cctv	Closed circuit television
CKT	ckt	Circuit
CMS	cms	Changeable message sign
DLC	dlc	Loop detector lead-in cable
EMS	ems	Extinguishable message sign
EVC	evc	Emergency vehicle cable
EVD	evd	Emergency vehicle detector
FB	fb	Flashing beacon
FBCA	fbca	Flashing beacon control assembly
FBS	fbs	Flashing beacon with slip base
FO	fo	Fiber optic
G	G	Ground (Equipment Grounding Conductor)
GFCI	GFCI	Ground fault circuit interrupt
HAR	har	Highway advisory radio
HEX	hex	Hexagonal
HPS	hps	High pressure sodium
IISNS	iisns	Internally illuminated street name sign
ISL	isl	Induction sign lighting
LED	led	Light emitting diode
LMA	lma	Luminaire mast arm
LPS	lps	Low pressure sodium
LTG	ltg	Lighting
LUM	lum	Luminaire
MAT	mat	Mast arm mounting vehicle signal faces, top attachment
MAS	mas	Mast arm mounting vehicle signal faces, side attachment
MAS-4A	mas-4A	Mast arm mounting vehicle signal faces, side attachment - 4 signal section
MAS-4B	mas-4B	
MAS-4C	mas-4C	
MAS-5A	mas-5A	Mast arm mounting vehicle signal faces, side attachment - 5 signal section
MAS-5B	mas-5B	
MC	mc	Mercury contactor
M/M	m/m	Multiple to multiple transformer
MT	mt	Conduit with pull wire or rope only
MTG	mtg	Mounting
	mv	Mercury vapor lighting fixture
N	N	Neutral (Grounded Conductor)
NC	NC	Normally closed
NO	NO	Normally open
PB	pb	Pull box
PEC	pec	Photoelectric control (Type I, II, III, IV or V as shown)
PED	ped	Pedestrian
PEU	peu	Photoelectric unit
PPB	ppb	Pedestrian push button
RL		Relocated equipment
RM	rm	Ramp metering
SB	sb	Slip base
SIC	sic	Signal interconnect cable
SIG	sig	Signal
SMA	sma	Signal mast arm
SNS	sns	Street name sign
SP	sp	Service point
TDC	tdc	Telephone demarcation cabinet
TMS	tms	Traffic monitoring station
TOS	tos	Traffic Operations System
VEH	veh	Vehicle
XFMR	xfmr	Transformer
COMM	comm	Communication
RWIS	rwis	Roadway weather information system

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	131	140

*Jeffery G. McRae*  
REGISTERED ELECTRICAL ENGINEER


October 5, 2007  
PLANS APPROVAL DATE

Jeffery G. McRae  
No. E14512  
Exp. 6-30-08  
ELECTRICAL  
STATE OF CALIFORNIA

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

To accompany plans dated 4-9-12

## SOFFIT AND WALL MOUNTED LUMINAIRES

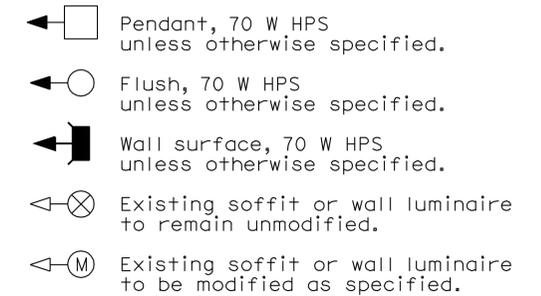

### NOTE:

Arrow indicates "street side" of luminaire.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

## ELECTRICAL SYSTEMS (SYMBOLS AND ABBREVIATIONS)

NO SCALE

RSP ES-1A DATED OCTOBER 5, 2007 SUPERSEDES STANDARD PLAN ES-1A DATED MAY 1, 2006 - PAGE 400 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP ES-1A**

2006 REVISED STANDARD PLAN RSP ES-1A

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	132	140










REGISTERED ELECTRICAL ENGINEER  
 October 5, 2007  
 PLANS APPROVAL DATE  
 Jeffrey G. McRae  
 No. E14512  
 Exp. 6-30-08  
 ELECTRICAL  
 STATE OF CALIFORNIA

*The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.*

### CONDUIT

PROPOSED	EXISTING	
---	---	Lighting Conduit, unless otherwise indicated or noted
---	---	Traffic signal conduit
-C-	-c-	Communication conduit
-T-	-t-	Telephone conduit
-F-	-f-	Fire alarm conduit
-FO-	-fo-	Fiber optic conduit
---	---	Conduit termination 
		Conduit riser in/on structure or service pole


### SIGNAL EQUIPMENT

PROPOSED	EXISTING	
		Pedestrian signal face
		Pedestrian push button post
		Pedestrian barricade
		Vehicle signal face (with backplate, 3-Section: red, yellow and green)
		Vehicle signal face with angle visors
		Modifications of basic symbols: "L" indicates all non-arrow sections louvered "LG" indicates louvered green section only "PV" indicates 12" programmed visibility sections "8" indicates all 8" sections (only when specified)
		Type 15TS and Vehicle signal face
		Vehicle signal face with red, yellow and green left arrow sections
		Vehicle signal face with red and yellow sections and up green arrow
		Vehicle signal face (5 Section) with red, yellow and green sections and yellow and green right arrows
		Type 1 Standard and attached vehicle signal faces
		Standard with signal mast arm only and attached vehicle signal faces and internally illuminated street name sign

### SERVICE EQUIPMENT

PROPOSED	EXISTING	
---OH---	---oh---	Overhead lines
		Wood pole "U" indicates utility owned
		Pole guy with anchor
		Utility transformer - ground mounted
		Service equipment enclosure type
		Service equipment enclosure door indicates front of enclosure
		Telephone demarcation cabinet



### POLE-MOUNTED SERVICE DESIGNATION

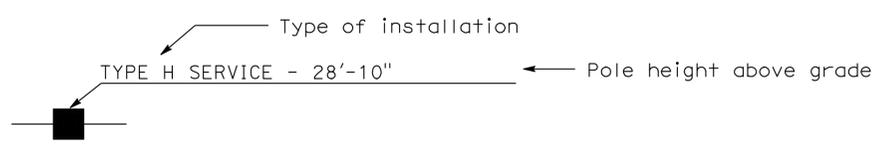

### ILLUMINATED OVERHEAD SIGN

PROPOSED	EXISTING	
		Overhead sign - Single post
		Overhead sign - Two post
		Overhead sign - Mounted on structure
		Overhead sign with electrolier

### SIGNAL EQUIPMENT Cont

PROPOSED	EXISTING	
		Guard post
		Type 1 Standard with "Meter On" sign
		Emergency Vehicle detector

### NOTES:

- All signal sections shall be 12" unless shown otherwise.
- Signal heads shall be provided with backplates unless shown otherwise.
- Signal indication shall be LED.

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**ELECTRICAL SYSTEMS  
 (SYMBOLS AND ABBREVIATIONS)**  
 NO SCALE


RSP ES-1B DATED OCTOBER 5, 2007 SUPERCEDES STANDARD PLAN ES-1B  
 DATED MAY 1, 2006 - PAGE 401 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP ES-1B**


2006 REVISED STANDARD PLAN RSP ES-1B

### EQUIPMENT IDENTIFICATION


#### ILLUMINATED SIGN IDENTIFICATION NUMBER:

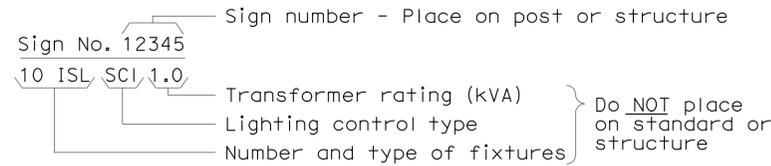


#### ELECTROLIER OR EQUIPMENT IDENTIFICATION NUMBER:

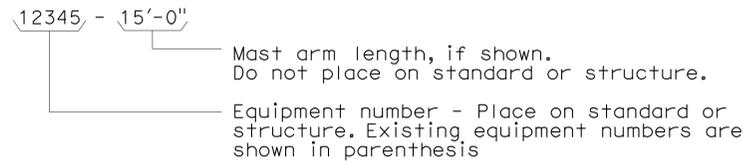

#### CONDUIT AND CONDUCTOR IDENTIFICATION:

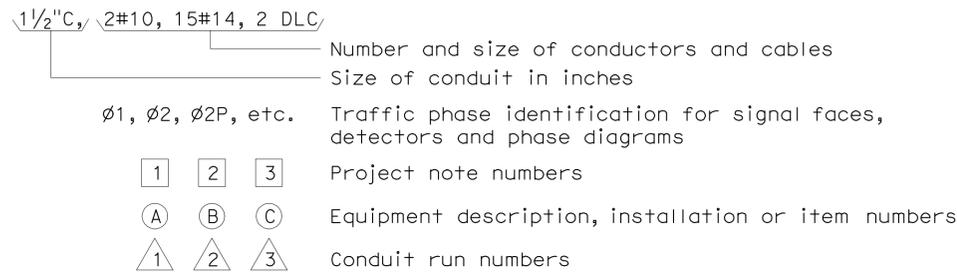

#### SIGNAL AND LIGHTING STANDARD (TYPICAL DESIGNATION):

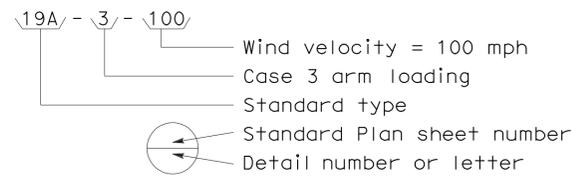

### MISCELLANEOUS EQUIPMENT

PROPOSED	EXISTING	
CMS	cms	Changeable message sign
		Closed circuit television camera
		Highway advisory radio pole and antenna
EMS	ems	Extinguishable message sign
M V	m v	Detection device M = Microwave sensor V = Video image sensor


### WIRING DIAGRAM LEGEND

P Pole	External conductor
CB Circuit breaker	Conductor or bus
A Ampere	Tie point
V Volt	Contactor coil
M Metered	Contactor, Contact NO
UM Unmetered	Terminal blocks
NB Neutral bus	Contactor, Contact NC
GB Ground bus	Enclosure bond
G Equipment grounding conductor	Grounding electrode
N Grounded conductor (Neutral)	Circuit breaker
	Receptacle

### PULL BOXES

PROPOSED	EXISTING	
		Pull box-No. 5 unless otherwise indicated or noted.
		Pull box-Additional designations or descriptions
3 = No. 3 1/2 pull box		(C) = Communications pull box
5 = No. 5 pull box		(E) = Pull box with extension
6 = No. 6 pull box		(S) = Sprinkler control pull box
7 = No. 7 (Ceiling pull box)		(21) = Anchor bolts and conduit for future installation of Type 21 Standard
8 = No. 8 (Pendant soffit pull box)		(T) = Traffic pull box
9 = No. 9 pull box		
9A = No. 9A pull box		

### VEHICLE DETECTORS

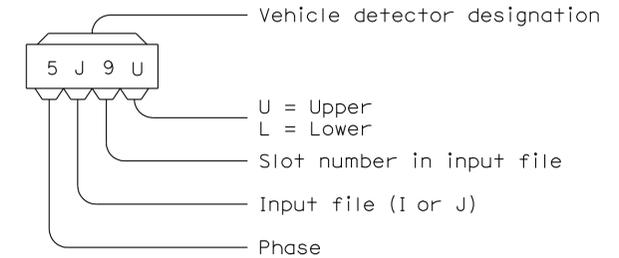

PROPOSED	EXISTING	
		Type A detector loop. Outline of sawcut shown.
		Type B detector loop. Outline of sawcut shown.
		Type C detector loop. Outline of sawcut shown.
		Type D detector loop. Outline of sawcut shown.
		Type E detector loop. Outline of sawcut shown.
		Type Q detector loop. Outline of sawcut shown.
		Magnetic detector
		Detector handhole
		Microwave or video detection zone

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**ELECTRICAL SYSTEMS  
(SYMBOLS AND ABBREVIATIONS)**

NO SCALE




RSP ES-1C DATED OCTOBER 5, 2007 SUPERCEDES STANDARD PLAN ES-1C  
DATED MAY 1, 2006 - PAGE 402 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP ES-1C**


2006 REVISED STANDARD PLAN RSP ES-1C

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	134	140


Jeffrey G. McRae  
 REGISTERED ELECTRICAL ENGINEER  
 June 6, 2008  
 PLANS APPROVAL DATE  
 The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.  
 REGISTERED PROFESSIONAL ENGINEER  
 Jeffrey G. McRae  
 No. E14512  
 Exp. 6-30-10  
 ELECTRICAL  
 STATE OF CALIFORNIA

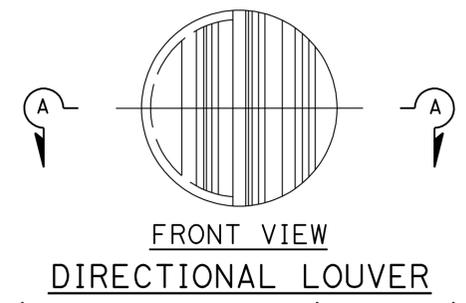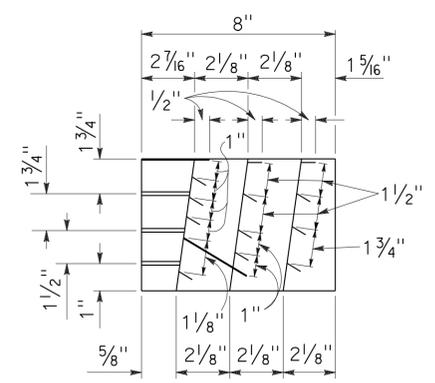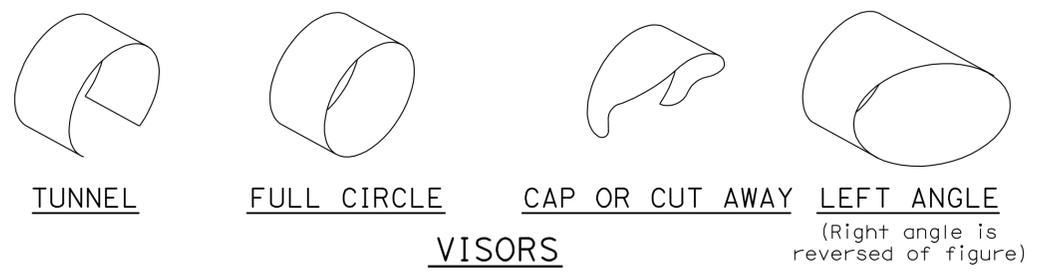

Directional louvers shall be oriented as directed by the Engineer and secured in place with one plated brass machine screw and nut.

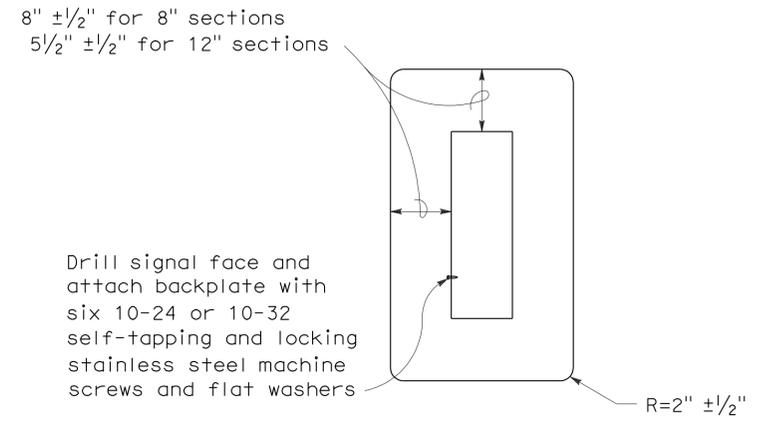

**8" AND 12" SECTIONS**  
**BACKPLATE**  
 1/16" minimum thickness  
 3001-14 aluminum, or plastic when specified

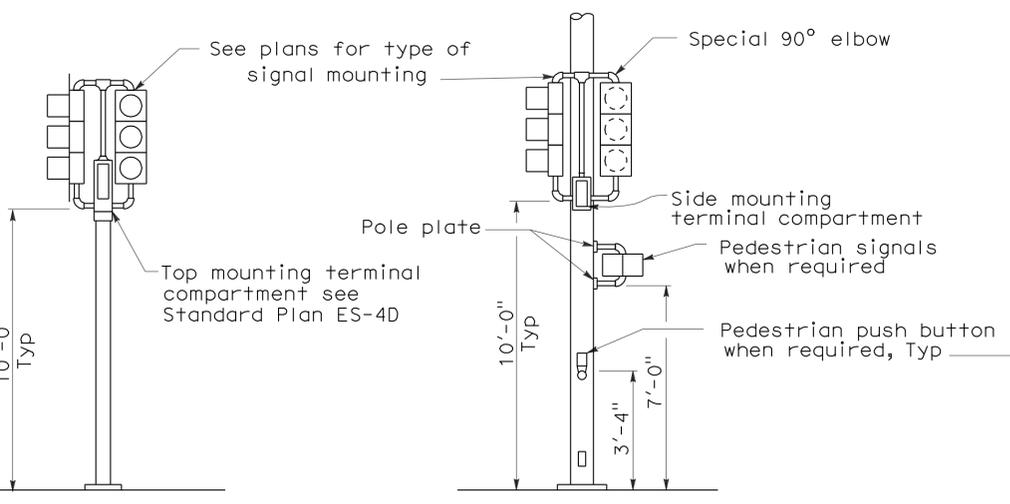


**TOP MOUNTED SIGNALS (TV)**  
 Type 1-A, 1-B, 1-C and 1-D standard as indicated on the plans

**SIDE MOUNTED SIGNALS (SV AND SP)**  
 Normally used on standards with luminaire or signal mast arm

**LEFT TURN LANE SIGNAL**  
 Type 1-A, 1-B, 1-C and 1-D standard as indicated on plans


**TYPICAL SIGNAL INSTALLATIONS**

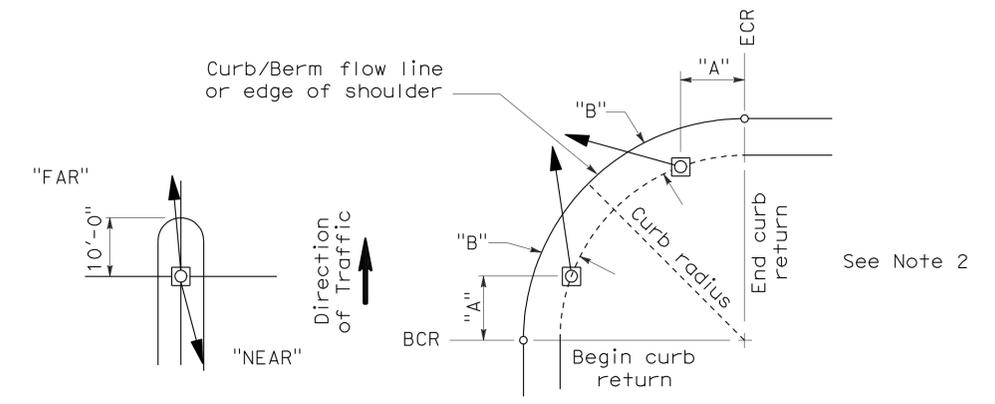

**NOTES:**

1. Typical signal pole placement unless dimensioned on plans.
2. For "A" and "B" dimensions, see Pole Schedule, or as directed by the Engineer.

**SIGNAL STANDARD PLACEMENT DIMENSIONS AND EQUIPMENT LOCATIONS**

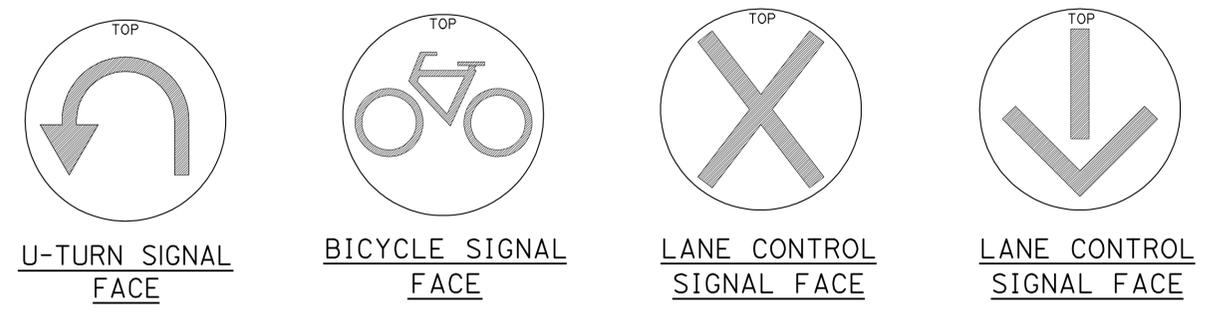

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**ELECTRICAL SYSTEMS (SIGNAL HEADS AND MOUNTINGS)**

NO SCALE

RSP ES-4C DATED JUNE 6, 2008 SUPERSEDES STANDARD PLAN ES-4C DATED MAY 1, 2006 - PAGE 420 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP ES-4C**

2006 REVISED STANDARD PLAN RSP ES-4C


DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	135	140

Jeffrey G. McRae  
 REGISTERED ELECTRICAL ENGINEER  
 No. E14512  
 Exp. 6-30-10  
 STATE OF CALIFORNIA  
 ELECTRICAL

June 6, 2008  
 PLANS APPROVAL DATE


The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

To accompany plans dated 4-9-12

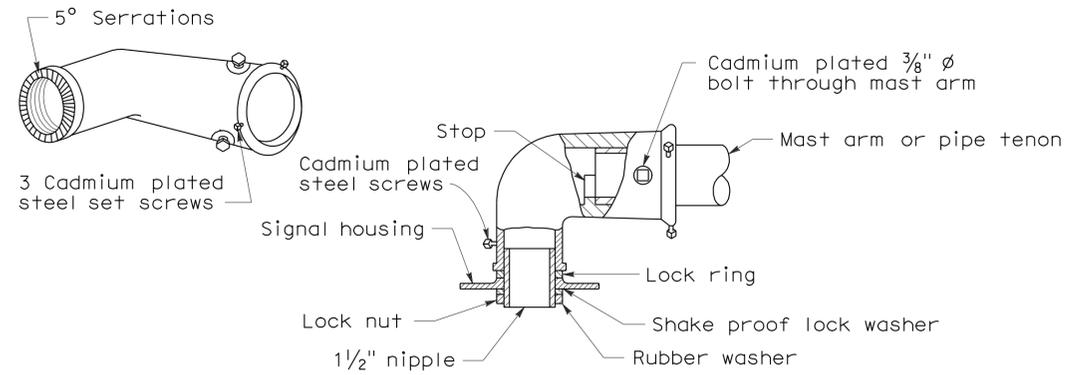

**MAST ARM MOUNTING - TYPE "MAT"**


For 2 NPS pipe, see Note 1.

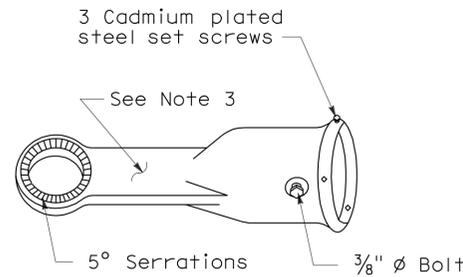

**MAST ARM MOUNTING - TYPE "MAS"**

For 2 NPS pipe. See Note 1.

**SIGNAL SLIP FITTERS**

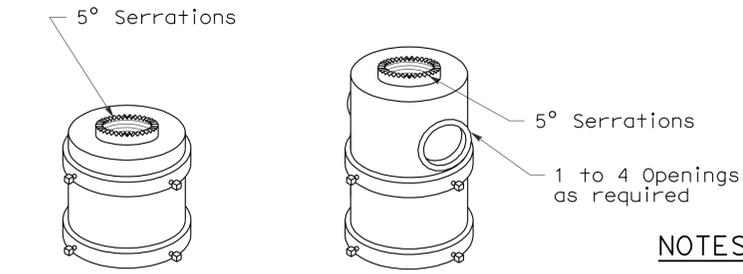


For one mounting For multiple mountings

**TOP MOUNTINGS**

For 4 NPS pipe, see Note 2.


**NOTES:**

- After mast arm signal has been plumbed and secured, drill 7/16" hole through mast arm tenon in line with slip fitter hole. Place a cadmium plated 3/8" ø galvanized bolt with washer under bolt head through hole and secure with washer, nut, and locknut. Seal openings between mast arm mountings and mast arm with mastic.
- (a) Threaded top mounted slip fitter openings shall be 1/2" NPS.  
 (b) Serrations in fittings shall match those on bottom of signal heads or in lock ring.  
 (c) Top opening shall be offset when backplate is used.
- Wireway shall have a cross section area of 0.95 square inch minimum. Minimum width of 1/2".

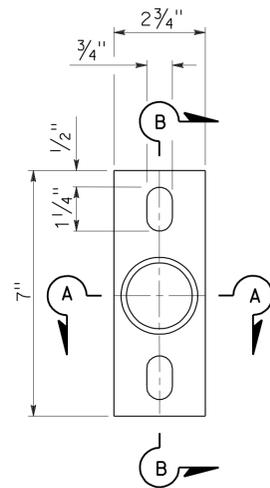


**POLE PLATE**

For side mountings

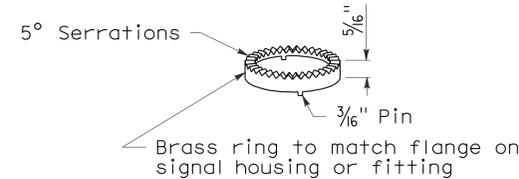

**LOCK RING**





Use where locking ring is not integral with signal housing or fitting.

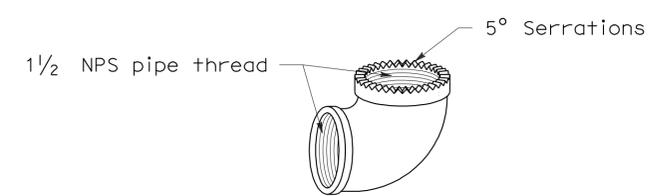

**SPECIAL 90° ELBOW**

One for each signal head, except those with special slip fitter mounting

**MISCELLANEOUS MOUNTING HARDWARE**

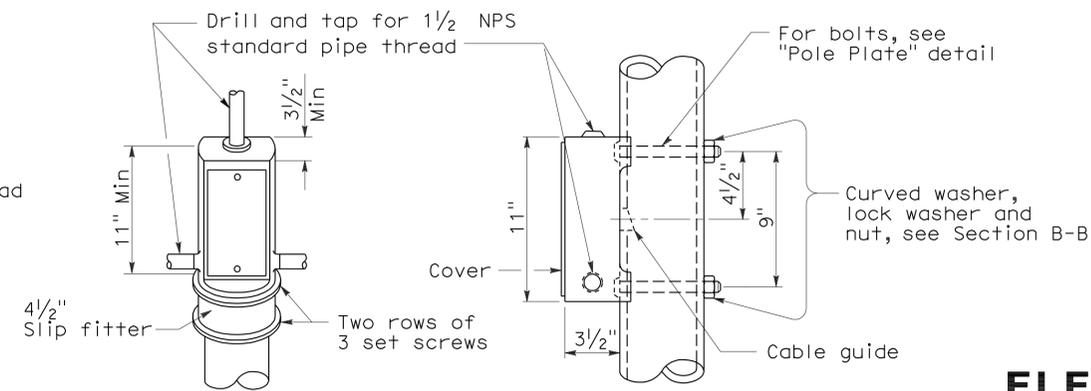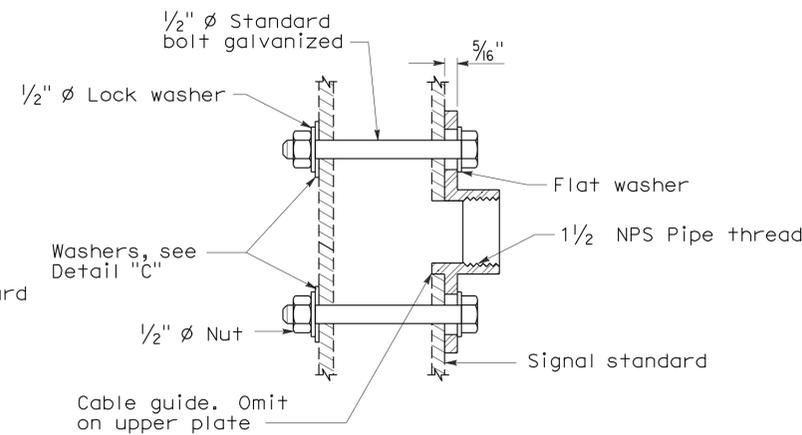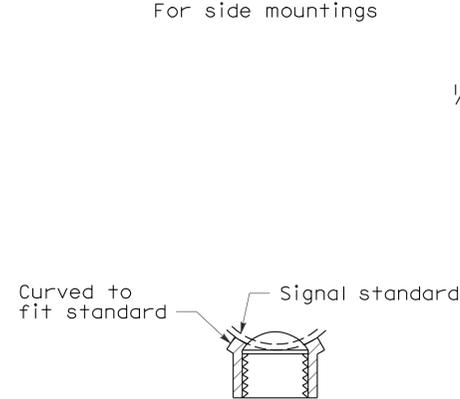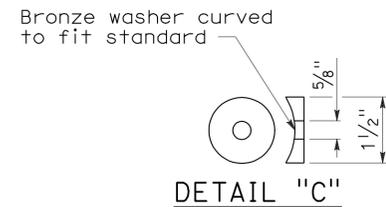

**TOP MOUNTING**

**SIDE MOUNTING**

**TERMINAL COMPARTMENTS**

**ELECTRICAL SYSTEMS (SIGNAL HEADS AND MOUNTINGS)**

NO SCALE

RSP ES-4D DATED June 6, 2008 SUPERSEDES STANDARD PLAN ES-4D DATED MAY 1, 2006 - PAGE 421 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP ES-4D**

2006 REVISED STANDARD PLAN RSP ES-4D


DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	136	140

REGISTERED ELECTRICAL ENGINEER  
 October 5, 2007  
 PLANS APPROVAL DATE  
 The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.  
 To accompany plans dated 4-9-12




REGISTERED PROFESSIONAL ENGINEER  
 Jeffrey G. McRae  
 No. E14512  
 Exp. 6-30-08  
 ELECTRICAL  
 STATE OF CALIFORNIA

## LOOP INSTALLATION PROCEDURE

- Loops shall be centered in lanes.
- Saw slots in pavement for loop conductors as shown in details.
- Distance between side of loop and a lead-in saw cut from adjacent detectors shall be 2'-0" minimum. Distance between lead-in saw cuts shall be 6" minimum.
- Bottom of saw slot shall be smooth with no sharp edges.
- Slots shall be washed until clean, blown out and thoroughly dried before installing loop conductors.
- Adjacent loops on the same sensor unit channel shall be wound in opposite directions.
- Identify and tag loop circuit pairs in the pull box with loop number, start (S) and finish (F) of conductor. Identify and tag lead-in-cable with sensor number and phase.
- Install loop conductor in slot using a 3/16" to 1/4" thick wood paddle. Hold loop conductors with wood paddles (at the bottom of the sawed slot) during sealant placement.
- No more than 2 twisted pairs shall be installed in one sawed slot.
- Allow additional 5'-0" of slack length of conductor for the lead-in run to pull box.
- The additional length of each conductor for each loop shall be twisted together into a pair (6 turns per 3'-4" minimum) before being placed in the slot and conduit leading to pull box.
- Test each loop circuit for continuity, circuit resistance and insulation resistance at the pull box before filling slots.
- Fill slots as shown in details.
- Splice loop conductors to lead-in-cable. Splices shall be soldered.
- End of lead-in-cable and Type 2 loop conductor shall be waterproofed prior to installing in conduit to prevent moisture from entering the cable.
- Lead-in-cable shall not be spliced between the pull box and the controller cabinet terminals.
- Test each loop circuit for continuity, circuit resistance and insulation resistance at the controller cabinet location.
- Where loop conductors are not to be spliced to a lead-in-cable, the ends of the conductors shall be taped and waterproofed with electrical insulating coating.

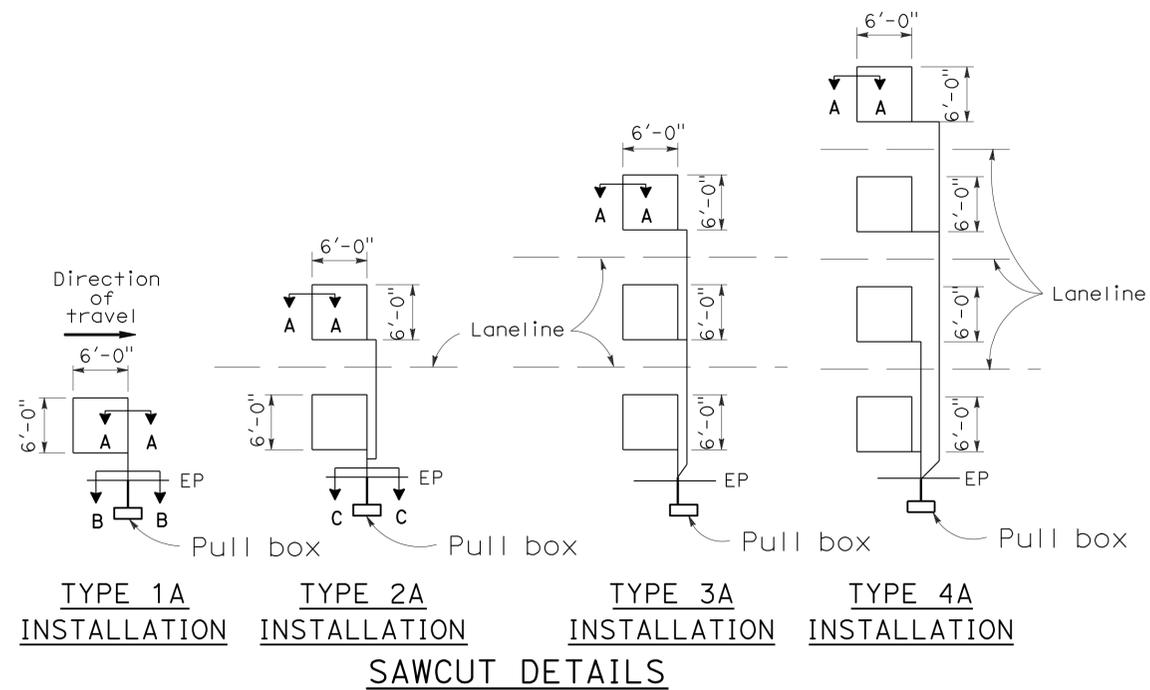

- 1A thru 4A = 1 Type A loop configuration in each lane.
- 1B thru 4B = 1 Type B loop configuration in each lane.
- 1C = 1 Type C loop configuration entering lanes as required.
- 1D thru 4D = 1 Type D loop configuration in each lane.
- 1E thru 4E = 1 Type E loop configuration in each lane.
- 1Q thru 4Q = 1 Type Q loop configuration in each lane.  
(Use Type A, B, C, D, E or Q loop detector configurations only when specified or shown on plans)

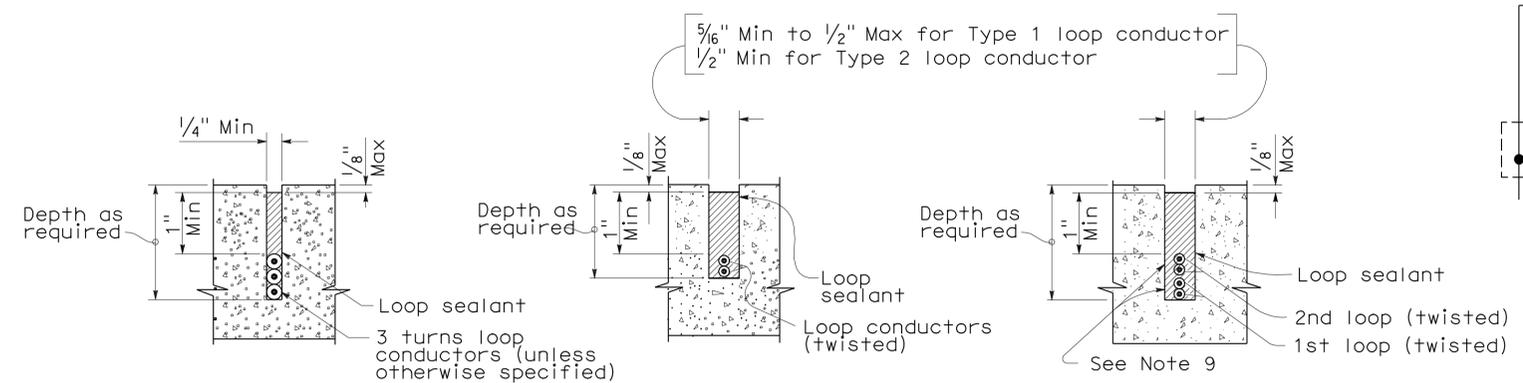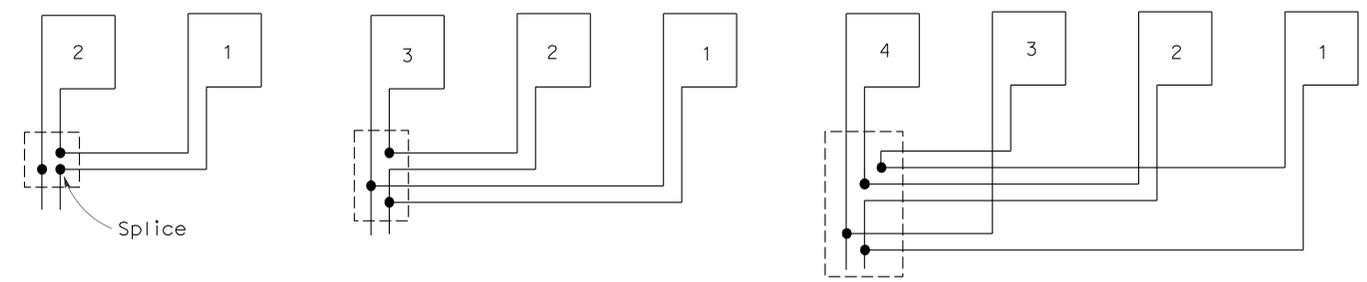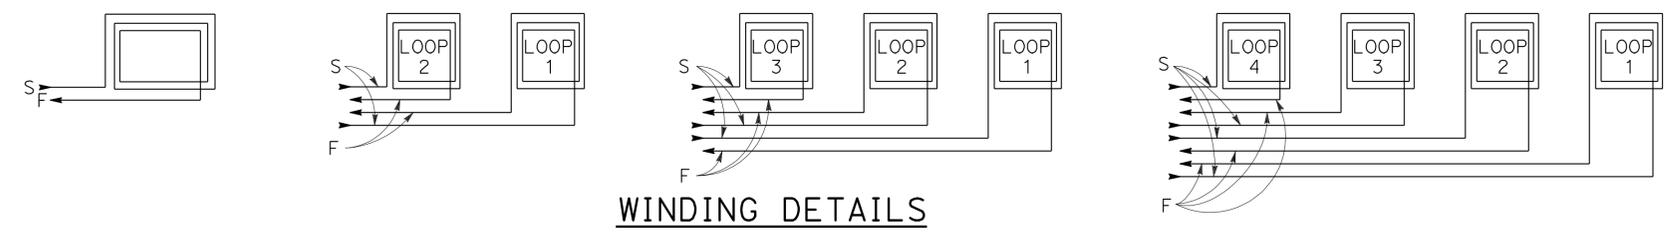

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**ELECTRICAL SYSTEMS  
 (DETECTORS)**  
 NO SCALE

RSP ES-5A DATED OCTOBER 5, 2007 SUPERCEDES STANDARD PLAN ES-5A  
 DATED MAY 1, 2006 - PAGE 423 OF THE STANDARD PLANS BOOK DATED MAY 2006.


**REVISED STANDARD PLAN RSP ES-5A**

2006 REVISED STANDARD PLAN RSP ES-5A


**LUMINAIRE ARM DATA**

PROJECTED LENGTH	THICKNESS	MINIMUM OD @ POLE	MOUNTING HEIGHT
* 6'-0"	0.1196"	3/4"	36'-9"±
8'-0"		3/2"	37'-3"±
10'-0"		3 3/4"	38'-0"±
12'-0"		3 3/4"	39'-0"±
15'-0"		4 1/4"	39'-6"±
** 20'-0"	0.1793"	5"	37'-0"±


\* Type 30 - arm length 6'-0" - 15'-0" maximum  
 \*\* Type 31 - arm lengths 20'-0"

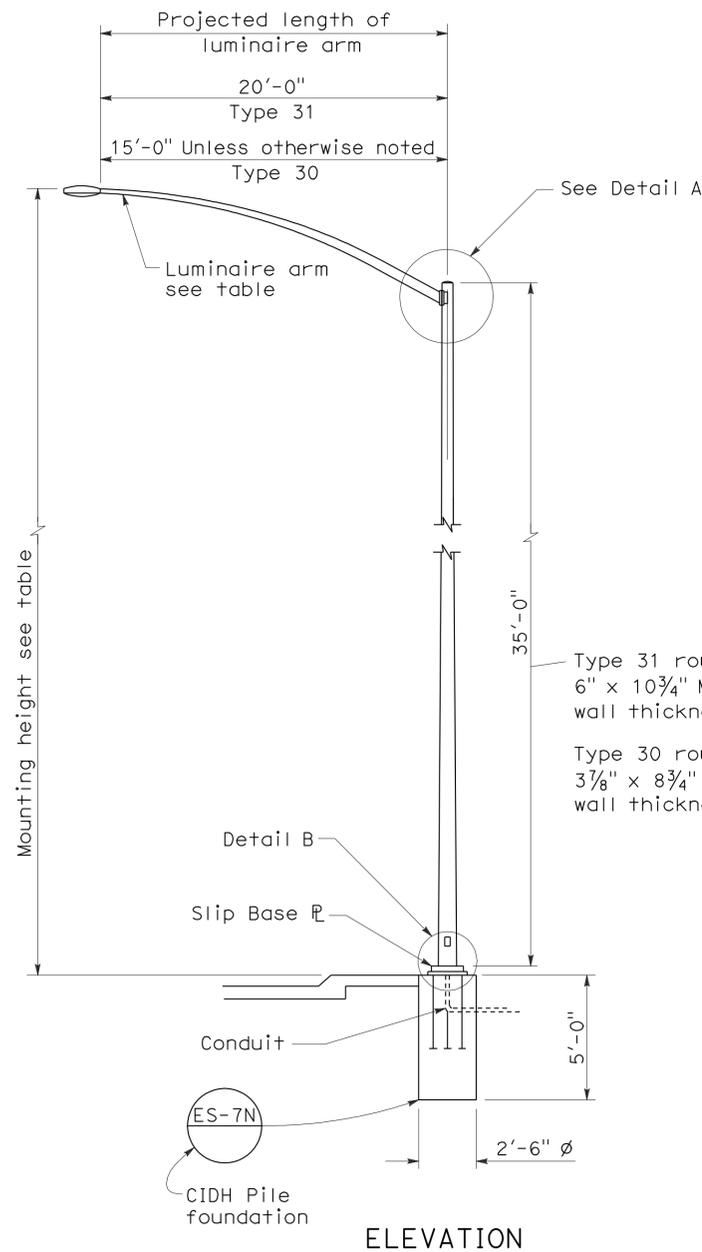


**ELEVATION**

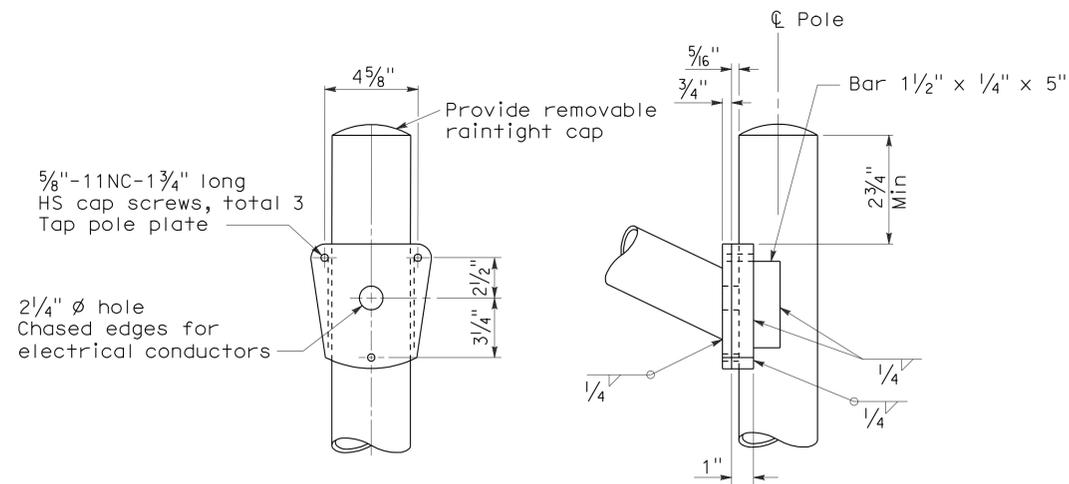


**DETAIL A - TYPE 30**

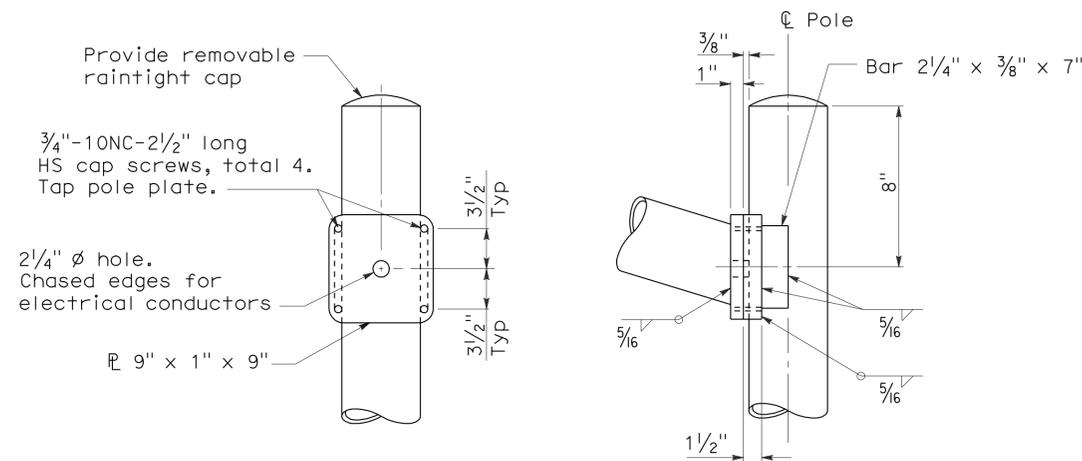

**DETAIL A - TYPE 31**

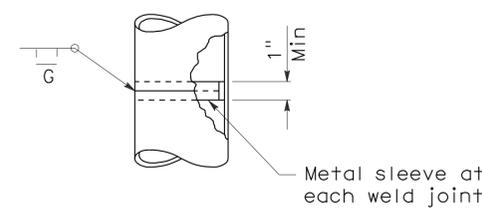

**POLE SPLICE**

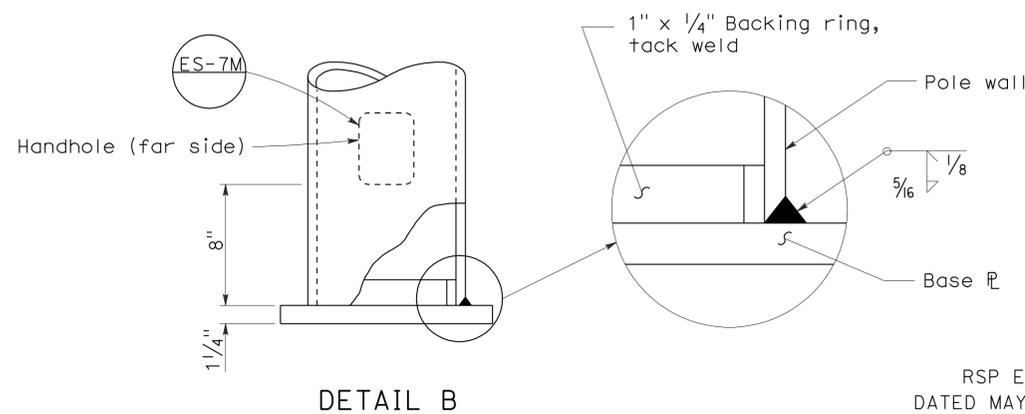

**DETAIL B**

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	137	140

Stanley P. Johnson  
 REGISTERED CIVIL ENGINEER

January 18, 2008  
 PLANS APPROVAL DATE

Stanley P. Johnson  
 No. C57793  
 Exp. 03-31-08  
 CIVIL  
 STATE OF CALIFORNIA

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

To accompany plans dated 4-9-12

**NOTES:**

- Sheet steel shall have a minimum yield of 48,000 psi.
- For slip base details see Standard Plan ES-6F.
- For Type 30 fixed base use Type 15 base plate, and foundation shown on Revised Standard Plan RSP ES-6A. Use 1 1/4" Dia x 3'-6" x 4" anchor bolts.
- For Type 31 fixed base use Type 32 base plate, anchor bolts and foundation on Standard Plan ES-6G.
- Handhole shall be located on downstream side of traffic unless noted otherwise on plans.
- For additional general notes refer to Standard Plan ES-7M.

STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**ELECTRICAL SYSTEMS  
 (LIGHTING STANDARD  
 TYPES 30 AND 31)**

NO SCALE

RSP ES-6E DATED JANUARY 18, 2008 SUPERCEDES STANDARD PLAN ES-6E  
 DATED MAY 1, 2006 - PAGE 430 OF THE STANDARD PLANS BOOK DATED MAY 2006.


**REVISED STANDARD PLAN RSP ES-6E**

2006 REVISED STANDARD PLAN RSP ES-6E

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	138	140


Stanley P. Johnson  
 REGISTERED CIVIL ENGINEER  
 October 5, 2007  
 PLANS APPROVAL DATE  
 The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.  
 REGISTERED PROFESSIONAL ENGINEER  
 Stanley P. Johnson  
 No. C57793  
 Exp. 3-31-08  
 CIVIL  
 STATE OF CALIFORNIA

To accompany plans dated 4-9-12

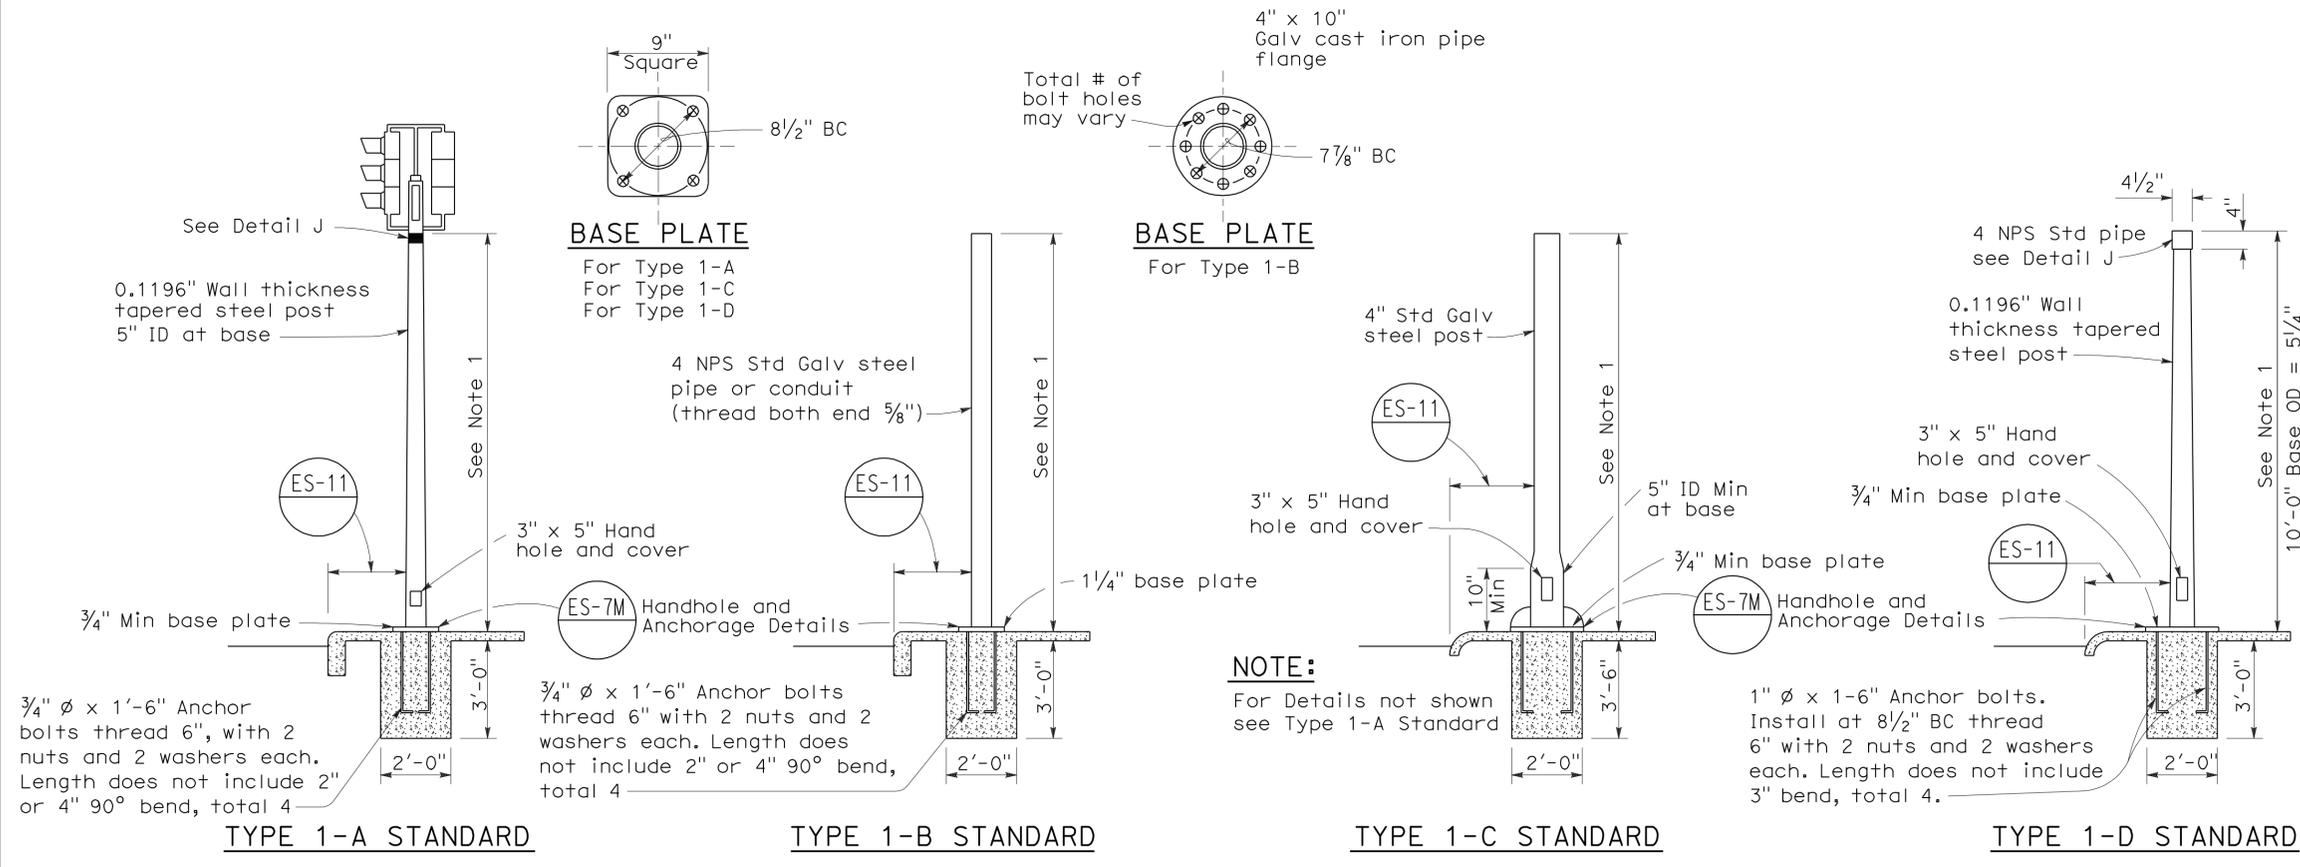


- NOTES:**
- Standards shall be 10'-0" ± 2" for vehicle signals and 7'-0" ± 2" for pedestrian signals unless otherwise noted on plans.
  - Top of standards shall be 4 1/2" OD.
  - Conduits shall extend 2" maximum above finished surface of foundation and for Types 1-A, 1-C and 1-D shall be sloped toward handhole.
  - Anchor bolts shall be bonded to conduit or grounding conductor.
  - Conduit between standard and adjacent pull box shall be 2" minimum.
  - Paint numbers on roadway side facing traffic when electrolier or post is left of direction of traffic.


**TYPE 1 SIGNAL STANDARDS**

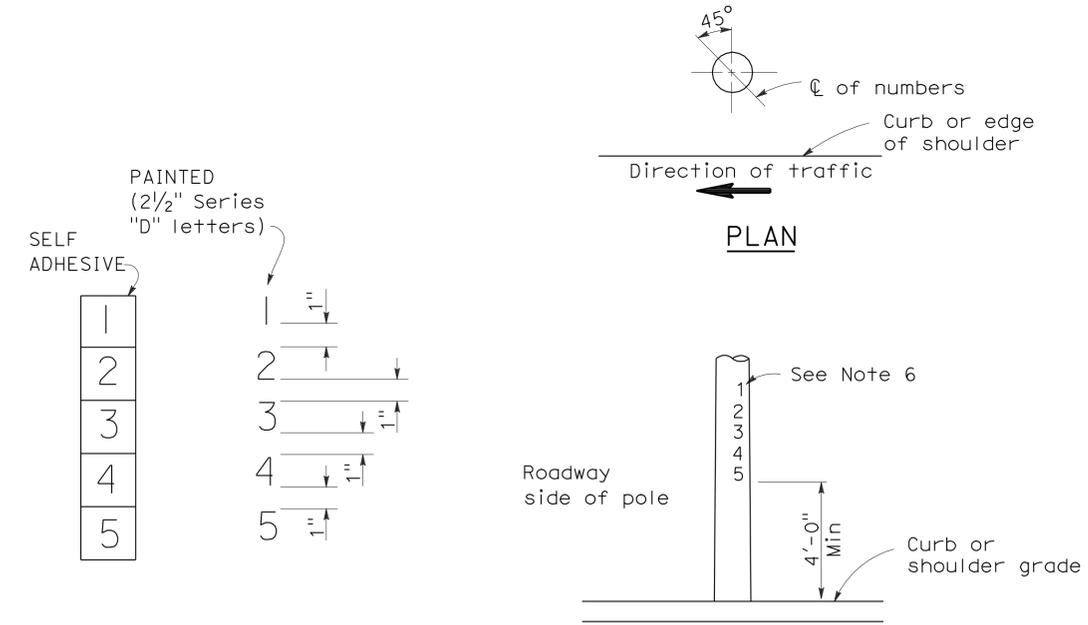

**LOCATION OF EQUIPMENT NUMBERS ON STANDARDS AND POSTS**

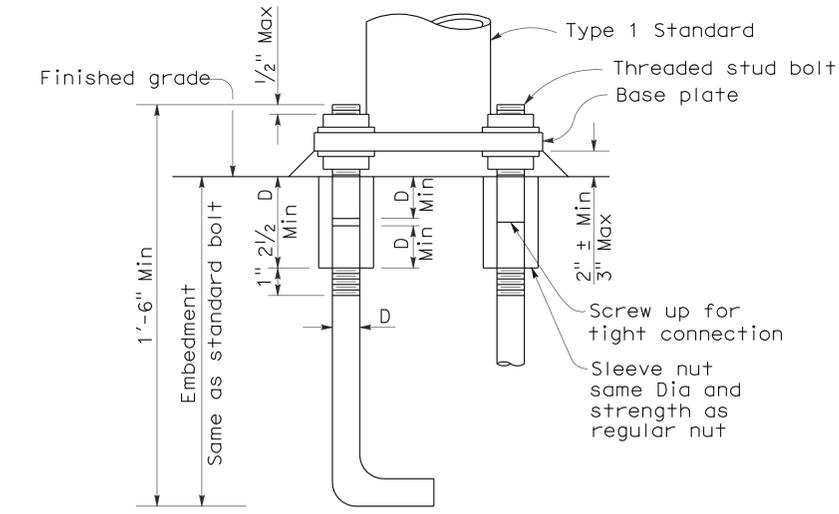

**ANCHOR BOLTS WITH SLEEVE NUTS**  
 Sleeve nuts to be used only when shown or specified on Project Plans  
 D = Diameter of anchor bolt

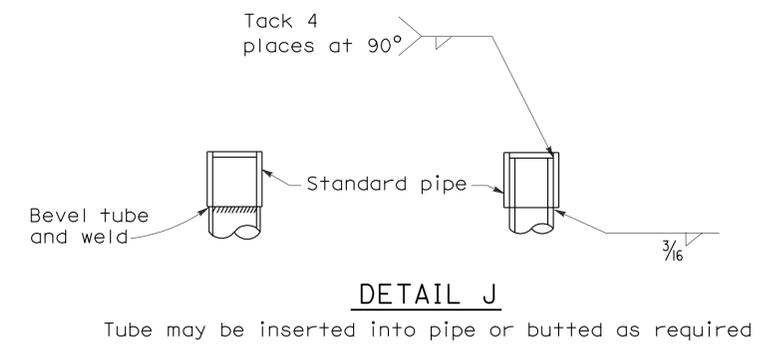

**DETAIL J**  
 Tube may be inserted into pipe or butted as required  
 STATE OF CALIFORNIA  
 DEPARTMENT OF TRANSPORTATION  
**ELECTRICAL SYSTEMS (SIGNAL AND LIGHTING STANDARD TYPE 1 STANDARD AND EQUIPMENT NUMBERING)**  
 NO SCALE

RSP ES-7B DATED OCTOBER 5, 2007 SUPERCEDES STANDARD PLAN ES-7B DATED MAY 1, 2006 - PAGE 438 OF THE STANDARD PLANS BOOK DATED MAY 2006.

**REVISED STANDARD PLAN RSP ES-7B**


2006 REVISED STANDARD PLAN RSP ES-7B

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	139	140


Jeffrey G. McRae  
 REGISTERED ELECTRICAL ENGINEER  
 January 20, 2012  
 PLANS APPROVAL DATE  
 The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

REGISTERED PROFESSIONAL ENGINEER  
 Jeffrey G. McRae  
 No. E14512  
 Exp. 6-30-12  
 ELECTRICAL  
 STATE OF CALIFORNIA


To accompany plans dated 4-9-12

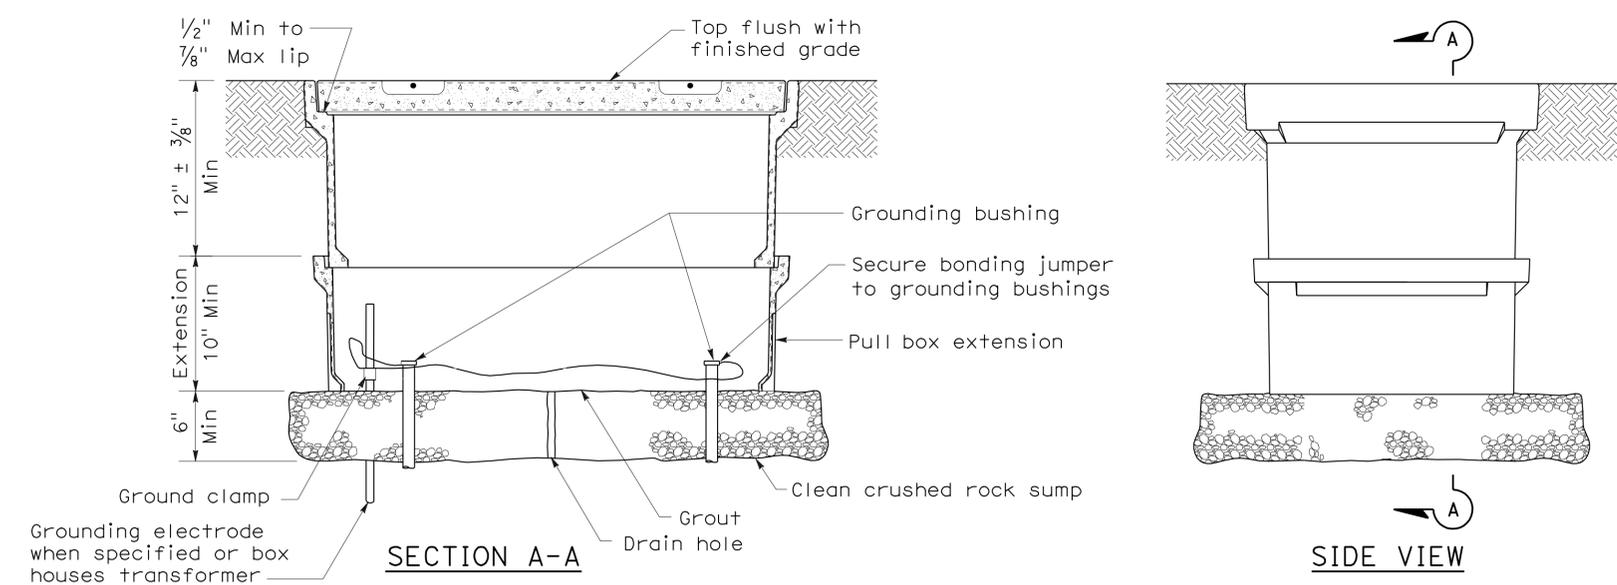


**INSTALLATION DETAILS**  
**DETAIL A**

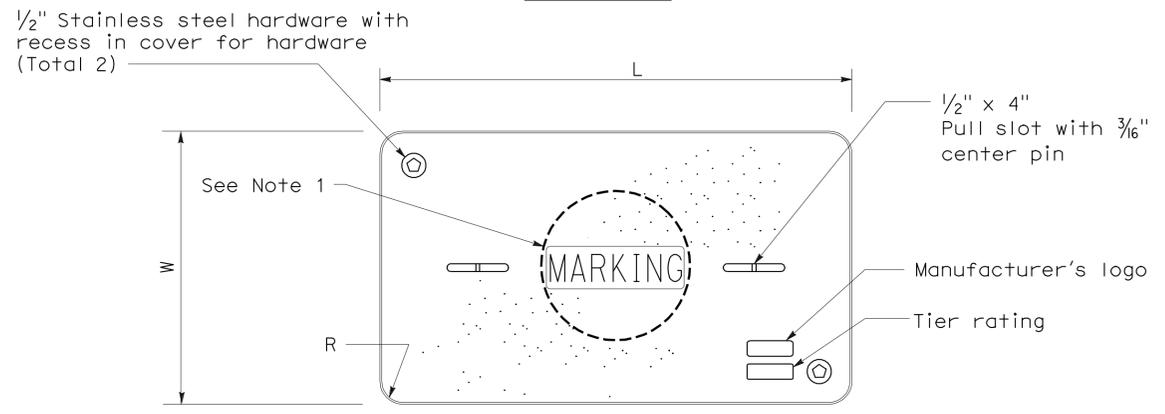

**COVER TOP VIEW**

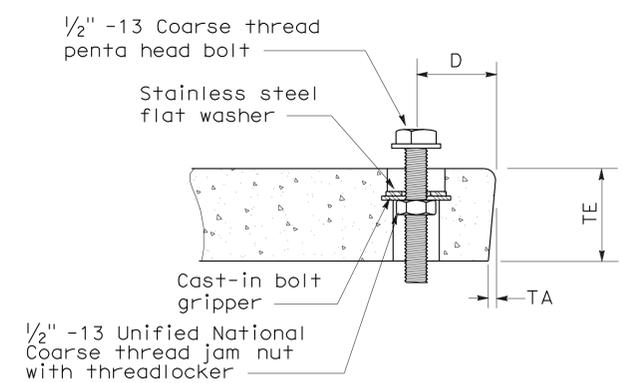

**TYPICAL COVER CAPTIVE BOLT**  
(Or similar)

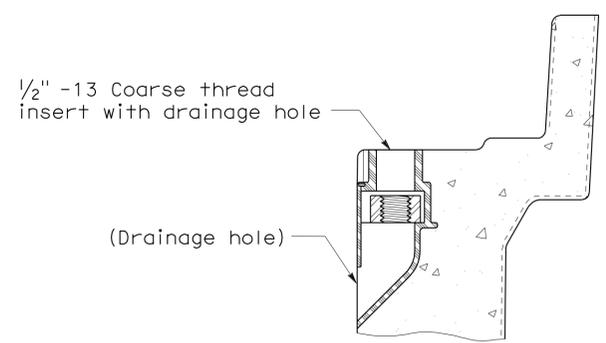

**TYPICAL THREADED INSERT**  
(Or similar)

**NOTES ON PULL BOXES:**

- Pull box covers must be marked as follows: "SERVICE" Service circuits between service point and service disconnect; "SPRINKLER-CONTROL" sprinkler control circuits, 50 V or less; "CALTRANS" on all pull boxes, except pull boxes marked "SPRINKLER-CONTROL"; and "TELEPHONE" Telephone service;
  - No. 3/2 pull box.
    - "SIGNAL" - Traffic signal circuits with or without street or sign lighting circuits.
    - "ST LIGHTING" - Street or sign lighting circuits where voltage is under 600 V.
  - No. 5, 6, 9 or 9A pull box.
    - "TRAFFIC SIGNAL" - Traffic signal circuits with or without street or sign lighting circuits.
    - "STREET LIGHTING" - Street or sign lighting circuits where voltage is under 600 V.
    - "STREET LIGHTING-HIGH VOLTAGE" - Street or sign lighting circuits where voltage is above 600 V.
    - "IRRIGATION" - Circuits to irrigation controller 120 V or more.
    - "RAMP METER" - Ramp meter circuits.
    - "COUNT STATION" - Count or speed monitor circuits.
    - "COMMUNICATIONS" - Communication circuits.
    - "TOS COMMUNICATIONS" - TOS communication line.
    - "TOS POWER" - TOS power.
    - "TDC POWER" - Telephone demarcation cabinet power.
    - "CCTV" - Closed circuit television circuits.
    - "TMS" - Traffic monitoring station circuits.
    - "CMS" - Changeable message sign circuits.
    - "HAR" - Highway advisory radio circuits.
- The nominal dimensions of the opening in which the cover sets must be the same as the cover dimensions (L and W) plus 1/8" or greater.
- Covers and boxes must be interchangeable with California Standard. When interchanged with a standard, the top surfaces must be flush within 1/8". Top outside radius of covers and pull boxes must have a 1/8" radius.
- Pull box extension may be another pull box as long as the bottom edge of the pull box can fit into the cover opening.

DIMENSION TABLE										
PULL BOX	PULL BOX			COVER						
	Minimum Depth Box	Minimum Depth Extension	Maximum Weight	L	W	R	TE	TA	D	Maximum Weight
No. 3/2	12"	N/A	40 lb	1' - 3 3/8"	10 1/8"	1 3/8"	2"	1/8"	1 3/4"	30 lb
No. 5	12"	10"	55 lb	1' - 11 1/4"	1' - 1 3/4"	1 3/8"	2"	1/8"	1 3/4"	60 lb
No. 6	12"	10"	70 lb	2' - 6 1/2"	1' - 5 1/2"	1 3/8"	2"	1/8"	2"	85 lb

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**ELECTRICAL SYSTEMS**  
**(PULL BOX)**  
NO SCALE

NSP ES-8A DATED JANUARY 20, 2012 SUPPLEMENTS THE STANDARD PLANS BOOK DATED MAY 2006.


2006 NEW STANDARD PLAN NSP ES-8A

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
07	LA	10, 110,405	R4.9/14.8, 21.1,29.1	140	140


*Jeffery G. McRae*  
 REGISTERED ELECTRICAL ENGINEER  
 October 5, 2007  
 PLANS APPROVAL DATE  
The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

REGISTERED PROFESSIONAL ENGINEER  
 Jeffery G. McRae  
 No. E14512  
 Exp. 6-30-08  
 ELECTRICAL  
 STATE OF CALIFORNIA

To accompany plans dated 4-9-12

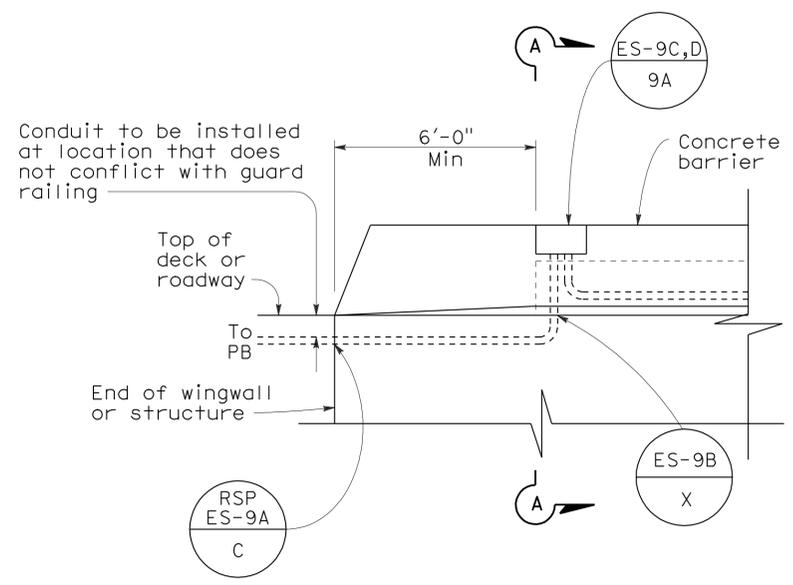


**SIDEVIEW**

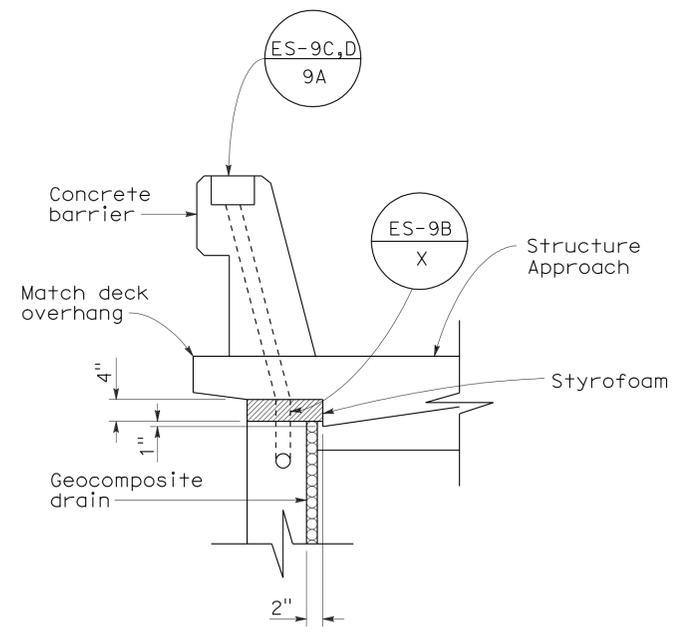


**SECTION A-A**

**DETAIL A  
CONDUIT TERMINATION**

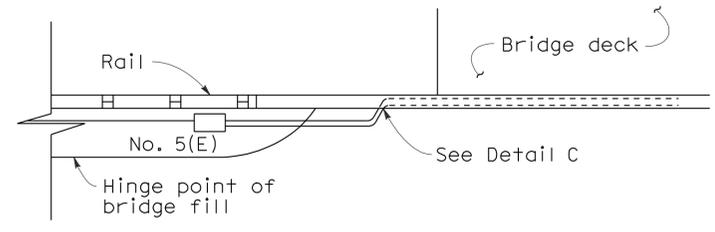


**TOP VIEW**

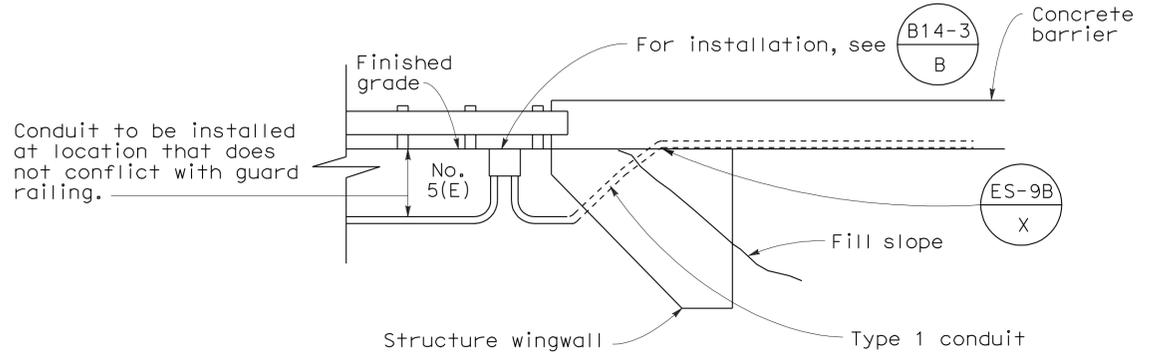

**SIDE VIEW  
DETAIL I**

**CONDUIT TERMINATION**

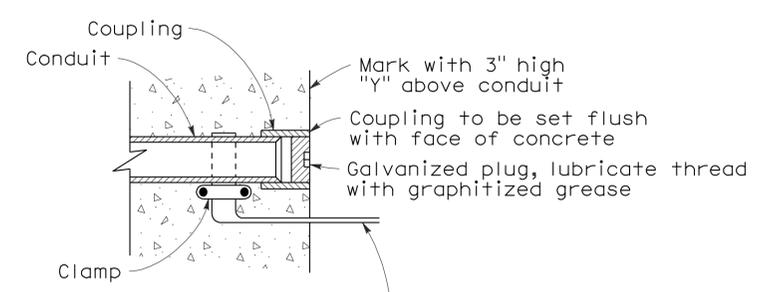

**DETAIL C  
CONDUIT TERMINATION**

Copper bonding strap install only at structure construction joint, extend at least 6" from face of concrete

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**ELECTRICAL SYSTEMS  
(ELECTRICAL DETAILS  
STRUCTURE INSTALLATIONS)**

NO SCALE

RSP ES-9A DATED OCTOBER 5, 2007 SUPERCEDES STANDARD PLAN ES-9A  
DATED MAY 1, 2006 - PAGE 454 OF THE STANDARD PLANS BOOK DATED MAY 2006.

2006 REVISED STANDARD PLAN RSP ES-9A