

**DEPARTMENT OF TRANSPORTATION**  
DIVISION OF ENGINEERING SERVICES  
OFFICE ENGINEER  
1727 30<sup>th</sup> Street MS-43  
P.O. BOX 168041  
SACRAMENTO, CA 95816-8041  
FAX (916) 227-6214  
TTY 711



*Flex your power!  
Be energy efficient!*

April 22, 2011

04-SF-1-6.9  
04-1637K4  
Project ID 0400020473  
NH-X075(035) N

Addendum No. 2

Dear Contractor:

This addendum is being issued to the contract for CONSTRUCTION ON STATE HIGHWAY IN THE CITY AND COUNTY OF SAN FRANCISCO 0.2 MILE SOUTH OF THE ROUTE 1/101 SEPARATION.

Submit bids for this work with the understanding and full consideration of this addendum. The revisions declared in this addendum are an essential part of the contract.

Bids for this work will be opened on Tuesday, May 10, 2011.

This addendum is being issued to revise the Project Plans, the Notice to Bidders and Special Provisions, and the Bid book and Project Plan Sheets 4, 5 and 19 are revised. Copies of the revised sheets are attached for substitution for the like-numbered sheets.

In the Notice to Bidders and Special Provisions, in the "NOTICE TO BIDDERS," the eleventh paragraph is revised as follows:

"Complete the work within 75 working days."

In the Special Provisions, Section 4 "BEGINNING OF WORK, TIME OF COMPLETION AND LIQUIDATED DAMAGES," the first paragraph is revised as follows:

"The 1st working day is the 15th day after contract approval."

In the Special Provisions, Section 4 "BEGINNING OF WORK, TIME OF COMPLETION AND LIQUIDATED DAMAGES," the fourth paragraph is revised as follows:

"You may start work at the job site before the 15th day after contract approval if:

1. You obtain required approval for each submittal before the 15th day
2. The Engineer authorizes it in writing"

Addendum No. 2  
Page 2  
April 22, 2011

04-SF-1-6.9  
04-1637K4  
Project ID 0400020473  
NH-X075(035) N

In the Special Provisions, Section 4 "BEGINNING OF WORK, TIME OF COMPLETION AND LIQUIDATED DAMAGES," the sixth paragraph is revised as follows:

"Complete the work within 75 working days."

In the Special Provisions, Section 5-1.10, "SUPPLEMENTAL PROJECT INFORMATION," the following paragraph is added to the description table:

"Excavation Clearance Application, for the Presidio Regional Notification Center"

In the Special Provisions, Section 8-1.02, "STATE FURNISHED MATERIALS," is deleted.

In the Special Provisions, Section 10-1.01, "ORDER OF WORK," the following paragraphs are added after the tenth paragraph.

"Existing soil stockpiles, as shown on the plans, will be removed before selected material is placed in the stockpile location, as shown on the plans.

Concrete structures will be a first order of work."

In the Special Provisions, Section 10-1.02 "WATER POLLUTION CONTROL," subsection "GENERAL," sub-subsection "Submittals," the first paragraph) is revised as follows:

"Within 2 days after contract approval, start the following process for WPCP approval:

1. Submit 2 copies of the WPCP and allow 7 days for the Engineer's review. If revisions are required, the Engineer provides comments and specifies the date that the review stopped.
2. Change and resubmit the WPCP within 5 days of receipt of the Engineer's comments. The Engineer's review resumes when the complete WPCP is resubmitted.
3. When the Engineer approves the WPCP, submit an electronic and 3 printed copies of the approved WPCP.
4. If the RWQCB reviews the approved WPCP, the Engineer submits one copy of the approved WPCP to the RWQCB for their review and comment. RWQCBs requiring time to review WPCPs include:

4.1. Lahontan for projects in the Lake Tahoe Hydrologic Unit and the Mammoth Lakes Hydrologic Unit

5. If the Engineer requests changes to the WPCP based on RWQCB comments, amend the WPCP within 3 days."

In the Special Provisions, Section 10-2, "HIGHWAY PLANTING AND IRRIGATION SYSTEMS," is deleted.

In the Bid book, in the "Bid Item List," Item 20 is revised as attached.

Addendum No. 3  
Page 3  
April 22, 2011

04-SF-1-6.9  
04-1637K4  
Project ID 0400020473  
NH-X075(035) N

To Bid book holders:

Replace page 3 of the "Bid Item List" in the Bid book with the attached revised page 3 of the Bid Item List. The revised Bid Item List is to be used in the bid.

Attached is a copy of the Information Handout, "Excavation Clearance Application".

Inquiries or questions in regard to this addendum must be communicated as a bidder inquiry and must be made as noted in the Notice to Bidders section of the Notice to Bidders and Special Provisions.

Indicate receipt of this addendum by filling in the number of this addendum in the space provided on the signature page of the Bid book.

Submit bids in the Bid book you now possess. Holders who have already mailed their book will be contacted to arrange for the return of their book.


Inform subcontractors and suppliers as necessary.

This addendum, attachments and the modified wage rates are available for the Contractors' download on the Web site:

[http://www.dot.ca.gov/hq/esc/oe/project\\_ads\\_addenda/04/04-1637K4](http://www.dot.ca.gov/hq/esc/oe/project_ads_addenda/04/04-1637K4)

If you are not a Bid book holder, but request a book to bid on this project, you must comply with the requirements of this letter before submitting your bid.

Sincerely,

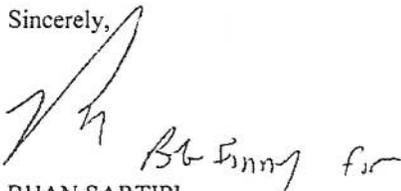

BIJAN SARTIPI  
District Director

Attachments

## BID ITEM LIST

04-1637K4

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity	Unit Price	Item Total
1	071325	TEMPORARY FENCE (TYPE ESA)	LF	1,600		
2	074016	CONSTRUCTION SITE MANAGEMENT	LS	LUMP SUM	LUMP SUM	
3	074017	PREPARE WATER POLLUTION CONTROL PROGRAM	LS	LUMP SUM	LUMP SUM	
4	074028	TEMPORARY FIBER ROLL	LF	800		
5	074038	TEMPORARY DRAINAGE INLET PROTECTION	EA	2		
6	074043	TEMPORARY CONCRETE WASHOUT BIN	EA	1		
7	020645	TRAFFIC MANAGEMENT PLAN	LS	LUMP SUM	LUMP SUM	
8	020646	TEMPORARY ACCESS PLAN	LS	LUMP SUM	LUMP SUM	
9	150806	REMOVE PIPE	LF	100		
10	020647	RELOCATE HISTORIC CURB BLOCKS	EA	45		
11	020648	RELOCATE GRANITE CURB AND MONUMENT	CY	25		
12	153246	REMOVE CONCRETE (MISCELLANEOUS)	CY	25		
13	160101	CLEARING AND GRUBBING	LS	LUMP SUM	LUMP SUM	
14	190101	ROADWAY EXCAVATION	CY	2,380		
15	190110	LEAD COMPLIANCE PLAN	LS	LUMP SUM	LUMP SUM	
16 (F)	192001	STRUCTURE EXCAVATION	CY	770		
17 (F)	193001	STRUCTURE BACKFILL	CY	400		
18	193013	STRUCTURE BACKFILL (RETAINING WALL)	CY	12		
19	203021	FIBER ROLLS	LF	2,320		
20	203031	EROSION CONTROL (HYDROSEED) (SQFT)	SQFT	41,400		