

DEPARTMENT OF TRANSPORTATION

DIVISION OF ENGINEERING SERVICES

OFFICE ENGINEER

1727 30th Street MS-43

P.O. BOX 168041

SACRAMENTO, CA 95816-8041

FAX (916) 227-6214

www.dot.ca.gov/hq/esc/oe



*Serious Drought.
Help save water!*

September 5, 2014

04-Ala-580-R31.7/R31.9

04-1SS044

Project ID 0400020870

ACNHPI-580-1(063)E

Addendum No. 1

Dear Contractor:

This addendum is being issued to the contract for CONSTRUCTION ON STATE HIGHWAY IN ALAMEDA COUNTY IN ASHLAND FROM 0.1 MILE EAST OF 164TH AVENUE UNDERCROSSING TO 0.2 MILE WEST OF 164TH AVENUE UNDERCROSSING.

Submit bids for this work with the understanding and full consideration of this addendum. The revisions declared in this addendum are an essential part of the contract.

Bids for this work will be opened on Wednesday, September 17, 2014.

This addendum is being issued to revise the project plans, the *Notice to Bidders and Special Provisions*, the *Bid* book, and the Federal Minimum Wages with Modification Number 22 dated 9/05/2014.

Project plan sheets 3, 23, 27, 29, 30, 35, 37, and 40 are replaced and attached for substitution for the like-numbered sheets.

In the *Notice to Bidders and Special Provisions*, in the "STANDARD PLANS LIST," the following Standard Plan is added as follows:

"T60."

In the *Special Provisions*, Section 8-1.04C, "Delayed Start," is added as attached.

Addendum No. 1
Page 2
September 5, 2014

04-Ala-580-R31.7/R31.9
04-1SS044
Project ID 0400020870
ACNHPI-580-1(063)E

In the *Bid* book, in the "Bid Item List," Items 43, 56, 61, 64, 67 are replaced.

In the *Bid* book, in the "Bid Item List," Items 108, and 109 are added.

In the *Bid* book, in the "Bid Item List," Items 22, and 107 are deleted.

To *Bid* book holders:

Inquiries or questions in regard to this addendum must be communicated as a bidder inquiry and must be made as noted in the *Notice to Bidders* section of the *Notice to Bidders and Special Provisions*.

Submit the *Bid* book as described in the *Electronic Bidding Guide* at the Bidders' Exchange website.

http://www.dot.ca.gov/hq/esc/oe/electronic_bidding/electronic_bidding.html


Inform subcontractors and suppliers as necessary.

This addendum, EBS addendum file, attachments and the modified wage rates are available for the Contractors' download on the Web site:

http://www.dot.ca.gov/hq/esc/oe/project_ads_addenda/04/04-1SS044

If you are not a *Bid* book holder, but request a book to bid on this project, you must comply with the requirements of this letter before submitting your bid.

Sincerely,

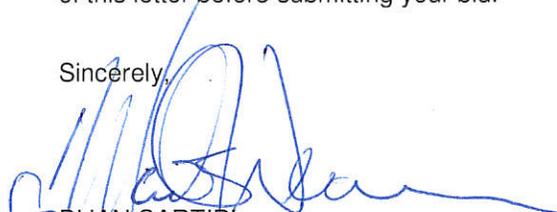

for BIJAN SARTIPI
District Director

Attachments

Add section 8-1.04C:

Section 8-1.04B does not apply.

Start job site activities within 55 days after receiving notice that the Contract has been approved by the Attorney General or the attorney appointed and authorized to represent the Department.

Do not start job site activities until the Department authorizes or accepts your submittal for:

1. CPM baseline schedule
2. WPCP or SWPPP, whichever applies
3. Contingency plan for opening closures to public traffic
4. SSPC QP certifications

Do not start other job site activities until all the submittals from the above list are authorized or accepted and the following information is received by the Engineer:

1. *Notice of Materials To Be Used* form.
2. Written statement from the vendor that the order for the sign panels has been received and accepted by the vendor. The statement must show the dates that the materials will be shipped.
3. Written statement from the vendor that the order for structural steel has been received and accepted by the vendor. The statement must show the dates that the materials will be shipped.

You may start job site activities before the 55th day after Contract approval if you:

1. Obtain specified authorization or acceptance for each submittal before the 55th day
2. Receive authorization to start

Submit a notice 72 hours before starting job site activities. If the project has more than 1 location of work, submit a separate notice for each location.

CONTRACT NO. 04-1SS044
ADDED PER ADDENDUM NO. 1 DATED SEPTEMBER 5, 2014

**BID ITEM LIST
04-1SS044**

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity	Unit Price	Item Total
21	130900	TEMPORARY CONCRETE WASHOUT	LS	LUMP SUM	LUMP SUM	
22	BLANK					
23	141103	REMOVE YELLOW THERMOPLASTIC TRAFFIC STRIPE (HAZARDOUS WASTE)	LF	1,830		
24	148005	NOISE MONITORING	LS	LUMP SUM	LUMP SUM	
25	150685	REMOVE IRRIGATION FACILITY	LS	LUMP SUM	LUMP SUM	
26	150714	REMOVE THERMOPLASTIC TRAFFIC STRIPE	LF	6,915		
27	150722	REMOVE PAVEMENT MARKER	EA	472		
28	150809	REMOVE CULVERT (LF)	LF	53		
29	150820	REMOVE INLET	EA	2		
30	160102	CLEARING AND GRUBBING (LS)	LS	LUMP SUM	LUMP SUM	
31	190101	ROADWAY EXCAVATION	CY	2,000		
32 (F)	192049	STRUCTURE EXCAVATION (SOLDIER PILE WALL)	CY	115		
33 (F)	193029	STRUCTURE BACKFILL (SOLDIER PILE WALL)	CY	15		
34 (F)	193116	CONCRETE BACKFILL (SOLDIER PILE WALL)	CY	79		
35 (F)	193119	LEAN CONCRETE BACKFILL	CY	30		
36	194001	DITCH EXCAVATION	CY	21		
37	027783	IMPORTED BORROW (SHOULDER)	CY	950		
38	198010	IMPORTED BORROW (CY)	CY	4,300		
39	198209	SUBGRADE ENHANCEMENT GEOTEXTILE, CLASS B2	SQYD	1,200		
40	200002	ROADSIDE CLEARING	LS	LUMP SUM	LUMP SUM	

4

REPLACED PER ADDEDDUM NO. 1 DATED SEPTEMBER 5, 2014

"Provide a safe, sustainable, integrated and efficient transportation system to enhance California's economy and livability"

**BID ITEM LIST
04-1SS044**

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity	Unit Price	Item Total
41	202006	SOIL AMENDMENT	CY	2		
42	202028	RELOCATE IRRIGATION CONTROLLER	LS	LUMP SUM	LUMP SUM	
43	202038	PACKET FERTILIZER	EA	210		
44	204035	PLANT (GROUP A)	EA	83		
45	204036	PLANT (GROUP B)	EA	7		
46	204099	PLANT ESTABLISHMENT WORK	LS	LUMP SUM	LUMP SUM	
47	205035	WOOD MULCH	CY	220		
48	206400	CHECK AND TEST EXISTING IRRIGATION FACILITIES	LS	LUMP SUM	LUMP SUM	
49	206402	OPERATE EXISTING IRRIGATION FACILITIES	LS	LUMP SUM	LUMP SUM	
50	206560	CONTROL AND NEUTRAL CONDUCTORS	LS	LUMP SUM	LUMP SUM	
51	206562	1" REMOTE CONTROL VALVE	EA	1		
52	206563	1 1/4" REMOTE CONTROL VALVE	EA	1		
53	206565	2" REMOTE CONTROL VALVE	EA	1		
54	206634	2" WYE STRAINER ASSEMBLY	EA	1		
55	206749	8 STATION IRRIGATION CONTROLLER (WALL MOUNTED)	EA	1		
56	208301	IRRIGATION CONTROLLER ENCLOSURE CABINET	EA	2		
57	208416	CERTIFY EXISTING BACKFLOW PREVENTERS	LS	LUMP SUM	LUMP SUM	
58	208442	FLOW SENSOR	EA	1		
59	208446	RISER SPRINKLER ASSEMBLY (GEAR DRIVEN)	EA	2		
60	208448	RISER SPRINKLER ASSEMBLY	EA	97		

BID ITEM LIST
04-1SS044

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity	Unit Price	Item Total
61 (F)	208594	3/4" PLASTIC PIPE (SCHEDULE 40) (SUPPLY LINE)	LF	961		
62 (F)	208595	1" PLASTIC PIPE (SCHEDULE 40) (SUPPLY LINE)	LF	661		
63 (F)	208597	1 1/2" PLASTIC PIPE (SCHEDULE 40) (SUPPLY LINE)	LF	169		
64 (F)	208598	2" PLASTIC PIPE (SCHEDULE 40) (SUPPLY LINE)	LF	100		
65	208683	BALL VALVE	EA	2		
66	208819	8" WELDED STEEL PIPE CONDUIT	LF	36		
67	210350	FIBER ROLLS	LF	1,160		
68	260203	CLASS 2 AGGREGATE BASE (CY)	CY	400		
69	390132	HOT MIX ASPHALT (TYPE A)	TON	80		
70	394074	PLACE HOT MIX ASPHALT DIKE (TYPE C)	LF	200		
71	394076	PLACE HOT MIX ASPHALT DIKE (TYPE E)	LF	710		
72	394077	PLACE HOT MIX ASPHALT DIKE (TYPE F)	LF	25		
73	410096	DRILL AND BOND (DOWEL BAR)	EA	117		
74	411105	INDIVIDUAL SLAB REPLACEMENT (RSC)	CY	80		
75	044705	STEEL SOLDIER PILE (W 14 X 211)	LF	592		
76	490403	30" DRILLED HOLE	LF	597		
77 (F)	510060	STRUCTURAL CONCRETE, RETAINING WALL	CY	26		
78 (F)	510072	STRUCTURAL CONCRETE, BARRIER SLAB	CY	54		
79 (F)	510502	MINOR CONCRETE (MINOR STRUCTURE)	CY	4		
80 (F)	044706	FLUTED RIB SINE WAVE TEXTURE	SQFT	350		

6

REPLACED PER ADDEDDUM NO. 1 DATED SEPTEMBER 5, 2014

*"Provide a safe, sustainable, integrated and efficient transportation system
to enhance California's economy and livability"*

**BID ITEM LIST
04-1SS044**

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity	Unit Price	Item Total
101	840504	4" THERMOPLASTIC TRAFFIC STRIPE	LF	7,300		
102	840506	8" THERMOPLASTIC TRAFFIC STRIPE	LF	550		
103	840508	8" THERMOPLASTIC TRAFFIC STRIPE (BROKEN 12-3)	LF	1,500		
104	850101	PAVEMENT MARKER (NON-REFLECTIVE)	EA	340		
105	850111	PAVEMENT MARKER (RETROREFLECTIVE)	EA	180		
106	860797	ELECTRIC SERVICE (IRRIGATION)	LS	LUMP SUM	LUMP SUM	
107	BLANK					
108	130670	TEMPORARY REINFORCED SILT FENCE	LF	210		
109	99990	MOBILIZATION	LS	LUMP SUM	LUMP SUM	

TOTAL BID

FOR BID ITEMS:

\$ _____

TOTAL BID

FOR TIME:

$$\frac{\text{WORKING DAYS BID}}{\text{(Not to exceed 140 Days)}} \times \frac{\$3,200.00}{\text{COST PER DAY}} = \$$$

TOTAL BID FOR COMPARISON (COST PLUS TIME):

\$ _____