**** WARNING ** WARNING ** WARNING ** WARNING ****
This document is intended for informational purposes only.

Users are cautioned that California Department of Transportation (Department) does not assume any liability or responsibility based on these electronic files or for any defective or incomplete copying, exerpting, scanning, faxing or downloading of the contract documents. As always, for the official paper versions of the bidders packages and non-bidder packages, including addenda write to the California Department of Transportation, Plans and Bid Documents, Room 0200, P.O. Box 942874, Sacramento, CA 94272-0001, telephone (916) 654-4490 or fax (916) 654-7028. Office hours are 7:30 a.m. to 4:15 p.m. When ordering bidder or non-bidder packages it is important that you include a telephone number and fax number, P.O. Box and street address so that you can receive addenda.

STATE OF CALIFORNIA

DEPARTMENT OF TRANSPORTATION

NOTICE TO CONTRACTORS

AND

SPECIAL PROVISIONS

FOR CONSTRUCTION ON STATE HIGHWAY IN

SAN MATEO COUNTY IN SAN MATEO, BURLINGAME AND MILLBRAE

ON ROUTE 101 FROM MILLBRAE AVENUE OVERCROSSING

IN MILLBRAE TO 3RD AVENUE OVERCROSSING IN SAN MATEO

DISTRICT 04, ROUTE 101

For Use in Connection with Standard Specifications Dated JULY 1999, Standard Plans Dated JULY 2004 and Labor Surcharge and Equipment Rental Rates.

CONTRACT NO. 04-264204

04-SM-101-21.7/28.5

Federal Aid Project

HPLUL-6204(060)

Bids Open: November 28, 2006
Dated: September 25, 2006

OSD

****

IMPORTANT SPECIAL NOTICES

****

A+B BIDDING SPECIAL NOTICE

The bidder's attention is directed to Section 2, "Proposal Requirements and Conditions," Section 3, "Award and Execution of Contract," and Section 4, "Beginning of Work, Time of Completion and Liquidated Damages," in the special provisions. In addition to the item prices and totals, the proposal shall set forth the number of working days bid to complete the work on the contract, except plant establishment. Bids will be compared on the basis of the sum of the item totals on the Engineer's Estimate for the work to be done (TOTAL BID (A)), plus the product of the number of working days bid to complete the work, except plant establishment, and the cost per day shown on the Engineer's Estimate (TOTAL BID (B)). The lowest bid will be determined on the basis of the "Total Basis for Comparison of Bids (A+B)" set forth in the Engineer's Estimate.

Bids in which the number of working days bid for completion of the work, except plant establishment, exceed the maximum number of days specified will be considered non-responsive and will be rejected.

- Attention is directed to Section 3, "Award and Execution of Contract," of these special provisions regarding submittal of the documents identified in Section 3-1.025, "Insurance Policies," of the Standard Specifications.

This project includes, but is not limited to, the following special requirements:

- Section 7-1.03, "Payment of Taxes," of the Standard Specifications regarding the payment of timber yield taxes for timber harvested by contractors during construction operations within State right of way. (California Revenue and Taxation Code Section 38115)

- The specifications for this project include Quality Control / Quality Assurance provisions for the contract item "Asphalt Concrete" in the Special Provisions. Asphalt concrete shall conform to the provisions in Section 11-1, "Quality Control / Quality Assurance," and the section entitled "Asphalt Concrete" in Section 10-1, "General," of the Special Provisions. Section 39, "Asphalt Concrete," of the Standard Specifications shall not apply to Type A and Type B asphalt concrete.

TABLE OF CONTENTS

NOTICE TO CONTRACTORS 1
COPY OF ENGINEER'S ESTIMATE 3
SPECIAL PROVISIONS 20
SECTION 1. SPECIFICATIONS AND PLANS 20
AMENDMENTS TO JULY 1999 STANDARD SPECIFICATIONS 20
SECTION 2. PROPOSAL REQUIREMENTS AND CONDITIONS: 109
2-1.01 GENERAL 109
2-1.015 FEDERAL LOBBYING RESTRICTIONS 110
2-1.02 DISADVANTAGED BUSINESS ENTERPRISE (DBE) 110
2-1.03 DBE AVAILABILITY ADVISORY 112
SECTION 3. AWARD AND EXECUTION OF CONTRACT 112
SECTION 4. BEGINNING OF WORK, TIME OF COMPLETION AND LIQUIDATED DAMAGES 112
SECTION 5. GENERAL 113
SECTION 5-1. MISCELLANEOUS 113
5-1.01 PLANS AND WORKING DRAWINGS 113
5-1.013 LINES AND GRADES 113
5-1.017 CONTRACT BONDS 113
5-1.018 GUARANTEE 113
5-1.019 COST REDUCTION INCENTIVE 114
5-1.02 LABOR NONDISCRIMINATION 115
5-1.022 EXCLUSION OF RETENTION 115
5-1.023 UNSATISFACTORY PROGRESS 115
5-1.03 INTEREST ON PAYMENTS 115
5-1.04 PUBLIC SAFETY 115
5-1.05 TESTING 116
5-1.06 REMOVAL OF ASBESTOS AND HAZARDOUS SUBSTANCES 116
5-1.065 SOLID WASTE DISPOSAL AND RECYCLING REPORT 117
5-1.07 (BLANK) 117
5-1.075 BUY AMERICA REQUIREMENTS 117
5-1.08 SUBCONTRACTOR AND DBE RECORDS 117
5-1.083 DBE CERTIFICATION STATUS 118
5-1.086 PERFORMANCE OF SUBCONTRACTORS 118
5-1.09 SUBCONTRACTING 118
5-1.10 PROMPT PROGRESS PAYMENT TO SUBCONTRACTORS 118
5-1.103 RECORDS 118
5-1.104 INTERNET DAILY EXTRA WORK REPORT 119
5-1.11 PARTNERING 119
5-1.114 VALUE ANALYSIS 120
5-1.12 DISPUTE REVIEW BOARD 120
5-1.13 FORCE ACCOUNT PAYMENT 130
5-1.14 RESPONSIBILITY TO OTHER ENTITIES 131
5-1.15 COMPENSATION ADJUSTMENTS FOR PRICE INDEX FLUCTUATIONS 131
5-1.16 AREAS FOR CONTRACTOR'S USE 132
5-1.17 PAYMENTS 133
5-1.18 PROJECT INFORMATION 133
5-1.19 SOUND CONTROL REQUIREMENTS 134
5-1.20 RELATIONS WITH CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD 135
5-1.21 RELATIONS WITH UNITED STATES ARMY CORPS OF ENGINEERS 135
5-1.22 AERIALLY DEPOSITED LEAD 136
5-1.23 ENVIRONMENTALLY SENSITIVE AREA 136
5-1.24 PRESERVATION OF PROPERTY 137
5-1.25 PRESERVE EXISTING EUCALYPTUS TREES 137
5-1.26 DAMAGE REPAIR 137
5-1.27 RELIEF FROM MAINTENANCE AND RESPONSIBILITY 138

5-1.28 TUNNEL SAFETY ORDERS 138
SECTION 6. (BLANK) 138
SECTION 7. (BLANK) 138
SECTION 8. MATERIALS 138
SECTION 8-1. MISCELLANEOUS 138
8-1.01 SUBSTITUTION OF NON-METRIC MATERIALS AND PRODUCTS 138
8-1.02 PREQUALIFIED AND TESTED SIGNING AND DELINEATION MATERIALS 145
8-1.03 STATE-FURNISHED MATERIALS 151
8-1.04 ENGINEERING FABRICS 151
8-1.05 ASPHALTIC EMULSION 151
SECTION 8-2. CONCRETE 151
8-2.01 PORTLAND CEMENT CONCRETE 151
8-2.02 CORROSION CONTROL FOR PORTLAND CEMENT CONCRETE 153
8-2.03 PRECAST CONCRETE QUALITY CONTROL 153
GENERAL 153
PRECAST CONCRETE QUALIFICATION AUDIT 154
PRECAST CONCRETE QUALITY CONTROL PLAN 154
REPORTING 155
PAYMENT 155
SECTION 8-3. WELDING 156
8-3.01 WELDING 156
GENERAL 156
WELDING QUALITY CONTROL 158
WELDING FOR OVERHEAD SIGN AND POLE STRUCTURES 160
PAYMENT 160
SECTION 9. DESCRIPTION OF BRIDGE WORK 161
SECTION 10. CONSTRUCTION DETAILS 162
SECTION 10-1. GENERAL 162
10-1.00 CONSTRUCTION PROJECT INFORMATION SIGNS 162
10-1.01 ORDER OF WORK 162
10-1.02 WATER POLLUTION CONTROL 164
RETENTION OF FUNDS 165
STORM WATER POLLUTION PREVENTION PLAN PREPARATION, APPROVAL AND AMENDMENTS 166
COST BREAK-DOWN 167
SWPPP IMPLEMENTATION 171
MAINTENANCE 172
REPORTING REQUIREMENTS 172
SAMPLING AND ANALYTICAL REQUIREMENTS 173
PAYMENT 174
10-1.03 NON-STORM WATER DISCHARGES 175
10-1.04 TEMPORARY EROSION CONTROL BLANKET 179
10-1.05 TEMPORARY COVER 181
10-1.06 TEMPORARY CONCRETE WASHOUT FACILITY 182
10-1.07 TEMPORARY CHECK DAM 184
MATERIALS 185
INSTALLATION 185
MAINTENANCE 186
MEASUREMENT AND PAYMENT 186
10-1.08 TEMPORARY FIBER ROLL 186
10-1.09 TEMPORARY SILT FENCE 188
10-1.10 TEMPORARY FENCE (TYPE CL-1.8) 189
10-1.11 TEMPORARY FENCE (TYPE ESA) 190
MATERIALS 190
INSTALLATION 191
MAINTENANCE 191
MEASUREMENT AND PAYMENT 191
10-1.12 TEMPORARY CONSTRUCTION ENTRANCE 191
MATERIALS 191

INSTALLATION 192
MAINTENANCE 193
MEASUREMENT AND PAYMENT 193
10-1.13 TEMPORARY DRAINAGE INLET PROTECTION 193
MATERIALS 193
INSTALLATION 196
REMOVAL 197
MAINTENANCE 197
MEASUREMENT 198
PAYMENT 198
10-1.14 MIGRATORY BIRD PROTECTION 198
10-1.15 BIOLOGICAL MONITOR 199
BIOLOGICAL TRAINING CLASS 199
PRE-CONSTRUCTION BIOLOGICAL SURVEY 199
MONITORING 199
BIOLOGICAL RECORDS 200
PAYMENT 200
10-1.16 TEMPORARY EXCLUSION FENCE 200
MATERIALS 200
INSTALLATION 200
MEASUREMENT AND PAYMENT 201
10-1.17 TEMPORARY SUPPORTS 201
TEMPORARY SUPPORT DESIGN AND DRAWINGS 201
TEMPORARY SUPPORT DESIGN CRITERIA 202
SPECIAL LOCATIONS 203
TEMPORARY SUPPORT CONSTRUCTION 203
REMOVING TEMPORARY SUPPORTS 203
PAYMENT 204
10-1.18 COOPERATION 204
10-1.19 PROGRESS SCHEDULE (CRITICAL PATH METHOD) 204
DEFINITIONS 204
GENERAL REQUIREMENTS 205
COMPUTER SOFTWARE 206
NETWORK DIAGRAMS, REPORTS AND DATA 206
PRE-CONSTRUCTION SCHEDULING CONFERENCE 207
BASELINE SCHEDULE 208
UPDATE SCHEDULE 208
TIME IMPACT ANALYSIS 208
FINAL UPDATE SCHEDULE 209
RETENTION 209
PAYMENT 209
10-1.20 TIME-RELATED OVERHEAD 210
10-1.21 OBSTRUCTIONS 212
10-1.22 DUST CONTROL 213
10-1.23 MOBILIZATION 213
10-1.24 CONSTRUCTION AREA TRAFFIC CONTROL DEVICES 213
10-1.25 CONSTRUCTION AREA SIGNS 214
10-1.26 MAINTAINING TRAFFIC 215
10-1.27 CLOSURE REQUIREMENTS AND CONDITIONS 222
CLOSURE SCHEDULE 222
CONTINGENCY PLAN 222
LATE REOPENING OF CLOSURES 222
COMPENSATION 223
10-1.28 TRAFFIC CONTROL SYSTEM FOR LANE CLOSURE 223
10-1.29 TEMPORARY PAVEMENT DELINEATION 224
GENERAL 224
TEMPORARY LANELINE AND CENTERLINE DELINEATION 224
TEMPORARY EDGELINE DELINEATION 224
TEMPORARY TRAFFIC STRIPE (PAINT) 225

TEMPORARY PAVEMENT MARKING (PAINT) 225
TEMPORARY PAVEMENT MARKERS 225
MEASUREMENT AND PAYMENT 226
10-1.30 PORTABLE CHANGEABLE MESSAGE SIGN 226
10-1.31 TEMPORARY RAILING 226
10-1.32 CHANNELIZER 227
10-1.33 TEMPORARY TRAFFIC SCREEN 227
10-1.34 TEMPORARY CRASH CUSHION MODULE 227
10-1.35 EXISTING HIGHWAY FACILITIES 228
ABANDON MANHOLE 229
ABANDON CULVERT AND SEWER PIPE LINE 229
ABANDON INLET 229
SALVAGE METAL BEAM GUARD RAILING 229
SALVAGE METAL FENCE 229
RELOCATE METAL FENCE 230
REMOVE WOOD BEAM GUARD RAILING 230
REMOVE SIGN STRUCTURE 230
REMOVE PAVEMENT MARKER 230
REMOVE TRAFFIC STRIPE AND PAVEMENT MARKING 230
REMOVE DRAINAGE FACILITY 232
REMOVE SEWER MANHOLE AND SEWER PIPE 232
REMOVE SLOTTED DRAIN 232
REMOVE ROADSIDE SIGN 232
RECONSTRUCT METAL BEAM GUARD RAILING 232
ADJUST INLET 232
REMOVE BASE AND SURFACING 233
COLD PLANE ASPHALT CONCRETE PAVEMENT 233
CAP INLET 233
EXISTING HIGHWAY IRRIGATION FACILITIES 234
BRIDGE REMOVAL 234
REMOVE CONCRETE 236
10-1.36 CLEARING AND GRUBBING 236
10-1.37 WATERING 236
10-1.38 EARTHWORK 236
LAGGING WALL EARTHWORK 237
10-1.39 LIGHTWEIGHT FILL 238
10-1.40 EARTH RETAINING STRUCTURES 239
WORKING DRAWINGS 240
MATERIALS 240
CONSTRUCTION 243
MEASUREMENT AND PAYMENT 245
10-1.41 TIEBACK WALL EARTHWORK 245
10-1.42 TEMPORARY RETAINING WALL 246
EARTHWORK 247
MATERIAL 247
MEASUREMENT AND PAYMENT 247
10-1.43 CONTROLLED LOW STRENGTH MATERIAL 247
10-1.44 MATERIAL CONTAINING AERIALLY DEPOSITED LEAD 248
LEAD COMPLIANCE PLAN 249
EXCAVATION AND TRANSPORTATION PLAN 249
DUST CONTROL 250
STOCKPILING 250
MATERIAL TRANSPORTATION 250
DISPOSAL 250
MEASUREMENT AND PAYMENT 251
10-1.45 EROSION CONTROL (NETTING) 251
MATERIALS 251
APPLICATION 252
INSTALLATION 253

MAINTENANCE....253
MEASUREMENT AND PAYMENT....253
10-1.46 MOVE-IN/MOVE-OUT (EROSION CONTROL)....253
10-1.47 EROSION CONTROL (NETTING)....253
MATERIALS....254
APPLICATION....255
INSTALLATION....255
MAINTENANCE....255
MEASUREMENT AND PAYMENT....255
10-1.48 EROSION CONTROL (TYPE D)....256
MATERIALS....256
APPLICATION....259
MEASUREMENT AND PAYMENT....260
10-1.49 FIBER ROLLS....261
MATERIALS....261
INSTALLATION....261
MEASUREMENT AND PAYMENT....261
10-1.50 DRAINAGE INLET PROTECTION....261
MATERIALS....261
INSTALLATION....262
MAINTENANCE....262
MEASUREMENT AND PAYMENT....263
10-1.51 FLARED END SECTION PROTECTION....263
MATERIALS....263
INSTALLATION....264
MAINTENANCE....264
MEASUREMENT AND PAYMENT....264
10-1.52 IRRIGATION CROSSOVERS....264
10-1.53 FINISHING ROADWAY....265
10-1.54 AGGREGATE SUBBASE....265
10-1.55 AGGREGATE BASE....265
10-1.56 SEAL RANDOM CRACKS IN EXISTING SURFACING....266
MATERIALS....266
PREPARATION....267
APPLICATION....267
MEASUREMENT AND PAYMENT....267
10-1.57 ASPHALT CONCRETE....268
10-1.58 OPEN GRADED ASPHALT CONCRETE....272
10-1.59 ASPHALT CONCRETE (MISCELLANEOUS AREAS)....273
10-1.60 RECYCLED ASPHALT CONCRETE (CONTRACTOR OPTION)....274
10-1.61 REPLACE CONCRETE PAVEMENT (RAPID STRENGTH CONCRETE), (WEIGH-IN-MOTION)....275
DEFINITIONS....275
PRE-OPERATION CONFERENCE....275
JUST-IN-TIME TRAINING....276
TRIAL SLAB....276
REMOVING EXISTING PAVEMENT....277
TEMPORARY ROADWAY STRUCTURAL SECTION....277
RAPID STRENGTH CONCRETE....278
REPLACE EXISTING PAVEMENT DELINEATION....287
MEASUREMENT AND PAYMENT....287
10-1.62 SURVEY OF EXISTING NON-HIGHWAY FACILITIES....288
10-1.63 VIBRATION MONITORING....290
VIBRATION MONITORING AND PHOTO SURVEY....290
10-1.64 PILING....293
GENERAL....293
CAST-IN-DRILLED-HOLE CONCRETE PILES....293
STEEL SOLDIER PILING....304
MEASUREMENT AND PAYMENT (PILING)....304
10-1.65 DRILLED HOLES....304

10-1.66 PRESTRESSING CONCRETE 305
10-1.67 TIEBACK ANCHORS 305
MATERIALS 305
CONSTRUCTION 307
MEASUREMENT AND PAYMENT 309
10-1.68 CONCRETE STRUCTURES 309
FALSEWORK 310
COST REDUCTION INCENTIVE PROPOSALS FOR CAST-IN-PLACE PRESTRESSED BOX GIRDER BRIDGES 311
DECK CLOSURE POURS 312
SLIDING BEARINGS 312
ELASTOMERIC BEARING PADS 312
CURING 312
DECK CRACK TREATMENT 312
10-1.69 PRECAST CONCRETE GIRDERS 314
PRECAST PRESTRESSED CONCRETE BRIDGE MEMBERS 315
MEASUREMENT AND PAYMENT 315
10-1.70 PRECAST CONCRETE BOX CULVERTS 315
PRECAST CONCRETE BOX CULVERTS 315
10-1.71 STRUCTURE APPROACH SLABS (TYPE N) 316
GENERAL 317
STRUCTURE APPROACH DRAINAGE SYSTEM 317
ENGINEERING FABRICS 317
TREATED PERMEABLE BASE UNDER APPROACH SLAB 318
APPROACH SLABS 318
JOINTS 319
MEASUREMENT AND PAYMENT 319
10-1.72 SOUND WALL 319
DESCRIPTION 319
SOUND WALL (MASONRY BLOCK) 319
ACCESS GATES 321
MEASUREMENT AND PAYMENT 321
10-1.73 SEALING JOINTS 322
10-1.74 JOINT SEAL ASSEMBLIES (MAXIMUM MOVEMENT RATING, 100 MM) 322
ALTERNATIVE JOINT SEAL ASSEMBLY 322
10-1.75 ARCHITECTURAL SURFACE (TEXTURED CONCRETE) 323
TEST PANEL 324
FORM LINERS 324
RELEASING FORM LINERS 325
ABRASIVE BLASTING 325
CURING 325
MEASUREMENT AND PAYMENT 325
10-1.76 ARCHITECTURAL SURFACE (STONE) 325
RELATED WORK 325
QUALITY ASSURANCE 325
SUBMITTALS 326
DELIVERY, STORAGE AND HANDLING 326
PRODUCTS 326
MATERIALS 326
FABRICATION 327
EXECUTION 327
INSPECTION 327
PREPARATION 327
GENERAL INSTALLATION REQUIREMENTS 327
INSTALLATION OF WALL STONE 327
INSTALLATION TOLERANCES 328
CLEANING 328
MEASUREMENT AND PAYMENT 328
10-1.77 REINFORCEMENT 328

EPOXY-COATED PREFABRICATED REINFORCEMENT....328
MEASUREMENT AND PAYMENT....329
10-1.78 STEEL STRUCTURES....330
MATERIALS....330
ROTATIONAL CAPACITY TESTING PRIOR TO SHIPMENT TO JOB SITE....330
INSTALLATION TENSION TESTING AND ROTATIONAL CAPACITY TESTING AFTER ARRIVAL ON THE JOB SITE....334
SURFACE PREPARATION....335
SEALING....335
WELDING....335
10-1.79 SIGN STRUCTURES....335
10-1.80 ROADSIDE SIGNS....336
10-1.81 INSTALL SIGN PANEL ON EXISTING FRAME....337
10-1.82 INSTALL REMOVABLE SIGN PANEL FRAME....337
10-1.83 FURNISH SIGN....337
QUALITY CONTROL FOR SIGNS....338
SHEET ALUMINUM....339
RETROREFLECTIVE SHEETING....339
PROCESS COLOR AND FILM....339
SINGLE SHEET ALUMINUM SIGN....339
LAMINATED PANEL SIGN....340
FORMED PANEL SIGN....341
10-1.84 TIMBER LAGGING....341
10-1.85 CLEAN AND PAINT STRUCTURAL STEEL....341
GENERAL....341
CLEANING....342
PAINTING....343
10-1.86 CLEAN AND PAINT STEEL SOLDIER PILING....344
CLEANING....344
PAINTING....345
REPAIR....346
PAYMENT....346
10-1.87 ALTERNATIVE PIPE....346
SPIRAL RIB PIPE....346
10-1.88 PLASTIC PIPE....346
10-1.89 REINFORCED CONCRETE PIPE....347
10-1.90 CORRUGATED METAL PIPE....348
10-1.91 MISCELLANEOUS FACILITIES....348
10-1.92 DRAINAGE INLET MARKER....348
10-1.93 GRATED LINE DRAIN....348
10-1.94 WELDED STEEL PIPE CASING (BRIDGE)....350
WORKING DRAWINGS....350
MATERIALS....350
CONSTRUCTION....350
MEASUREMENT AND PAYMENT....350
10-1.95 WELDED STEEL PIPE....351
10-1.96 JACKED WELDED STEEL PIPE....351
MEASUREMENT....352
PAYMENT....352
10-1.97 SLOPE PROTECTION....352
10-1.98 MISCELLANEOUS CONCRETE CONSTRUCTION....352
10-1.99 MINOR CONCRETE (GUTTER)....353
10-1.100 MINOR CONCRETE (MEDIAN)....353
10-1.101 MISCELLANEOUS IRON AND STEEL....353
10-1.102 MISCELLANEOUS METAL (LAGGING WALL)....353
10-1.103 BRIDGE DECK DRAINAGE SYSTEM....353
10-1.104 MISCELLANEOUS METAL (RESTRAINER-CABLE TYPE)....354
10-1.105 CHAIN LINK FENCE....354
10-1.106 CHAIN LINK WALK GATE....354

10-1.107 MARKERS AND DELINEATORS....354
10-1.108 METAL BEAM GUARD RAILING....354
ALTERNATIVE FLARED TERMINAL SYSTEM....354
10-1.109 CHAIN LINK RAILING....355
10-1.110 METAL BRIDGE RAILING....355
10-1.111 CONCRETE BARRIER....355
10-1.112 PORTABLE CONCRETE BARRIER (TYPE 60K)....356
10-1.113 THRIE BEAM BARRIER....356
10-1.114 TRANSITION RAILING (TYPE WB)....356
10-1.115 TRANSITION RAILING (TYPE STB)....357
10-1.116 TRANSITION RAILING (TYPE DTB)....357
10-1.117 CRASH CUSHION (REACT)....357
10-1.118 CRASH CUSHION, SAND FILLED....358
10-1.119 THERMOPLASTIC TRAFFIC STRIPE AND PAVEMENT MARKING....359
10-1.120 PAINT TRAFFIC STRIPE....359
10-1.121 PAVEMENT MARKERS....360
SECTION 10-2 HIGHWAY PLANTING AND IRRIGATION SYSTEMS....361
10-2.01 GENERAL....361
PROGRESS INSPECTIONS....361
COST BREAK-DOWN....361
10-2.02 EXISTING HIGHWAY PLANTING....366
MAINTAIN EXISTING PLANTED AREAS....366
REMOVE EXISTING PLANTS FOR TRENCHING....366
PRUNE EXISTING PLANTS....367
10-2.03 EXISTING HIGHWAY IRRIGATION FACILITIES....367
LOCATE EXISTING CROSSOVERS AND CONDUITS....367
CHECK AND TEST EXISTING IRRIGATION FACILITIES....367
MAINTAIN EXISTING IRRIGATION FACILITIES....367
REMOVE EXISTING IRRIGATION FACILITIES....368
10-2.04 HIGHWAY PLANTING....368
HIGHWAY PLANTING MATERIALS....368
ROADSIDE CLEARING....369
PESTICIDES....369
PREPARING PLANTING AREAS....370
CULTIVATE....370
PLANTING....370
PLANT ESTABLISHMENT WORK....371
10-2.05 IRRIGATION SYSTEMS....371
VALVE BOXES....372
ELECTRIC AUTOMATIC IRRIGATION COMPONENTS....372
ARMOR-CLAD CONDUCTORS....374
REMOTE CONTROL VALVE ACTUATOR SYSTEM....374
IRRIGATION CONTROLLER ENCLOSURE CABINET....375
IRRIGATION SYSTEMS FUNCTIONAL TEST....375
PIPE....376
WATER METER....376
BACKFLOW PREVENTER ASSEMBLIES....376
BACKFLOW PREVENTER ASSEMBLY ENCLOSURE....377
TESTING NEW BACKFLOW PREVENTERS....377
SPRINKLERS....377
WYE STRAINERS....377
FINAL IRRIGATION SYSTEM CHECK....377
SECTION 10-3. SIGNALS, LIGHTING AND ELECTRICAL SYSTEMS....378
10-3.01 DESCRIPTION....378
10-3.02 COST BREAK-DOWN....378
10-3.03 EQUIPMENT LIST AND DRAWINGS....379
10-3.04 MAINTAINING EXISTING AND TEMPORARY ELECTRICAL SYSTEMS....379
10-3.05 FOUNDATIONS....379
10-3.06 STANDARDS, STEEL PEDESTALS, AND POSTS....379

10-3.07 CONDUIT 380
10-3.08 PULL BOXES 380
10-3.09 CONDUCTORS AND WIRING 380
10-3.10 CLOSED CIRCUIT TELEVISION CABLES 381
COAXIAL CABLE CONNECTORS (TVL COAXIAL CABLES) 382
TESTING 382
10-3.11 TELEPHONE CABLE 383
10-3.12 BONDING AND GROUNDING 383
10-3.13 SERVICE 383
ELECTRIC SERVICE (IRRIGATION) 384
10-3.14 NUMBERING ELECTRICAL EQUIPMENT 384
10-3.15 STATE-FURNISHED CONTROLLER ASSEMBLIES 384
10-3.16 CONTRACTOR-FURNISHED CITY CONTROLLER ASSEMBLIES 385
10-3.17 VEHICLE SIGNAL FACES AND SIGNAL HEADS 385
10-3.18 PROGRAMMED VISIBILITY VEHICLE TRAFFIC SIGNAL HEADS 385
10-3.19 PEDESTRIAN SIGNALS 385
10-3.20 AUDIBLE PEDESTRIAN SIGNALS 385
10-3.21 FLASHING BEACONS 386
10-3.22 DETECTORS 386
10-3.23 EMERGENCY VEHICLE DETECTOR SYSTEM 386
GENERAL 386
EMITTER ASSEMBLY 386
OPTICAL DETECTION/DISCRIMINATOR ASSEMBLY 387
SYSTEM OPERATION 390
10-3.24 PEDESTRIAN PUSH BUTTONS 390
10-3.25 LUMINAIRES 390
10-3.26 SOFFIT AND WALL LUMINAIRES 390
10-3.27 PEDESTRIAN OVERCROSSING FIXTURES 390
10-3.28 SIGN LIGHTING FIXTURES – INDUCTION 392
MATERIALS 392
10-3.29 INTERNALLY ILLUMINATED SIGNS 393
10-3.30 LIGHT EMITTING DIODE (LED) METER ON SIGNAL MODULES 393
DEFINITION 393
GLOSSARY 393
GENERAL 394
ELECTRICAL 394
METER ON SIGNAL 395
QUALITY ASSURANCE 396
WARRANTY 397
10-3.31 INTERNALLY ILLUMINATED STREET NAME SIGNS 398
10-3.32 PHOTOELECTRIC CONTROLS 398
10-3.33 MODIFY CHANGEABLE MESSAGE SIGN SYSTEM 398
10-3.34 MODIFY CHANGEABLE MESSAGE SIGN STATION 398
10-3.35 CAMERA UNIT 399
CAMERA 399
LENS 401
ENVIRONMENTAL HOUSING 401
CAMERA UNIT CABLE ASSEMBLY 402
10-3.36 PAN/TILT UNIT 402
GENERAL 402
ELECTRICAL 403
MECHANICAL 403
ENVIRONMENTAL 403
PAN AND TILT MOUNTING 403
10-3.37 CAMERA JUNCTION BOX 403
10-3.38 CAMERA CONTROL UNIT 404
GENERAL 404
MECHANICAL 404
ELECTRICAL 404

ENVIRONMENTAL 408
CCU MESSAGES 408
SERIAL COMMUNICATION PROTOCOL 408
10-3.39 VIDEO ENCODER UNIT 409
GENERAL 409
ACCEPTABLE EQUIPMENT 409
QUALIFYING SPECIFICATIONS 409
ACCESSORY ITEM 411
10-3.40 CAMERA STATION 411
GENERAL 411
CABLES AND CONNECTORS 411
INSTALLATION OF CAMERA STATION 411
CAMERA UNIT MOUNTING 412
CAMERA STATION TESTING 412
10-3.41 CAMERA POLES 413
10-3.42 GENERAL PACKET RADIO SYSTEM WIRELESS MODEM ASSEMBLY 413
MODEM 413
POWER SUPPLY 417
MODEM MOUNTING BRACKET AND HARDWARE 418
D SERIAL COMMUNICATION CABLE 418
ANTENNA 419
10-3.43 INTEGRATED SERVICES DIGITAL NETWORK TERMINAL ADAPTER UNIT 419
10-3.44 SERVICE MANUAL REQUIREMENTS 420
GENERAL 420
THEORY OF OPERATION 420
MAINTENANCE 420
REPLACEMENT PARTS 421
DIAGRAM 421
PHYSICAL REQUIREMENTS 421
10-3.45 TRAFFIC OPERATIONS SYSTEM EQUIPMENT TESTING 421
10-3.46 REMOVING, REINSTALLING OR SALVAGING ELECTRICAL EQUIPMENT 421
10-3.47 DISPOSING OF ELECTRICAL EQUIPMENT 421
10-3.48 PAYMENT 422
SECTION 10-4. HIGH SPEED WEIGH IN MOTION SYSTEM 423
10-4.01 DESCRIPTION 423
10-4.02 CERTIFICATES OF COMPLIANCE 423
10-4.03 CONDUIT 423
10-4.04 PULL BOXES 424
10-4.05 CONDUCTORS AND WIRING 424
10-4.06 HIGH SPEED WEIGH IN MOTION CONTROLLER CABINET 424
10-4.07 DETECTORS 424
10-4.08 CONCRETE REMOVAL (WIM SCALE FRAME) 424
10-4.09 ON-SITE EQUIPMENT 425
10-4.10 FUNCTIONAL REQUIREMENTS 425
10-4.11 HIGH SPEED WIM SYSTEM APPLICATION SOFTWARE 427
10-4.12 DATA FILES 431
10-4.13 ACCEPTANCE TEST 431
10-4.14 MAINTENANCE AND OPERATIONS MANUALS 431
10-4.15 WARRANTY 431
10-4.16 PAYMENT 432
SECTION 10-5. DOMESTIC SANITARY SEWER 432
10-5.01 SANITARY SEWER 432
MATERIAL 432
INSTALLATION OF PIPE 433
TESTING 434
BACKFILLING 434
MEASUREMENT 435
PAYMENT 435
SECTION 10-6. DOMESTIC WATER 435

10-6.01 DOMESTIC WATER FACILITIES 435
MATERIALS 436
VALVES 436
VALVE BOXES 437
GASKETS 437
THRUST BLOCKS 437
INSTALLATION 437
TESTING 440
INTERRUPTION OF SERVICE 440
DISINFECTING WATER MAINS 440
METHOD NO. 1 – H.T.H. TABLET METHOD 441
METHOD NO. 2 – H.T.H. SOLUTION WITH HAND PUMP METHOD 442
SHORING AND BRACING 443
FILTER FABRIC 443
PIPE BORING AND JACKING 443
MEASUREMENT AND PAYMENT 444
SECTION 11. MODIFIED STANDARD SPECIFICATION SECTIONS 445
SECTION 11-1. QUALITY CONTROL / QUALITY ASSURANCE 445
SECTION 39: ASPHALT CONCRETE 445
39-1 GENERAL 445
39-2 MATERIALS 445
39-3 ASPHALT CONCRETE MIX DESIGN PROPOSAL AND REVIEW 447
39-4 CONTRACTOR QUALITY CONTROL 448
39-5 ENGINEER QUALITY ASSURANCE 452
39-6 DISPUTE RESOLUTION 454
39-7 STORING, PROPORTIONING AND MIXING MATERIALS 456
39-8 SUBGRADE, PRIME COAT, PAINT BINDER (TACK COAT), AND PAVEMENT REINFORCING FABRIC461
39-9 SPREADING AND COMPACTING EQUIPMENT 462
39-10 SPREADING AND COMPACTING 462
39-11 ACCEPTANCE OF WORK 466
39-12 MEASUREMENT AND PAYMENT 474
SECTION 12. (BLANK) 475
SECTION 13. (BLANK) 475
FEDERAL REQUIREMENT TRAINING SPECIAL PROVISIONS 495

STANDARD PLANS LIST

The Standard Plan sheets applicable to this contract include, but are not limited to those indicated below. The Revised Standard Plans (RSP) and New Standard Plans (NSP) which apply to this contract are included as individual sheets of the project plans.

A10A	Acronyms and Abbreviations (A-L)
A10B	Acronyms and Abbreviations (M-Z)
A10C	Symbols (Sheet 1 of 2)
A10D	Symbols (Sheet 2 of 2)
A20A	Pavement Markers and Traffic Lines, Typical Details
A20B	Pavement Markers and Traffic Lines, Typical Details
A20C	Pavement Markers and Traffic Lines, Typical Details
A20D	Pavement Markers and Traffic Lines, Typical Details
A24A	Pavement Markings - Arrows
A24B	Pavement Markings - Arrows
A24C	Pavement Markings – Symbols and Numerals
A24D	Pavement Markings – Words
A24E	Pavement Markings – Words And Crosswalks
A62A	Excavation and Backfill – Miscellaneous Details

A62B	Limits of Payment for Excavation and Backfill – Bridge Surcharge and Wall
A62C	Limits of Payment for Excavation and Backfill - Bridge
A62D	Excavation and Backfill – Concrete Pipe Culverts
A62DA	Excavation and Backfill – Concrete Pipe Culverts
A62E	Excavation and Backfill – Cast-In-Place Reinforced Concrete Box and Arch Culverts
A62F	Excavation and Backfill – Metal And Plastic Culverts
A63A	Portable Concrete Barrier (Type 60K)
A63B	Portable Concrete Barrier (Type 60K)
A73A	Object Markers
A73B	Markers
A73C	Delineators, Channelizers and Barricades
A76A	Concrete Barrier Type 60
A76B	Concrete Barrier Type 60
A76C	Concrete Barrier Type 60E
A77A1	Metal Beam Guard Railing – Standard Railing Section (Wood Post With Wood Block)
A77A2	Metal Beam Guard Railing – Standard Railing Section (Steel Post With Notched Wood or Notched Plastic Block
A77B1	Metal Beam Guard Railing – Standard Hardware
A77C1	Metal Beam Guard Railing – Wood Post and Wood Block Details
A77C2	Metal Beam Guard Railing Steel Post, Notched Wood Block and Notched Plastic Block Details
A77C3	Metal Beam Guard Railing – Typical Line Post Embedment and Hinge Point Offset Details
A77C4	Metal Beam Guard Railing – Typical Railing Delineation and Dike Positioning Details
A77E1	Metal Beam Guard Railing – Typical Layouts for Embankments
A77E2	Metal Beam Guard Railing – Typical Layouts for Embankments
A77E3	Metal Beam Guard Railing – Typical Layouts for Embankments
A77E4	Metal Beam Guard Railing – Typical Layouts for Embankments
A77E5	Metal Beam Guard Railing – Typical Layouts for Embankments
A77E6	Metal Beam Guard Railing – Typical Layouts for Embankments
A77F1	Metal Beam Guard Railing – Typical Layouts for Structure Approach
A77F2	Metal Beam Guard Railing – Typical Layouts for Structure Approach and Between Structures
A77F3	Metal Beam Guard Railing – Typical Layouts for Structure Approach
A77F4	Metal Beam Guard Railing – Typical Layouts for Structure Departure
A77F5	Metal Beam Guard Railing – Typical Layouts for Structure Departure
A77G1	Metal Beam Guard Railing – Typical Layouts for Fixed Objects Between Separate Roadbeds (Two-Way Traffic)
A77G2	Metal Beam Guard Railing – Typical Layouts for Fixed Objects Between Separate Roadbeds (One Way Traffic)
A77G3	Metal Beam Guard Railing – Typical Layouts for Roadside Fixed Objects
A77G4	Metal Beam Guard Railing – Typical Layouts for Roadside Fixed Objects
A77G5	Metal Beam Guard Railing – Typical Layouts for Roadside Fixed Objects
A77G6	Metal Beam Guard Railing – Typical Layouts for Roadside Fixed Objects
A77G7	Metal Beam Guard Railing – Typical Layouts for Roadside Fixed Objects
A77G8	Metal Beam Guard Railing – Typical Layouts for Roadside Fixed Objects
A77H1	Metal Railing End Anchor Assembly (Type SFT)
A77H3	Metal Railing Anchor Cable and Anchor Plate Details
A77I1	Metal Railing End Anchor Assembly (Type CA)
A77J1	Metal Beam Guard Railing Connections To Bridge Railings Without Sidewalks Details No.1
A77J2	Metal Beam Guard Railing Connections To Bridge Railings Without Sidewalks Details No2
A77J3	Metal Beam Guard Railing Connections to Abutments and Walls
A77J4	Metal Beam Guard Railing Transition Railing (Type WB)
A77L1	Metal Beam Railing Terminal System (Type SRT)
A77L5	Metal Beam Railing Terminal System (Type FLEAT)
A78A	Thrie Beam Barrier Standard Barrier Railing Section (Wood Post With Wood Block)

A78B	Thrie Beam Barrier Standard Barrier Railing Section (Steel Post With Notched Wood Block or Notched Plastic Block)
A78C1	Thrie Beam Barrier – Standard Hardware Details
A78C2	Thrie Beam Barrier Post And Block Details
A78G	Thrie Beam Barrier Connections to Abutments and Walls
A78I	Thrie Beam Barrier Connections to Concrete Barrier
A78J	Thrie Beam Barrier Transition Railing (Type STB)
A78K	Thrie Beam Barrier Transition Railing (Type DTB)
A81A	Crash Cushion, Sand Filled (Unidirectional)
A82D1	Crash Cushion (Type React 9SCBS)
A82D2	Crash Cushion (Type React 9SCBS) – Connection To Concrete Barrier
A82D3	Crash Cushion (Type React 9SCBS) – Alignment Offset Details
A85	Chain Link Fence
A87A	Curbs and Driveways
A87B	Asphalt Concrete Dikes
RSP A88A	Curb Ramp Details
RSP A88B	Curb Ramp and Island Passageway Details
P1	Jointed Plain Concrete Pavement
P10	Concrete Pavement – Dowel Bar Details
P18	Concrete Pavement – Lane Schematics and Isolation Joint Detail
P20	Concrete Pavement – Joint Details
D72	Drainage Inlets
D73	Drainage Inlets
D74A	Drainage Inlets
D74B	Drainage Inlets
D74C	Drainage Inlets Details
D77A	Grate Details
D77B	Bicycle Proof Grate Details
D78A	Gutter Depressions
D79	Precast Reinforced Concrete Pipe – Direct Design Method
D84	Box Culvert Wingwalls-Types A, B and C
D85	Box Culvert Wingwalls-Type D and E
D86A	Box Culvert Warped Wingwalls
D86B	Pipe Culvert Headwalls, Endwalls and Warped Wingwalls
D86C	Arch Culvert Headwalls, Endwalls and Warped Wingwalls
D88	Construction Loads On Culverts
D89	Pipe Headwalls
D90	Pipe Culvert Headwalls, Endwalls and Wingwalls-Type A, B And C
D93B	Drainage Inlet Riser Connections
D94A	Metal and Plastic Flared End Sections
D94B	Concrete Flared End Sections
D97B	Corrugated Metal Pipe Coupling Details No. 2- Hat Band Coupler and Flange Details
D97C	Corrugated Metal Pipe Coupling Details No. 3- Helical and Universal Couplers
D97D	Corrugated Metal Pipe Coupling Details No. 4- Hugger Coupling Bands
D97E	Corrugated Metal Pipe Coupling Details No. 5- Standard Joint
D97F	Corrugated Metal Pipe Coupling Details No. 6- Positive Joint
D97G	Corrugated Metal Pipe Coupling Details No. 7- Positive Joints and Downdrain
D97H	Reinforced Concrete Pipe or Non-Reinforced Concrete Pipe-Standard and Positive Joints
D98C	Grated Line Drain Details
D99A	Structural Section Drainage System Details
D102	Underdrains
H1	Planting and Irrigation – Abbreviations
H2	Planting and Irrigation – Symbols
H3	Planting and Irrigation Details
H4	Planting and Irrigation Details
H5	Planting and Irrigation Details

H6	Planting and Irrigation Details
H7	Planting and Irrigation Details
H8	Planting and Irrigation Details
H9	Planting and Irrigation Details
H10	Irrigation Controller Enclosure Cabinet
T1A	Temporary Crash Cushion, Sand Filled (Unidirectional)
T1B	Temporary Crash Cushion, Sand Filled (Bidirectional)
T2	Temporary Crash Cushion, Sand Filled (Shoulder Installations)
T3	Temporary Railing (Type K)
T4	Temporary Traffic Screen
RSP T7	Construction Project Funding Identification Signs
RSP T10	Traffic Control System for Lane Closure On Freeways and Expressways
RSP T10A	Traffic Control System for Lane and Complete Closures On Freeways and Expressways
RSP T13	Traffic Control System for Lane Closure On Two lane Conventional Highways
RSP T14	Traffic Control System for Ramp Closure
T51	Temporary Water Pollution Control Details (Temporary Silt Fence)
T53	Temporary Water Pollution Control Details (Temporary Cover)
T54	Temporary Water Pollution Control Details (Temporary Erosion Control Blanket)
T57	Temporary Water Pollution Control Details (Temporary Check Dam)
T58	Temporary Water Pollution Control Details (Temporary Construction Entrance)
T59	Temporary Water Pollution Control Details (Temporary Concrete Washout Facility)
B0-1	Bridge Details
B0-3	Bridge Details
B0-5	Bridge Details
B0-13	Bridge Details
B2-5	Pile Details-Class 400 And Class 625
B2-8	Pile Details-Class 900
B3-1	Retaining Wall Type 1 – H=1200 Through 9100 mm
B3-2	Retaining Wall Type 1 – H=9700 Through 10 900 mm
B3-7	Retaining Wall Type 5
B3-8	Retaining Wall Details No. 1
B3-9	Retaining Wall Details No. 2
RSP B6-21	Joint Seals (Maximum Movement Rating = 50 mm)
B7-1	Box Girder Details
B7-5	Deck Drains
B7-6	Deck Drains – Types D-1 and D-2
B7-10	Utility Opening – Box Girder
RSP B8-5	Cast-In-Place Prestressed Girder Details
B11-47	Cable Railing
B11-51	Tubular Hand Railing
B11-52	Chain Link Railing Type 7
B11-54	Concrete Barrier Type 26
B11-56	Concrete Barrier Type 736
B11-62	Concrete Barrier Type 80SW (Sheet 1 Of 3)
B11-63	Concrete Barrier Type 80SW (Sheet 2 Of 3)
B11-64	Concrete Barrier Type 80SW (Sheet 3 Of 3)
B14-5	Water Supply Line (Details) (Pipe Sizes Less Than NPS 4)
RS1	Roadside Signs, Typical Installation Details No. 1
RS2	Roadside Signs - Wood Post, Typical Installation Details No. 2
RS3	Roadside Signs - Laminated Wood Box Post Typical Installation Details No. 3
RS4	Roadside Signs, Typical Installation Details No. 4
RSP S1	Overhead Signs – Truss, Instructions And Examples
RSP S2	Overhead Signs – Truss, Single Post Type – Post Type II Thru IX
RSP S3	Overhead Signs – Truss, Single Post Type – Base Plate and Anchorage Details
RSP S4	Overhead Signs – Truss, Single Post Type – Structural Frame Members Details No. 1
S5	Overhead Signs – Truss, Single Post Type – Structural Frame Members Details No. 2

RSP S6	Overhead Signs – Truss, Gusset Plate Details
RSP S7	Overhead Signs – Truss, Single Post Type – Square Pedestal Foundation
RSP S12	Overhead Signs – Truss, Structural Frame Details
RSP S13	Overhead Signs – Truss, Frame Juncture Details
RSP S16	Overhead Signs – Walkway Details No. 1
RSP S17	Overhead Signs – Walkway Details No. 2
RSP S18	Overhead Signs – Walkway Safety Railing Details
RSP S19	Overhead Signs – Truss, Sign Mounting Details – Laminated Panel – Type A
RSP S20	Overhead Signs – Steel Frames – Removable Sign Panel Frames
S21	Overhead Signs – Removable Sign Panel Frames Mounting Details
RSP S22	Overhead Signs – Truss, Removable Sign Panel Frames – 2794 mm and 3048 mm Sign Panels
S81	Overhead Laminated Sign – Single or Multiple Panel, Type A (25.4 mm Thick)
S86	Laminated Panel Details – Extrusions for Type A, B and H Panels
RSP S87	Type A –1 Mounting Hardware – Overhead Laminated Type A Panel, Truss and Lightweight Sign Structures
S88	Type A – 2 Mounting Hardware – Overhead Laminated Type A Panel, Box Beam Closed Truss, Bridge Mounted and Tubular Sign Structures
S92	Overhead Formed Sign Panel
S93	Framing Details for Framed Single Sheet Aluminum Signs, Rectangular Shape
S94	Roadside Single Sheet Aluminum Sign, Rectangular Shape
S95	Roadside Single Sheet Aluminum Sign, Diamond Shape
ES-1A	Electrical Systems (Symbols And Abbreviations)
ES-1B	Electrical Systems (Symbols And Abbreviations)
ES-1C	Electrical Systems (Symbols And Abbreviations)
ES-2A	Electrical Systems (Service Equipment)
ES-2C	Electrical Systems (Service Equipment Notes, Type III Series)
ES-2D	Electrical Systems (Service Equipment and Typical Wiring Diagram, Type III – A Series)
ES-3B	Electrical Systems (Controller Cabinet Details)
ES-3C	Electrical Systems (Controller Cabinet Details)
ES-3F	Electrical Systems (Telephone Demarcation Cabinet, Type C)
ES-3G	Electrical Systems (Telephone Demarcation Cabinet, Type C Details)
ES-3H	Electrical Systems (Irrigation Controller Enclosure Cabinet)
ES-4A	Electrical Systems (Signal Heads And Mountings)
ES-4B	Electrical Systems (Signal Heads And Mountings)
ES-4C	Electrical Systems (Signal Heads And Mountings)
ES-4D	Electrical Systems (Signal Heads And Mountings)
ES-4E	Electrical Systems (Signal Faces And Mountings)
ES-5A	Electrical Systems (Detectors)
ES-5B	Electrical Systems (Detectors)
ES-5C	Electrical Systems (Detectors)
ES-5D	Electrical Systems (Detectors)
ES-6A	Electrical Systems (Lighting Standards Types 15 and 21)
ES-6B	Electrical Systems (Lighting Standards Types 15 and 21, Barrier Rail Mounted Details)
ES-6D	Electrical Systems (Lighting Standards Type S 15D and 21D, Double Arm)
RSP ES-6E	Electrical Systems (Lighting Standards Type 30 and 31)
ES-6F	Electrical Systems (Lighting Standards Type 30 and 31, Base Plate Details)
RSP ES-6K	Electrical Systems (Lighting Standards Type 5 and Type 10 Overhead Sign Mounted)
RSP ES-7A	Electrical Systems (Signal Standards Push Button Posts and Type 15TS Standard))
ES-7B	Electrical Systems (Signal And Lighting Standards – Type 1 Standards and Equipment Numbering)
RSP ES-7C	Electrical Systems (Signal and Lighting Standards – Case 1 Arm Loading, Wind Velocity = 161 km/h, Arm Lengths 4.6 m To 9.1 m
RSP ES-7D	Electrical Systems (Signal and Lighting Standards – Case 2 Arm Loading, Wind Velocity = 161 km/h, Arm Lengths 4.6 m to 9.1 m)
RSP ES-7E	Electrical Systems (Signal and Lighting Standards – Case 3 Arm Loading, Wind Velocity = 161 km/h, Arm Lengths 4.6 m to 13.7 m)

RSP ES-7F	Electrical Systems (Signal and Lighting Standards – Case 4 Arm Loading, Wind Velocity = 161 km/h, Arm Lengths 7.6 m to 13.7 m)
ES-7J	Electrical Systems (Signal and Lighting Standards – Advance Flashing Beacons)
RSP ES-7M	Electrical Systems (Signal and Lighting Standards – Details No. 1)
ES-7N	Electrical Systems (Signal and Lighting Standards – Details No. 2)
ES-70	Electrical Systems (Sign Illumination – Internally Illumination Street Name Sign)
ES-8	Electrical Systems (Pull Box Details)
ES-9A	Electrical Systems (Electrical Details, Structure Installations)
ES-9B	Electrical Systems (Electrical Details, Structure Installations)
ES-9C	Electrical Systems (Electrical Details, Structure Installations)
ES-9D	Electrical Systems (Electrical Details, Structure Installations)
ES-9E	Electrical Systems (Electrical Details, Structure Installations)
ES-9F	Electrical Systems (Flush Soffit Luminaire Modification Details, Structure Installations)
ES-10	Electrical Systems (Isolux Diagrams)
ES-11	Electrical Systems (Foundation Installations)
ES-12A	Electrical Systems (Pedestrian Overcrossing Fluorescent Lighting Fixture)
ES-13A	Electrical Systems (Splicing Details)
ES-13B	Electrical Systems (Wiring Details and Fuse Ratings)
ES-15A	Electrical Systems (Sign Illumination Equipment)
ES-15C	Electrical Systems (Sign Illumination Equipment)
RSP ES-15D	Electrical Systems (Lighting and Sign Illumination Control)
RSP ES-16A	Electrical Systems (Closed Circuit Television Pole Details)

DEPARTMENT OF TRANSPORTATION

NOTICE TO CONTRACTORS

CONTRACT NO. 04-264204

04-SM-101-21.7/28.5

Sealed proposals for the work shown on the plans entitled:

STATE OF CALIFORNIA; DEPARTMENT OF TRANSPORTATION; PROJECT PLANS FOR CONSTRUCTION ON STATE HIGHWAY IN SAN MATEO COUNTY IN SAN MATEO, BURLINGAME AND MILLBRAE ON ROUTE 101 FROM MILLBRAE AVENUE OVERCROSSING IN MILLBRAE TO 3RD AVENUE OVERCROSSING IN SAN MATEO

will be received at the Department of Transportation, 1120 N Street, Room 0200, MS #26, Sacramento, CA 95814, until 2 o'clock p.m. on November 28, 2006, at which time they will be publicly opened and read in Room 0100 at the same address.

Proposal forms for this work are included in a separate book entitled:

STATE OF CALIFORNIA; DEPARTMENT OF TRANSPORTATION; PROPOSAL AND CONTRACT FOR CONSTRUCTION ON STATE HIGHWAY IN SAN MATEO COUNTY IN SAN MATEO, BURLINGAME AND MILLBRAE ON ROUTE 101 FROM MILLBRAE AVENUE OVERCROSSING IN MILLBRAE TO 3RD AVENUE OVERCROSSING IN SAN MATEO

General work description: Construct lanes, Peninsula OC, Broadway & Monte Diablo POC, SoundWalls.

Bidders are advised that, as required by federal law, the State has established a statewide overall DBE goal. The Department is required to report to FHWA on DBE participation for all Federal-aid contracts each year so that attainment efforts may be evaluated. To provide assistance in meeting the statewide goal, the Department may include a DBE Availability Advisory in this contract. Bidders need not achieve the percentage stated in any DBE Availability Advisory as a condition of award.

No prebid meeting is scheduled for this project.

THIS PROJECT IS SUBJECT TO THE "BUY AMERICA" PROVISIONS OF THE SURFACE TRANSPORTATION ASSISTANCE ACT OF 1982 AS AMENDED BY THE INTERMODAL SURFACE TRANSPORTATION EFFICIENCY ACT OF 1991.

Bids are required for the entire work described herein.

At the time this contract is awarded, the Contractor shall possess either a Class A license or a combination of Class C licenses which constitutes a majority of the work.

This contract is subject to state contract nondiscrimination and compliance requirements pursuant to Government Code, Section 12990.

Inquiries or questions based on alleged patent ambiguity of the plans, specifications or estimate must be communicated as a bidder inquiry prior to bid opening. Any such inquiries or questions, submitted after bid opening, will not be treated as a bid protest.

Bidder inquiries may be made as follows:

Submit Bidder Inquiries by e-mail to the Duty Senior at duty_senior_district04@dot.ca.gov. To the extent feasible and at the discretion of the Department, completed Bidder Inquiries submitted for consideration will be investigated, and responses will be posted on the Internet at

http://www.dot.ca.gov/dist4/construction/Inquiries/index.html

Project plans, special provisions, and proposal forms for bidding this project can only be obtained at the Department of Transportation, Plans and Bid Documents, Room 0200, MS #26, Transportation Building, 1120 N Street, Sacramento, California 95814, FAX No. (916) 654-7028, Telephone No. (916) 654-4490. Use FAX orders to expedite orders for project plans, special provisions and proposal forms. FAX orders must include credit card charge number, card expiration date and authorizing signature. Project plans, special provisions, and proposal forms may be seen at the above Department of Transportation office and at the offices of the District Directors of Transportation at Irvine, Oakland, and the district in which the work is situated. Standard Specifications and Standard Plans are available through the State of California, Department of Transportation, Publications Unit, 1900 Royal Oaks Drive, Sacramento, CA 95815, Telephone No. (916) 445-3520.

The successful bidder shall furnish a payment bond and a performance bond.

The Department of Transportation affirms that in any contract entered into pursuant to this advertisement, disadvantaged business enterprises will be afforded full opportunity to submit bids in response to this invitation.

The U.S. Department of Transportation (USDOT) provides a toll-free "hotline" service to report bid rigging activities. Bid rigging activities can be reported Mondays through Fridays, between 8:00 a.m. and 5:00 p.m., eastern time, Telephone No. 1-800-424-9071. Anyone with knowledge of possible bid rigging, bidder collusion, or other fraudulent activities should use the "hotline" to report these activities. The "hotline" is part of USDOT's continuing effort to identify and investigate highway construction contract fraud and abuse and is operated under the direction of the USDOT Inspector General. All information will be treated confidentially and caller anonymity will be respected.

Pursuant to Section 1773 of the Labor Code, the general prevailing wage rates in the county, or counties, in which the work is to be done have been determined by the Director of the California Department of Industrial Relations. These wages are set forth in the General Prevailing Wage Rates for this project, available at the Labor Compliance Office at the offices of the District Director of Transportation for the district in which the work is situated, and available from the California Department of Industrial Relations' internet web site at: http://www.dir.ca.gov. The Federal minimum wage rates for this project as predetermined by the United States Secretary of Labor are available on the internet at http://www.dot.ca.gov/hq/esc/oe/federal-wages/. Addenda to modify the Federal minimum wage rates, if necessary, will be issued to holders of "Proposal and Contract" books. Future effective general prevailing wage rates which have been predetermined and are on file with the California Department of Industrial Relations are referenced but not printed in the general prevailing wage rates.

If there is a difference between the minimum wage rates predetermined by the United States Secretary of Labor and the general prevailing wage rates determined by the Director of the California Department of Industrial Relations for similar classifications of labor, the Contractor and subcontractors shall pay not less than the higher wage rate. The Department will not accept lower State wage rates not specifically included in the Federal minimum wage determinations. This includes "helper" (or other classifications based on hours of experience) or any other classification not appearing in the Federal wage determinations. Where Federal wage determinations do not contain the State wage rate determination otherwise available for use by the Contractor and subcontractors, the Contractor and subcontractors shall pay not less than the Federal minimum wage rate which most closely approximates the duties of the employees in question.

DEPARTMENT OF TRANSPORTATION

Deputy Director Transportation Engineering

Dated September 25, 2006

RAP

COPY OF ENGINEER'S ESTIMATE

(NOT TO BE USED FOR BIDDING PURPOSES)

04-264204

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
1	070012	PROGRESS SCHEDULE (CRITICAL PATH METHOD)	LS	LUMP SUM
2	070018	TIME-RELATED OVERHEAD	LS	LUMP SUM
3	071322	TEMPORARY FENCE (TYPE CL-1.8)	M	4760
4	071325	TEMPORARY FENCE (TYPE ESA)	M	2650
5	010090	TEMPORARY EXCLUSION FENCE	M	230
6	072006	TEMPORARY SUPPORT	LS	LUMP SUM
7	074019	PREPARE STORM WATER POLLUTION PREVENTION PLAN	LS	LUMP SUM
8	074020	WATER POLLUTION CONTROL	LS	LUMP SUM
9	010091	NON-STORM WATER DISCHARGES	LS	LUMP SUM
10	074027	TEMPORARY EROSION CONTROL BLANKET	M2	7000
11	074028	TEMPORARY FIBER ROLL	M	240
12	074029	TEMPORARY SILT FENCE	M	6970
13	074032	TEMPORARY CONCRETE WASHOUT FACILITY	EA	10
14	074033	TEMPORARY CONSTRUCTION ENTRANCE	EA	16
15	074034	TEMPORARY COVER	M2	6000
16	074035	TEMPORARY CHECK DAM	M	60
17	074038	TEMPORARY DRAINAGE INLET PROTECTION	EA	160
18 (S)	120090	CONSTRUCTION AREA SIGNS	LS	LUMP SUM
19 (S)	120100	TRAFFIC CONTROL SYSTEM	LS	LUMP SUM
20 (S)	120149	TEMPORARY PAVEMENT MARKING (PAINT)	M2	120

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
21 (S)	120159	TEMPORARY TRAFFIC STRIPE (PAINT)	M	12 000
22 (S)	120165	CHANNELIZER (SURFACE MOUNTED)	EA	120
23 (S)	120300	TEMPORARY PAVEMENT MARKER	EA	14 400
24	128650	PORTABLE CHANGEABLE MESSAGE SIGN	EA	21
25	129000	TEMPORARY RAILING (TYPE K)	M	43 600
26	129110	TEMPORARY CRASH CUSHION	EA	764
27	129150	TEMPORARY TRAFFIC SCREEN	M	34 400
28	129510	TEMPORARY RETAINING WALL	M2	4920
29	150206	ABANDON CULVERT	M	1090
30	150221	ABANDON INLET	EA	27
31	150224	ABANDON MANHOLE	EA	2
32	010092	ABANDON SEWER MANHOLE	EA	2
33	010093	ABANDON SEWER PIPE	M	360
34	150608	REMOVE CHAIN LINK FENCE	M	5770
35	010094	REMOVE WOOD BEAM GUARD RAILING	M	220
36	150710	REMOVE TRAFFIC STRIPE	M	31 600
37	150715	REMOVE THERMOPLASTIC PAVEMENT MARKING	M2	8
38	010095	REMOVE TRAFFIC STRIPE (YELLOW)	M	16 400
39	150722	REMOVE PAVEMENT MARKER	EA	94 600
40	150742	REMOVE ROADSIDE SIGN	EA	95

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
41	150760	REMOVE SIGN STRUCTURE	EA	13
42	150762	REMOVE SIGN FROM SIGN FRAME	EA	2
43	150767	REMOVE BRIDGE MOUNTED SIGN	EA	4
44	010096	REMOVE SLOTTED DRAIN	M	55
45	150805	REMOVE CULVERT	M	550
46	150820	REMOVE INLET	EA	56
47	150821	REMOVE HEADWALL	EA	5
48	150824	REMOVE SEWER MANHOLE	EA	6
49	150841	REMOVE SEWER PIPE	M	120
50	150860	REMOVE BASE AND SURFACING	M3	2120
51	010097	SALVAGE METAL FENCE	M	260
52	151272	SALVAGE METAL BEAM GUARD RAILING	M	3510
53	151625	RECONSTRUCT METAL BEAM GUARD RAILING (WOOD POST)	M	650
54	010098	RELOCATE METAL FENCE	M	2
55	152430	ADJUST INLET	EA	29
56	152440	ADJUST MANHOLE TO GRADE	EA	1
57	010099	ADJUST SEWER MANHOLE TO GRADE	EA	2
58	010100	MODIFY SEWER MANHOLE	EA	4
59 (S)	153103	COLD PLANE ASPHALT CONCRETE PAVEMENT	M2	98 200
60	153215	REMOVE CONCRETE (CURB AND GUTTER)	M3	420

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
61	153218	REMOVE CONCRETE SIDEWALK	M3	110
62	153221	REMOVE CONCRETE BARRIER	M	4890
63	153222	REMOVE CONCRETE ISLAND (PORTIONS)	M3	58
64	010101	REMOVE CONCRETE (EXISTING SOUND WALL, PORTION)	M3	4
65	010102	SURVEY OF EXISTING NON-HIGHWAY FACILITIES	LS	LUMP SUM
66	010103	VIBRATION MONITORING	LS	LUMP SUM
67	155003	CAP INLET	EA	13
68	157551	BRIDGE REMOVAL, LOCATION A	LS	LUMP SUM
69	157552	BRIDGE REMOVAL, LOCATION B	LS	LUMP SUM
70	160101	CLEARING AND GRUBBING	LS	LUMP SUM
71	170101	DEVELOP WATER SUPPLY	LS	LUMP SUM
72	190101	ROADWAY EXCAVATION	M3	56 500
73	190105	ROADWAY EXCAVATION (TYPE Z-2) (AERIALLY DEPOSITED LEAD)	M3	6790
74	190107	ROADWAY EXCAVATION (TYPE Y-1) (AERIALLY DEPOSITED LEAD)	M3	15 500
75	190108	ROADWAY EXCAVATION (TYPE Y-2) (AERIALLY DEPOSITED LEAD)	M3	3240
76	190110	LEAD COMPLIANCE PLAN	LS	LUMP SUM
77	192001	STRUCTURE EXCAVATION	M3	650
78 (F)	192003	STRUCTURE EXCAVATION (BRIDGE)	M3	1415
79 (F)	192020	STRUCTURE EXCAVATION (TYPE D)	M3	138
80 (F)	192037	STRUCTURE EXCAVATION (RETAINING WALL)	M3	1344

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
81	192038	STRUCTURE EXCAVATION (SOUND WALL)	M3	290
82 (F)	192040	STRUCTURE EXCAVATION (LAGGING WALL)	M3	940
83 (F)	192057	STRUCTURE EXCAVATION (TYPE Y-1) (AERIALLY DEPOSITED LEAD)	M3	839
84 (F)	192058	STRUCTURE EXCAVATION (TYPE Y-2) (AERIALLY DEPOSITED LEAD)	M3	162
85 (F)	010104	STRUCTURE EXCAVATION (RETAINING WALL NO.9)	M3	36
86 (F)	010105	STRUCTURE EXCAVATION (RETAINING WALL NO.10)	M3	348
87 (F)	010106	STRUCTURE EXCAVATION (RETAINING WALL NO.11)	M3	288
88	193001	STRUCTURE BACKFILL	M3	170
89 (F)	193003	STRUCTURE BACKFILL (BRIDGE)	M3	5192
90 (F)	193009	STRUCTURE BACKFILL (LAGGING WALL)	M3	792
91 (F)	193013	STRUCTURE BACKFILL (RETAINING WALL)	M3	2680
92	193014	STRUCTURE BACKFILL (SOUND WALL)	M3	140
93 (F)	193031	PERVIOUS BACKFILL MATERIAL (RETAINING WALL)	M3	123
94 (F)	010107	STRUCTURE BACKFILL (RETAINING WALL NO.9)	M3	31
95 (F)	010108	STRUCTURE BACKFILL (RETAINING WALL NO.10)	M3	968
96 (F)	010109	STRUCTURE BACKFILL (RETAINING WALL NO.11)	M3	1010
97 (F)	010110	PREVIOUS BACKFILL MATERIAL (RETAINGING WALL NO.9)	M3	1
98 (F)	010111	PREVIOUS BACKFILL MATERIAL (RETAINGING WALL NO.10)	M3	48
99 (F)	010112	PREVIOUS BACKFILL MATERIAL (RETAINGING WALL NO.11)	M3	49
100	193114	SAND BACKFILL	M3	200

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
101	193115	SAND BACKFILL (ABANDON SEWER)	M3	46
102	194001	DITCH EXCAVATION	M3	380
103 (F)	197021	EARTH RETAINING STRUCTURE, LOCATION A	M2	761
104 (F)	197022	EARTH RETAINING STRUCTURE, LOCATION B	M2	1430
105	198100	LIGHTWEIGHT FILL	M3	450
106 (S)	200001	HIGHWAY PLANTING	LS	LUMP SUM
107 (S)	010113	EROSION CONTROL (NETTING)	M2	9960
108 (S)	010114	STRAW (EROSION CONTROL) (TYPE D) (SEED TYPE 1)	TONN	5
109 (S)	010115	STRAW (EROSION CONTROL) (TYPE D) (SEED TYPE 2)	TONN	5
110 (S)	203014	FIBER (EROSION CONTROL)	KG	4780
111 (S)	203021	FIBER ROLLS	M	3260
112 (S)	010116	DRAINAGE INLET PROTECTION	EA	17
113 (S)	203024	COMPOST (EROSION CONTROL)	M3	18
114 (S)	010117	FLARED END SECTION PROTECTION	EA	3
115 (S)	203026	MOVE-IN/MOVE-OUT (EROSION CONTROL)	EA	8
116 (S)	010118	PURE LIVE SEED (EROSION CONTROL)(TYPE D) (SEED TYPE 2)	KG	130
117 (S)	010119	PURE LIVE SEED (EROSION CONTROL)(TYPE D) (SEED TYPE 1)	KG	65
118 (S)	203061	STABILIZING EMULSION (EROSION CONTROL)	KG	320
119 (S)	204096	MAINTAIN EXISTING PLANTED AREAS	LS	LUMP SUM
120 (S)	204099	PLANT ESTABLISHMENT WORK	LS	LUMP SUM

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
121 (S)	010120	BIOLOGICAL MONITOR	LS	LUMP SUM
122 (S)	206401	MAINTAIN EXISTING IRRIGATION FACILITIES	LS	LUMP SUM
123 (S)	208000	IRRIGATION SYSTEM	LS	LUMP SUM
124 (S)	208304	WATER METER	EA	5
125	208733	300 MM CORRUGATED HIGH DENSITY POLYETHYLENE PIPE CONDUIT	M	63
126	220101	FINISHING ROADWAY	LS	LUMP SUM
127	250401	CLASS 4 AGGREGATE SUBBASE	M3	23 300
128	260301	CLASS 3 AGGREGATE BASE	M3	26 100
129	374206	SEAL RANDOM CRACKS	LNKM	4
130	390102	ASPHALT CONCRETE (TYPE A)	TONN	80 100
131	390106	ASPHALT CONCRETE (OPEN GRADED)	TONN	22 200
132	390107	ASPHALT CONCRETE (LEVELING)	TONN	87 200
133	393001	PAVEMENT REINFORCING FABRIC	M2	57 400
134	394002	PLACE ASPHALT CONCRETE (MISCELLANEOUS AREA)	M2	2520
135	394049	PLACE ASPHALT CONCRETE DIKE (TYPE F)	M	120
136	395000	LIQUID ASPHALT (PRIME COAT)	TONN	150
137	397001	ASPHALTIC EMULSION (PAINT BINDER)	TONN	540
138	010121	CONCRETE PAVEMENT (WEIGH IN MOTION) (RAPID STRENGTH CONCRETE)	M3	450
139	404092	SEAL PAVEMENT JOINT	M	310
140	040441	STEEL SOLDIER PILE (W460 X 158)	M	428

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
141	040442	STEEL SOLDIER PILE (DOUBLE MC310 X 74)	M	1550
142 (S)	040443	760 MM DRILLED HOLE	M	5108
143	040444	STEEL SOLDIER PILE (W460 X 194)	M	3898
144	010122	FURNISH PILING (CLASS 400) (ALTERNATIVE X, MOD)	M	7971
145	010123	DRIVE PILE (CLASS 400) (ALTERNATIVE X, MOD)	EA	1608
146	490770	FURNISH PILING (CLASS 625) (ALTERNATIVE V)	M	166
147 (S)	490771	DRIVE PILE (CLASS 625) (ALTERNATIVE V)	EA	9
148	490772	FURNISH PILING (CLASS 625) (ALTERNATIVE W)	M	10 171
149 (S)	490773	DRIVE PILE (CLASS 625) (ALTERNATIVE W)	EA	524
150	040445	FURNISH PILING (CLASS 900) (ALTERNATIVE X)	M	1223
151 (S)	040446	DRIVE PILE (CLASS 900)(ALTERNATIVE X)	EA	83
152	010124	FURNISH PILING (CLASS 900) (ALTERNATIVE X, MOD)(SOUND WALL)	M	1096
153	010125	DRIVE PILE (CLASS 900) (ALTERNATIVE X, MOD)(SOUND WALL)	EA	68
154	491012	FURNISH PILING (CLASS 400) (ALTERNATIVE W)	M	815
155 (S)	491013	DRIVE PILE (CLASS 400) (ALTERNATIVE W)	EA	50
156 (S)	500001	PRESTRESSING CAST-IN-PLACE CONCRETE	LS	LUMP SUM
157 (S)	500050	TIEBACK ANCHOR	EA	163
158 (F)	510051	STRUCTURAL CONCRETE, BRIDGE FOOTING	M3	891
159 (F)	510053	STRUCTURAL CONCRETE, BRIDGE	M3	3170
160 (F)	510060	STRUCTURAL CONCRETE, RETAINING WALL	M3	1344

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
161 (F)	040447	STRUCTURAL CONCRETE, RAMP	M3	487
162 (F)	510072	STRUCTURAL CONCRETE, BARRIER SLAB	M3	2588
163 (F)	510086	STRUCTURAL CONCRETE, APPROACH SLAB (TYPE N)	M3	204
164 (F)	010126	STRUCTURAL CONCRETE (RETAINING WALL NO.9)	M3	19
165 (F)	010127	STRUCTURAL CONCRETE) (RETAINING WALL NO.10)	M3	219
166 (F)	010128	STRUCTURAL CONCRETEE (RETAINING WALL NO.11)	M3	197
167 (F)	510220	CLASS 3 CONCRETE (BACKFILL)	M3	2181
168 (F)	510502	MINOR CONCRETE (MINOR STRUCTURE)	M3	227
169 (F)	010129	CLASS I CONCRETE (DRAINAGE STRUCTURES)	M3	907
170 (F)	510524	MINOR CONCRETE (SOUND WALL)	M3	207
171	510526	MINOR CONCRETE (BACKFILL)	M3	57
172 (F)	040448	ARCHITECTURAL SURFACE (STONE)	M3	1115
173 (F)	040449	CONCRETE SURFACE TEXTURE (STONE)	M2	432
174 (F)	511064	FRACTURED RIB TEXTURE	M2	944
175 (F)	010130	FRACTURED RIB TEXTURE (RETAINING WALL NO.10)	M2	264
176 (F)	010131	FRACTURED RIB TEXTURE (RETAINING WALL NO.11)	M2	256
177 (S)	040450	FURNISH PRECAST PRESTRESSED CONCRETE BATHTUB GIRDER (30M - 35M)	EA	2
178 (S)	040451	FURNISH PRECAST PRESTRESSED CONCRETE BATHTUB GIRDER (35M - 40M)	EA	2
179 (S)	512500	ERECT PRECAST PRESTRESSED CONCRETE GIRDER	EA	4
180	010132	PRECAST CONCRETE BOX CULVERT (2.7M X 1.5M)	M	22

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
181	517961	SOUND WALL (BARRIER) (MASONRY BLOCK)	M2	10 880
182 (S)	519117	JOINT SEAL (MR 30 MM)	M	9
183 (S)	519127	JOINT SEAL ASSEMBLY (MR 90 MM)	M	8
184 (S)	519144	JOINT SEAL (MR 50 MM)	M	77
185 (S-F)	520102	BAR REINFORCING STEEL (BRIDGE)	KG	647 070
186 (S-F)	520103	BAR REINFORCING STEEL (RETAINING WALL)	KG	91 800
187 (S-F)	040452	BAR REINFORCING STEEL (BARRIER SLAB)	KG	219 770
188 (S-F)	040453	BAR REINFORCING STEEL (RAMP)	KG	152 000
189	010133	BAR REINFORCING STEEL (DRAINAGE STRUCTURE)	KG	31 322
190	010134	BAR REINFORCING STEEL (RETAINING WALL NO.9)	KG	794
191	010135	BAR REINFORCING STEEL (RETAINING WALL NO.10)	KG	38 710
192	010136	BAR REINFORCING STEEL (RETAINING WALL NO.11)	KG	37 465
193 (F)	560218	FURNISH SIGN STRUCTURE (TRUSS)	KG	85 331
194 (F)	560219	INSTALL SIGN STRUCTURE (TRUSS)	KG	85 331
195 (F)	010137	FURNISH SIGN STRUCTURE (BRIDGE MOUNTED)	KG	2962
196 (F)	010138	INSTALL SIGN STRUCTURE (BRIDGE MOUNTED)	KG	2962
197	560233	FURNISH FORMED PANEL SIGN (OVERHEAD)	M2	449
198	560238	FURNISH SINGLE SHEET ALUMINUM SIGN (1.6 MM-UNFRAMED)	M2	53
199	560239	FURNISH SINGLE SHEET ALUMINUM SIGN (2.0 MM-UNFRAMED)	M2	67
200	560241	FURNISH SINGLE SHEET ALUMINUM SIGN (1.6 MM-FRAMED)	M2	20

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
201	560242	FURNISH SINGLE SHEET ALUMINUM SIGN (2.0 MM-FRAMED)	M2	20
202	010139	1500 MM CIDH CONCRETE PILE (SIGN FOUNDATION)	M	158
203	562002	METAL (BARRIER MOUNTED SIGN)	KG	4050
204	566011	ROADSIDE SIGN - ONE POST	EA	69
205	566012	ROADSIDE SIGN - TWO POST	EA	6
206	568001	INSTALL SIGN (STRAP AND SADDLE BRACKET METHOD)	EA	7
207	010140	INSTALL SIGN AT PEDESTRIAN BARRICADE	EA	3
208	568021	INSTALL FRAMED SIGN PANEL	EA	1
209 (F)	575004	TIMBER LAGGING	M3	417
210 (S)	040454	CLEAN AND PAINT STEEL SOLDIER PILES	LS	LUMP SUM
211	620909	450 MM ALTERNATIVE PIPE CULVERT	M	4390
212	620913	600 MM ALTERNATIVE PIPE CULVERT	M	360
213	620924	900 MM ALTERNATIVE PIPE CULVERT	M	49
214 (S)	010141	150 MM PVC WATER PIPE	M	310
215 (S)	010142	305 MM PVC WATER PIPE	M	300
216 (S)	010143	150 MM PVC WATER PIPE IN 305 MM STEEL CASING	M	220
217 (S)	010144	305 MM PVC WATER PIPE IN 610 MM STEEL CASING	M	220
218 (S)	010145	JACKED 610 MM STEEL PIPE WITH 305 MM PVC WATER PIPE	M	58
219	010146	610 MM X 960 MM OVAL SHAPED APC	M	249
220	703233	GRATED LINE DRAIN	M	4450

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
221	010147	450 MM GALVANIZED CSP RISER (4.32 MM THICK)	M	4
222	703481	600 MM WELDED STEEL PIPE CASING (BRIDGE)	M	49
223	703518	100 MM WELDED STEEL PIPE (2.67 MM THICK)	M	30
224	010148	1200 MM WELDED STEEL PIPE (9.5 MM THICK)	M	175
225	010149	JACKED 900 MM WELDED STEEL PIPE	M	190
226	010150	JACKED 1200 MM WELDED STEEL PIPE	M	410
227	705222	450 MM CONCRETE FLARED END SECTION	EA	15
228	705224	600 MM CONCRETE FLARED END SECTION	EA	6
229	707051	DRAINAGE MANHOLE	EA	3
230 (S)	717074	150 MM SEWER PIPE (LATERAL)	M	16
231 (S)	717079	300 MM SEWER PIPE	M	300
232	010151	380 MM SEWER PIPE	M	192
233 (S)	717089	675 MM SEWER PIPE	M	8
234 (S)	717093	900 MM SEWER PIPE	M	34
235 (S)	719200	SEWER MANHOLE	M	34
236	721008	ROCK SLOPE PROTECTION (LIGHT, METHOD B)	M3	109
237	721011	ROCK SLOPE PROTECTION (BACKING NO. 2, METHOD B)	M3	76
238	729000	FILTER FABRIC	M2	411
239	729010	ROCK SLOPE PROTECTION FABRIC	M2	1067
240	731502	MINOR CONCRETE (MISCELLANEOUS CONSTRUCTION)	M3	806

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
241 (F)	731517	MINOR CONCRETE (GUTTER)	M	77
242	731519	MINOR CONCRETE (STAMPED CONCRETE)	M2	1185
243 (F)	040455	MINOR CONCRETE (MEDIAN)	M3	40
244 (S-F)	750001	MISCELLANEOUS IRON AND STEEL	KG	30 450
245 (S-F)	750498	MISCELLANEOUS METAL (RESTRAINER - CABLE TYPE)	KG	490
246	750501	MISCELLANEOUS METAL (BRIDGE)	KG	1930
247 (S-F)	040456	MISCELLANEOUS METAL (LAGGING WALL)	KG	1278
248 (S-F)	750505	BRIDGE DECK DRAINAGE SYSTEM	KG	1900
249	800391	CHAIN LINK FENCE (TYPE CL-1.8)	M	256
250	010152	CHAIN LINK FENCE (TYPE CL-1.2 MOD)	M	1300
251	802589	1.5 M CHAIN LINK GATE (TYPE CL-1.8)	EA	1
252	010153	MEDIAN CONCRETE BARRIER MARKER	EA	910
253	820107	DELINEATOR (CLASS 1)	EA	98
254	820118	GUARD RAILING DELINEATOR	EA	18
255	820130	OBJECT MARKER	EA	36
256 (S-F)	833000	METAL RAILING	M	429
257 (S-F)	040457	METAL RAILING (BICYCLE)	M	227
258 (S-F)	833032	CHAIN LINK RAILING (TYPE 7)	M	293
259 (S-F)	833034	CHAIN LINK RAILING (TYPE 7L)	M	811
260	010154	PEDESTRIAN BARRICADE (TYPE 1)	EA	3

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
261 (S-F)	833088	TUBULAR HANDRAILING	M	340
262	833140	CONCRETE BARRIER (TYPE 26)	M	204
263 (F)	833142	CONCRETE BARRIER (TYPE 26 MODIFIED)	M	293
264 (F)	833143	CONCRETE BARRIER (TYPE 26A MODIFIED)	M	318
265	833184	CONCRETE BARRIER (TYPE 27SV MODIFIED)	M	10
266	839302	SINGLE THRIE BEAM BARRIER (WOOD POST)	M	117
267	839311	DOUBLE THRIE BEAM BARRIER (WOOD POST)	M	117
268 (S-F)	839521	CABLE RAILING	M	32
269	839540	TRANSITION RAILING (TYPE STB)	EA	4
270	839541	TRANSITION RAILING (TYPE WB)	EA	6
271	839542	TRANSITION RAILING (TYPE DTB)	EA	8
272	839568	TERMINAL ANCHOR ASSEMBLY (TYPE SFT)	EA	20
273	839569	TERMINAL ANCHOR ASSEMBLY (TYPE CA)	EA	6
274	839578	END CAP (TYPE TC)	EA	2
275	839585	ALTERNATIVE FLARED TERMINAL SYSTEM	EA	21
276	839605	CRASH CUSHION (REACT 9SCBS)	EA	3
277	839631	CRASH CUSHION MODULE, SAND FILLED	EA	50
278	010155	CONCRETE BARRIER (TYPE 60R)	M	137
279	839701	CONCRETE BARRIER (TYPE 60)	M	3430
280	839703	CONCRETE BARRIER (TYPE 60C)	M	4330

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
281	839704	CONCRETE BARRIER (TYPE 60D)	M	190
282	839705	CONCRETE BARRIER (TYPE 60E)	M	31
283 (F)	040458	CONCRETE BARRIER (TYPE 80A)	M	655
284 (F)	839726	CONCRETE BARRIER (TYPE 736A)	M	416
285 (F)	040459	CONCRETE BARRIER (TYPE 736A MODIFIED)	M	729
286 (F)	010156	CONCRETE BARRIER (TYPE 736SV MODIFIED)	M	68
287 (F)	839734	CONCRETE BARRIER (TYPE 736SV)	M	3396
288	010157	PORTABLE CONCRETE BARRIER (TYPE 60K)	M	50
289 (S)	840515	THERMOPLASTIC PAVEMENT MARKING	M2	390
290 (S)	840561	100 MM THERMOPLASTIC TRAFFIC STRIPE	M	30 900
291 (S)	840562	150 MM THERMOPLASTIC TRAFFIC STRIPE	M	550
292 (S)	840563	200 MM THERMOPLASTIC TRAFFIC STRIPE	M	2510
293 (S)	840564	200 MM THERMOPLASTIC TRAFFIC STRIPE (BROKEN 3.66 M - 0.92 M)	M	4710
294 (S)	840571	100 MM THERMOPLASTIC TRAFFIC STRIPE (BROKEN 5.18 M - 2.14 M)	M	92
295 (S)	010158	150 MM THERMOPLASTIC TRAFFIC STRIPE (BROKEN 4.22 M - 1.22 M)	M	130
296	840656	PAINT TRAFFIC STRIPE (2-COAT)	M	143 408
297	850101	PAVEMENT MARKER (NON-REFLECTIVE)	EA	62 770
298	850111	PAVEMENT MARKER (RETROREFLECTIVE)	EA	25 083
299 (S)	010159	SIGNAL & LIGHTING (LOCATION 1)	LS	LUMP SUM
300 (S)	010160	SIGNAL & LIGHTING (LOCATION 2)	LS	LUMP SUM

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
301 (S)	010161	SIGNAL & LIGHTING (LOCATION 3)	LS	LUMP SUM
302 (S)	010162	EMERGENCY VEHICLE DETECTION SYSTEM (LOCATION 2)	LS	LUMP SUM
303 (S)	010163	SIGNAL AND LIGHTING (CITY LOCATION 1)	LS	LUMP SUM
304 (S)	010164	SIGNAL AND LIGHTING (CITY LOCATION 2)	LS	LUMP SUM
305 (S)	010165	LIGHTING (CITY STREET)	LS	LUMP SUM
306 (S)	860415	LIGHTING (STAGE CONSTRUCTION)	LS	LUMP SUM
307 (S)	010166	LIGHTING (BROADWAY AVE PEDESTRIAN OVERCROSSING)	LS	LUMP SUM
308 (S)	010167	LIGHTING (MONTE DIABLO PEDESTRIAN OVERCROSSING)	LS	LUMP SUM
309 (S)	860460	LIGHTING AND SIGN ILLUMINATION	LS	LUMP SUM
310 (S)	010168	EMERGENCY VEHICLE DETECTION SYSTEM (CITY LOCATION 1)	LS	LUMP SUM
311 (S)	010169	EMERGENCY VEHICLE DETECTION SYSTEM (CITY LOCATION 2)	LS	LUMP SUM
312 (S)	010170	INTERCONNECTION SYSTEM	LS	LUMP SUM
313 (S)	010171	ELECTRIC SERVICE (IRRIGATION) (CITY LOCATION 1)	LS	LUMP SUM
314 (S)	010172	ELECTRIC SERVICE (IRRIGATION) (CITY LOCATION 2)	LS	LUMP SUM
315 (S)	010173	ELECTRIC SERVICE (IRRIGATION) (CITY LOCATION 3)	LS	LUMP SUM
316 (S)	010174	ELECTRIC SERVICE (IRRIGATION) (CITY LOCATION 4)	LS	LUMP SUM
317 (S)	010175	CAMERA UNIT	EA	1
318 (S)	010176	PAN/TILT UNIT	EA	1
319 (S)	010177	CAMERA CONTROL UNIT	EA	1
320 (S)	010178	VIDEO ENCODER UNIT	EA	1

Item No.	Item Code	Item Description	Unit of Measure	Estimated Quantity
321 (S)	010179	GENERAL PACKET RADIO SYSTEM WIRELESS MODEM	EA	14
322 (S)	010180	TRAFFIC OPERATIONS SYSTEM (LOCATION 1)	LS	LUMP SUM
323 (S)	010181	TRAFFIC OPERATIONS SYSTEM (LOCATION 2)	LS	LUMP SUM
324 (S)	010182	TRAFFIC OPERATIONS SYSTEM (LOCATION 3)	LS	LUMP SUM
325 (S)	010183	TRAFFIC OPERATIONS SYSTEM (LOCATION 4)	LS	LUMP SUM
326 (S)	010184	TRAFFIC OPERATIONS SYSTEM (LOCATION 5)	LS	LUMP SUM
327 (S)	010185	TRAFFIC OPERATIONS SYSTEM (LOCATION 6)	LS	LUMP SUM
328 (S)	010186	TRAFFIC OPERATIONS SYSTEM (LOCATION 7)	LS	LUMP SUM
329 (S)	010187	TRAFFIC OPERATIONS SYSTEM (LOCATION 8)	LS	LUMP SUM
330 (S)	010188	TRAFFIC OPERATIONS SYSTEM (LOCATION 9)	LS	LUMP SUM
331 (S)	010189	TRAFFIC OPERATIONS SYSTEM (LOCATION 10)	LS	LUMP SUM
332 (S)	010190	TRAFFIC OPERATIONS SYSTEM (LOCATION 11)	LS	LUMP SUM
333 (S)	010191	TRAFFIC OPERATIONS SYSTEM (LOCATION 12)	LS	LUMP SUM
334 (S)	010192	TRAFFIC OPERATIONS SYSTEM (LOCATION 13)	LS	LUMP SUM
335 (S)	010193	TRAFFIC OPERATIONS SYSTEM (LOCATION 14)	LS	LUMP SUM
336 (S)	861200	WEIGH-IN-MOTION SYSTEM	LS	LUMP SUM
337 (S)	010194	FIBER OPTIC SYSTEM	LS	LUMP SUM
338 (S)	010195	INTEGRATED SERVICES DIGITAL NETWORK TERMINAL ADAPTER (ISDNTA)	EA	1
339	999990	MOBILIZATION	LS	LUMP SUM

STATE OF CALIFORNIA

DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISIONS

Annexed to Contract No. 04-264204

SECTION 1. SPECIFICATIONS AND PLANS

The work embraced herein shall conform to the provisions in the Standard Specifications dated July 1999, and the Standard Plans dated July 2004, of the Department of Transportation insofar as the same may apply, and these special provisions.

In case of conflict between the Standard Specifications and these special provisions, the special provisions shall take precedence over and shall be used in lieu of the conflicting portions.

AMENDMENTS TO JULY 1999 STANDARD SPECIFICATIONS

UPDATED JULY 21, 2006

Amendments to the Standard Specifications set forth in these special provisions shall be considered as part of the Standard Specifications for the purposes set forth in Section 5-1.04, "Coordination and Interpretation of Plans, Standard Specifications and Special Provisions," of the Standard Specifications. Whenever either the term "Standard Specifications is amended" or the term "Standard Specifications are amended" is used in the special provisions, the text or table following the term shall be considered an amendment to the Standard Specifications. In case of conflict between such amendments and the Standard Specifications, the amendments shall take precedence over and be used in lieu of the conflicting portions.

SECTION 1: DEFINITIONS AND TERMS

Issue Date: June 30, 2006

Section 1-1.25, "Laboratory," of the Standard Specifications is amended to read:

1-1.25 LABORATORY

- The Division of Engineering Services - Materials Engineering and Testing Services and Division of Engineering Services - Geotechnical Services of the Department of Transportation, or established laboratories of the various Districts of the Department, or other laboratories authorized by the Department to test materials and work involved in the contract. When a reference is made in the specifications to the "Transportation Laboratory," the reference shall mean Division of Engineering Services - Materials Engineering and Testing Services and Division of Engineering Services - Geotechnical Services, located at 5900 Folsom Boulevard, Sacramento, CA 95819, Telephone (916) 227-7000.

Section 1-1.275, "Office of Structure Design," of the Standard Specifications is amended to read:

1-1.275 OFFICES OF STRUCTURE DESIGN

- The Offices of Structure Design of the Department of Transportation. When the specifications require working drawings to be submitted to the Offices of Structure Design, the drawings shall be submitted to: Offices of Structure Design, Documents Unit, Mail Station 9-4/4I, 1801 30th Street, Sacramento, CA 95816, Telephone (916) 227-8252.

Section 1-1.265, "Manual of Traffic Controls," of the Standard Specifications is amended to read:

1-1.265 MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES

• The Manual on Uniform Traffic Control Devices for Streets and Highways, 2003 Edition (MUTCD) is administered by the Federal Highway Administration.

Section 1, "Definitions and Terms," of the Standard Specifications is amended by adding the following section:

1-1.266 MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES CALIFORNIA SUPPLEMENT

• The MUTCD 2003 California Supplement (MUTCD California Supplement) is issued by the Department of Transportation to provide amendments to the MUTCD. The MUTCD and MUTCD California Supplement supersede the Department's Manual of Traffic Controls.

Section 1-1.39, "State," of the Standard Specifications is amended to read:

1-1.39 STATE

• The State of California, including its agencies, departments, or divisions, whose conduct or action is related to the work.

SECTION 2: PROPOSAL REQUIREMENTS AND CONDITIONS

Issue Date: June 19, 2003

Section 2-1.03, "Examination of Plans, Specifications, Contract, and Site of Work," of the Standard Specifications is amended to read:

2-1.03 Examination of Plans, Specifications, Contract, and Site of Work

• The bidder shall examine carefully the site of the work contemplated, the plans and specifications, and the proposal and contract forms therefor. The submission of a bid shall be conclusive evidence that the bidder has investigated and is satisfied as to the general and local conditions to be encountered, as to the character, quality and scope of work to be performed, the quantities of materials to be furnished and as to the requirements of the proposal, plans, specifications and the contract.

• The submission of a bid shall also be conclusive evidence that the bidder is satisfied as to the character, quality and quantity of surface and subsurface materials or obstacles to be encountered insofar as this information was reasonably ascertainable from an inspection of the site and the records of exploratory work done by the Department as shown in the bid documents, as well as from the plans and specifications made a part of the contract.

• Where the Department has made investigations of site conditions including subsurface conditions in areas where work is to be performed under the contract, or in other areas, some of which may constitute possible local material sources, bidders or contractors may, upon written request, inspect the records of the Department as to those investigations subject to and upon the conditions hereinafter set forth.

• Where there has been prior construction by the Department or other public agencies within the project limits, records of the prior construction that are currently in the possession of the Department and which have been used by, or are known to, the designers and administrators of the project will be made available for inspection by bidders or contractors, upon written request, subject to the conditions hereinafter set forth. The records may include, but are not limited to, as-built drawings, design calculations, foundation and site studies, project reports and other data assembled in connection with the investigation, design, construction and maintenance of the prior projects.

• Inspection of the records of investigations and project records may be made at the office of the district in which the work is situated, or in the case of records of investigations related to structure work, at the Transportation Laboratory in Sacramento, California.

• When a log of test borings or other record of geotechnical data obtained by the Department's investigation of surface and subsurface conditions is included with the contract plans, it is furnished for the bidders' or Contractor's information and its use shall be subject to the conditions and limitations set forth in this Section 2-1.03.

• In some instances, information considered by the Department to be of possible interest to bidders or contractors has been compiled as "Materials Information." The use of the "Materials Information" shall be subject to the conditions and limitations set forth in this Section 2-1.03 and Section 6-2, "Local Materials."

• When cross sections are not included with the plans, but are available, bidders or contractors may inspect the cross sections and obtain copies for their use, at their expense.

• When cross sections are included with the contract plans, it is expressly understood and agreed that the cross sections do not constitute part of the contract, do not necessarily represent actual site conditions or show location, character,

dimensions and details of work to be performed, and are included in the plans only for the convenience of bidders and their use is subject to the conditions and limitations set forth in this Section 2-1.03.

- When contour maps were used in the design of the project, the bidders may inspect those maps, and if available, they may obtain copies for their use.
- The availability or use of information described in this Section 2-1.03 is not to be construed in any way as a waiver of the provisions of the first paragraph in this Section 2-1.03 and bidders and contractors are cautioned to make independent investigations and examinations as they deem necessary to be satisfied as to conditions to be encountered in the performance of the work and, with respect to possible local material sources, the quality and quantity of material available from the property and the type and extent of processing that may be required in order to produce material conforming to the requirements of the specifications.
- The Department assumes no responsibility for conclusions or interpretations made by a bidder or contractor based on the information or data made available by the Department. The Department does not assume responsibility for representation made by its officers or agents before the execution of the contract concerning surface or subsurface conditions, unless that representation is expressly stated in the contract.
- No conclusions or interpretations made by a bidder or contractor from the information and data made available by the Department will relieve a bidder or contractor from properly fulfilling the terms of the contract.

SECTION 3: AWARD AND EXECUTION OF CONTRACT

Issue Date: July 21, 2006

Section 3, "Award and Execution of Contract," of the Standard Specifications is amended by adding the following section after Section 3-1.02, "Contract Bonds":

3-1.025 INSURANCE POLICIES

- The successful bidder shall submit:

A. Copy of its commercial general liability policy and its excess policy, including the declarations page, all amendments, riders, endorsements, and other modifications in effect at the time of contract execution. Standard ISO form No. CG 0001 or similar exclusions are allowed if not inconsistent with Section 7-1.12, "Indemnification and Insurance." Allowance of any additional exclusions is at the discretion of the Department.
B. Certificate of Insurance showing all other required coverages. Certificates of Insurance, as evidence of required insurance for the auto liability and any other required policy shall set forth deductible amounts applicable to each policy and all exclusions that are added by endorsement to each policy. The evidence of insurance shall provide that no cancellation, lapse, or reduction of coverage will occur without 10 days prior written notice to the Department.

- If the successful bidder uses any form of self-insurance, it shall submit:

A. A notice of election to self-insure.
B. The coverages for which self-insurance applies.
C. The amount of self-insurance.
D. Declaration under the penalty of perjury by a certified public accountant certifying the accountant has applied Generally Accepted Accounting Principles (GAAP) guidelines and the successful bidder has sufficient funds or other resources to cover the self-insurance amounts.
E. Copy of its commercial general liability policy and its excess policy, including the declarations page, all amendments, riders, endorsements and other modifications in effect at the time of contract execution, for those amounts not covered by self-insurance.

Section 3-1.03, "Execution of Contract," of the Standard Specifications is amended to read:

3-1.03 EXECUTION OF CONTRACT

- The contract shall be signed by the successful bidder and returned, together with the contract bonds and the documents identified in Section 3-1.025, "Insurance Policies," within 10 days, not including Saturdays, Sundays and legal holidays, of receiving the contract for execution.

Section 3-1.04, "Failure to Execute Contract," of the Standard Specifications is amended to read:

3-1.04 FAILURE TO EXECUTE CONTRACT

• Failure of the lowest responsible bidder, the second lowest responsible bidder, or the third lowest responsible bidder to execute the contract as required in Section 3-1.03, " Execution of Contract," within 10 days, not including Saturdays, Sundays, and legal holidays, of receiving the contract for execution shall be just cause for the forfeiture of the proposal guaranty. The successful bidder may file with the Department a written notice, signed by the bidder or the bidder's authorized representative, specifying that the bidder will refuse to execute the contract if it is presented. The filing of this notice shall have the same force and effect as the failure of the bidder to execute the contract and furnish acceptable bonds within the time specified.

SECTION 5: CONTROL OF WORK

Issue Date: December 31, 2001

Section 5-1.02A, "Trench Excavation Safety Plans," of the Standard Specifications is amended to read:

5-1.02A Excavation Safety Plans

• The Construction Safety Orders of the Division of Occupational Safety and Health shall apply to all excavations. For all excavations 1.5 m or more in depth, the Contractor shall submit to the Engineer a detailed plan showing the design and details of the protective systems to be provided for worker protection from the hazard of caving ground during excavation. The detailed plan shall include any tabulated data and any design calculations used in the preparation of the plan. Excavation shall not begin until the detailed plan has been reviewed and approved by the Engineer.

• Detailed plans of protective systems for which the Construction Safety Orders require design by a registered professional engineer shall be prepared and signed by an engineer who is registered as a Civil Engineer in the State of California, and shall include the soil classification, soil properties, soil design calculations that demonstrate adequate stability of the protective system, and any other design calculations used in the preparation of the plan.

• No plan shall allow the use of a protective system less effective than that required by the Construction Safety Orders.

• If the detailed plan includes designs of protective systems developed only from the allowable configurations and slopes, or Appendices, contained in the Construction Safety Orders, the plan shall be submitted at least 5 days before the Contractor intends to begin excavation. If the detailed plan includes designs of protective systems developed from tabulated data, or designs for which design by a registered professional engineer is required, the plan shall be submitted at least 3 weeks before the Contractor intends to begin excavation.

• Attention is directed to Section 7-1.01E, "Trench Safety."

SECTION 7: LEGAL RELATIONS AND RESPONSIBILITY

Issue Date: July 21, 2006

The eighth paragraph of Section 7-1.09, "Public Safety" of the Standard Specifications is amended to read:

• Signs, lights, flags, and other warning and safety devices and their use shall conform to the requirements set forth in Part 6 of the MUTCD and of the MUTCD California Supplement. Signs or other protective devices furnished and erected by the Contractor, at the Contractor's expense, as above provided, shall not obscure the visibility of, nor conflict in intent, meaning and function of either existing signs, lights and traffic control devices or any construction area signs and traffic control devices for which furnishing of, or payment for, is provided elsewhere in the specifications. Signs furnished and erected by the Contractor, at the Contractor's expense, shall be approved by the Engineer as to size, wording and location.

The fourteenth paragraph of Section 7-1.09, "Public Safety," of the Standard Specifications is amended to read:

• The Contractor shall notify the Engineer not less than 18 days and no more than 90 days prior to the anticipated start of an operation that will change the vertical or horizontal clearance available to public traffic (including shoulders).

The sixteenth paragraph of Section 7-1.09, "Public Safety," of the Standard Specifications is amended to read:

• When vertical clearance is temporarily reduced to 4.72 m or less, low clearance warning signs shall be placed in accordance with Part 2 of the MUTCD and the MUTCD California Supplement, and as directed by the Engineer. Signs shall conform to the dimensions, color, and legend requirements of the MUTCD, the MUTCD California Supplement, and these

specifications except that the signs shall have black letters and numbers on an orange retroreflective background. W12-2P signs shall be illuminated so that the signs are clearly visible.

Section 7-1.01A(6), "Workers' Compensation," of the Standard Specifications is amended to read:

7-1.101A(6) (Blank)

Section 7-1.12, "Indemnification and Insurance," of the Standard Specifications is amended to read:

7-1.12 INDEMNIFICATION AND INSURANCE

• The Contractor's obligations regarding indemnification of the State of California and the requirements for insurance shall conform to the provisions in Section 3-1.025, "Insurance Policies," and Sections 7-1.12A, "Indemnification," and 7-1.12B, "Insurance," of this Section 7-1.12.

7-1.12A Indemnification

• The Contractor shall defend, indemnify, and save harmless the State, including its officers, employees, and agents (excluding agents who are design professionals) from any and all claims, demands, causes of action, damages, costs, expenses, actual attorneys' fees, losses or liabilities, in law or in equity (Section 7-1.12A Claims) arising out of or in connection with the Contractor's performance of this contract for:

A. Bodily injury including, but not limited to, bodily injury, sickness or disease, emotional injury or death to persons, including, but not limited to, the public, any employees or agents of the Contractor, the State, or any other contractor; and
B. Damage to property of anyone including loss of use thereof; caused or alleged to be caused in whole or in part by any negligent or otherwise legally actionable act or omission of the Contractor or anyone directly or indirectly employed by the Contractor or anyone for whose acts the Contractor may be liable.

• Except as otherwise provided by law, these requirements apply regardless of the existence or degree of fault of the State. The Contractor is not obligated to indemnify the State for Claims arising from conduct delineated in Civil Code Section 2782 and to Claims arising from any defective or substandard condition of the highway that existed at or before the start of work, unless this condition has been changed by the work or the scope of the work requires the Contractor to maintain existing highway facilities and the Claim arises from the Contractor's failure to maintain. The Contractor's defense and indemnity obligation shall extend to Claims arising after the work is completed and accepted if the Claims are directly related to alleged acts or omissions by the Contractor that occurred during the course of the work. No inspection by the State is a waiver of full compliance with these requirements.

• The Contractor's obligation to defend and indemnify shall not be excused because of the Contractor's inability to evaluate liability or because the Contractor evaluates liability and determine that the Contractor is not liable. The Contractor shall respond within 30 days to the tender of any Claim for defense and indemnity by the State, unless this time has been extended by the State. If the Contractor fails to accept or reject a tender of defense and indemnity within 30 days, in addition to any other remedy authorized by law, the Department may withhold such funds the State reasonably considers necessary for its defense and indemnity until disposition has been made of the Claim or until the Contractor accepts or rejects the tender of defense, whichever occurs first.

• With respect to third-party claims against the Contractor, the Contractor waives all rights of any type to express or implied indemnity against the State, its officers, employees, or agents (excluding agents who are design professionals).

• Nothing in the Contract is intended to establish a standard of care owed to any member of the public or to extend to the public the status of a third-party beneficiary for any of these indemnification specifications.

7-1.12B Insurance

7-1.12B(1) General

• Nothing in the contract is intended to establish a standard of care owed to any member of the public or to extend to the public the status of a third-party beneficiary for any of these insurance specifications.

7-1.12B(2) Casualty Insurance

• The Contractor shall procure and maintain insurance on all of its operations with companies acceptable to the State as follows:

A. The Contractor shall keep all insurance in full force and effect from the beginning of the work through contract acceptance.
B. All insurance shall be with an insurance company with a rating from A.M. Best Financial Strength Rating of A- or better and a Financial Size Category of VII or better.
C. The Contractor shall maintain completed operations coverage with a carrier acceptable to the State through the expiration of the patent deficiency in construction statute of repose set forth in Code of Civil Procedure Section 337.1.

7-1.12B(3) Workers' Compensation and Employer's Liability Insurance

• In accordance with Labor Code Section 1860, the Contractor shall secure the payment of worker's compensation in accordance with Labor Code Section 3700.

• In accordance with Labor Code Section 1861, the Contractor shall submit to the Department the following certification before performing the work:

> I am aware of the provisions of Section 3700 of the Labor Code which require every employer to be insured against liability for workers' compensation or to undertake self-insurance in accordance with the provisions of that code, and I will comply with such provisions before commencing the performance of the work of this contract.

• Contract execution constitutes certification submittal.
• The Contractor shall provide Employer's Liability Insurance in amounts not less than:

A. $1 000 000 for each accident for bodily injury by accident.
B. $1 000 000 policy limit for bodily injury by disease.
C. $1 000 000 for each employee for bodily injury by disease.

• If there is an exposure of injury to the Contractor's employees under the U.S. Longshoremen's and Harbor Workers' Compensation Act, the Jones Act, or under laws, regulations, or statutes applicable to maritime employees, coverage shall be included for such injuries or claims.

7-1.12B(4) Liability Insurance

7-1.12B(4)(a) General

• The Contractor shall carry General Liability and Umbrella or Excess Liability Insurance covering all operations by or on behalf of the Contractor providing insurance for bodily injury liability and property damage liability for the following limits and including coverage for:

A. Premises, operations, and mobile equipment.
B. Products and completed operations.
C. Broad form property damage (including completed operations).
D. Explosion, collapse, and underground hazards.
E. Personal injury.
F. Contractual liability.

• The Contractor shall ensure that all of its subcontractors carry sufficient insurance coverage that the Contractor deems adequate based on the size, duration, and hazards of the subcontracted work.

7-1.12B(4)(b) Liability Limits/Additional Insureds

• The limits of liability shall be at least the amounts shown in the following table:

Total Bid	For Each Occurrence[1]	Aggregate for Products/Completed Operation	General Aggregate[2]	Umbrella or Excess Liability[3]
≤$25 000 000	$1 000 000	$2 000 000	$2 000 000	$5 000 000
>$25 000 000	$1 000 000	$2 000 000	$2 000 000	$15 000 000

1. Combined single limit for bodily injury and property damage.
2. This limit shall apply separately to the Contractor's work under this contract.
3. The umbrella or excess policy shall contain a clause stating that it takes effect (drops down) in the event the primary limits are impaired or exhausted.

• The State, including its officers, directors, agents (excluding agents who are design professionals), and employees, shall be named as additional insureds under the General Liability and Umbrella Liability Policies with respect to liability arising out of or connected with work or operations performed by or on behalf of the Contractor under this contract. Coverage for such additional insureds does not extend to liability:

A. Arising from any defective or substandard condition of the roadway which existed at or before the time the Contractor started work, unless such condition has been changed by the work or the scope of the work requires the Contractor to maintain existing roadway facilities and the claim arises from the Contractor's failure to maintain;
B. For claims occurring after the work is completed and accepted unless these claims are directly related to alleged acts or omissions of the Contractor that occurred during the course of the work; or
C. To the extent prohibited by Insurance Code Section 11580.04.

• Additional insured coverage shall be provided by a policy provision or by an endorsement providing coverage at least as broad as Additional Insured (Form B) endorsement form CG 2010, as published by the Insurance Services Office (ISO), or other form designated by the Department.

7-1.12B(4)(c) Contractor's Insurance Policy is Primary

• The policy shall stipulate that the insurance afforded the additional insureds applies as primary insurance. Any other insurance or self-insurance maintained by the State is excess only and shall not be called upon to contribute with this insurance.

7-1.12B(5) Automobile Liability Insurance

• The Contractor shall carry automobile liability insurance, including coverage for all owned, hired, and nonowned automobiles. The primary limits of liability shall be not less than $1 000 000 combined single limit each accident for bodily injury and property damage. The umbrella or excess liability coverage required under Section 7-1.12B(4)(b) also applies to automobile liability.

7-1.12B(6) Policy Forms, Endorsements, and Certificates

• The Contractor shall provide its General Liability Insurance under Commercial General Liability policy form No. CG0001 as published by the Insurance Services Office (ISO) or under a policy form at least as broad as policy form No. CG0001.

7-1.12B(7) Deductibles

• The State may expressly allow deductible clauses, which it does not consider excessive, overly broad, or harmful to the interests of the State. Regardless of the allowance of exclusions or deductions by the State, the Contractor is responsible for any deductible amount and shall warrant that the coverage provided to the State is in accordance with Section 7-1.12B, "Insurance."

7-1.12B(8) Enforcement

• The Department may assure the Contractor's compliance with its insurance obligations. Ten days before an insurance policy lapses or is canceled during the contract period, the Contractor shall submit to the Department evidence of renewal or replacement of the policy.

• If the Contractor fails to maintain any required insurance coverage, the Department may maintain this coverage and withhold or charge the expense to the Contractor or terminate the Contractor's control of the work in accordance with Section 8-1.08, "Termination of Control."

• The Contractor is not relieved of its duties and responsibilities to indemnify, defend, and hold harmless the State, its officers, agents, and employees by the Department's acceptance of insurance policies and certificates.

• Minimum insurance coverage amounts do not relieve the Contractor for liability in excess of such coverage, nor do they preclude the State from taking other actions available to it, including the withholding of funds under this contract.

7-1.12B(9) Self-Insurance

• Self-insurance programs and self-insured retentions in insurance policies are subject to separate annual review and approval by the State.

• If the Contractor uses a self-insurance program or self-insured retention, the Contractor shall provide the State with the same protection from liability and defense of suits as would be afforded by first-dollar insurance. Execution of the contract is the Contractor's acknowledgement that the Contractor will be bound by all laws as if the Contractor were an insurer as defined under Insurance Code Section 23 and that the self-insurance program or self-insured retention shall operate as insurance as defined under Insurance Code Section 22.

SECTION 9: MEASUREMENT AND PAYMENT

Issue Date: June 30, 2006

The third paragraph of Section 9-1.03, "Work Performed by Contractor," of the Standard Specifications is amended to read:

• The above markups shall constitute full compensation for all delay costs, overhead costs and profit which shall be deemed to include all items of expense not specifically designated as cost or equipment rental in Sections 9-1.03A(1), "Labor," 9-1.03A(2), "Materials," and 9-1.03A(3), "Equipment Rental." The total payment made as provided above shall be deemed to be the actual cost of the work and shall constitute full compensation therefor.

Section 9-1.04, "Notice of Potential Claim," of the Standard Specifications is amended to read:

9-1.04 NOTICE OF POTENTIAL CLAIM

• It is the intention of this section that disputes between the parties arising under and by virtue of the contract be brought to the attention of the Engineer at the earliest possible time in order that the matters may be resolved, if possible, or other appropriate action promptly taken.

• Disputes will not be considered unless the Contractor has first complied with specified notice or protest requirements, including Section 4-1.03, "Changes," Section 5-1.116, "Differing Site Conditions," Section 8-1.06, "Time of Completion," Section 8-1.07, "Liquidated Damages," and Section 8-1.10, "Utility and Non-Highway Facilities."

• For disputes arising under and by virtue of the contract, including an act or failure to act by the Engineer, the Contractor shall provide a signed written initial notice of potential claim to the Engineer within 5 days from the date the dispute first arose. The initial notice of potential claim shall provide the nature and circumstances involved in the dispute which shall remain consistent through the dispute. The initial notice of potential claim shall be submitted on Form CEM-6201A furnished by the Department and shall be certified with reference to the California False Claims Act, Government Code Sections 12650-12655. The Contractor shall assign an exclusive identification number for each dispute, determined by chronological sequencing, based on the date of the dispute.

• The exclusive identification number for each dispute shall be used on the following corresponding documents:

A. Initial notice of potential claim.
B. Supplemental notice of potential claim.
C. Full and final documentation of potential claim.
D. Corresponding claim included in the Contractor's written statement of claims.

• The Contractor shall provide the Engineer the opportunity to examine the site of work within 5 days from the date of the initial notice of potential claim. The Contractor shall proceed with the performance of contract work unless otherwise specified or directed by the Engineer.

• Throughout the disputed work, the Contractor shall maintain records that provide a clear distinction between the incurred direct costs of disputed work and that of undisputed work. The Contractor shall allow the Engineer access to the Contractor's project records deemed necessary by the Engineer to evaluate the potential claim within 20 days of the date of the Engineer's written request.

• Within 15 days of submitting the initial notice of potential claim, the Contractor shall provide a signed supplemental notice of potential claim to the Engineer that provides the following information:

A. The complete nature and circumstances of the dispute which caused the potential claim.

B. The contract provisions that provide the basis of claim.
C. The estimated cost of the potential claim, including an itemized breakdown of individual costs and how the estimate was determined.
D. A time impact analysis of the project schedule that illustrates the effect on the scheduled completion date due to schedule changes or disruptions where a request for adjustment of contract time is made.

• The information provided in items A and B above shall provide the Contractor's complete reasoning for additional compensation or adjustments.

• The supplemental notice of potential claim shall be submitted on Form CEM-6201B furnished by the Department and shall be certified with reference to the California False Claims Act, Government Code Sections 12650-12655. The Engineer will evaluate the information presented in the supplemental notice of potential claim and provide a written response to the Contractor within 20 days of its receipt. If the estimated cost or effect on the scheduled completion date changes, the Contractor shall update information in items C and D above as soon as the change is recognized and submit this information to the Engineer.

• Within 30 days of the completion of work related to the potential claim, the Contractor shall provide the full and final documentation of potential claim to the Engineer that provides the following information:

A. A detailed factual narration of events fully describing the nature and circumstances that caused the dispute, including, but not limited to, necessary dates, locations, and items of work affected by the dispute.
B. The specific provisions of the contract that support the potential claim and a statement of the reasons these provisions support and provide a basis for entitlement of the potential claim.
C. When additional monetary compensation is requested, the exact amount requested calculated in conformance with Section 9-1.03, "Force Account Payment," or Section 8-1.09, "Right of Way Delays," including an itemized breakdown of individual costs. These costs shall be segregated into the following cost categories:

    1. Labor – A listing of individuals, classifications, regular hours and overtime hours worked, dates worked, and other pertinent information related to the requested reimbursement of labor costs.
    2. Materials – Invoices, purchase orders, location of materials either stored or incorporated into the work, dates materials were transported to the project or incorporated into the work, and other pertinent information related to the requested reimbursement of material costs.
    3. Equipment – Listing of detailed description (make, model, and serial number), hours of use, dates of use and equipment rates. Equipment rates shall be at the applicable State rental rate as listed in the Department of Transportation publication entitled "Labor Surcharge and Equipment Rental Rates," in effect when the affected work related to the dispute was performed.
    4. Other categories as specified by the Contractor or the Engineer.

D. When an adjustment of contract time is requested the following information shall be provided:

    1. The specific dates for which contract time is being requested.
    2. The specific reasons for entitlement to a contract time adjustment.
    3. The specific provisions of the contract that provide the basis for the requested contract time adjustment.
    4. A detailed time impact analysis of the project schedule. The time impact analysis shall show the effect of changes or disruptions on the scheduled completion date to demonstrate entitlement to a contract time adjustment.

E. The identification and copies of the Contractor's documents and the substance of oral communications that support the potential claim.

• The full and final documentation of the potential claim shall be submitted on Form CEM-6201C furnished by the Department and shall be certified with reference to the California False Claims Act, Government Code Sections 12650-12655.

• Pertinent information, references, arguments, and data to support the potential claim shall be included in the full and final documentation of potential claim. Information submitted subsequent to the full and final documentation submittal will not be considered. Information required in the full and final documentation of potential claim, as listed in items A to E above, that is not applicable to the dispute may be exempted as determined by the Engineer. No full and final documentation of potential claim will be considered that does not have the same nature and circumstances, and basis of claim as those specified on the initial and supplemental notices of potential claim.

• The Engineer will evaluate the information presented in the full and final documentation of potential claim and provide a written response to the Contractor within 30 days of its receipt unless otherwise specified. The Engineer's receipt

of the full and final documentation of potential claim shall be evidenced by postal receipt or the Engineer's written receipt if delivered by hand. If the full and final documentation of potential claim is submitted by the Contractor after acceptance of the work by the Director, the Engineer need not provide a written response.

- Provisions in this section shall not apply to those claims for overhead costs and administrative disputes that occur after issuance of the proposed final estimate. Administrative disputes are disputes of administrative deductions or retentions, contract item quantities, contract item adjustments, interest payments, protests of contract change orders as provided in Section 4-1.03A, "Procedure and Protest," and protests of the weekly statement of working days as provided in Section 8-1.06, "Time of Completion." Administrative disputes that occur prior to issuance of the proposed final estimate shall follow applicable requirements of this section. Information listed in the supplemental notice and full and final documentation of potential claim that is not applicable to the administrative dispute may be exempted as determined by the Engineer.
- Unless otherwise specified in the special provisions, the Contractor may pursue the administrative claim process pursuant to Section 9-1.07B, "Final Payment and Claims," for any potential claim found by the Engineer to be without merit.
- Failure of the Contractor to conform to specified dispute procedures shall constitute a failure to pursue diligently and exhaust the administrative procedures in the contract, and is deemed as the Contractor's waiver of the potential claim and a waiver of the right to a corresponding claim for the disputed work in the administrative claim process in conformance with Section 9-1.07B, "Final Payment of Claims," and shall operate as a bar to arbitration pursuant to Section 10240.2 of the California Public Contract Code.

Section 9-1.07B, "Final Payment and Claims," of the Standard Specifications is amended to read:

9-1.07B Final Payment and Claims

- After acceptance by the Director, the Engineer will make a proposed final estimate in writing of the total amount payable to the Contractor, including an itemization of the total amount, segregated by contract item quantities, extra work and other bases for payment, and shall also show each deduction made or to be made for prior payments and amounts to be kept or retained under the provisions of the contract. Prior estimates and payments shall be subject to correction in the proposed final estimate. The Contractor shall submit written approval of the proposed final estimate or a written statement of claims arising under or by virtue of the contract so that the Engineer receives the written approval or statement of claims no later than close of business of the thirtieth day after receiving the proposed final estimate. If the thirtieth day falls on a Saturday, Sunday or legal holiday, then receipt of the written approval or statement of claims by the Engineer shall not be later than close of business of the next business day. The Contractor's receipt of the proposed final estimate shall be evidenced by postal receipt. The Engineer's receipt of the Contractor's written approval or statement of claims shall be evidenced by postal receipt or the Engineer's written receipt if delivered by hand.
- On the Contractor's approval, or if the Contractor files no claim within the specified period of 30 days, the Engineer will issue a final estimate in writing in conformance with the proposed final estimate submitted to the Contractor, and within 30 days thereafter the State will pay the entire sum so found to be due. That final estimate and payment thereon shall be conclusive and binding against both parties to the contract on all questions relating to the amount of work done and the compensation payable therefor, except as otherwise provided in Sections 9-1.03C, "Records," and 9-1.09, "Clerical Errors."
- If the Contractor within the specified period of 30 days files claims, the Engineer will issue a semifinal estimate in conformance with the proposed final estimate submitted to the Contractor and within 30 days thereafter the State will pay the sum found to be due. The semifinal estimate and corresponding payment shall be conclusive and binding against both parties to the contract on each question relating to the amount of work done and the compensation payable therefor, except insofar as affected by the claims filed within the time and in the manner required hereunder and except as otherwise provided in Sections 9-1.03C, "Records," and 9-1.09, "Clerical Errors."
- Except for claims for overhead costs and administrative disputes that occur after issuance of the proposed final estimate, the Contractor shall only provide the following two items of information for each claim:

A. The exclusive identification number that corresponds to the supporting full and final documentation of potential claim.
B. The final amount of requested additional compensation.

- If the final amount of requested additional compensation is different than the amount of requested compensation included in the full and final documentation of potential claim, the Contractor shall provide in the written statement of claims the reasons for the changed amount, the specific provisions of the contract which support the changed amount, and a statement of the reasons the provisions support and provide a basis for the changed amount. If the Contractor's claim fails to provide an exclusive identification number or if there is a disparity in the provided exclusive identification number, the Engineer will notify the Contractor of the omission or disparity. The Contractor shall have 15 days after receiving notification from the Engineer to correct the omission or disparity. If after the 15 days has elapsed, there is still an omission

or disparity of the exclusive identification number assigned to the claim, the Engineer will assign the number. No claim will be considered that has any of the following deficiencies:

A. The claim does not have the same nature, circumstances, and basis as the corresponding full and final documentation of potential claim.
B. The claim does not have a corresponding full and final documentation of potential claim.
C. The claim was not included in the written statement of claims.
D. The Contractor did not comply with applicable notice or protest requirements of Sections 4-1.03, "Changes," 5-1.116, "Differing Site Condition," 8-1.06, "Time of Completion," 8-1.07, "Liquidated Damages," 8-1.10, "Utility and Non-Highway Facilities," and 9-1.04, "Notice of Potential Claim."

• Administrative disputes that occur after issuance of the proposed final estimate shall be included in the Contractor's written statement of claims in sufficient detail to enable the Engineer to ascertain the basis and amounts of those claims.

• The Contractor shall keep full and complete records of the costs and additional time incurred for work for which a claim for additional compensation is made. The Engineer or designated claim investigators or auditors shall have access to those records and any other records as may be required by the Engineer to determine the facts or contentions involved in the claims. Failure to permit access to those records shall be sufficient cause for denying the claims.

• The written statement of claims submitted by the Contractor shall be accompanied by a notarized certificate containing the following language:

Under the penalty of law for perjury or falsification and with specific reference to the California False Claims Act, Government Code Section 12650 et. seq., the undersigned,

_____ .
(name)

_____ *of*
(title)

_____ .
(company)

hereby certifies that the claim for the additional compensation and time, if any, made herein for the work on this contract is a true statement of the actual costs incurred and time sought, and is fully documented and supported under the contract between parties.

Dated _____

/s/ _____

Subscribed and sworn before me this _____ day

of _____ .

_____
(Notary Public)
My Commission
Expires _____

• Failure to submit the notarized certificate will be sufficient cause for denying the claim.

• Any claim for overhead, in addition to being certified as stated above, shall be supported and accompanied by an audit report of an independent Certified Public Accountant. Omission of a supporting audit report of an independent Certified Public Accountant shall result in denial of the claim and shall operate as a bar to arbitration, as to the claim, in conformance with the requirements in Section 10240.2 of the California Public Contract Code. Any claim for overhead shall be subject to audit by the State at its discretion. The costs of performing an audit examination and submitting the report shall be borne by the Contractor. The Department will deduct an offset amount for field and home office overhead paid on all added work from any claim for overhead as appropriate, as determined by the Department. The value of the added work equals the value of the work completed minus the total bid. The home office overhead offset equals 5 percent of the added work. The field office overhead offset equals 5-1/2 percent of the added work. The Certified Public Accountant's audit examination shall be performed in conformance with the requirements of the American Institute of Certified Public Accountants Attestation Standards. The audit examination and report shall depict the Contractor's project and company-wide financial records and shall specify the actual overall average daily rates for both field and home office overhead for the entire

duration of the project, and whether the costs have been properly allocated. The rates of field and home office overhead shall exclude unallowable costs as determined in Title 48 of the Federal Acquisition Regulations, Chapter 1, Part 31. The audit examination and report shall determine if the rates of field and home office overhead are:

A. Allowable in conformance with the requirements in Title 48 of the Federal Acquisition Regulations, Chapter 1, Part 31.
B. Adequately supported by reliable documentation.
C. Related solely to the project under examination.

• Costs or expenses incurred by the State in reviewing or auditing claims that are not supported by the Contractor's cost accounting or other records shall be deemed to be damages incurred by the State within the meaning of the California False Claims Act.

• If the Engineer determines that a claim requires additional analysis, the Engineer will schedule a board of review meeting. The Contractor shall meet with the review board or person and make a presentation in support of the claim. Attendance by the Contractor at the board of review meeting shall be mandatory.

• The District Director of the District that administered the contract will make the final determination of any claims which remain in dispute after completion of claim review by the Engineer or board of review meeting.

The final determination of claims will be sent to the Contractor by hand delivery or deposit in the U.S. mail. The Engineer will then make and issue the Engineer's final estimate in writing and within 30 days thereafter the State will pay the entire sum, if any, found due thereon. That final estimate shall be conclusive and binding against both parties to the contract on all questions relating to the amount of work done and the compensation payable therefor, except as otherwise provided in Sections 9-1.03C, "Records," and 9-1.09, "Clerical Errors."

• Failure of the Contractor to conform to the specified dispute procedures shall constitute a failure to pursue diligently and exhaust the administrative procedures in the contract and shall operate as a bar to arbitration in conformance with the requirements in Section 10240.2 of the California Public Contract Code.

SECTION 12: CONSTRUCTION AREA TRAFFIC CONTROL DEVICES

Issue Date: June 30, 2006

The second paragraph of Section 12-1.01, "Description," of the Standard Specifications is amended to read:

• Attention is directed to Part 6 of the MUTCD and of the MUTCD California Supplement. Nothing in this Section 12 is to be construed as to reduce the minimum standards in these manuals.

Section 12-2.01, "Flaggers," of the Standard Specifications is amended to read:

• Flaggers while on duty and assigned to traffic control or to give warning to the public that the highway is under construction and of any dangerous conditions to be encountered as a result thereof, shall perform their duties and shall be provided with the necessary equipment in conformance with Part 6 of the MUTCD and of the MUTCD California Supplement. The equipment shall be furnished and kept clean and in good repair by the Contractor at the Contractor's expense.

The first paragraph of Section 12-3.01, "General," of the Standard Specifications is amended to read:

• In addition to the requirements in Part 6 of the MUTCD and of the MUTCD California Supplement, all devices used by the Contractor in the performance of the work shall conform to the provisions in this Section 12-3.

The fifth paragraph of Section 12-3.01, "General," of the Standard Specifications is amended to read:

• Retroreflective sheeting shall conform to the requirements in ASTM Designation: D 4956 and to the special provisions.

The first paragraph of Section 12-3.06, "Construction Area Signs," of the Standard Specifications is amended to read:

• The term "Construction Area Signs" shall include all temporary signs required for the direction of public traffic through or around the work during construction. Construction area signs are shown in or referred to in Part 6 of the MUTCD and of the MUTCD California Supplement.

The fourth paragraph of Section 12-3.06, "Construction Area Signs," of the Standard Specifications is amended to read:

• All construction area signs shall conform to the dimensions, color and legend requirements of the plans, Part 6 of the MUTCD, Part 6 of the MUTCD California Supplement, and these specifications. All sign panels shall be the product of a commercial sign manufacturer, and shall be as specified in these specifications.

The eighth paragraph of Section 12-3.06, "Construction Area Signs," of the Standard Specifications is amended to read:

• Used signs with the specified sheeting material will be considered satisfactory if they conform to the requirements for visibility and legibility and the colors conform to the requirements in Part 6 of the MUTCD and of the MUTCD California Supplement. A significant difference between day and nighttime retroreflective color will be grounds for rejecting signs.

Section 12-3.06A, "Stationary Mounted Signs," of the Standard Specifications is amended by deleting the third, fourth, fifth, and sixth paragraphs.

SECTION 15: EXISTING HIGHWAY FACILITIES

Issue Date: November 2, 2004

The sixth paragraph of Section 15-2.07, "Payment," of the Standard Specifications is amended to read:

• Full compensation for removing, salvaging, reconstructing, relocating or resetting end caps, return caps, terminal sections, and buried post anchors, for metal beam guard railings and thrie beam barriers, and for connecting reconstructed, relocated or reset railings and barriers to new and existing facilities, including connections to concrete, shall be considered as included in the contract price paid per meter for the type of railing or barrier work involved and no additional compensation will be allowed therefor.

SECTION 19: EARTHWORK

Issue Date: December 31, 2001

The third paragraph of Section 19-1.02, "Preservation of Property," of the Standard Specifications is amended to read:

• In addition to the provisions in Sections 5-1.02, "Plans and Working Drawings," and 5-1.02A, "Excavation Safety Plans," detailed plans of the protective systems for excavations on or affecting railroad property will be reviewed for adequacy of protection provided for railroad facilities, property, and traffic. These plans shall be submitted at least 9 weeks before the Contractor intends to begin excavation requiring the protective systems. Approval by the Engineer of the detailed plans for the protective systems will be contingent upon the plans being satisfactory to the railroad company involved.

SECTION 20: EROSION CONTROL AND HIGHWAY PLANTING

Issue Date: November 18, 2005

Section 20-2.25, "Backflow Preventers," of the Standard Specifications is amended to read:

20-2.25 BACKFLOW PREVENTERS

• Backflow preventers shall be one of the reduced pressure principle devices as specified in these specifications and the special provisions.

• Backflow preventers shall be factory assembled and shall include 2 check valves, one pressure differential relief valve, 2 shut-off valves and 4 test cocks. Backflow preventer and valves shall be the same size as the pipeline in which they are installed, unless otherwise shown on the plans.

• Backflow preventer shut-off valves shall be manufactured from iron or bronze and shall be either resilient wedged gate valves, resilient seated and fully ported ball valves, or resilient seated butterfly valves. Threaded type shut-off valves shall be provided with a union on one side of each valve. Unions shall be brass or malleable iron.

Section 20-5.03J, "Check and Test Backflow Preventers," of the Standard Specifications is amended to read:

20-5.03J Check and Test Backflow Preventers

- Backflow preventers shall be checked and tested for proper operation by a certified Backflow Preventer Tester. The tester shall hold a valid certification as a Backflow Preventer Tester from the local governing authority in which the device to be tested is located. The local governing authority shall be the county, city or water purveyor having the governing authority over testing of backflow preventers involved. If the local governing authority does not have a certification program for Backflow Preventer Testers, the tester shall have a certificate from one of the following:

A. The American Water Works Association.
B. A county which has a certification program for Backflow Preventer Testers.

- Tests for proper operation shall conform to the requirements of the governing authority.
- The Engineer shall be notified at least 5 days prior to testing backflow preventers.
- One copy of the test results for each backflow preventer tested shall be furnished to the Engineer.
- Backflow preventers, installed by the Contractor, failing required tests shall be repaired at the Contractor's expense.

SECTION 29: TREATED PERMEABLE BASES

Issue Date: November 18, 2005

The fourth paragraph of Section 29-1.02A, "Asphalt Treated Permeable Base," of the Standard Specifications is amended to read:

- The type and grade of asphalt binder to be mixed with aggregate will be specified in the special provisions.

SECTION 39: ASPHALT CONCRETE

Issue Date: November 18, 2005

The fifth paragraph of Section 39-2.01, "Asphalts," of the Standard Specifications is amended to read:

- Paving asphalt to be used as a binder for pavement reinforcing fabric shall be a steam-refined paving asphalt conforming to the provisions in Section 92, "Asphalts," and shall be Grade PG 70-10.

SECTION 40: PORTLAND CEMENT CONCRETE PAVEMENT

Issue Date: June 30, 2006

The fourth paragraph of Section 40-1.08, "Joints," of the Standard Specifications is amended to read:

- Straight tie bars shall be deformed reinforcing steel bars conforming to the requirements in ASTM Designation: A 615/A 615M, Grade 280 or 420; ASTM Designation: A 996/A 996M, Grade 350 or 420; or ASTM Designation: A 706/A 706M.

SECTION 42: GROOVE AND GRIND PAVEMENT

Issue Date: December 31, 2001

The last sentence of the first subparagraph of the third paragraph in Section 42-2.02, "Construction," of the Standard Specifications is amended to read:

- After grinding has been completed, the pavement shall conform to the straightedge and profile requirements specified in Section 40-1.10, "Final Finishing."

SECTION 49: PILING

Issue Date: June 30, 2006

The first paragraph in Section 49-1.03, "Determination of Length," of the Standard Specifications is amended to read:

• Foundation piles of any material shall be of such length as is required to obtain the specified penetration, and to extend into the cap or footing block as shown on the plans, or specified in the special provisions.

The fourth paragraph in Section 49-1.03, "Determination of Length," of the Standard Specifications is amended to read:

• Modification to the specified installation methods and specified pile tip elevation will not be considered at locations where tension or lateral load demands control design pile tip elevations or when the plans state that specified pile tip elevation shall not be revised.

The sixth and seventh paragraphs in Section 49-1.03, "Determination of Length," of the Standard Specifications are amended to read:

• Indicator compression pile load testing shall conform to the requirements in ASTM Designation: D 1143-81. The pile shall sustain the first compression test load applied which is equal to the nominal resistance in compression, as shown on the plans, with no more than 13 mm total vertical movement at the top of the pile measured relative to the top of the pile prior to the start of compression load testing.

• Indicator tension pile load testing shall conform to the requirements in ASTM Designation: D 3689-90. The loading apparatus described as "Load Applied to Pile by Hydraulic Jack(s) Acting at One End of Test Beam(s) Anchored to the Pile" shall not be used. The pile shall sustain the first tension test load applied which is equal to the nominal resistance in tension, as shown on the plans, with no more than 13 mm total vertical movement at the top of the pile measured relative to the top of the pile prior to the start of tension load testing.

The ninth paragraph in Section 49-1.03, "Determination of Length," of the Standard Specifications is amended to read:

• For driven piling, the Contractor shall furnish piling of sufficient length to obtain the specified tip elevation shown on the plans or specified in the special provisions. For cast-in-drilled-hole concrete piling, the Contractor shall construct piling of such length to develop the nominal resistance in compression and to obtain the specified tip elevation shown on the plans or specified in the special provisions.

The tenth paragraph in Section 49-1.03, "Determination of Length," of the Standard Specifications is deleted.

The fourth paragraph in Section 49-1.04, "Load Test Piles," of the Standard Specifications is amended to read:

• Load test piles and anchor piles which are not to be incorporated in the completed structure shall be removed in conformance with the provisions in Section 15-4.02, "Removal Methods," and the remaining holes shall be backfilled with earth or other suitable material approved by the Engineer.

The fifth paragraph in Section 49-1.04, "Load Test Piles," of the Standard Specifications is amended to read:

• Load test anchorages in piles used as anchor piles shall conform to the following requirements:

A. High strength threaded steel rods shall conform to the provisions for bars in Section 50-1.05, "Prestressing Steel," except Type II bars shall be used.
B. High strength steel plates shall conform to the requirements in ASTM Designation: A 709/A 709M, Grade 345.
C. Anchor nuts shall conform to the provisions in the second paragraph in Section 50-1.06, "Anchorages and Distribution."

The first paragraph in Section 49-1.05, "Driving Equipment," of the Standard Specifications is amended to read:

• Driven piles shall be installed with impact hammers that are approved in writing by the Engineer. Impact hammers shall be steam, hydraulic, air or diesel hammers. Impact hammers shall develop sufficient energy to drive the piles at a penetration rate of not less than 3 mm per blow at the specified nominal resistance.

The seventh paragraph in Section 49-1.05, "Driving Equipment," of the Standard Specifications is amended to read:

• When necessary to obtain the specified penetration and when authorized by the Engineer, the Contractor may supply and operate one or more water jets and pumps, or furnish the necessary drilling apparatus and drill holes not greater than the least dimension of the pile to the proper depth and drive the piles therein. Jets shall not be used at locations where the stability of embankments or other improvements would be endangered. In addition, for steel piles, steel shells, or steel casings, when necessary to obtain the specified penetration or to prevent damage to the pile during installation, the Contractor shall provide special driving tips or heavier pile sections or take other measures as approved by the Engineer.

• The use of followers or underwater hammers for driving piles will be permitted if authorized in writing by the Engineer. When a follower or underwater hammer is used, its efficiency shall be verified by furnishing the first pile in each bent or footing sufficiently long and driving the pile without the use of a follower or underwater hammer.

The second paragraph in Section 49-1.07, "Driving," of the Standard Specifications is amended to read:

• Timber piles shall be fresh-headed and square and when permitted by the Engineer, the heads of the piles may be protected by means of heavy steel or wrought iron rings. During driving operations timber piling shall be restrained from lateral movement at intervals not to exceed 6 m over the length between the driving head and the ground surface. During driving operations, the timber pile shall be kept moving by continuous operation of the hammer. When the blow count exceeds either 2 times the blow count required in 300 mm, or 3 times the blow count required in 75 mm for the nominal resistance as shown on the plans, computed in conformance with the provisions in Section 49-1.08, "Pile Driving Acceptance Criteria," additional aids shall be used to obtain the specified penetration. These aids may include the use of water jets or drilling, where permitted, or the use of a larger hammer employing a heavy ram striking with a low velocity.

Section 49-1.08, "Bearing Value and Penetration," of the Standard Specifications is amended to read:

49-1.08 PILE DRIVING ACCEPTANCE CRITERIA

• Except for piles to be load tested, driven piles shall be driven to a value of not less than the nominal resistance shown on the plans unless otherwise specified in the special provisions or permitted in writing by the Engineer. In addition, when a pile tip elevation is specified, driven piles shall penetrate at least to the specified tip elevation, unless otherwise permitted in writing by the Engineer. Piles to be load tested shall be driven to the specified tip elevation.

• When the pile nominal resistance is omitted from the plans or the special provisions, timber piles shall be driven to a nominal resistance of 800 kN, and steel and concrete piles shall be driven to a nominal resistance of 1250 kN.

• The nominal resistance for driven piles shall be determined from the following formula in which "R_u" is the nominal resistance in kilonewtons, "E_r" is the manufacturer's rating for joules of energy developed by the hammer at the observed field drop height, and "N" is the number of hammer blows in the last 300 millimeters. (maximum value to be used for N is 100):

$$R_u = (7 * (E_r)^{1/2} * \log_{10} (0.83 * N)) - 550$$

The first paragraph in Section 49-2.03, "Requirements," of the Standard Specifications is amended to read:

• When preservative treatment of timber piles is required by the plans or specified in the special provisions, the treatment shall conform to the provisions in Section 58, "Preservative Treatment of Lumber, Timber and Piling," and the applicable AWPA Use Category.

The first paragraph in Section 49-2.04, "Treatment of Pile Heads," of the Standard Specifications is amended to read:

A. An application of wood preservative conforming to the provisions in Section 58-1.04, "Wood Preservative for Manual Treatment," shall first be applied to the head of the pile and a protective cap shall then be built up by applying alternate layers of loosely woven fabric and hot asphalt or tar similar to membrane waterproofing, using 3 layers of asphalt or tar and 2 layers of fabric. The fabric shall measure at least 150 mm more in each direction than the diameter of the pile and shall be turned down over the pile and the edges secured by binding with 2 turns of No. 10 galvanized wire. The fabric shall be wired in advance of the application of the final layer of asphalt or tar, which shall extend down over the wiring.
B. The sawed surface shall be covered with 3 applications of a hot mixture of 60 percent creosote and 40 percent roofing pitch, or thoroughly brushcoated with 3 applications of hot creosote and covered with hot roofing pitch. A covering of 3.50-mm nominal thickness galvanized steel sheet shall be placed over the coating and bent down over the sides of each pile to shed water.

Section 49-3.01, "Description," of the Standard Specifications is amended by deleting the fifth paragraph.

The sixth and seventh paragraphs in Section 49-3.01, "Description," of the Standard Specifications are amended to read:

- Except for precast prestressed concrete piles in a corrosive environment, lifting anchors used in precast prestressed concrete piles shall be removed, and the holes filled in conformance with the provisions in Section 51-1.18A, "Ordinary Surface Finish."
- Lifting anchors used in precast prestressed concrete piles in a corrosive environment shall be removed to a depth of at least 25 mm below the surface of the concrete, and the resulting hole shall be filled with epoxy adhesive before the piles are delivered to the job site. The epoxy adhesive shall conform to the provisions in Sections 95-1, "General," and 95-2.01, "Binder (Adhesive), Epoxy Resin Base (State Specification 8040-03)."

The first and second paragraphs in Section 49-4.01, "Description," of the Standard Specifications are amended to read:

- Cast-in-place concrete piles shall consist of one of the following:

  A. Steel shells driven permanently to the required nominal resistance and penetration and filled with concrete.
  B. Steel casings installed permanently to the required penetration and filled with concrete.
  C. Drilled holes filled with concrete.
  D. Rock sockets filled with concrete.

- The drilling of holes shall conform to the provisions in these specifications. Concrete filling for cast-in-place concrete piles is designated by compressive strength and shall have a minimum 28-day compressive strength of 25 MPa. At the option of the Contractor, the combined aggregate grading for the concrete shall be either the 25-mm maximum grading, the 12.5-mm maximum grading, or the 9.5-mm maximum grading. Concrete shall conform to the provisions in Section 90, "Portland Cement Concrete," and Section 51, "Concrete Structures." Reinforcement shall conform to the provisions in Section 52, "Reinforcement."

The fourth paragraph in Section 49-4.03, "Drilled Holes," of the Standard Specifications is amended to read:

- After placing reinforcement and prior to placing concrete in the drilled hole, if caving occurs or deteriorated foundation material accumulates on the bottom of the hole, the bottom of the drilled hole shall be cleaned. The Contractor shall verify that the bottom of the drilled hole is clean.

The first and second paragraphs in Section 49-4.04, "Steel Shells," of the Standard Specifications are amended to read:

- Steel shells shall be sufficiently watertight to exclude water during the placing of concrete. The shells may be cylindrical or tapered, step-tapered, or a combination of either, with cylindrical sections.

The first paragraph in Section 49-4.05, "Inspection," of the Standard Specifications is amended to read:

- After being driven and prior to placing reinforcement and concrete therein, the steel shells shall be examined for collapse or reduced diameter at any point. Any shell which is improperly driven or broken or shows partial collapse to such an extent as to materially decrease its nominal resistance will be rejected. Rejected shells shall be removed and replaced, or a new shell shall be driven adjacent to the rejected shell. Rejected shells which cannot be removed shall be filled with concrete by the Contractor at the Contractor's expense. When a new shell is driven to replace a rejected shell, the Contractor, at the Contractor's expense, shall enlarge the footing as determined necessary by the Engineer.

The third paragraph in Section 49-5.01, "Description," of the Standard Specifications is amended to read:

- Steel pipe piles shall conform to the following requirements:

  1. Steel pipe piles less than 360 mm in diameter shall conform to the requirements in ASTM Designation: A 252, Grade 2 or 3.
  2. Steel pipe piles 360 mm and greater in diameter shall conform to the requirements in ASTM Designation: A 252, Grade 3.
  3. Steel pipe piles shall be of the nominal diameter and nominal wall thickness shown on the plans or specified in the special provisions.

4. The carbon equivalency (CE) of steel for steel pipe piles, as defined in AWS D 1.1, Section XI5.1, shall not exceed 0.45.
5. The sulfur content of steel for steel pipe piles shall not exceed 0.05-percent.
6. Seams in steel pipe piles shall be complete penetration welds.

The first paragraph in Section 49-6.01, "Measurement," of the Standard Specifications is amended to read:

• The length of timber, steel, and precast prestressed concrete piles, and of cast-in-place concrete piles consisting of driven shells filled with concrete, shall be the greater of the following:

A. The total length in place in the completed work, measured along the longest side, from the tip of the pile to the plane of pile cut-off.
B. The length measured along the longest side, from the tip elevation shown on the plans or the tip elevation ordered by the Engineer, to the plane of pile cut-off.

The third paragraph in Section 49-6.02, "Payment," of the Standard Specifications is amended to read:

• The contract price paid per meter for cast-in-drilled-hole concrete piling shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all work involved in drilling holes, disposing of material resulting from drilling holes, temporarily casing holes and removing water when necessary, furnishing and placing concrete and reinforcement, and constructing reinforced concrete extensions, complete in place, to the required penetration, as shown on the plans, as specified in these specifications and in the special provisions, and as directed by the Engineer.

The seventh paragraph in Section 49-6.02, "Payment," of the Standard Specifications is amended to read

• The contract unit price paid for drive pile shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in driving timber, concrete and steel piles, driving steel shells for cast-in-place concrete piles, placing filling materials for cast-in-place concrete piles and cutting off piles, all complete in place to the required nominal resistance and penetration as shown on the plans and as specified in these specifications and the special provisions, and as directed by the Engineer.

The ninth paragraph in Section 49-6.02, "Payment," of the Standard Specifications is amended to read:

• Full compensation for all jetting, drilling, providing special driving tips or heavier sections for steel piles or shells, or other work necessary to obtain the specified penetration and nominal resistance of the piles, for predrilling holes through embankment and filling the space remaining around the pile with sand or pea gravel, for disposing of material resulting from jetting, drilling or predrilling holes, and for all excavation and backfill involved in constructing concrete extensions as shown on the plans, and as specified in these specifications and the special provisions, and as directed by the Engineer shall be considered as included in the contract unit price paid for drive pile or in the contract price paid per meter for cast-in-drilled-hole concrete piling, and no additional compensation will be allowed therefor.

Section 49-6.02, "Payment," of the Standard Specifications is amended by adding the following paragraphs:

• Full compensation for furnishing and placing additional testing reinforcement, for load test anchorages, and for cutting off test piles, shall be considered as included in the contract price paid for piling of the type or class shown in the Engineer's Estimate, and no additional compensation will be allowed.

• No additional compensation or extension of time will be made for additional foundation investigation, installation and testing of indicator piling, cutting off piling and restoring the foundation investigation and indicator pile sites, and review of request by the Engineer.

SECTION 50: PRESTRESSING CONCRETE

Issue Date: June 30, 2006

Section 50-1.02, "Drawings," of the Standard Specifications is amended by adding the following paragraph after the second paragraph:

- Each working drawing submittal shall consist of plans for a single bridge or portion thereof. For multi-frame bridges, each frame shall require a separate working drawing submittal.

The eighth paragraph of Section 50-1.02, "Drawings," of the Standard Specifications is deleted.

Section 50-1.05, "Prestressing Steel," of the Standard Specifications is amended to read:

- Prestressing steel shall be high-tensile wire conforming to the requirements in ASTM Designation: A 421, including Supplement I; high-tensile seven-wire strand conforming to the requirements in ASTM Designation: A 416; or uncoated high-strength steel bars conforming to the requirements in ASTM Designation: A 722, including all supplementary requirements. The maximum mass requirement of ASTM Designation: A 722 will not apply.
- In addition to the requirements of ASTM Designation: A 722, for deformed bars, the reduction of area shall be determined from a bar from which the deformations have been removed. The bar shall be machined no more than necessary to remove the deformations over a length of 300 mm, and reduction will be based on the area of the machined portion.
- In addition to the requirements specified herein, epoxy-coated seven-wire prestressing steel strand shall be grit impregnated and filled in conformance with the requirements in ASTM Designation: A 882/A 882M, including Supplement I, and the following:

A. The coating material shall be on the Department's list of approved coating materials for epoxy-coated strand, available from the Transportation Laboratory.
B. The film thickness of the coating after curing shall be 381 µm to 1143 µm.
C. Prior to coating the strand, the Contractor shall furnish to the Transportation Laboratory a representative 230-g sample from each batch of epoxy coating material to be used. Each sample shall be packaged in an airtight container identified with the manufacturer's name and batch number.
D. Prior to use of the epoxy-coated strand in the work, written certifications referenced in ASTM Designation: A 882/A 882M, including a representative load-elongation curve for each size and grade of strand to be used and a copy of the quality control tests performed by the manufacturer, shall be furnished to the Engineer.
E. In addition to the requirements in Section 50-1.10, "Samples for Testing," four 1.5-m long samples of coated strand and one 1.5-m long sample of uncoated strand of each size and reel shall be furnished to the Engineer for testing. These samples, as selected by the Engineer, shall be representative of the material to be used in the work.
F. Epoxy-coated strand shall be cut using an abrasive saw.
G. All visible damage to coatings caused by shipping and handling, or during installation, including cut ends, shall be repaired in conformance with the requirements in ASTM Designation: A 882/A 882M. The patching material shall be furnished by the manufacturer of the epoxy powder and shall be applied in conformance with the manufacturer's written recommendations. The patching material shall be compatible with the original epoxy coating material and shall be inert in concrete.

- All bars in any individual member shall be of the same grade, unless otherwise permitted by the Engineer.
- When bars are to be extended by the use of couplers, the assembled units shall have a tensile strength of not less than the manufacturer's minimum guaranteed ultimate tensile strength of the bars. Failure of any one sample to meet this requirement will be cause for rejection of the heat of bars and lot of couplers. The location of couplers in the member shall be subject to approval by the Engineer.
- Wires shall be straightened if necessary to produce equal stress in all wires or wire groups or parallel lay cables that are to be stressed simultaneously or when necessary to ensure proper positioning in the ducts.
- Where wires are to be button-headed, the buttons shall be cold formed symmetrically about the axes of the wires. The buttons shall develop the minimum guaranteed ultimate tensile strength of the wire. No cold forming process shall be used that causes indentations in the wire. Buttonheads shall not contain wide open splits, more than 2 splits per head, or splits not parallel with the axis of the wire.
- Prestressing steel shall be protected against physical damage and rust or other results of corrosion at all times from manufacture to grouting or encasing in concrete. Prestressing steel that has sustained physical damage at any time shall be rejected. The development of visible rust or other results of corrosion shall be cause for rejection, when ordered by the Engineer.
- Epoxy-coated prestressing steel strand shall be covered with an opaque polyethylene sheeting or other suitable protective material to protect the strand from exposure to sunlight, salt spray, and weather. For stacked coils, the protective covering shall be draped around the perimeter of the stack. The covering shall be adequately secured; however, it should

allow for air circulation around the strand to prevent condensation under the covering. Epoxy-coated strand shall not be stored within 300 m of ocean or tidal water for more than 2 months.

- Prestressing steel shall be packaged in containers or shipping forms for the protection of the steel against physical damage and corrosion during shipping and storage. Except for epoxy-coated strand, a corrosion inhibitor which prevents rust or other results of corrosion, shall be placed in the package or form, or shall be incorporated in a corrosion inhibitor carrier type packaging material, or when permitted by the Engineer, may be applied directly to the steel. The corrosion inhibitor shall have no deleterious effect on the steel or concrete or bond strength of steel to concrete. Packaging or forms damaged from any cause shall be immediately replaced or restored to original condition.
- The shipping package or form shall be clearly marked with a statement that the package contains high-strength prestressing steel, and the type of corrosion inhibitor used, including the date packaged.
- Prestressing steel for post-tensioning which is installed in members prior to placing and curing of the concrete, and which is not epoxy-coated, shall be continuously protected against rust or other results of corrosion, until grouted, by means of a corrosion inhibitor placed in the ducts or applied to the steel in the duct. The corrosion inhibitor shall conform to the provisions specified herein.
- When steam curing is used, prestressing steel for post-tensioning shall not be installed until the steam curing is completed.
- Water used for flushing ducts shall contain either quick lime (calcium oxide) or slaked lime (calcium hydroxide) in the amount of 0.01-kg/L. Compressed air used to blow out ducts shall be oil free.
- When prestressing steel for post-tensioning is installed in the ducts after completion of concrete curing, and if stressing and grouting are completed within 10 days after the installation of the prestressing steel, rust which may form during those 10 days will not be cause for rejection of the steel. Prestressing steel installed, tensioned, and grouted in this manner, all within 10 days, will not require the use of a corrosion inhibitor in the duct following installation of the prestressing steel. Prestressing steel installed as above but not grouted within 10 days shall be subject to all the requirements in this section pertaining to corrosion protection and rejection because of rust. The requirements in this section pertaining to tensioning and grouting within 10 days shall not apply to epoxy-coated prestressing steel strand.
- Any time prestressing steel for pretensioning is placed in the stressing bed and is exposed to the elements for more than 36 hours prior to encasement in concrete, adequate measures shall be taken by the Contractor, as approved by the Engineer, to protect the steel from contamination or corrosion.
- After final fabrication of the seven-wire prestressing steel strand, no electric welding of any form shall be performed on the prestressing steel. Whenever electric welding is performed on or near members containing prestressing steel, the welding ground shall be attached directly to the steel being welded.
- Pretensioned prestressing steel shall be cut off flush with the end of the member. For epoxy-coated prestressing steel, only abrasive saws shall be used to cut the steel. The exposed ends of the prestressing steel and a 25-mm strip of adjoining concrete shall be cleaned and painted. Cleaning shall be by wire brushing or abrasive blast cleaning to remove all dirt and residue on the metal or concrete surfaces. Immediately after cleaning, the surfaces shall be covered with one application of unthinned zinc-rich primer (organic vehicle type) conforming to the provisions in Section 91, "Paint," except that 2 applications shall be applied to surfaces which will not be covered by concrete or mortar. Aerosol cans shall not be used. The paint shall be thoroughly mixed at the time of application and shall be worked into any voids in the prestressing tendons.

The sixth paragraph of Section 50-1.08, "Prestressing," of the Standard Specifications is amended to read:

- The following formula and friction coefficients shall be used in calculating friction losses in tendons:

$$To = Txe^{(\mu\alpha + KL)}$$

Where:

To = steel stress at jacking end
Tx = steel stress at any point x
e = base of Naperian logarithms
μ = friction curvature coefficient
α = total angular change of prestressing steel profile in radians from jacking end to point x
K = friction wobble coefficient (=0.00066/m)
L = length of prestressing steel from jacking end to point x

Type of Steel Tendon	Length of Tendon L(m)	Type of Duct	μ
Wire or Strand	0 to less than 183	Rigid or semi-rigid galvanized sheet metal	0.15
	183 to less than 275		0.20
	275 to less than 366		0.25
	Greater than or equal to 366		0.25*
Wire or Strand	All	Plastic	0.23
	All	Rigid Steel Pipes	0.25*
High Strength Bar	All	Rigid or semi-rigid galvanized sheet metal	0.30

* With the use of lubrication

The thirteenth and fourteenth paragraphs in Section 50-1.08, "Prestressing," of the Standard Specifications are amended to read:

• Prestressing steel in pretensioned members shall not be cut or released until the concrete in the member has attained a compressive strength of not less than the value shown on the plans or 28 MPa, whichever is greater. In addition to these concrete strength requirements, when epoxy-coated prestressing steel strand is used, the steel shall not be cut or released until the temperature of the concrete surrounding the strand is less than 65°C, and falling.

• When ordered by the Engineer, prestressing steel strands in pretensioned members, if tensioned individually, shall be checked by the Contractor for loss of prestress not more than 48 hours prior to placing concrete for the members. The method and equipment for checking the loss of prestress shall be subject to approval by the Engineer. Strands which show a loss of prestress in excess of 3 percent shall be retensioned to the original computed jacking stress.

The fifth paragraph in Section 50-1.10, "Samples for Testing," of the Standard Specifications is amended to read:

• The following samples of materials and tendons, selected by the Engineer from the prestressing steel at the plant or jobsite, shall be furnished by the Contractor to the Engineer well in advance of anticipated use:

A. For wire or bars, one 2-m long sample and for strand, one 1.5-m long sample, of each size shall be furnished for each heat or reel.
B. For epoxy-coated strand, one 1.5-m long sample of uncoated strand of each size shall be furnished for each reel.
C. If the prestressing tendon is a bar, one 2-m long sample shall be furnished and in addition, if couplers are to be used with the bar, two 1.25-m long samples of bar, equipped with one coupler and fabricated to fit the coupler, shall be furnished.

The second paragraph in Section 50-1.11, "Payment," of the Standard Specifications is amended to read:

• The contract lump sum prices paid for prestressing cast-in-place concrete of the types listed in the Engineer's Estimate shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all work involved in furnishing, placing, and tensioning the prestressing steel in cast-in-place concrete structures, complete in place, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

SECTION 51: CONCRETE STRUCTURES

Issue Date: January 28, 2005

The eleventh paragraph in Section 51-1.05, "Forms," of the Standard Specifications is amended to read:

• Form panels for exposed surfaces shall be furnished and placed in uniform widths of not less than 0.9-m and in uniform lengths of not less than 1.8 m, except at the end of continuously formed surfaces where the final panel length

required is less than 1.8 m. Where the width of the member formed is less than 0.9-m, the width of the panels shall be not less than the width of the member. Panels shall be arranged in symmetrical patterns conforming to the general lines of the structure. Except when otherwise provided herein or shown on the plans, panels for vertical surfaces shall be placed with the long dimension horizontal and with horizontal joints level and continuous. Form panels for curved surfaces of columns shall be continuous for a minimum of one quarter of the circumference, or 1.8 m. For walls with sloping footings which do not abut other walls, panels may be placed with the long dimension parallel to the footing. Form panels on each side of the panel joint shall be precisely aligned, by means of supports or fasteners common to both panels, to result in a continuous unbroken concrete plane surface. When prefabricated soffit panels are used, form filler panels joining prefabricated panels shall have a uniform minimum width of 0.3-m and shall produce a smooth uniform surface with consistent longitudinal joint lines between the prefabricated panels.

The first and second paragraph in Section 51-1.06A, "Falsework Design and Drawings," of the Standard Specifications are amended to read:

- The Contractor shall submit to the Engineer working drawings and design calculations for falsework proposed for use at bridges. For bridges where the height of any portion of the falsework, as measured from the ground line to the soffit of the superstructure, exceeds 4.25 m; or where any individual falsework clear span length exceeds 4.85 m; or where provision for vehicular, pedestrian, or railroad traffic through the falsework is made; the drawings shall be signed by an engineer who is registered as a Civil Engineer in the State of California. Six sets of the working drawings and 2 copies of the design calculations shall be furnished. Additional working drawings and design calculations shall be submitted to the Engineer when specified in "Railroad Relations and Insurance" of the special provisions.
- The falsework drawings shall include details of the falsework erection and removal operations showing the methods and sequences of erection and removal and the equipment to be used. The details of the falsework erection and removal operations shall demonstrate the stability of all or any portions of the falsework during all stages of the erection and removal operations.

The seventh paragraph in Section 51-1.06A, "Falsework Design and Drawings," of the Standard Specifications is amended to read:

- In the event that several falsework plans are submitted simultaneously, or an additional plan is submitted for review before the review of a previously submitted plan has been completed, the Contractor shall designate the sequence in which the plans are to be reviewed. In such event, the time to be provided for the review of any plan in the sequence shall be not less than the review time specified above for that plan, plus 2 weeks for each plan of higher priority which is still under review. A falsework plan submittal shall consist of plans for a single bridge or portion thereof. For multi-frame bridges, each frame shall require a separate falsework plan submittal.

Section 51-1.06A, "Falsework Design and Drawings," of the Standard Specifications is amended by adding the following paragraphs:

- If structural composite lumber is proposed for use, the falsework drawings shall clearly identify the structural composite lumber members by grade (E value), species, and type. The Contractor shall provide technical data from the manufacturer showing the tabulated working stress values of the composite lumber. The Contractor shall furnish a certificate of compliance as specified in Section 6-1.07, "Certificates of Compliance," for each delivery of structural composite lumber to the project site.
- For falsework piles with a calculated loading capacity greater than 900 kN, the falsework piles shall be designed by an engineer who is registered as either a Civil Engineer or a Geotechnical Engineer in the State of California, and the calculations shall be submitted to the Engineer.

The first paragraph in Section 51-1.06A(1), "Design Loads," of the Standard Specifications is amended to read:

- The design load for falsework shall consist of the sum of dead and live vertical loads, and an assumed horizontal load. The minimum total design load for any falsework, including members that support walkways, shall be not less than 4800 N/m^2 for the combined live and dead load regardless of slab thickness.

The eighth paragraph in Section 51-1.06A(1), "Design Loads," of the Standard Specifications is amended to read:

- In addition to the minimum requirements specified in this Section 51-1.06A, falsework for box girder structures with internal falsework bracing systems using flexible members capable of withstanding tensile forces only, shall be designed to include the vertical effects caused by the elongation of the flexible member and the design horizontal load combined with the

dead and live loads imposed by concrete placement for the girder stems and connected bottom slabs. Falsework comprised of individual steel towers with bracing systems using flexible members capable of withstanding tensile forces only to resist overturning, shall be exempt from these additional requirements.

The third paragraph in Section 51-1.06B, "Falsework Construction," of the Standard Specifications is amended to read:

- When falsework is supported on piles, the piles shall be driven and the actual nominal resistance assessed in conformance with the provisions in Section 49, "Piling."

Section 51-1.06B, "Falsework Construction," of the Standard Specifications is amended by adding the following paragraphs:

- For falsework piles with a calculated nominal resistance greater than 1800 kN, the Contractor shall conduct dynamic monitoring of pile driving and generate field acceptance criteria based on a wave equation analysis. These analyses shall be signed by an engineer who is registered as a Civil Engineer in the State of California and submitted to the Engineer prior to completion of falsework erection.

- Prior to the placement of falsework members above the stringers, the final bracing system for the falsework shall be installed.

Section 51-1.06C, "Removing Falsework," of the Standard Specifications is amended by adding the following paragraph:

- The falsework removal operation shall be conducted in such a manner that any portion of the falsework not yet removed remains in a stable condition at all times.

The sixth paragraph in Section 51-1.09, "Placing Concrete," of the Standard Specifications is amended to read:

- Vibrators used to consolidate concrete containing epoxy-coated bar reinforcement or epoxy-coated prestressing steel shall have a resilient covering to prevent damage to the epoxy-coating on the reinforcement or prestressing steel.

The third sentence of the fourth paragraph in Section 51-1.12D, "Sheet Packing, Preformed Pads and Board Fillers," of the Standard Specifications is amended to read:

Surfaces of expanded polystyrene against which concrete is placed shall be faced with hardboard.

Section 51-1.12F, "Sealed Joints," of the Standard Specifications is amended by adding the following paragraph:

- The opening of the joints at the time of placing shall be that shown on the plans adjusted for temperature. Care shall be taken to avoid impairment of the clearance in any manner.

The first paragraph in Section 51-1.12F, "Sealed Joints," of the Standard Specifications is amended to read:

- Where shown on the plans, joints in structures shall be sealed with joint seals, joint seal assemblies, or seismic joints in conformance with the details shown on the plans, the provisions in these specifications, and the special provisions.

The fourth paragraph in Section 51-1.12F, "Sealed Joints," of the Standard Specifications is amended to read:

- Joint seal assemblies and seismic joints shall consist of metal or metal and elastomeric assemblies which are anchored or cast into a recess in the concrete over the joint. Strip seal joint seal assemblies consist of only one joint cell. Modular unit joint seal assemblies consist of more than one joint cell.

The fifth paragraph in Section 51-1.12F, "Sealed Joints," of the Standard Specifications is amended to read:

- The Movement Rating (MR) shall be measured normal to the longitudinal axis of the joint. The type of seal to be used for the MR shown on the plans shall be as follows:

Movement Rating (MR)	Seal Type
MR ≤ 15 mm	Type A or Type B
15 mm < MR ≤ 30 mm	Type A (silicone only) or Type B
30 mm < MR ≤ 50 mm	Type B
50 mm < MR ≤ 100 mm	Joint Seal Assembly (Strip Seal)
MR > 100 mm	Joint Seal Assembly (Modular Unit) or Seismic Joint

The second paragraph in Section 51-1.12F(3)(b), "Type B Seal," of the Standard Specifications is amended to read:

• The preformed elastomeric joint seal shall conform to the requirements in ASTM Designation: D 2628 and the following:

A. The seal shall consist of a multi-channel, nonporous, homogeneous material furnished in a finished extruded form.
B. The minimum depth of the seal, measured at the contact surface, shall be at least 95 percent of the minimum uncompressed width of the seal as designated by the manufacturer.
C. When tested in conformance with the requirements in California Test 673 for Type B seals, joint seals shall provide a Movement Rating (MR) of not less than that shown on the plans.
D. The top and bottom edges of the joint seal shall maintain continuous contact with the sides of the groove over the entire range of joint movement.
E. The seal shall be furnished full length for each joint with no more than one shop splice in any 18-m length of seal.
F. The Contractor shall demonstrate the adequacy of the procedures to be used in the work before installing seals in the joints.
G. Shop splices and field splices shall have no visible offset of exterior surfaces, and shall show no evidence of bond failure.
H. At all open ends of the seal that would admit water or debris, each cell shall be filled to a depth of 80 mm with commercial quality open cell polyurethane foam, or closed by other means subject to approval by the Engineer.

Section 51-1.12F(3)(c), "Joint Seal Assemblies," of the Standard Specifications is amended to read:

(c) Joint Seal Assemblies and Seismic Joints

• Joint seal assemblies and seismic joints shall be furnished and installed in joints in bridge decks as shown on the plans and as specified in the special provisions.

The eighth paragraph in Section 51-1.12H(1), "Plain and Fabric Reinforced Elastomeric Bearing Pads," of the Standard Specifications is amended to read:

• The elastomer, as determined from test specimens, shall conform to the following:

Test	ASTM Designation	Requirement
Tensile strength, MPa	D 412	15.5 Min.
Elongation at break, percent	D 412	350 Min.
Compression set, 22 h at 70°C, percent	D 395 (Method B)	25 Max.
Tear strength, kN/m	D 624 (Die C)	31.5 Min.
Hardness (Type A)	D 2240 with 2 kg. mass	55 ±5
Ozone resistance 20% strain, 100 h at 40°C ±2°C	D 1149 (except 100 ±20 parts per 100 000 000)	No cracks
Instantaneous thermal stiffening at -40°C	D 1043	Shall not exceed 4 times the stiffness measured at 23°C
Low temperature brittleness at -40°C	D 746 (Procedure B)	Pass

The table in the ninth paragraph of Section 51-1.12H(1), "Plain and Fabric Reinforced Elastomeric Bearing Pads," of the Standard Specifications is amended to read:

Tensile strength, percent	-15
Elongation at break, percent	-40; but not less than 300% total elongation of the material
Hardness, points	+10

The first paragraph in Section 51-1.12H(2), "Steel Reinforced Elastomeric Bearings," of the Standard Specifications is amended to read:

• Steel reinforced elastomeric bearings shall conform to the requirements for steel-laminated elastomeric bearings in ASTM Designation: D 4014 and the following:

A. The bearings shall consist of alternating steel laminates and internal elastomer laminates with top and bottom elastomer covers. Steel laminates shall have a nominal thickness of 1.9 mm (14 gage). Internal elastomer laminates shall have a thickness of 12 mm, and top and bottom elastomer covers shall each have a thickness of 6 mm. The combined thickness of internal elastomer laminates and top and bottom elastomer covers shall be equal to the bearing pad thickness shown on the plans. The elastomer cover to the steel laminates at the sides of the bearing shall be 3 mm. If guide pins or other devices are used to control the side cover over the steel laminates, any exposed portions of the steel laminates shall be sealed by vulcanized patching. The length, width, or diameter of the bearings shall be as shown on the plans.
B. The total thickness of the bearings shall be equal to the thickness of elastomer laminates and covers plus the thickness of the steel laminates.
C. Elastomer for steel reinforced elastomeric bearings shall conform to the provisions for elastomer in Section 51-1.12H(1), "Plain and Fabric Reinforced Elastomeric Bearing Pads."
D. A Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificates of Compliance," shall be furnished to the Engineer certifying that the bearings to be furnished conform to all of the above provisions. The Certificate of Compliance shall be supported by a certified copy of the results of tests performed by the manufacturer on the bearings.
E. One sample bearing shall be furnished to the Engineer from each lot of bearings to be furnished for the contract. Samples shall be available at least 3 weeks in advance of intended use. The sample bearing shall be one of the following:

Bearing Pad Thickness as Shown on the Plans	Sample Bearing
≤ 50 mm	Smallest complete bearing shown on the plans
> 50 mm	* 57 ± 3 mm thick sample not less than 200 mm x 305 mm in plan and cut by the manufacturer from the center of one of the thickest complete bearings

* The sample bearing plus remnant parts of the complete bearing shall be furnished to the Engineer.

F. A test specimen taken from the sample furnished to the Engineer will be tested in conformance with the requirements in California Test 663. Specimens tested shall show no indication of loss of bond between the elastomer and steel laminates.

The fourth paragraph in Section 51-1.14, "Waterstops," of the Standard Specifications is amended to read:

• Neoprene shall be manufactured from a vulcanized elastomeric compound containing neoprene as the sole elastomer and shall conform to the following:

Test	ASTM Designation	Requirement
Tensile strength, MPa	D 412	13.8 Min.
Elongation at break, percent	D 412	300 Min.
Compression set, 22 h at 70°C, percent	D 395 (Method B)	30 Max.
Tear strength, kN/m	D 624 (Die C)	26.3 Min.
Hardness (Type A)	D 2240	55±5
Ozone resistance 20% strain, 100 h at 38°C ±1°C	D 1149 (except 100± 20 parts per 100 000 000)	No cracks
Low temperature brittleness at -40°C	D 746 (Procedure B)	Pass
Flame resistance	C 542	Must not propagate flame
Oil Swell, ASTM Oil #3, 70 h at 100°C, volume change, percent	D 471	80 Max.
Water absorption, immersed 7 days at 70°C, change in mass, percent	D 471	15 Max.

The first sentence of the fourth paragraph in Section 51-1.17, "Finish Bridge Decks," of the Standard Specifications is amended to read:

• The smoothness of completed roadway surfaces of structures, approach slabs and the adjacent 15 m of approach pavement, and the top surfaces of concrete decks which are to be covered with another material, will be tested by the Engineer with a bridge profilograph in conformance with the requirements in California Test 547 and the requirements herein.

Section 51-1.17, "Finishing Bridge Decks," of the Standard Specifications is amended by deleting the seventh, thirteenth and fourteenth paragraphs.

The fourteenth paragraph in Section 51-1.23, "Payment," of the Standard Specifications is amended by deleting "and injecting epoxy in cracks".

SECTION 52: REINFORCEMENT

Issue Date: June 30, 2006

The first paragraph in Section 52-1.02A, "Bar Reinforcement," of the Standard Specifications is amended to read:

• Reinforcing bars shall be low-alloy steel deformed bars conforming to the requirements in ASTM Designation: A 706/A 706M, except that deformed or plain billet-steel bars conforming to the requirements in ASTM Designation: A 615/A 615M, Grade 280 or 420, may be used as reinforcement in the following 5 categories:

A. Slope and channel paving,
B. Minor structures,
C. Sign and signal foundations (pile and spread footing types),
D. Roadside rest facilities, and
E. Concrete barrier Type 50 and Type 60 series and temporary railing.

The third paragraph in Section 52-1.04, "Inspection," of the Standard Specifications is amended to read:

• A Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificates of Compliance," shall also be furnished for each shipment of epoxy-coated bar reinforcement or wire reinforcement certifying that the coated reinforcement conforms to the requirements in ASTM Designation: A 775/A 775M or A 884/A 884M respectively, and the provisions in Section 52-1.02B, "Epoxy-coated Reinforcement." The Certificate of Compliance shall include all of the certifications specified in ASTM Designation: A 775/A 775M or A 884/A 884M respectively.

The third paragraph of Section 52-1.06, "Bending," of the Standard Specifications is amended to read:

• Hooks and bends shall conform to the provisions of the Building Code Requirements for Structural Concrete of the American Concrete Institute.

Section 52-1.07 "Placing," of the Standard Specifications is amended by deleting item C of the third paragraph.

The eleventh paragraph in Section 52-1.07, "Placing," of the Standard Specifications is amended to read:

• Attention is directed to the provisions in Section 7-1.09, "Public Safety." Whenever a portion of an assemblage of bar reinforcing steel that is not encased in concrete exceeds 6 m in height, the Contractor shall submit to the Engineer for approval, in accordance with the provisions in Section 5-1.02, "Plans and Working Drawings," working drawings and design calculations for the temporary support system to be used. The working drawings and design calculations shall be signed by an engineer who is registered as a Civil Engineer in the State of California. The temporary support system shall be designed to resist all expected loads and shall be adequate to prevent collapse or overturning of the assemblage. If the installation of forms or other work requires revisions to or temporary release of any portion of the temporary support system, the working drawings shall show the support system to be used during each phase of construction. The minimum horizontal wind load to be applied to the bar reinforcing steel assemblage, or to a combined assemblage of reinforcing steel and forms, shall be the sum of the products of the wind impact area and the applicable wind pressure value for each height zone. The wind impact area is the total projected area of the cage normal to the direction of the applied wind. Wind pressure values shall be determined from the following table:

Height Zone (Meters above ground)	Wind Pressure Value (Pa)
0-9.0	960
9.1-15.0	1200
15.1-30.0	1440
Over 30	1675

Section 52-1.08 "Splicing," of the Standard Specifications is amended to read:

52-1.08 SPLICING

• Splices of reinforcing bars shall consist of lap splices, service splices, or ultimate butt splices.

• Splicing of reinforcing bars will not be permitted at a location designated on the plans as a "No-Splice Zone." At the option of the Contractor, reinforcing bars may be continuous at locations where splices are shown on the plans. The location of splices, except where shown on the plans, shall be determined by the Contractor using available commercial lengths where practicable.

• Unless otherwise shown on the plans, splices in adjacent reinforcing bars at any particular section shall be staggered. The minimum distance between staggered lap splices or mechanical lap splices shall be the same as the length required for a lap splice in the largest bar. The minimum distance between staggered butt splices shall be 600 mm, measured between the midpoints of the splices along a line which is centered between the axes of the adjacent bars.

52-1.08A Lap Splicing Requirements

• Splices made by lapping shall consist of placing reinforcing bars in contact and wiring them together, maintaining the alignment of the bars and the minimum clearances. Should the Contractor elect to use a butt welded or mechanical splice at a location not designated on the plans as requiring a service or ultimate butt splice, this splice shall conform to the testing requirements for service splice.

• Reinforcing bars shall not be spliced by lapping at locations where the concrete section is not sufficient to provide a minimum clear distance of 50 mm between the splice and the nearest adjacent bar. The clearance to the surface of the concrete specified in Section 52-1.07, "Placing," shall not be reduced.

• Reinforcing bars Nos. 43 and 57 shall not be spliced by lapping.

• Where ASTM Designations: A 615/A 615M, Grade 420 or A 706/A 706M reinforcing bars are required, the length of lap splices shall be as follows: Reinforcing bars No. 25 or smaller shall be lapped at least 45 diameters of the smaller bar joined; and reinforcing bars Nos. 29, 32, and 36 shall be lapped at least 60 diameters of the smaller bar joined, except when otherwise shown on the plans.

• Where ASTM Designation: A 615/A 615M, Grade 280 reinforcing bars are permitted, the length of lap splices shall be as follows: Reinforcing bars No. 25 or smaller shall be lapped at least 30 diameters of the smaller bar joined; and

reinforcing bars Nos. 29, 32, and 36 shall be lapped at least 45 diameters of the smaller bar joined, except when otherwise shown on the plans.

- Splices in bundled bars shall conform to the following:

A In bundles of 2 bars, the length of the lap splice shall be the same as the length of a single bar lap splice.
B. In bundles of 3 bars, the length of the lap splice shall be 1.2 times the length of a single bar lap splice.

- Welded wire fabric shall be lapped such that the overlap between the outermost cross wires is not less than the larger of:

A. 150 mm,
B. The spacing of the cross wires plus 50 mm, or
C. The numerical value of the longitudinal wire size (MW-Size Number) times 370 divided by the spacing of the longitudinal wires in millimeters.

52-1.08B Service Splicing and Ultimate Butt Splicing Requirements

- Service splices and ultimate butt splices shall be either butt welded or mechanical splices, shall be used at the locations shown on the plans, and shall conform to the requirements of these specifications and the special provisions.

52-1.08B(1) Mechanical Splices

- Mechanical splices to be used in the work shall be on the Department's current prequalified list before use. The prequalified list can be obtained from the Department's internet site listed in the special provisions or by contacting the Transportation Laboratory directly.
- When tested in conformance with the requirements in California Test 670, the total slip shall not exceed the values listed in the following table:

Reinforcing Bar Number	Total Slip (μm)
13	250
16	250
19	250
22	350
25	350
29	350
32	450
36	450
43	600
57	750

- Slip requirements shall not apply to mechanical lap splices, splices that are welded, or splices that are used on hoops.
- Splicing procedures shall be in conformance with the manufacturer's recommendations, except as modified in this section. Splices shall be made using the manufacturer's standard equipment, jigs, clamps, and other required accessories.
- Splice devices shall have a clear coverage of not less than 40 mm measured from the surface of the concrete to the outside of the splice device. Stirrups, ties, and other reinforcement shall be adjusted or relocated, and additional reinforcement shall be placed, if necessary, to provide the specified clear coverage to reinforcement.
- The Contractor shall furnish the following information for each shipment of splice material in conformance with the provisions in Section 6-1.07, "Certificates of Compliance:"

A. The type or series identification of the splice material including tracking information for traceability.
B. The bar grade and size number to be spliced.
C. A copy of the manufacturer's product literature giving complete data on the splice material and installation procedures.
D. A statement that the splicing systems and materials used in conformance with the manufacturer's installation procedures will develop the required tensile strengths, based on the nominal bar area, and will conform to the total slip requirements and the other requirements in these specifications.
E. A statement that the splice material conforms to the type of mechanical splice in the Department's current prequalified list.

52-1.08B(2) Butt Welded Splices

- Except for resistance butt welds, butt welded splices of reinforcing bars shall be complete joint penetration butt welds conforming to the requirements in AWS D 1.4, and these specifications.
- Welders and welding procedures shall be qualified in conformance with the requirements in AWS D 1.4.
- Only the joint details and dimensions as shown in Figure 3.2, "Direct Butt Joints," of AWS D 1.4, shall be used for making complete joint penetration butt welds of bar reinforcement. Split pipe backing shall not be used.
- Butt welds shall be made with multiple weld passes using a stringer bead without an appreciable weaving motion. The maximum stringer bead width shall be 2.5 times the diameter of the electrode and slagging shall be performed between each weld pass. Weld reinforcement shall not exceed 4 mm in convexity.
- Electrodes used for welding shall meet the minimum Charpy V-notch impact requirement of 27°J at –20°C.
- For welding of bars conforming to the requirements of ASTM Designation: A 615/A 615M, Grade 280 or Grade 420, the requirements of Table 5.2, "Minimum Preheat and Interpass Temperatures," of AWS D 1.4 are superseded by the following:

The minimum preheat and interpass temperatures shall be 200°C for Grade 280 bars and 300°C for Grade 420 bars. Immediately after completing the welding, at least 150 mm of the bar on each side of the splice shall be covered by an insulated wrapping to control the rate of cooling. The insulated wrapping shall remain in place until the bar has cooled below 90°C.

- When welding different grades of reinforcing bars, the electrode shall conform to Grade 280 bar requirements and the preheat shall conform to the Grade 420 bar requirements.
- In the event that any of the specified preheat, interpass, and post weld cooling temperatures are not met, all weld and heat affected zone metal shall be removed and the splice rewelded.
- Welding shall be protected from air currents, drafts, and precipitation to prevent loss of heat or loss of arc shielding. The method of protecting the welding area from loss of heat or loss of arc shielding shall be subject to approval by the Engineer.
- Reinforcing bars shall not be direct butt spliced by thermite welding.
- Procedures to be used in making welded splices in reinforcing bars, and welders employed to make splices in reinforcing bars, shall be qualified by tests performed by the Contractor on sample splices of the type to be used, before making splices to be used in the work.

52-1.08B(3) Resistance Butt Welds

- Shop produced resistance butt welds shall be produced by a fabricator who is approved by the Transportation Laboratory. The list of approved fabricators can be obtained from the Department's internet site or by contacting the Transportation Laboratory directly.
- Before manufacturing hoops using resistance butt welding, the Contractor shall submit to the Engineer the manufacturer's Quality Control (QC) manual for the fabrication of hoops. As a minimum, the QC manual shall include the following:

A. The pre-production procedures for the qualification of material and equipment.
B. The methods and frequencies for performing QC procedures during production.
C. The calibration procedures and calibration frequency for all equipment.
D. The welding procedure specification (WPS) for resistance welding.
E. The method for identifying and tracking lots.

52-1.08C Service Splice and Ultimate Butt Splice Testing Requirements

- The Contractor shall designate in writing a splicing Quality Control Manager (QCM). The QCM shall be responsible directly to the Contractor for 1) the quality of all service and ultimate butt splicing including the inspection of materials and workmanship performed by the Contractor and all subcontractors; and 2) submitting, receiving, and approving all correspondence, required submittals, and reports regarding service and ultimate splicing to and from the Engineer.
- The QCM shall not be employed or compensated by any subcontractor, or by other persons or entities hired by subcontractors, who will provide other services or materials for the project. The QCM may be an employee of the Contractor.
- Testing on prequalification and production sample splices shall be performed at the Contractor's expense, at an independent qualified testing laboratory. The laboratory shall not be employed or compensated by any subcontractor, or by other persons or entities hired by subcontractors who will provide other services or materials for the project, and shall have the following:

A. Proper facilities, including a tensile testing machine capable of breaking the largest size of reinforcing bar to be tested with minimum lengths as shown in this section.
B. A device for measuring the total slip of the reinforcing bars across the splice to the nearest 25 µm, that, when placed parallel to the longitudinal axis of the bar is able to simultaneously measure movement across the splice at 2 locations 180 degrees apart.
C. Operators who have received formal training for performing the testing requirements of ASTM Designation: A 370 and California Test 670.
D. A record of annual calibration of testing equipment performed by an independent third party that has 1) standards that are traceable to the National Institute of Standards and Technology, and 2) a formal reporting procedure, including published test forms.

• The Contractor shall provide samples for quality assurance testing in conformance with the provisions in these specifications and the special provisions.

• Prequalification and production sample splices shall be 1) a minimum length of 1.5 meters for reinforcing bars No. 25 or smaller, and 2 meters for reinforcing bars No. 29 or larger, with the splice located at mid-point; and 2) suitably identified before shipment with weatherproof markings that do not interfere with the Engineer's tamper-proof markings or seals. Splices that show signs of tampering will be rejected.

• Shorter length sample splice bars may be furnished if approved in writing by the Engineer.

• The Contractor shall ensure that sample splices are properly secured and transported to the testing laboratory in such a manner that no alterations to the physical conditions occur during transportation. Sample splices shall be tested in the same condition as received. No modifications to the sample splices shall be made before testing.

• Each set or sample splice, as defined herein, shall be identified as representing either a prequalification or production test sample splice.

• For the purpose of production testing, a lot of either service splices or ultimate butt splices is defined as 1) 150, or fraction thereof, of the same type of mechanical splices used for each bar size and each bar deformation pattern that is used in the work, or 2) 150, or fraction thereof, of complete joint penetration butt welded splices or resistance butt welded splices for each bar size used in the work. If different diameters of hoop reinforcement are shown on the plans, separate lots shall be used for each different hoop diameter.

• Whenever a lot of splices is rejected, the rejected lot and subsequent lots of splices shall not be used in the work until 1) the QCM performs a complete review of the Contractor's quality control process for these splices, 2) a written report is submitted to the Engineer describing the cause of failure for the splices in this lot and provisions for preventing similar failures in future lots, and 3) the Engineer has provided the Contractor with written notification that the report is acceptable. The Engineer shall have 3 working days after receipt of the report to provide notification to the Contractor. In the event the Engineer fails to provide notification within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in providing notification, the Contractor will be compensated for any resulting loss, and an extension of time will be granted in the same manner as provided for in Section 8-1.09, "Right of Way Delays."

52-1.08C(1) Splice Prequalification Report

• Before using any service splices or ultimate butt splices in the work, the Contractor shall submit a Splice Prequalification Report. The report shall include splice material information, names of the operators who will be performing the splicing, and descriptions of the positions, locations, equipment, and procedures that will be used in the work.

• The Splice Prequalification Report shall also include certifications from the fabricator for prequalifications of operators and procedures based on sample tests performed no more than 2 years before submitting the report. Each operator shall be certified by performing 2 sample splices for each bar size of each splice type that the operator will be performing in the work. For deformation-dependent types of splice devices, each operator shall be certified by performing 2 additional samples for each bar size and deformation pattern that will be used in the work.

• Prequalification sample splices shall be tested by an independent qualified testing laboratory and shall conform to the appropriate production test criteria and slip requirements specified herein. When epoxy-coated reinforcement is required, resistance butt welded sample splices shall have the weld flash removed by the same procedure as will be used in the work, before coating and testing. The Splice Prequalification Report shall include the certified test results for all prequalification sample splices.

• The QCM shall review and approve the Splice Prequalification Report before submitting it to the Engineer for approval. The Contractor shall allow 2 weeks for the review and approval of a complete report before performing any service splicing or ultimate butt splicing in the work. In the event the Engineer fails to complete the review within the time allowed, and in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays."

52-1.08C(2) Service Splice Test Criteria

• Service production and quality assurance sample splices shall be tensile tested in conformance with the requirements in ASTM Designation: A 370 and California Test 670 and shall develop a minimum tensile strength of not less than 550 MPa.

52-1.08C(2)(a) Production Test Requirements for Service Splices

• Production tests shall be performed by the Contractor's independent laboratory for all service splices used in the work. A production test shall consist of testing 4 sample splices prepared for each lot of completed splices. The samples shall be prepared by the Contractor using the same splice material, position, operators, location, and equipment, and following the same procedure as used in the work.

• At least one week before testing, the Contractor shall notify the Engineer in writing of the date when and the location where the testing of the samples will be performed.

• The 4 samples from each production test shall be securely bundled together and identified with a completed sample identification card before shipment to the independent laboratory. The card will be furnished by the Engineer. Bundles of samples containing fewer than 4 samples of splices shall not be tested.

• Before performing any tensile tests on production test sample splices, one of the 4 samples shall be tested for, and shall conform to, the requirements for total slip. Should this sample not meet the total slip requirements, one retest, in which the 3 remaining samples are tested for total slip, will be allowed. Should any of the 3 remaining samples not conform to the total slip requirements, all splices in the lot represented by this production test will be rejected.

• If 3 or more sample splices from a production test conform to the provisions in this Section 52-1.08C(2),"Service Splice Test Criteria," all splices in the lot represented by this production test will be considered acceptable, provided each of the 4 samples develop a minimum tensile strength of not less than 420 MPa.

• Should only 2 sample splices from a production test conform to the provisions in this Section 52-1.08C(2), "Service Splice Test Criteria," one additional production test shall be performed on the same lot of splices. This additional production test shall consist of testing 4 samples splices that have been randomly selected by the Engineer and removed by the Contractor from the actual completed lot of splices. Should any of the 4 splices from this additional test fail to conform to these provisions, all splices in the lot represented by these production tests will be rejected.

• If only one sample splice from a production test conforms to the provisions in this Section 52-1.08C(2), "Service Splice Test Criteria," all splices in the lot represented by this production test will be rejected.

• If a production test for a lot fails, the Contractor shall repair or replace all reinforcing bars from which sample splices were removed before the Engineer selects additional splices from this lot for further testing.

52-1.08C(2)(b) Quality Assurance Test Requirements for Service Splices

• For the first production test performed, and for at least one, randomly selected by the Engineer, of every 5 subsequent production tests, or portion thereof, the Contractor shall concurrently prepare 4 additional service quality assurance sample splices. These service quality assurance sample splices shall be prepared in the same manner as specified herein for service production sample splices.

• These 4 additional quality assurance sample splices shall be shipped to the Transportation Laboratory for quality assurance testing. The 4 sample splices shall be securely bundled together and identified by location and contract number with weatherproof markings before shipment. Bundles containing fewer than 4 samples of splices will not be tested. Sample splices not accompanied by the supporting documentation required in Section 52-1.08B(1), for mechanical splices, or in Section 52-1.08B(3), for resistance butt welds, will not be tested.

• Quality assurance testing will be performed in conformance with the requirements for service production sample splices in Section 52-1.08C(2)(a), "Production Test Requirements for Service Splices."

52-1.08C(3) Ultimate Butt Splice Test Criteria

• Ultimate production and quality assurance sample splices shall be tensile tested in conformance with the requirements described in ASTM Designation: A 370 and California Test 670.

• A minimum of one control bar shall be removed from the same bar as, and adjacent to, all ultimate prequalification, production, and quality assurance sample splices. Control bars shall be 1) a minimum length of one meter for reinforcing bars No. 25 or smaller and 1.5 meters for reinforcing bars No. 29 or larger, and 2) suitably identified before shipment with weatherproof markings that do not interfere with the Engineer's tamper-proof markings or seals. The portion of adjacent bar remaining in the work shall also be identified with weatherproof markings that correspond to its adjacent control bar.

• Each sample splice and its associated control bar shall be identified and marked as a set. Each set shall be identified as representing a prequalification, production, or quality assurance sample splice.

• The portion of hoop reinforcing bar, removed to obtain a sample splice and control bar, shall be replaced using a prequalified ultimate mechanical butt splice, or the hoop shall be replaced in kind.

• Reinforcing bars, other than hoops, from which sample splices are removed, shall be repaired using ultimate mechanical butt splices conforming to the provisions in Section 52-1.08C(1), "Splice Prequalification Report," or the bars shall be replaced in kind. These bars shall be repaired or replaced such that no splices are located in any "No Splice Zone" shown on the plans.

• Ultimate production and quality assurance sample splices shall rupture in the reinforcing bar either: 1) outside of the affected zone or 2) within the affected zone, provided that the sample splice has achieved at least 95 percent of the ultimate tensile strength of the control bar associated with the sample splice. In addition, necking of the bar, as defined in California Test 670, shall be evident at rupture regardless of whether the bar breaks inside or outside the affected zone.

• The affected zone is the portion of the reinforcing bar where any properties of the bar, including the physical, metallurgical, or material characteristics, have been altered by fabrication or installation of the splice.

• The ultimate tensile strength shall be determined for all control bars by tensile testing the bars to rupture, regardless of where each sample splice ruptures. If 2 control bars are tested for one sample splice, the bar with the lower ultimate tensile strength shall be considered the control bar.

52-1.08C(3)(a) Production Test Requirements for Ultimate Butt Splices

• Production tests shall be performed for all ultimate butt splices used in the work. A production test shall consist of testing 4 sets of sample splices and control bars removed from each lot of completed splices, except when quality assurance tests are performed.

• After the splices in a lot have been completed, and the bars have been epoxy-coated when required, the QCM shall notify the Engineer in writing that the splices in this lot conform to the specifications and are ready for testing. Except for hoops, sample splices will be selected by the Engineer at the job site. Sample splices for hoops will be selected by the Engineer either at the job site or a fabrication facility.

• After notification has been received, the Engineer will randomly select the 4 sample splices to be removed from the lot and place tamper-proof markings or seals on them. The Contractor shall select the adjacent control bar for each sample splice bar, and the Engineer will place tamper-proof markings or seals on them. These ultimate production sample splices and control bars shall be removed by the Contractor, and tested by an independent qualified testing laboratory.

• At least one week before testing, the Contractor shall notify the Engineer in writing of the date when and the location where the testing of the samples will be performed.

• A sample splice or control bar from any set will be rejected if a tamper-proof marking or seal is disturbed before testing.

• The 4 sets from each production test shall be securely bundled together and identified with a completed sample identification card before shipment to the independent laboratory. The card will be furnished by the Engineer. Bundles of samples containing fewer than 4 sets of splices shall not be tested.

• Before performing any tensile tests on production test sample splices, one of the 4 sample splices shall be tested for, and shall conform to, the requirements for total slip. Should this sample splice not meet these requirements, one retest, in which the 3 remaining sample splices are tested for total slip, will be allowed. Should any of the 3 remaining sample splices not conform to these requirements, all splices in the lot represented by this production test will be rejected.

• If 3 or more sample splices from a production test conform to the provisions in Section 52-1.08C(3), "Ultimate Butt Splice Test Criteria," all splices in the lot represented by this production test will be considered acceptable.

• Should only 2 sample splices from a production test conform to the provisions in Section 52-1.08C(3), "Ultimate Butt Splice Test Criteria," one additional production test shall be performed on the same lot of splices. Should any of the 4 sample splices from this additional test fail to conform to these provisions, all splices in the lot represented by these production tests will be rejected.

• If only one sample splice from a production test conforms to the provisions in Section 52-1.08C(3), "Ultimate Butt Splice Test Criteria," all splices in the lot represented by this production test will be rejected.

• If a production test for a lot fails, the Contractor shall repair or replace all reinforcing bars from which sample splices were removed, complete in place, before the Engineer selects additional splices from this lot for further testing.

• Production tests will not be required on repaired splices from a lot, regardless of the type of prequalified ultimate mechanical butt splice used to make the repair. However, should an additional production test be required, the Engineer may select any repaired splice for the additional production test.

52-1.08C(3)(b) Quality Assurance Test Requirements for Ultimate Butt Splices

• For the first production test performed, and for at least one, randomly selected by the Engineer, of every 5 subsequent production tests, or portion thereof, the Contractor shall concurrently prepare 4 additional ultimate quality assurance sample splices along with associated control bars.

• Each time 4 additional ultimate quality assurance sample splices are prepared, 2 of these quality assurance sample splice and associated control bar sets and 2 of the production sample splice and associated control bar sets, together, shall conform to the requirements for ultimate production sample splices in Section 52-1.08C(3)(a),"Production Test Requirements for Ultimate Butt Splices."

- The 2 remaining quality assurance sample splice and associated control bar sets, along with the 2 remaining production sample splice and associated control bar sets shall be shipped to the Transportation Laboratory for quality assurance testing. The 4 sets shall be securely bundled together and identified by location and contract number with weatherproof markings before shipment. Bundles containing fewer than 4 sets will not be tested.
- Quality assurance testing will be performed in conformance with the requirements for ultimate production sample splices in Section 52-1.08C(3)(a), "Production Test Requirements for Ultimate Butt Splices."

52-1.08C(3)(c) Nondestructive Splice Tests

- When the specifications allow for welded sample splices to be taken from other than the completed lot of splices, the Contractor shall meet the following additional requirements.
- Except for resistance butt welded splices, radiographic examinations shall be performed on 25 percent of all complete joint penetration butt welded splices from a production lot. The size of a production lot will be a maximum of 150 splices. The Engineer will select the splices which will compose the production lot and also the splices within each production lot to be radiographically examined.
- All required radiographic examinations of complete joint penetration butt welded splices shall be performed by the Contractor in conformance with the requirements in AWS D 1.4 and these specifications.
- Before radiographic examination, welds shall conform to the requirements in Section 4.4, "Quality of Welds," of AWS D 1.4.
- Should more than 12 percent of the splices which have been radiographically examined in any production lot be defective, an additional 25 percent of the splices, selected by the Engineer from the same production lot, shall be radiographically examined. Should more than 12 percent of the cumulative total of splices tested from the same production lot be defective, all remaining splices in the lot shall be radiographically examined.
- Additional radiographic examinations performed due to the identification of defective splices shall be at the Contractor's expense.
- All defects shall be repaired in conformance with the requirements in AWS D 1.4.
- The Contractor shall notify the Engineer in writing 48 hours before performing any radiographic examinations.
- The radiographic procedure used shall conform to the requirements in AWS D1.1, AWS D1.4, and the following:

Two exposures shall be made for each complete joint penetration butt welded splice. For each of the 2 exposures, the radiation source shall be centered on each bar to be radiographed. The first exposure shall be made with the radiation source placed at zero degrees from the top of the weld and perpendicular to the weld root and identified with a station mark of "0." The second exposure shall be at 90 degrees to the "0" station mark and shall be identified with a station mark of "90." When obstructions prevent a 90 degree placement of the radiation source for the second exposure, and when approved in writing by the Engineer, the source may be rotated, around the centerline of the reinforcing bar, a maximum of 25 degrees.

For field produced complete joint penetration butt welds, no more than one weld shall be radiographed during one exposure. For shop produced complete joint penetration butt welds, if more than one weld is to be radiographed during one exposure, the angle between the root line of each weld and the direction to the radiation source shall be not less than 65 degrees.

Radiographs shall be made by either X-ray or gamma ray. Radiographs made by X-ray or gamma rays shall have densities of not less than 2.3 nor more than 3.5 in the area of interest. A tolerance of 0.05 in density is allowed for densitometer variations. Gamma rays shall be from the iridium 192 isotope and the emitting specimen shall not exceed 4.45 mm in the greatest diagonal dimension.

The radiographic film shall be placed perpendicular to the radiation source at all times; parallel to the root line of the weld unless source placement determines that the film must be turned; and as close to the root of the weld as possible.

The minimum source to film distance shall be maintained so as to ensure that all radiographs maintain a maximum geometric unsharpness of 0.020 at all times, regardless of the size of the reinforcing bars.

Penetrameters shall be placed on the source side of the bar and perpendicular to the radiation source at all times. One penetrameter shall be placed in the center of each bar to be radiographed, perpendicular to the weld root, and adjacent to the weld. Penetrameter images shall not appear in the weld area.

When radiography of more than one weld is being performed per exposure, each exposure shall have a minimum of one penetrameter per bar, or 3 penetrameters per exposure. When 3 penetrameters per exposure are used, one penetrameter shall be placed on each of the 2 outermost bars of the exposure, and the remaining penetrameter shall be placed on a centrally located bar.

An allowable weld buildup of 4 mm may be added to the total material thickness when determining the proper penetrameter selection. No image quality indicator equivalency will be accepted. Wire penetrameters or penetrameter blocks shall not be used.

Penetrameters shall be sufficiently shimmed using a radiographically identical material. Penetrameter image densities shall be a minimum of 2.0 and a maximum of 3.6.

Radiographic film shall be Class 1, regardless of the size of reinforcing bars.

Radiographs shall be free of film artifacts and processing defects, including, but not limited to, streaks, scratches, pressure marks or marks made for the purpose of identifying film or welding indications.

Each splice shall be clearly identified on each radiograph and the radiograph identification and marking system shall be established between the Contractor and the Engineer before radiographic inspection begins. Film shall be identified by lead numbers only; etching, flashing or writing in identifications of any type will not be permitted. Each piece of film identification information shall be legible and shall include, as a minimum, the following information: Contractor's name, date, name of nondestructive testing firm, initials of radiographer, contract number, part number and weld number. The letter "R" and repair number shall be placed directly after the weld number to designate a radiograph of a repaired weld.

Radiographic film shall be developed within a time range of one minute less to one minute more than the film manufacturer's recommended maximum development time. Sight development will not be allowed.

Processing chemistry shall be done with a consistent mixture and quality, and processing rinses and tanks shall be clean to ensure proper results. Records of all developing processes and any chemical changes to the developing processes shall be kept and furnished to the Engineer upon request. The Engineer may request, at any time, that a sheet of unexposed film be processed in the presence of the Engineer to verify processing chemical and rinse quality.

The results of all radiographic interpretations shall be recorded on a signed certification and a copy kept with the film packet.

Technique sheets prepared in conformance with the requirements in ASME Boiler and Pressure Vessels Code, Section V, Article 2 Section T-291 shall also contain the developer temperature, developing time, fixing duration and all rinse times.

52-1.08D Reporting Test Results

- A Production Test Report for all testing performed on each lot shall be prepared by the independent testing laboratory performing the testing and submitted to the QCM for review and approval. The report shall be signed by an engineer who represents the laboratory and is registered as a Civil Engineer in the State of California. The report shall include, as a minimum, the following information for each test: contract number, bridge number, lot number and location, bar size, type of splice, length of mechanical splice, length of test specimen, physical condition of test sample splice and any associated control bar, any notable defects, total measured slip, ultimate tensile strength of each splice, and for ultimate butt splices, limits of affected zone, location of visible necking area, ultimate tensile strength and 95 percent of this ultimate tensile strength for each control bar, and a comparison between 95 percent of the ultimate tensile strength of each control bar and the ultimate tensile strength of its associated splice.
- The QCM must review, approve, and forward each Production Test Report to the Engineer for review before the splices represented by the report are encased in concrete. The Engineer will have 3 working days to review each Production Test Report and respond in writing after a complete report has been received. Should the Contractor elect to encase any splices before receiving notification from the Engineer, it is expressly understood that the Contractor will not be relieved of the responsibility for incorporating material in the work that conforms to the requirements of the plans and specifications. Material not conforming to these requirements will be subject to rejection. Should the Contractor elect to wait to encase splices pending notification by the Engineer, and in the event the Engineer fails to complete the review and provide notification within the time allowed, and if, in the opinion of the Engineer, the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays."
- Quality assurance test results for each bundle of 4 sets or 4 samples of splices will be reported in writing to the Contractor within 3 working days after receipt of the bundle by the Transportation Laboratory. In the event that more than one bundle is received on the same day, 2 additional working days shall be allowed for providing test results for each additional bundle received. A test report will be made for each bundle received. Should the Contractor elect to encase splices before receiving notification from the Engineer, it is expressly understood that the Contractor will not be relieved of the responsibility for incorporating material in the work that conforms to the requirements of the plans and specifications. Material not conforming to these requirements will be subject to rejection. Should the Contractor elect to wait to encase splices pending notification by the Engineer, and in the event the Engineer fails to complete the review within the time allowed, and in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays."

Section 52-1.11, "Payment," of the Standard Specifications is amended by adding the following paragraph after the seventh paragraph:

• If a portion or all of the reinforcing steel is epoxy-coated more than 480 air line kilometers from both Sacramento and Los Angeles, additional shop inspection expenses will be sustained by the State. Whereas it is and will be impracticable and extremely difficult to ascertain and determine the actual increase in these expenses, it is agreed that payment to the Contractor for furnishing the epoxy-coated reinforcement will be reduced $5000 for each epoxy-coating facility located more than 480 air line kilometers from both Sacramento and Los Angeles and an additional $3000 ($8000 total) for each epoxy-coating facility located more than 4800 air line kilometers from both Sacramento and Los Angeles.

SECTION 55: STEEL STRUCTURES

Issue Date: July 21, 2006

The third and fourth paragraphs of Section 55-1.01, "Description," of the Standard Specifications are amended to read:

• Details of connections for highway bridges selected for use by the Contractor shall conform to the AASHTO LRFD Bridge Design Specifications with Caltrans Amendments.

• Details of design selected by the Contractor, fabrication and workmanship, for steel railway bridges shall conform to the requirements of the Specifications for Steel Railway Bridges, for Fixed Spans Not Exceeding 400 Feet in Length of the AREMA, as set forth in the special provisions.

The third paragraph of Section 55-1.05, "Falsework," of the Standard Specifications is amended to read:

• Construction methods and equipment employed by the Contractor shall conform to the provisions in Section 7-1.02, "Load Limitations." Loads imposed on existing, new or partially completed structures shall not exceed the load carrying capacity of the structure, or portion of structure, as determined by the AASHTO LRFD Bridge Design Specifications with Caltrans Amendments.

The fourth and fifth paragraphs of Section 55-2.01, "Description," of the Standard Specifications are amended to read:

• All structural steel plate used for the fabrication of tension members, tension flanges, eyebars and hanger plates and for splice plates of tension members, tension flanges and eyebars shall meet the longitudinal Charpy V-notch impact value requirements specified herein. Sampling procedures shall conform to the requirements in ASTM Designation: A 673. The H (Heat) frequency of testing shall be used for structural steels conforming to the requirements in ASTM Designations: A 709/A 709M, Grades 36 [250], 50 [345], 50W [345W], and HPS 50W [345W]. The P (Piece) frequency of testing shall be used for structural steel conforming to the requirements in ASTM Designation: A 709/A 709M, Grades HPS 70W [485W], 100 [690], and 100W [690W]. Charpy V-notch impact values shall be determined in conformance with the requirements in ASTM Designation: E 23.

• Charpy V-notch (CVN) impact values shall conform to the following minimum values for non fracture critical members:

Material Conforming to ASTM Designation: A 709/A 709M	CVN Impact Value (Joules at Temp.)
Grade 36 [250]	20 at 4°C
Grade 50 [345]* (50 mm and under in thickness)	20 at 4°C
Grade 50W [345W]* (50 mm and under in thickness)	20 at 4°C
Grade 50 [345]* (Over 50 mm to 100 mm in thickness)	27 at 4°C
Grade 50W [345W]* (Over 50 mm to 100 mm in thickness)	27 at 4°C
Grade HPS 50W [345W]* (100 mm and under in thickness)	27 at -12°C
Grade HPS 70W [485]* (100 mm and under in thickness)	34 at -23°C
Grade 100 [490] (65 mm and under in thickness)	34 at -18°C
Grade 100W [490W] (Over 65 mm to 100 mm in thickness)	48 at -18°C

* If the yield point of the material exceeds 450 MPa, the temperature for the CVN impact value for acceptability shall be reduced 8°C for each increment of 70 MPa above 450 MPa.

Structural Steel Materials

Material	Specification
Structural steel:	
Carbon steel	ASTM: A 709/A 709M, Grade 36 [250] or {A 36/A 36M}a
High strength low alloy columbium vanadium steel	ASTM: A 709/A 709M, Grade 50 [345]or {A 572/A 572M, Grade 50 [345]}a
High strength low alloy structural steel	ASTM: A 709/A 709M, Grade 50W [345W], Grade HPS 50W [HSP 345W], or {A 588/A 588M}a
High strength low alloy structural steel plate	ASTM: A 709/A 709M, Grade HPS 70W [HPS 485W]
High-yield strength, quenched and tempered alloy steel plate suitable for welding	ASTM: A 709/A 709M, Grade 100 [690] and Grade 100W [690W], or {A 514/A 514M}a
Steel fastener components for general applications:	
Bolts and studs	ASTM: A 307
Headed anchor bolts	ASTM: A 307, Grade B, including S1 supplementary requirements
Nonheaded anchor bolts	ASTM: A 307, Grade C, including S1 supplementary requirements and S1.6 of AASHTO: M 314 supplementary requirements or AASHTO: M 314, Grade 36 or 55, including S1 supplementary requirements
High-strength bolts and studs	ASTM: A 449, Type 1
High-strength threaded rods	ASTM: A 449, Type 1
High-strength nonheaded anchor bolts	ASTM: A 449, Type 1
Nuts	ASTM: A 563, including Appendix X1b
Washers	ASTM: F 844

Components of high-strength steel fastener assemblies for use in structural steel joints:	
Bolts	ASTM: A 325, Type 1
Tension control bolts	ASTM: F 1852, Type 1
Nuts	ASTM: A 563, including Appendix X1b
Hardened washers	ASTM : F 436, Type 1, Circular, including S1 supplementary requirements
Direct tension indicators	ASTM: F 959, Type 325, zinc-coated
Carbon steel for forgings, pins and rollers	ASTM: A 668/A 668M, Class D
Alloy steel for forgings	ASTM: A 668/A 668M, Class G
Pin nuts	ASTM: A 36/A 36M
Carbon-steel castings	ASTM: A 27/A 27M, Grade 65-35, Class 1
Malleable iron castings	ASTM: A 47, Grade 32510 or A 47M, Grade 22010
Gray iron castings	ASTM: A 48, Class 30B
Carbon steel structural tubing	ASTM: A 500, Grade B or A 501
Steel pipe (Hydrostatic testing will not apply)	ASTM: A 53, Type E or S, Grade B; A 106, Grade B; or A 139, Grade B
Stud connectors	ASTM: A 108 and AASHTO/AWS D1.5

a Grades that may be substituted for the equivalent ASTM Designation: A 709 steel, at the Contractor's option, subject to the modifications and additions specified and to the requirements of A 709.

b Zinc-coated nuts that will be tightened beyond snug or wrench tight shall be furnished with a dry lubricant conforming to Supplementary Requirement S2 in ASTM Designation: A 563.

The first sentence of the first paragraph of Section 55-2.02, " Structural Steel," of the Standard Specifications is amended to read:

• Unless otherwise specified or shown on the plans, all structural steel plates, shapes, and bars shall conform to ASTM Designation: A 709/A 709M, Grade 50 [345].

Section 55-3.14, "Bolted Connections," of the Standard Specifications is amended by adding the following after the ninth paragraph:

• If a torque multiplier is used in conjunction with a calibrated wrench as a method for tightening fastener assemblies to the required tension, both the multiplier and the wrench shall be calibrated together as a system. The same length input and output sockets and extensions that will be used in the work shall also be included in the calibration of the system. The manufacturer's torque multiplication ratio shall be adjusted during calibration of the system, such that when this adjusted ratio is multiplied by the actual input calibrated wrench reading, the product is a calculated output torque that is within 2 percent of the true output torque. When this system is used in the work to perform any installation tension testing, rotational capacity testing, fastener tightening, or tension verification, it shall be used, intact as calibrated.

The second paragraph of Section 55-3.17, "Welding," of the Standard Specifications is amended to read:

• The minimum size of all fillet welds, except those to reinforce groove welds, shall be as shown in the following table:

Base Metal Thickness of the Thicker Part Joined (Millimeters)	*Minimum Size of Fillet Weld (Millimeters)
To 19 inclusive	6
Over 19	8

* Except that the weld size need not exceed the thickness of the thinner part joined.

The third paragraph of Section 55-3.19, "Bearings and Anchorages," is amended to read:

• Immediately before setting bearing assemblies or masonry plates directly on ground concrete surfaces, the Contractor shall thoroughly clean the surfaces of the concrete and the metal to be in contact and shall apply a coating of polysulfide or polyurethane caulking conforming to the requirements in ASTM Designation: C 920, Type S, Grade NS, Class 25, Use M, to contact areas to provide full bedding.

The sixth paragraph of Section 55-4.02, "Payment," of the Standard Specifications is amended to read:

• If a portion or all of the structural steel is fabricated more than 480 air line kilometers from both Sacramento and Los Angeles, additional shop inspection expenses will be sustained by the State. Whereas it is and will be impracticable and extremely difficult to ascertain and determine the actual increase in these expenses, it is agreed that payment to the Contractor for furnishing the structural steel from each fabrication site located more than 480 air line kilometers from both Sacramento and Los Angeles will be reduced $5000 or by an amount computed at $0.044 per kilogram of structural steel fabricated, whichever is greater, or in the case of each fabrication site located more than 4800 air line kilometers from both Sacramento and Los Angeles, payment will be reduced $8000 or by $0.079 per kilogram of structural steel fabricated, whichever is greater.

SECTION 56: SIGNS

Issue Date: November 2, 2004

Section 56-1.01, "Description," of the Standard Specifications is amended by deleting the third paragraph.

Section 56-1.02A, "Bars, Plates and Shapes," of the Standard Specifications is amended to read:

56-1.02A Bars, Plates, Shapes, and Structural Tubing

• Bars, plates, and shapes shall be structural steel conforming to the requirements in ASTM Designation: A 36/A 36M, except, at the option of the Contractor, the light fixture mounting channel shall be continuous-slot steel channel conforming to the requirements in ASTM Designation: A 1011/A 1011M, Designation SS, Grade 33[230], or aluminum Alloy 6063-T6 extruded aluminum conforming to the requirements in ASTM Designation: B 221 or B 221M.

• Structural tubing shall be structural steel conforming to the requirements in ASTM Designation: A 500, Grade B.

• Removable sign panel frames shall be constructed of structural steel conforming to the requirements in ASTM Designation: A 36/A 36M.

Section 56-1.02B, "Sheets," of the Standard Specifications is amended to read:

56-1.02B Sheets

• Sheets shall be carbon-steel sheets conforming to the requirements in ASTM Designation: A 1011/A 1011M, Designation SS, Grade 33[230].

• Ribbed sheet metal for box beam-closed truss sign structures shall be fabricated from galvanized sheet steel conforming to the requirements in ASTM Designation: A 653/A 653M, Designation SS, Grade 33[230]. Sheet metal panels shall be G 165 coating designation in conformance with the requirements in ASTM Designation: A 653/A 653M.

Section 56-1.02F, "Steel Walkway Gratings," of the Standard Specifications is amended to read:

56-1.02F Steel Walkway Gratings

• Steel walkway gratings shall be furnished and installed in conformance with the details shown on the plans and the following provisions:

A. Gratings shall be the standard product of an established grating manufacturer.
B. Material for gratings shall be structural steel conforming to the requirements in ASTM Designation: A 1011/A 1011M, Designation CS, Type B.
C. For welded type gratings, each joint shall be full resistance welded under pressure, to provide a sound, completely beaded joint.
D. For mechanically locked gratings, the method of fabrication and interlocking of the members shall be approved by the Engineer, and the fabricated grating shall be equal in strength to the welded type.

E. Gratings shall be accurately fabricated and free from warps, twists, or other defects affecting their appearance or serviceability. Ends of all rectangular panels shall be square. The tops of the bearing bars and cross members shall be in the same plane. Gratings distorted by the galvanizing process shall be straightened.

The sixth through the thirteenth paragraphs in Section 56-1.03, "Fabrication," of the Standard Specifications are amended to read:

- High-strength bolted connections, where shown on the plans, shall conform to the provisions in Section 55-3.14, "Bolted Connections," except that only fastener assemblies consisting of a high-strength bolt, nut, hardened washer, and direct tension indicator shall be used.
- High-strength fastener assemblies, and any other bolts, nuts, and washers attached to sign structures shall be zinc-coated by the mechanical deposition process.
- Nuts for high-strength bolts designated as snug-tight shall not be lubricated.
- An alternating snugging and tensioning pattern for anchor bolts and high-strength bolted splices shall be used. Once tensioned, high-strength fastener components and direct tension indicators shall not be reused.
- For bolt diameters less than 10 mm, the diameter of the bolt hole shall be not more than 0.80-mm larger than the nominal bolt diameter. For bolt diameters greater than or equal to 10 mm, the diameter of the bolt hole shall be not more than 1.6 mm larger than the nominal bolt diameter.
- Sign structures shall be fabricated into the largest practical sections prior to galvanizing.
- Ribbed sheet metal panels for box beam closed truss sign structures shall be fastened to the truss members by cap screws or bolts as shown on the plans, or by 4.76 mm stainless steel blind rivets conforming to Industrial Fasteners Institute, Standard IFI-114, Grade 51. The outside diameter of the large flange rivet head shall be not less than 15.88 mm in diameter. Web splices in ribbed sheet metal panels may be made with similar type blind rivets of a size suitable for the thickness of material being connected.
- Spalling or chipping of concrete structures shall be repaired by the Contractor at the Contractor's expense.
- Overhead sign supports shall have an aluminum identification plate permanently attached near the base, adjacent to the traffic side on one of the vertical posts, using either stainless steel rivets or stainless steel screws. As a minimum, the information on the plate shall include the name of the manufacturer, the date of manufacture and the contract number.

The fifth paragraph of Section 56-2.02B, "Wood Posts," of the Standard Specifications is amended to read:

- Douglas fir and Hem-Fir posts shall be treated in conformance with the provisions in Section 58, "Preservative Treatment of Lumber, Timber and Piling," and in conformance with AWPA Use Category System: UC4A, Commodity Specification A. Posts shall be incised and the minimum retention of preservative shall be as specified in AWPA Standards.

SECTION 57: TIMBER STRUCTURES

Issue Date: October 12, 2004

The second paragraph of Section 57-1.02A, "Structural Timber and Lumber," of the Standard Specifications is amended to read:

- When preservative treatment of timber and lumber is required, the treatment shall conform to the provisions in Section 58, "Preservative Treatment of Lumber, Timber and Piling," and AWPA's Use Category 4B. The type of treatment to be used will be shown on the plans or specified in the special provisions.

SECTION 58: PRESERVATIVE TREATMENT OF LUMBER, TIMBER AND PILING

Issue Date: November 18, 2005

The first paragraph of Section 58-1.02, "Treatment and Retention," of the Standard Specifications is amended to read:

- Timber, lumber, and piling shall be pressure treated after millwork is completed. Preservatives, treatment, and results of treatment shall conform to the requirements in AWPA Standards U1 and T1. Treatment of lumber and timber shall conform to the specified AWPA Use Category cited in the special provisions, on the plans, or elsewhere in these specifications.

The second paragraph of Section 58-1.02, "Treatment and Retention," of the Standard Specifications is deleted.

SECTION 59: PAINTING

Issue Date: June 30, 2006

The first paragraph of Section 59-1.02, "Weather Conditions," of the Standard Specifications is amended to read:

• Paint shall be applied only on thoroughly dry surfaces and during periods of favorable weather. Blast cleaning or application of solvent-borne paint will not be permitted when the atmospheric or surface temperature is at or below 2°C or above 38°C, or when the relative humidity exceeds 85 percent at the site of the work. Application of water-borne paint will not be permitted when the atmospheric or surface temperature is at or below 10°C, or above 38°C, or when the relative humidity exceeds 75 percent at the site of the work. Application of paint will not be permitted when the steel surface temperature is less than 3°C above the dew point, or when freshly painted surfaces may become damaged by rain, fog or condensation, or when it can be anticipated that the atmospheric temperature or relative humidity will not remain within the specified application conditions during the drying period, except as provided in the following paragraph for enclosures. If uncured paint is damaged by the elements, it shall be replaced or repaired by the Contractor at the Contractor's expense.

The second paragraph of Section 59-1.05, "Protection Against Damage," of the Standard Specifications is amended to read:

• Paint or paint stains on surfaces not designated to be painted shall be removed by the Contractor at the Contractor's expense and to the satisfaction of the Engineer.

Section 59-2.01, "General," of the Standard Specifications is amended by adding the following paragraphs after the first paragraph:

• Unless otherwise specified, no painting Contractors or subcontractors will be permitted to commence work without having the following current "SSPC: The Society for Protective Coatings" (formerly the Steel Structures Painting Council) certifications in good standing:

A. For cleaning and painting structural steel in the field, certification in conformance with the requirements in Qualification Procedure No. 1, "Standard Procedure For Evaluating Painting Contractors (Field Application to Complex Industrial Structures)" (SSPC-QP 1).
B. For removing paint from structural steel, certification in conformance with the requirements in Qualification Procedure No. 2, "Standard Procedure For Evaluating Painting Contractors (Field Removal of Hazardous Coatings from Complex Structures)" (SSPC-QP 2).
C. For cleaning and painting structural steel in a permanent painting facility, certification in conformance with the requirements in Qualification Procedure No. 3, "Standard Procedure For Evaluating Qualifications of Shop Painting Applicators" (SSPC-QP 3). The AISC's Sophisticated Paint Endorsement (SPE) quality program will be considered equivalent to SSPC-QP 3.

The third paragraph of Section 59-2.03, "Blast Cleaning," of the Standard Specifications is amended to read:

• Exposed steel or other metal surfaces to be blast cleaned shall be cleaned in conformance with the requirements in Surface Preparation Specification No. 6, "Commercial Blast Cleaning," of the "SSPC: The Society for Protective Coatings." Blast cleaning shall leave all surfaces with a dense, uniform, angular anchor pattern of not less than 35 µm as measured in conformance with the requirements in ASTM Designation: D 4417.

The first paragraph of Section 59-2.06, "Hand Cleaning," of the Standard Specifications is amended to read:

• Dirt, loose rust and mill scale, or paint which is not firmly bonded to the surfaces shall be removed in conformance with the requirements in Surface Preparation Specification No. 2, "Hand Tool Cleaning," of the "SSPC: The Society for Protective Coatings." Edges of old remaining paint shall be feathered.

The third and fourth paragraphs of Section 59-2.12, "Painting," of the Standard Specifications are amended to read:

- Contact surfaces of stiffeners, railings, built up members or open seam exceeding 6 mils in width that would retain moisture, shall be caulked with polysulfide or polyurethane sealing compound conforming to the requirements in ASTM Designation: C 920, Type S, Grade NS, Class 25, Use O, or other approved material.
- The dry film thickness of the paint will be measured in place with a calibrated Type 2 magnetic film thickness gage in conformance with the requirements in SSPC-PA 2, "Measurement of Dry Coating Thickness with Magnetic Gages," of the "SSPC: The Society for Protective Coatings," except that there shall be no limit to the number or location of spot measurements to verify compliance with specified thickness requirements.

SECTION 72: SLOPE PROTECTION

Issue Date: November 18, 2005

The sixth paragraph of Section 72-4.04, "Construction," of the Standard Specifications is amended to read:

- Pervious backfill material, if required by the plans, shall be placed as shown. A securely tied sack containing 0.03-m^3 of pervious backfill material shall be placed at each weep hole and drain hole. The sack material shall conform to the provisions in Section 88-1.03, "Filter Fabric."

SECTION 75: MISCELLANEOUS METAL

Issue Date: June 30, 2006

The table in the tenth paragraph of Section 75-1.02, "Miscellaneous Iron and Steel," of the Standard Specifications is amended to read:

Material	Specification
Steel bars, plates and shapes	ASTM Designation: A 36/A 36M or A 575, A 576 (AISI or M Grades 1016 through 1030)
Steel fastener components for general applications:	
Bolts and studs	ASTM Designation: A 307
Headed anchor bolts	ASTM Designation: A 307, Grade B, including S1 supplementary requirements
Nonheaded anchor bolts	ASTM Designation: A 307, Grade C, including S1 supplementary requirements and S1.6 of AASHTO Designation: M 314 supplementary requirements or AASHTO Designation: M 314, Grade 36 or 55, including S1 supplementary requirements
High-strength bolts and studs, threaded rods, and nonheaded anchor bolts	ASTM Designation: A 449, Type 1
Nuts	ASTM Designation: A 563, including Appendix X1*
Washers	ASTM Designation: F 844
Components of high-strength steel fastener assemblies for use in structural steel joints:	
Bolts	ASTM Designation: A 325, Type 1
Tension control bolts	ASTM Designation: F 1852, Type 1
Nuts	ASTM Designation: A 563, including Appendix X1*
Hardened washers	ASTM Designation: F 436, Type 1, Circular, including S1 supplementary requirements
Direct tension indicators	ASTM Designation: F 959, Type 325, zinc-coated
Stainless steel fasteners (Alloys 304 & 316) for general applications:	
Bolts, screws, studs, threaded rods, and nonheaded anchor bolts	ASTM Designation: F 593 or F 738M
Nuts	ASTM Designation: F 594 or F 836M
Washers	ASTM Designation: A 240/A 240M and ANSI B 18.22M
Carbon-steel castings	ASTM Designation: A 27/A 27M, Grade 65-35 [450-240], Class 1
Malleable iron castings	ASTM Designation: A 47, Grade 32510 or A 47M, Grade 22010
Gray iron castings	ASTM Designation: A 48, Class 30B
Ductile iron castings	ASTM Designation: A 536, Grade 65-45-12
Cast iron pipe	Commercial quality
Steel pipe	Commercial quality, welded or extruded
Other parts for general applications	Commercial quality

* Zinc-coated nuts that will be tightened beyond snug or wrench tight shall be furnished with a dyed dry lubricant conforming to Supplementary Requirement S2 in ASTM Designation: A 563.

The second paragraph in Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications is amended to read:

• Miscellaneous bridge metal shall consist of the following, except as further provided in Section 51-1.19, "Utility Facilities," and in the special provisions:

A. Bearing assemblies, equalizing bolts and expansion joint armor in concrete structures.
B. Expansion joint armor in steel structures.
C. Manhole frames and covers, frames and grates, ladder rungs, guard posts and access door assemblies.
D. Deck drains, area drains, retaining wall drains, and drainage piping, except drainage items identified as "Bridge Deck Drainage System" in the special provisions.

The seventh paragraph of Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications is amended to read:

• Sheet steel for access doors shall be galvanized sheet conforming to the requirements in ASTM Designation: A 653/A 653M, Coating Designation Z600 {G210}.

The table in the eighteenth paragraph of Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications is amended to read:

Stud Diameter (millimeters)	Sustained Tension Test Load (kilonewtons)
29.01-33.00	137.9
23.01-29.00	79.6
21.01-23.00	64.1
* 18.01-21.00	22.2
15.01-18.00	18.2
12.01-15.00	14.2
9.01-12.00	9.34
6.00-9.00	4.23

* Maximum stud diameter permitted for mechanical expansion anchors.

The table in the nineteenth paragraph of Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications is amended to read:

Stud Diameter (millimeters)	Ultimate Tensile Load (kilonewtons)
30.01-33.00	112.1
27.01-30.00	88.1
23.01-27.00	71.2
20.01-23.00	51.6
16.01-20.00	32.0
14.01-16.00	29.4
12.00-14.00	18.7

The table in the twenty-second paragraph of Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications is amended to read:

Installation Torque Values, (newton meters)

Stud Diameter (millimeters)	Shell Type Mechanical Expansion Anchors	Integral Stud Type Mechanical Expansion Anchors	Resin Capsule Anchors and Cast-in-Place Inserts
29.01-33.00	—	—	540
23.01-29.00	—	—	315
21.01-23.00	—	—	235
18.01-21.00	110	235	200
15.01-18.00	45	120	100
12.01-15.00	30	65	40
9.01-12.00	15	35	24
6.00-9.00	5	10	—

The twenty-fourth paragraph of Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications is amended to read:

- Sealing compound, for caulking and adhesive sealing, shall be a polysulfide or polyurethane material conforming to the requirements in ASTM Designation: C 920, Type S, Grade NS, Class 25, Use O.

The third paragraph in Section 75-1.035, "Bridge Joint Restrainer Units," of the Standard Specifications is amended to read:

- Cables shall be 19 mm preformed, 6 x 19, wire strand core or independent wire rope core (IWRC), galvanized, and in conformance with the requirements in Federal Specification RR-W-410D, right regular lay, manufactured of improved plow steel with a minimum breaking strength of 200 kN. Two certified copies of mill test reports of each manufactured length of cable used shall be furnished to the Engineer.

The second paragraph in Section 75-1.05, "Galvanizing," of the Standard Specifications is amended to read:

- At the option of the Contractor, material thinner than 3.2 mm shall be galvanized either before fabrication in conformance with the requirements of ASTM Designation: A 653/A 653M, Coating Designation Z600, or after fabrication in conformance with the requirements of ASTM Designation: A 123, except that the weight of zinc coating shall average not less than 365 g per square meter of actual surface area with no individual specimen having a coating weight of less than 305 g per square meter.

SECTION 80: FENCES

Issue Date: October 12, 2004

The second paragraph of Section 80-3.01B(2), "Treated Wood Posts and Braces," of the Standard Specifications is amended to read:

- Posts and braces to be treated shall be pressure treated in conformance with the provisions in Section 58, "Preservative Treatment of Lumber, Timber and Piling," and AWPA Use Category System: UC4A, Commodity Specification A or B.

SECTION 81: MONUMENTS

Issue Date: June 30, 2006

The fifth paragraph of Section 81-1.02, "Materials," of the Standard Specifications is amended to read:

- At the option of the Contractor, the frame and cover for Type B and Type D survey monuments shall be fabricated from either cast steel or gray cast iron. The covers shall fit into the frames without rocking.

The seventh paragraph of Section 81-1.02, "Materials," of the Standard Specifications is amended to read:

• Granular material for Type B and Type D survey monuments shall be gravel, crushed gravel, crushed rock or any combination thereof. Granular material shall not exceed 37.5 mm in greatest dimension.

SECTION 82: MARKERS AND DELINEATORS

Issue Date: June 30, 2006

The first paragraph of Section 82-1.02B, "Metal Posts," of the Standard Specifications is amended to read:

• Steel for metal posts shall conform to the requirements in ASTM Designation: A 36/A 36M. The posts shall be galvanized in conformance with the requirements in Section 75-1.05, "Galvanizing."

The third paragraph of Section 82-1.02D, "Target Plates," of the Standard Specifications is amended to read:

• The zinc-coated steel sheet shall conform to the requirements in ASTM Designation: A 653/A 653M, Classification: Commercial Steel (CS Types A, B and C). The steel sheets shall be galvanized in conformance with the requirements in Section 75-1.05, "Galvanizing." The zinc-coated surface shall be prepared for painting in a manner designed to produce optimum paint adherence. The surface preparation shall be accomplished without damaging or removing the zinc coating. Any evidence of damage or removal of the zinc coating shall be cause for rejection of the entire lot.

The eleventh paragraph of Section 82-1.02D, "Target Plates," of the Standard Specifications is amended to read:

• When tested in conformance with the requirements in California Test 671, the painted metal target plates shall, in general, have satisfactory resistance to weathering, humidity, salt spray and chemicals; the enamel coating shall have satisfactory adherence and impact resistance, a pencil lead hardness of HB minimum, 60° specular gloss of 80 percent minimum, an excitation purity of 3 percent maximum as received and after 1000 hours in an artificial weathering device in conformance with the requirements in ASTM Designation: G 155, Table X3.1, Cycle 1, and a daylight luminous directional reflectance ("Y" value) of 70 minimum.

The second paragraph of Section 82-1.02F, "Reflectors," of the Standard Specifications is amended to read:

• Reflectors for flexible target plates on Type K object markers and target plates on Class 2 delineators, and reflectors for Class 1 delineators shall be made from impact resistant retroreflective sheeting as specified in the special provisions. The color of the retroreflective sheeting shall conform to the color designated on the plans and the Chromaticity Coordinates specified in ASTM Designation: D 4956, or the PR color number specified by the Federal Highway Administration's Color Tolerance Chart.

The fourth paragraph of Section 82-1.02F, "Reflectors," of the Standard Specifications is amended to read:

The instrumental method of determining color shall conform to the requirements specified in ASTM Designation: D 4956. In the event of any dispute concerning the test results of instrumental testing, the visual test shall prevail.

SECTION 83: RAILINGS AND BARRIERS

Issue Date: January 28, 2005

The first paragraph of Section 83-1.02B, "Metal Beam Guard Railing," of the Standard Specifications is amended to read:

• The rail elements, backup plates, terminal sections, end and return caps, bolts, nuts and other fittings shall conform to the requirements in AASHTO Designation: M 180, except as modified in this Section 83-1.02B and as specified in Section 83-1.02. The rail elements, backup plates, terminal sections, end and return caps shall conform to Class A, Type 1 W-Beam guard railing as shown in AASHTO Designation: M 180. The edges and center of the rail element shall contact each post block. Rail element joints shall be lapped not less than 316 mm and bolted. The rail metal, in addition to conforming to the requirements in AASHTO Designation: M 180, shall withstand a cold bend, without cracking, of 180 degrees around a mandrel of a diameter equal to 2.5 times the thickness of the plate.

The ninth paragraph in Section 83-1.02B, "Metal Beam Guard Railing," of the Standard Specifications is amended to read:

• The grades and species of wood posts and blocks shall be No. 1 timbers (also known as No. 1 structural) Douglas fir or No. 1 timbers Southern yellow pine. Wood posts and blocks shall be graded in conformance with the provisions in Section 57-2, "Structural Timber," of the Standard Specifications, except allowances for shrinkage after mill cutting shall in no case exceed 5 percent of the American Lumber Standards minimum sizes, at the time of installation.

The eleventh paragraph in Section 83-1.02B, "Metal Beam Guard Railing," of the Standard Specifications is amended to read:

• After fabrication, wood posts and blocks shall be pressure treated in conformance with Section 58, "Preservative Treatment of Lumber, Timber and Piling," and AWPA Use Category System: UC4A, Commodity Specification A.

The twelfth paragraph in Section 83-1.02B, "Metal Beam Guard Railing," of the Standard Specifications is amended to read:

• If copper naphthenate, ammoniacal copper arsenate, chromated copper arsenate, ammoniacal copper zinc arsenate, ammoniacal copper quat or copper azole is used to treat the wood posts and blocks, the bolt holes shall be treated as follows:

A. Before the bolts are inserted, bolt holes shall be filled with a grease, recommended by the manufacturer for corrosion protection, which will not melt or run at a temperature of 65°C.

The twenty-fourth paragraph of Section 83-1.02B, "Metal Beam Guard Railing," of the Standard Specifications is amended to read:

• End anchor assemblies and rail tensioning assemblies for metal beam guard railing shall be constructed as shown on the plans and shall conform to the following provisions:

An end anchor assembly (Type SFT) for metal beam guard railing shall consist of an anchor cable, an anchor plate, a wood post, a steel foundation tube, a steel soil plate and hardware.

An end anchor assembly (Type CA) for metal beam guard railing shall consist of an anchor cable, an anchor plate, a single anchor rod or double anchor rods, hardware and one concrete anchor.

A rail tensioning assembly for metal beam guard railing shall consist of an anchor cable, an anchor plate, and hardware.

The anchor plate, metal plates, steel foundation tubes and steel soil plate shall be fabricated of steel conforming to the requirements in ASTM Designation: A 36/A 36M.

The anchor rods shall be fabricated of steel conforming to the requirements in ASTM Designation: A 36/A 36M, A 441 or A 572, or ASTM Designation: A 576, Grades 1018, 1019, 1021 or 1026. The eyes shall be hot forged or formed with full penetration welds. After fabrication, anchor rods with eyes that have been formed with any part of the eye below 870°C during the forming operation or with eyes that have been closed by welding shall be thermally stress relieved prior to galvanizing. The completed anchor rod, after galvanizing, shall develop a strength of 220 kN.

In lieu of built-up fabrication of anchor plates as shown on the plans, anchor plates may be press-formed from steel plate, with or without welded seams.

All bolts and nuts shall conform to the requirements in ASTM Designation: A 307, unless otherwise specified in the special provisions or shown on the plans.

Anchor cable shall be 19-mm preformed, 6 x 19, wire strand core or independent wire rope core (IWRC), galvanized in conformance with the requirements in Federal Specification RR-W-410D, right regular lay, manufactured of improved plow steel with a minimum breaking strength of 200 kN. Two certified copies of mill test reports of each manufactured length of cable used shall be furnished to the Engineer. The overall length of each cable anchor assembly shall be as shown on the plans, but shall be a minimum of 2 m.

Where shown on the plans, cable clips and a cable thimble shall be used to attach cable to the anchor rod. Thimbles shall be commercial quality, galvanized steel. Cable clips shall be commercial quality drop forged galvanized steel.

The swaged fitting shall be machined from hot-rolled bars of steel conforming to AISI Designation: C 1035, and shall be annealed suitable for cold swaging. The swaged fitting shall be galvanized before swaging. A lock pin hole to accommodate a 6-mm, plated, spring steel pin shall be drilled through the head of the swage fitting to retain the stud in proper position. The manufacturer's identifying mark shall be stamped on the body of the swage fitting.

The 25-mm nominal diameter stud shall conform to the requirements in ASTM Designation: A 449 after galvanizing. Prior to galvanizing, a 10-mm slot for the locking pin shall be milled in the stud end.

The swaged fittings, stud and nut assembly shall develop the specified breaking strength of the cable.

The cable assemblies shall be shipped as a complete unit including stud and nut.

Clevises shall be drop forged galvanized steel and shall develop the specified breaking strength of the cable.

One sample of cable properly fitted with swaged fitting and right hand thread stud at both ends as specified above, including a clevis when shown on the plans, one meter in total length, shall be furnished the Engineer for testing.

The portion of the anchor rod to be buried in earth shall be coated with a minimum 0.5-mm thickness of coal tar enamel conforming to AWWA Standard: C203 or a coal tar epoxy conforming to the requirements in Steel Structures Painting Council Paint Specification No. 16, Coal-Tar Epoxy-Polymide Black Paint or Corps of Engineers Specification, Formula C-200a, Coal-Tar Epoxy Paint.

Metal components of the anchor assembly shall be fabricated in conformance with good shop practice and shall be hot-dip galvanized in conformance with the provisions in Section 75-1.05, "Galvanizing."

Anchor cables shall be tightened after the concrete anchor has cured for at least 5 days.

Concrete used to construct anchors for end anchor assemblies shall be Class 3 or minor concrete conforming to the provisions in Section 90, "Portland Cement Concrete."

Concrete shall be placed against undisturbed material of the excavated holes for end anchors. The top 300 mm of holes shall be formed, if required by the Engineer.

Reinforcing steel in concrete anchors for end anchor assemblies shall conform to the provisions in Section 52, "Reinforcement."

The second paragraph in Section 83-1.02D, "Steel Bridge Railing," of the Standard Specifications is amended to read:

- Structural shapes, tubing, plates, bars, bolts, nuts, and washers shall be structural steel conforming to the provisions in Section 55-2, "Materials." Other fittings shall be commercial quality.

The second and third paragraphs in Section 83-1.02E, "Cable Railing," of the Standard Specifications are replaced with the following paragraph:

- Pipe for posts and braces shall be standard steel pipe or pipe that conforms to the provisions in Section 80-4.01A, "Posts and Braces."

The fourteenth paragraph in Section 83-1.02I, "Chain Link Railing," of the Standard Specifications is amended to read:

- Chain link fabric shall be either 11-gage Type I zinc coated fabric conforming to the requirements in AASHTO Designation: M 181 or 11-gage Type IV polyvinyl chloride (PVC) coated fabric conforming to the requirements in Federal Specification RR-F-191/1D.

The second paragraph of Section 83-1.03, "Measurement," of the Standard Specifications is amended to read:

- Except for metal beam guard railing within the pay limits of a terminal system end treatment or transition railing (Type WB), metal beam guard railing will be measured by the meter along the face of the rail element from end post to end post of the completed railing at each installation. The point of measurement at each end post will be the center of the bolt attaching the rail element to the end post.

The seventh paragraph of Section 83-1.03, "Measurement," of the Standard Specifications is amended to read:

- The quantities of end anchor assemblies (Type SFT or Type CA) and rail tensioning assemblies will be measured as units determined from actual count. An end anchor assembly (Type CA) with 2 cables attached to one concrete anchor will be counted as one terminal anchor assembly (Type CA) for measurement and payment.

The eighth paragraph of Section 83-1.03, "Measurement," of the Standard Specifications is amended to read:

- The quantities of return and end caps and the various types of terminal sections for metal beam guard railing will be determined as units from actual count.

The third paragraph of Section 83-1.04, "Payment," of the Standard Specifications is amended to read:

• The contract unit prices paid for end anchor assembly (Type SFT), end anchor assembly (Type CA), and rail tensioning assembly shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all work involved in constructing the end anchor assemblies, complete in place, including drilling anchor plate bolt holes in rail elements, driving steel foundation tubes, excavating for concrete anchor holes and disposing of surplus material, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

The fourth paragraph of Section 83-1.04, "Payment," of the Standard Specifications is amended to read:

• The contract unit prices paid for return caps, end caps, and the various types of terminal sections for metal beam guard railing shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in installing terminal sections, return and end caps, complete in place, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

The second paragraph of Section 83-2.02B, "Thrie Beam Barrier," of the Standard Specifications is amended to read:

• Rail elements, backup plates, terminal connectors, terminal sections, and return caps shall conform to Class A, Type 1 thrie beam guard railing as shown in AASHTO Designation: M 180.

The fourteenth paragraph of Section 83-2.02B, "Thrie Beam Barrier," of the Standard Specifications is amended to read:

• All metal work shall be fabricated in the shop, and no punching, cutting or welding will be permitted in the field. Rail elements shall be lapped so that the exposed ends will not face approaching traffic. Terminal sections and return caps shall be installed in conformance with the manufacturer's recommendation.

The first paragraph in Section 83-2.02D(2), "Materials," of the Standard Specifications is amended to read:

• Type 50 and 60 series concrete barriers shall be constructed of minor concrete conforming to the provisions in Section 90-10, "Minor Concrete," except as follows:

a. The maximum size of aggregate used for extruded or slip-formed concrete barriers shall be at the option of the Contractor, but in no case shall the maximum size be larger than 37.5-mm or smaller than 9.5-mm.
b. If the 9.5-mm maximum size aggregate grading is used to construct extruded or slip-formed concrete barriers, the cementitious material content of the minor concrete shall be not less than 400 kg/m^3.

The third paragraph in Section 83-2.02D(2), "Materials," of the Standard Specifications is amended to read:

• The concrete paving between the tops of the 2 walls of concrete barrier (Types 50E, 60E, 60GE, and 60SE) and the optional concrete slab at the base between the 2 walls of concrete barrier (Types 50E, 60E, 60GE, and 60SE) shall be constructed of minor concrete conforming to the provisions of Section 90-10, except that the minor concrete shall contain not less than 300 kg of cementitious material per cubic meter.

The first paragraph of Section 83-2.03, "Measurement," of the Standard Specifications is amended to read:

• Except for single thrie beam barrier within the pay limits of transition railing (Type STB), single thrie beam barrier will be measured by the meter from end post to end post along the face of the rail element of the installed barrier. Single thrie beam barriers constructed on each side of piers under structures or other obstructions will be measured for payment along each line of the installed barrier.

The second paragraph of Section 83-2.03, "Measurement," of the Standard Specifications is amended to read:

• Except for double thrie beam barrier within the pay limits of transition railing (Type DTB), double thrie beam barrier will be measured by the meter from end post to end post along the center line of the installed barrier.

The fifth paragraph of Section 83-2.03, "Measurement," of the Standard Specifications is amended to read:

• The quantity of return caps, terminal connectors and the various types of terminal sections for single and double thrie beam barriers will be determined as units from actual count.

The sixth paragraph of Section 83-2.03, "Measurement," of the Standard Specifications is amended to read:

- The quantity of end anchor assemblies will be paid for as units determined from actual count.

The first paragraph of Section 83-2.04, "Payment," of the Standard Specifications is amended to read:

- The various types of thrie beam barrier, measured as specified in Section 83-2.03, "Measurement," will be paid for at the contract price per meter for single or double thrie beam barrier, whichever applies, and the contract unit price or prices for end anchor assemblies, return caps, terminal connectors and the various types of terminal sections.

The second paragraph of Section 83-2.04, "Payment," of the Standard Specifications is amended to read:

- The above prices and payments shall include full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in constructing the barrier, complete in place, including drilling holes for wood posts, driving posts, backfilling the space around posts, excavating and backfilling end anchor assembly holes, connecting thrie beam barrier to concrete surfaces and disposing of surplus excavated material, and for furnishing, placing, removing and disposing of the temporary railing for closing the gap between existing barrier and the barrier being constructed as shown on the plans, and as specified in these specifications and the special provisions, and as directed by the Engineer.

The fourth paragraph in Section 83-2.04, "Payments," of the Standard Specifications is amended to read:

- Steel plate barrier attached to concrete barrier at overhead sign foundations, electroliers, drainage structures, and other locations shown on the plans will be measured and paid for as the type of concrete barrier attached thereto.

SECTION 84: TRAFFIC STRIPES AND PAVEMENT MARKINGS

Issue Date: July 21, 2006

The first paragraph of Section 84-2.02, "Materials," of the Standard Specifications is amended to read:

- The thermoplastic material shall conform to State Specification PTH-02SPRAY, PTH-02HYDRO or PTH-02ALKYD. Glass beads to be applied to the surface of the molten thermoplastic material shall conform to the requirements of State Specification 8010-004 (Type II).

The first paragraph of Section 84-3.02, "Materials," of the Standard Specifications is amended to read:

- Paint for traffic stripes and pavement markings shall conform to the following State Specifications:

Paint Type	Color	State Specification No.
Waterborne Traffic Line	White, Yellow and Black	PTWB-01
Acetone-Based	White, Yellow and Black	PT-150VOC(A)
Waterborne Traffic Line for disabled persons' parking, and other curb markings	Blue, Red and Green	Federal Specification No. TT-P-1952D

The fourth paragraph of Section 84-3.02, "Materials," of the Standard Specifications is amended to read:

- The kind of paint to be used (waterborne or acetone-based) shall be determined by the Contractor based on the time of year the paint is applied and local air pollution control regulations.

The first paragraph of Section 84-3.05, "Application," of the Standard Specifications is amended to read:

Traffic stripes and pavement markings shall be applied only on dry surfaces and only during periods of favorable weather. Painting shall not be performed when the atmospheric temperature is below 5°C when using acetone-based paint or

below 10°C when using water borne paint; when freshly painted surfaces may become damaged by rain, fog, or condensation; nor when it can be anticipated that the atmospheric temperature will drop below the aforementioned 5°C or 10°C temperatures during the drying period.

The third paragraph of Section 84-3.05, "Application," of the Standard Specifications is deleted.

The tenth paragraph of Section 84-3.05, "Application," of the Standard Specifications is amended to read:

- Paint to be applied in 2 coats shall be applied approximately as follows:

Paint Type	Square Meter Coverage Per Liter	
	First Coat	Second Coat
Waterborne Paint	6	6
Acetone-Based Paint	10	5

SECTION 85: PAVEMENT MARKERS

Issue Date: June 30, 2006

The second through fifth paragraphs in Section 85-1.03, "Sampling, Tolerances and Packaging," of the Standard Specifications are amended to read:

Sampling

- Twenty markers selected at random will constitute a representative sample for each lot of markers.
- The lot size shall not exceed 25 000 markers.

Tolerances

- Three test specimens will be randomly selected from the sample for each test and tested in conformance with these specifications. Should any one of the 3 specimens fail to conform with the requirements in these specifications, 6 additional specimens will be tested. The failure of any one of these 6 specimens shall be cause for rejection of the entire lot or shipment represented by the sample.
- The entire sample of retroreflective pavement markers will be tested for reflectance. The failure of 10 percent or more of the original sampling shall be cause for rejection.

Section 85-1.04, "Non-Reflective Pavement Markers," of the Standard Specifications is amended to read:

85-1.04 Non-Reflective Pavement Markers

- Non-reflective pavement markers (Types A and AY) shall be, at the option of the Contractor, either ceramic or plastic conforming to these specifications.
- The top surface of the marker shall be convex with a gradual change in curvature. The top, bottom and sides shall be free of objectionable marks or discoloration that will affect adhesion or appearance.
- The bottom of markers shall have areas of integrally formed protrusions or indentations, which will increase the effective bonding surface area of adhesive. The bottom surface of the marker shall not deviate more than 1.5 mm from a flat surface. The areas of protrusion shall have faces parallel to the bottom of the marker and shall project approximately one mm from the bottom.

The second through fourth paragraphs of Section 85-1.04A, "Non-Reflective Pavement Markers (Ceramic)," of the Standard Specifications are deleted.

The table in the fifth paragraph in Section 85-1.04A, "Non-Reflective Pavement Markers (Ceramic)," of the Standard Specifications is amended to read:

Testing

- Tests shall be performed in conformance with the requirements in California Test 669.

Test	Test Description	Requirement
a	Bond strength	4.8 MPa, min.
b	Glaze thickness	180 µm, min.
c	Hardness	6 Moh, min.
d	Luminance factor, Type A, white markers only, glazed surface	75, min.
e	Yellowness index, Type A, white markers only, glazed surface	7, max.
f	Color-yellow, Type AY, yellow markers only. The chromaticity coordinates shall be within a color box defined in CTM 669	Pass
g	Compressive strength	6700 N, min.
h	Water absorption	2.0 %, max.
i	Artificial weathering, 500 hours exposure, yellowness index	20, max.

Section 85-1.04B, "Non-Reflective Pavement Markers (Plastic)," of the Standard Specifications is amended to read:

85-1.04B Non-Reflective Pavement Markers (Plastic)

- Plastic non-reflective pavement markers Types A and AY shall be, at the option of the Contractor, either polypropylene or acrylonitrile-butadiene-styrene (ABS) plastic type.
- Plastic markers shall conform to the testing requirements specified in Section 85-1.04A, "Non-Reflective Pavement Markers (Ceramic)," except that Tests a, b, c, and h shall not apply. The plastic markers shall not be coated with substances that interfere with the ability of the adhesive bonding to the marker.

The sixth and seventh paragraphs in Section 85-1.05, "Retroreflective Pavement Markers," of the Standard Specifications are amended to read:

Testing

- Tests shall be performed in conformance with the requirements in California Test 669.

Test Description	Requirement		
Bond strength[a]	3.4 MPa, min.		
Compressive strength[b]	8900 N, min.		
Abrasion resistance, marker must meet the respective specific intensity minimum requirements after abrasion.	Pass		
Water Soak Resistance	No delamination of the body or lens system of the marker nor loss of reflectance		
	Specific Intensity		
Reflectance	Clear	Yellow	Red
0° Incidence Angle, min.	3.0	1.5	0.75
20° Incidence Angle, min.	1.2	0.60	0.30
After one year field evaluation	0.30	0.15	0.08

a. Failure of the marker body or filler material prior to reaching 3.4 MPa shall constitute a failing bond strength test.

b. Deformation of the marker of more than 3 mm at a load of less than 8900 N or delamination of the shell and the filler material of more than 3 mm regardless of the load required to break the marker shall be cause for rejection of the markers as specified in Section 85-1.03, "Sampling, Tolerances and Packaging."

- Pavement markers to be placed in pavement recesses shall conform to the above requirements for retroreflective pavement markers except that the minimum compressive strength requirement shall be 5338 N.

The eighth paragraph of Section 85-1.05, "Retroreflective Pavement Markers" of the Standard Specifications is deleted.

The eighth paragraph in Section 85-1.06, "Replacement," of the Standard Specifications is amended to read:

- Epoxy adhesive shall not be used to apply non-reflective plastic pavement markers.

The seventh sentence of the fourteenth paragraph of Section 85-1.06, "Placement," of the Standard Specifications is amended to read:

- Soft rags moistened with mineral spirits conforming to Army Mil-PRF-680A(1) or kerosene may be used, if necessary, to remove adhesive from exposed faces of pavement markers.

SECTION 86: SIGNALS, LIGHTING AND ELECTRICAL SYSTEMS

Issue Date: June 30, 2006

The second paragraph of Section 86-1.01, "Description," of the Standard Specifications is amended to read:

- The locations of signals, beacons, standards, lighting fixtures, signs, controls, services and appurtenances shown on the plans are approximate and the exact locations will be approved by the Engineer in the field.

The tenth paragraph of Section 86-1.06, "Maintaining Existing and Temporary Electrical Systems," of the Standard Specifications is amended to read:

- These provisions will not relieve the Contractor in any manner of the Contractor's responsibilities as provided in Section 7-1.12, "Indemnification and Insurance," and Section 7-1.16, "Contractor's Responsibility for the Work and Materials."

The first paragraph of Section 86-2.03, "Foundations," of the Standard Specifications is amended to read:

- Except for concrete for cast-in-drilled-hole concrete pile foundations, portland cement concrete shall conform to Section 90-10, "Minor Concrete."

The fifth paragraph of Section 86-2.03, "Foundations," of the Standard Specifications is amended to read:

- Reinforced cast-in-drilled-hole concrete pile foundations for traffic signal and lighting standards shall conform to the provisions in Section 49, "Piling," with the following exceptions: 1) Material resulting from drilling holes shall be disposed of in conformance with the provisions in Section 86-2.01, "Excavating and Backfilling," and 2) Concrete filling for cast-in-drilled-hole concrete piles will not be considered as designated by compressive strength.

The seventh paragraph of Section 86-2.03, "Foundations," of the Standard Specifications is amended to read:

- Forms shall be true to line and grade. Tops of foundations for posts and standards, except special foundations, shall be finished to curb or sidewalk grade or as directed by the Engineer. Forms shall be rigid and securely braced in place. Conduit ends and anchor bolts shall be placed in proper position and to proper height, and anchor bolts shall be held in place by means of rigid top and bottom templates. The bottom template shall be made of steel. The bottom template shall provide proper spacing and alignment of the anchor bolts near their bottom embedded end. The bottom template shall be installed before placing footing concrete. Anchor bolts shall not be installed more than 1:40 from vertical.

Section 86-2.03, "Foundations," of the Standard Specifications is amended by deleting the eighth paragraph.

The twelfth paragraph of Section 86-2.03, "Foundations," of the Standard Specifications is amended to read:

- Plumbing of the standards shall be accomplished by adjusting the leveling nuts before placing the mortar or before the foundation is finished to final grade. Shims or other similar devices shall not be used for plumbing or raking of posts, standards, or pedestals. After final adjustments of both top nuts and leveling nuts on anchorage assemblies have been made, firm contact shall exist between all bearing surfaces of the anchor bolt nuts, washers, and the base plates.

The first paragraph of Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications is amended to read:

• Bolts, nuts and washers, and anchor bolts for use in signal and lighting support structures shall conform to the provisions in Section 55-2, "Materials." Except when bearing-type connections or slipbases are specified, high-strength bolted connections shall conform to the provisions in Section 55-3.14, "Bolted Connections." Welding, nondestructive testing (NDT) of welds, and acceptance and repair criteria for NDT of steel members shall conform to the requirements of AWS D1.1 and the special provisions.

The second paragraph of Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications is amended to read:

• On each lighting standard except Type 1, one rectangular corrosion resistant metal identification tag shall be permanently attached above the hand hole, near the base of the standard, using stainless steel rivets. On each signal pole support, two corrosion resistant metal identification tags shall be attached, one above the hand hole near the base of the vertical standard and one on the underside of the signal mast arm near the arm plate. As a minimum, the information on each identification tag shall include the name of the manufacturer, the date of manufacture, the identification number as shown on the plans, the contract number, and a unique identification code assigned by the fabricator. This number shall be traceable to a particular contract and the welds on that component, and shall be readable after the support structure is coated and installed. The lettering shall be a minimum of 7 mm high. The information may be either depressed or raised, and shall be legible.

The fourth paragraph of Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications is amended to read:

• Ferrous metal parts of standards, with shaft length of 4.6 m and longer, shall conform to the details shown on the plans, the provisions in Section 55-2, "Materials," except as otherwise noted, and the following requirements:

Except as otherwise specified, standards shall be fabricated from sheet steel of weldable grade having a minimum yield strength, after fabrication, of 276 MPa.

Certified test reports which verify conformance to the minimum yield strength requirements shall be submitted to the Engineer. The test reports may be the mill test reports for the as-received steel or, when the as-received steel has a lower yield strength than required, the Contractor shall provide supportive test data which provides assurance that the Contractor's method of cold forming will consistently increase the tensile properties of the steel to meet the specified minimum yield strength. The supportive test data shall include tensile properties of the steel after cold forming for specific heats and thicknesses.

When a single-ply 8-mm thick pole is specified, a 2-ply pole with equivalent section modulus may be substituted.

Standards may be fabricated of full-length sheets or shorter sections. Each section shall be fabricated from not more than 2 pieces of sheet steel. Where 2 pieces are used, the longitudinal welded seams shall be directly opposite one another. When the sections are butt-welded together, the longitudinal welded seams on adjacent sections shall be placed to form continuous straight seams from base to top of standard.

Butt-welded circumferential joints of tubular sections requiring CJP groove welds shall be made using a metal sleeve backing ring inside each joint. The sleeve shall be 3-mm nominal thickness, or thicker, and manufactured from steel having the same chemical composition as the steel in the tubular sections to be joined. When the sections to be joined have different specified minimum yield strengths, the steel in the sleeve shall have the same chemical composition as the tubular section having the higher minimum yield strength. The width of the metal sleeve shall be consistent with the type of NDT chosen and shall be a minimum width of 25 mm. The sleeve shall be centered at the joint and be in contact with the tubular section at the point of the weld at time of fit-up.

Welds shall be continuous.

The weld metal at the transverse joint shall extend to the sleeve, making the sleeve an integral part of the joint.

During fabrication, longitudinal seams on vertical tubular members of cantilevered support structures shall be centered on and along the side of the pole that the pole plate is located. Longitudinal seams on horizontal tubular members, including signal and luminaire arms, shall be within +/-45 degrees of the bottom of the arm.

The longitudinal seam welds in steel tubular sections may be made by the electric resistance welding process.

Longitudinal seam welds shall have 60 percent minimum penetration, except that within 150 mm of circumferential welds, longitudinal seam welds shall be CJP groove welds. In addition, longitudinal seam welds on lighting support structures having telescopic pole segment splices shall be CJP groove welds on the female end for a length on each end equal to the designated slip fit splice length plus 150 mm.

Exposed circumferential welds, except fillet and fatigue-resistant welds, shall be ground flush (-0, +2mm) with the base metal prior to galvanizing or painting.

Circumferential welds and base plate-to-pole welds may be repaired only one time without written permission from the Engineer.

Exposed edges of the plates that make up the base assembly shall be finished smooth and exposed corners of the plates shall be broken unless otherwise shown on the plans. Shafts shall be provided with slip-fitter shaft caps.

Flatness of surfaces of 1) base plates that are to come in contact with concrete, grout, or washers and leveling nuts; 2) plates in high-strength bolted connections; 3) plates in joints where cap screws are used to secure luminaire and signal arms; and 4) plates used for breakaway slip base assemblies shall conform to the requirements in ASTM A6.

Standards shall be straight, with a permissive variation not to exceed 25 mm measured at the midpoint of a 9-m or 11-m standard and not to exceed 20 mm measured at the midpoint of a 5-m through 6-m standard. Variation shall not exceed 25 mm at a point 4.5 m above the base plate for Type 35 and Type 36 standards.

Zinc-coated nuts used on fastener assemblies having a specified preload (obtained by specifying a prescribed tension, torque value, or degree of turn) shall be provided with a colored lubricant that is clean and dry to the touch. The color of the lubricant shall be in contrast to the zinc coating on the nut so that the presence of the lubricant is visually obvious. In addition, either the lubricant shall be insoluble in water, or fastener components shall be shipped to the job site in a sealed container.

No holes shall be made in structural members unless the holes are shown on the plans or are approved in writing by the Engineer.

Standards with an outside diameter of 300 mm or less shall be round. Standards with an outside diameter greater than 300 mm shall be round or multisided. Multisided standards shall have a minimum of 12 sides which shall be convex and shall have a minimum bend radius of 100 mm.

Mast arms for standards shall be fabricated from material as specified for standards, and shall conform to the dimensions shown on the plans.

The cast steel option for slip bases shall be fabricated from material conforming to the requirements in ASTM Designation: A 27/A 27M, Grade 70-40. Other comparable material may be used if written permission is given by the Engineer. The casting tolerances shall be in conformance with the Steel Founder's Society of America recommendations (green sand molding).

One casting from each lot of 50 castings or less shall be subject to radiographic inspection, in conformance with the requirements in ASTM Designation: E 94. The castings shall comply with the acceptance criteria severity level 3 or better for the types and categories of discontinuities in conformance with the requirements in ASTM Designations: E 186 and E 446. If the one casting fails to pass the inspection, 2 additional castings shall be radiographed. Both of these castings shall pass the inspection, or the entire lot of 50 will be rejected.

Material certifications, consisting of physical and chemical properties, and radiographic films of the castings shall be filed at the manufacturer's office. These certifications and films shall be available for inspection upon request.

High-strength bolts, nuts, and flat washers used to connect slip base plates shall conform to the requirements in ASTM Designation: A 325 or A 325M and shall be galvanized in conformance with the provisions in Section 75-1.05, "Galvanizing."

Plate washers shall be fabricated by saw cutting and drilling steel plate conforming to the requirements in AISI Designation: 1018, and be galvanized in conformance with the provisions in Section 75-1.05, "Galvanizing." Prior to galvanizing, burrs and sharp edges shall be removed and holes shall be chamfered sufficiently on each side to allow the bolt head to make full contact with the washer without tension on the bolt.

High-strength cap screws shown on the plans for attaching arms to standards shall conform to the requirements in ASTM Designation: A 325, A 325M, or A 449, and shall comply with the mechanical requirements in ASTM Designation: A 325 or A 325M after galvanizing. The cap screws shall be galvanized in conformance with the provisions in Section 75-1.05, "Galvanizing." The threads of the cap screws shall be coated with a colored lubricant that is clean and dry to the touch. The color of the lubricant shall be in contrast to the color of the zinc coating on the cap screw so that presence of the lubricant is visually obvious. In addition, either the lubricant shall be insoluble in water, or fastener components shall be shipped to the job site in a sealed container.

Unless otherwise specified, bolted connections attaching signal or luminaire arms to poles shall be considered slip critical. Galvanized faying surfaces on plates on luminaire and signal arms and matching plate surfaces on poles shall be roughened by hand using a wire brush prior to assembly and shall conform to the requirements for Class C surface conditions for slip-critical connections in "Specification for Structural Joints Using ASTM A 325 or A 490 Bolts," a specification approved by the Research Council on Structural Connections (RCSC) of the Engineering Foundation. For faying surfaces required to be painted, the paint shall be an approved type, brand, and thickness that has been tested and approved according to the RCSC Specification as a Class B coating.

Samples of fastener components will be randomly taken from each production lot by the Engineer and submitted, along with test reports required by appropriate ASTM fastener specifications, for QA testing and evaluation. Sample sizes for each fastener component shall be as determined by the Engineer.

The seventh paragraph of Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications is amended to read:

- To avoid interference of arm plate-to-tube welds with cap screw heads, and to ensure cap screw heads can be turned using conventional installation tools, fabricators shall make necessary adjustments to details prior to fabrication and properly locate the position of arm tubes on arm plates during fabrication.

The traffic signal controller cabinet requirement in the table in Section 86-2.08A, "Conductor Identification," of the Standard Specifications is amended to read:

Traffic Signal Controller Cabinet	Ungrounded between Service	Blk	None	CON-1	6
	Grounded Circuit Conductor	White	None	CON-2	6

The second paragraph of Section 86-2.08B, "Multiple Circuit Conductors," of the Standard Specifications is amended to read by the following 2 paragraphs:

- At any point, the minimum insulation thickness of any Type USE, RHH, or RHW insulation shall be 1.0 mm for conductor sizes No. 14 to No. 10, inclusive; and 1.3 mm for No. 8 to No. 2, inclusive.
- At any point, the minimum insulation thickness of any Type THW or TW wires shall be 0.7 mm for conductor sizes No. 14 to No. 10, inclusive; 1.0 mm for No. 8; and 1.4 mm for No. 6 to No. 2, inclusive.

The sixth and seventh paragraphs of 86-2.12, "Wood Poles," of the Standard Specifications are amended to read:

- After fabrication, wood poles shall be pressure treated in conformance with the provisions in Section 58, "Preservative Treatment of Lumber, Timber and Piling," and AWPA Use Category System: UC4B, Commodity Specification D.
- Wood poles, when specified in the special provisions to be painted, shall be treated with waterborne wood preservatives.

The first paragraph of Section 86-2.15, "Galvanizing," of the Standard Specifications is amended to read:

- Galvanizing shall be in conformance with the provisions in Section 75-1.05, "Galvanizing," except that cabinets may be constructed of material galvanized prior to fabrication in conformance with the requirements in ASTM Designation: A 653/653M, Coating Designation G 90, in which case all cut or damaged edges shall be painted with at least 2 applications of approved unthinned zinc-rich primer (organic vehicle type) conforming to the provisions in Section 91, "Paint." Aerosol cans shall not be used. Other types of protective coating must be approved by the Engineer prior to installation.

Subparagraph B of the thirteenth paragraph of Section 86-2.16, "Multiple Circuit Conductors," of the Standard Specifications is amended to read:

B. Salt Spray Resistance - The undercutting of the film of the coating system shall not exceed 3 mm average, from lines scored diagonally and deep enough to expose the base metal, after 336 hours exposure in a salt spray cabinet in conformance with the requirements in ASTM Designation: B 117.

The third paragraph under "Mounting Assemblies" of Section 86-2.16, "Internally Illuminated Street Name Signs," of the Standard Specifications is amended to read:

- At least 16 feet of clearance shall be provided between the bottom of the fixture and the roadway.

The first paragraph of Section 86-4.01, "Vehicle Signal Faces," of the Standard Specifications is amended to read:

- Each vehicle signal face shall be of the adjustable type conforming to the requirements in Institute of Transportation Engineers (ITE) Publication: ST-017B, "Vehicle Traffic Control Signal Heads."

Subparagraphs 1 and 3 of the first paragraph of Section 86-4.01A, "Optical Units," of the Standard Specifications are amended to read:

- Lenses, reflectors, reflector assemblies, lamp receptacles, lamps, wiring and light distribution shall conform to the requirements in ITE Publication: ST-017B.

- All reflectors shall conform to the requirements in ITE Publication: ST-017B except that reflectors shall be made of silvered glass or of specular aluminum with an anodic coating. Reflector ring holder shall be made of cast aluminum.

The first paragraph of Section 86-4.01B, "Signal Sections," of the Standard Specifications is amended to read:

- Each signal section housing shall be either die-cast or permanent mold-cast aluminum conforming to ITE Publication: ST-017B or, when specified in the special provisions, shall be structural plastic.

The first paragraph of Section 86-4.01C, "Electrical Components," of the Standard Specifications is amended to read:

- Lamp receptacles and wiring shall conform to ITE Publication: ST-017B. The metal portion of the medium base lamp socket shall be brass, copper or phosphor bronze.

The first paragraph of Section 86-4.01D, "Visors," of the Standard Specifications is amended to read:

- Each signal section shall be provided with a removable visor conforming to the requirements in ITE Publication: ST-017B. Visors are classified, on the basis of lens enclosure, as full circle, tunnel (bottom open), or cap (bottom and lower sides open). Unless otherwise specified, visors shall be the tunnel type.

The first paragraph of Section 86-4.02A, "Physical and Mechanical Requirements," of the Standard Specifications is amended to read:

- Light emitting diode signal modules shall be designed as retrofit replacements for optical units of standard traffic signal sections and shall not require special tools for installation. Light emitting diode signal modules shall fit into existing traffic signal section housings built in conformance with the requirements in the Institute of Transportation Engineers (ITE) publication ST-017B, "Vehicle Traffic Control Signal Heads (VTCSH)" without modification to the housing.

The seventh paragraph of Section 86-4.02A, "Physical and Mechanical Requirements," of the Standard Specifications is amended to read:

- Light emitting diode signal modules shall be protected against dust and moisture intrusion in conformance with the requirements in NEMA Standard 250 for Type 4 enclosures to protect the internal components.

The first paragraph of Section 86-4.02B, "Photometric Requirements," of the Standard Specifications is amended to read:

- The minimum initial luminous intensity values for light emitting diode signal modules shall conform to the requirements in Section 11.04 of the Institute of Transportation Engineers (ITE) publication ST-017B, "Vehicle Traffic Control Signal Heads (VTCSH)" at 25°C.

The third paragraph of Section 86-4.02C, "Electrical," of the Standard Specifications is amended to read:

- The light emitting diode signal module on-board circuitry shall include voltage surge protection to withstand high-repetition noise transients as specified in Section 2.1.6 of NEMA Standard TS2.

Subparagraph 7 of the fourth paragraph of Section 86-4.02D(1), "Design Qualification Testing," of the Standard Specifications is amended to read:

- Moisture resistance testing shall be performed on light emitting diode signal modules in conformance with the requirements in NEMA Standard 250 for Type 4 enclosures. Evidence of internal moisture after testing shall be cause for rejection.

The second paragraph of Section 86-4.05, "Programmed Visibility Vehicle Signal Faces," of the Standard Specifications is amended to read:

- Each programmed visibility signal section shall provide a nominal 300-mm diameter circular or arrow indication. Color and arrow configuration shall conform to the requirements in ITE Publication: ST-017B.

The first paragraph of Section 86-4.06, "Pedestrian Signal Faces" of the Standard Specifications is amended to read:

- Message symbols for pedestrian signal faces shall be white WALKING PERSON and Portland orange UPRAISED HAND conforming to the requirements in the Institute of Transportation Engineers Standards: "Pedestrian Traffic Control Signal Indications," "Manual on Uniform Traffic Control Devices," and "MUTCD California Supplement." The height of each symbol shall be not less than 250 mm and the width of each symbol shall be not less than 165 mm.

Subparagraph 3 of the first paragraph of Section 86-4.06A, "Types," of the Standard Specifications is amended to read:

- Each reflector assembly shall consist of a double reflector or 2 single reflectors. Each reflector shall be made of either aluminum or plastic. Reflectors shall conform to the requirements in Institute of Transportation Engineers Publication: ST-017B, "Vehicle Traffic Control Signal Heads." Plastic reflectors shall consist of molded or vacuum-formed plastic with a vacuum-deposited aluminum reflecting surface. The plastic material shall not distort when the reflector is used with the lamp of the wattage normally furnished with the signal. In addition, the UL nonmechanical loading temperature of the material shall exceed, by at least 10°C, the maximum temperature in the signal section with the lamp "ON" and measured in an ambient air temperature of 25°C in conformance with the requirements in UL Publication UL 746B. Each completed reflector shall, when operated with the appropriate lamp and lens, provide the message brightness specified.

The tenth paragraph of Section 86-4.07, "Light Emitting Diode Pedestrian Signal Face 'Upraised Hand' Module" of the Standard Specifications is amended to read:

- The luminance of the "UPRAISED HAND" symbol shall be 3750 cd/m^2 minimum. The color of "UPRAISED HAND" shall be Portland orange conforming to the requirements of the Institute of Transportation Engineers Standards: "Pedestrian Traffic Control Signal Indications," "Manual on Uniform Traffic Control Devices," and "MUTCD California Supplement." The height of each symbol shall be not less than 250 mm and the width of each symbol shall be not less than 165 mm.

The second paragraph of Section 86-4.07C, "Electrical," of the Standard Specifications is amended to read:

- On-board circuitry of the light emitting diode pedestrian signal modules shall include voltage surge protection to withstand high-repetition noise transients as stated in Section 2.1.6 of NEMA Standard TS2.

The second paragraph of Section 86-4.07D(1), "Design Qualification Testing," of the Standard Specifications is amended to read:

- A quantity of 2 units for each design shall be submitted for Design Qualification Testing. Test units shall be submitted to the Transportation Laboratory, after manufacturer's testing is complete.

Subparagraphs 5 and 7 of the fourth paragraph of Section 86-4.07D(1), "Design Qualification Testing," of the Standard Specifications are amended to read:

- Mechanical vibration testing shall be in conformance with the requirements in Military Specification MIL-STD-883, Test Method 2007, using three 4-minute cycles along each x, y and z axis, at a force of 2.5 Gs, with a frequency sweep from 2 Hz to 120 Hz. The loosening of the lens or of internal components, or other physical damage shall be cause for rejection.

- Moisture resistance testing shall be performed on modules mounted in a standard pedestrian signal housing in conformance to the requirements in NEMA Standard 250 for Type 4 enclosures. Evidence of internal moisture after testing shall be cause for rejection.

The cone penetration, flow, and resilience requirements in the table in the second paragraph under "Hot-Melt Rubberized Asphalt Sealant" of Section 86-5.01A(5), "Installation Details," of the Standard Specifications is amended to read:

Cone Penetration, 25°C, 150 g, 5 s	D 5329, Sec. 6	3.5 mm, max.
Flow, 60°C	D 5329, Sec. 8	5 mm, max.
Resilience, 25°C	D 5329, Sec. 12	25%, min.

The third paragraph under "Mounting Assemblies" of Section 86-6.065, "Internally Illuminated Street Name Signs," of the Standard Specifications is amended to read:

- At least 4.9-m of clearance shall be provided between the bottom of the fixture and the roadway.

Section 86-8.01, "Payment," of the Standard Specifications is amended by adding the following paragraph after the first paragraph:

- If a portion or all of the poles for signal, lighting and electrical systems pursuant to Standard Specification Section 86, "Signals, Lighting and Electrical Systems," is fabricated more than 480 air line kilometers from both-Sacramento and Los Angeles, additional shop inspection expenses will be sustained by the State. Whereas it is and will be impracticable and extremely difficult to ascertain and determine the actual increase in such expenses, it is agreed that payment to the Contractor for furnishing such items from each fabrication site located more than 480 air line kilometers from both Sacramento and Los Angeles will be reduced $5000; in addition, in the case where a fabrication site is located more than 4800 air line kilometers from both Sacramento and Los Angeles, payment will be reduced an additional $3000 per each fabrication site ($8000 total per site).

SECTION 88: ENGINEERING FABRIC

Issue Date: January 15, 2002

Section 88-1.02, "Pavement Reinforcing Fabric," of the Standard Specifications is amended to read:

- Pavement reinforcing fabric shall be 100 percent polypropylene staple fiber fabric material, needle-punched, thermally bonded on one side, and conform to the following:

Specification	Requirement
Weight, grams per square meter ASTM Designation: D 5261	140
Grab tensile strength (25-mm grip), kilonewtons, min. in each direction ASTM Designation: D 4632	0.45
Elongation at break, percent min. ASTM Designation: D 4632	50
Asphalt retention by fabric, grams per square meter. (Residual Minimum) ASTM Designation: D 6140	900

Note: Weight, grab, elongation and asphalt retention are based on Minimum Average Roll Value (MARV)

SECTION 90: PORTLAND CEMENT CONCRETE

Issue Date: November 2, 2004

Section 90, "Portland Cement Concrete," of the Standard Specifications is amended to read:

SECTION 90: PORTLAND CEMENT CONCRETE
90-1 GENERAL

90-1.01 DESCRIPTION

- Portland cement concrete shall be composed of cementitious material, fine aggregate, coarse aggregate, admixtures if used, and water, proportioned and mixed as specified in these specifications.

• The Contractor shall determine the mix proportions for concrete in conformance with these specifications. Unless otherwise specified, cementitious material shall be a combination of cement and mineral admixture. Cementitious material shall be either:

1. "Type IP (MS) Modified" cement; or
2. A combination of "Type II Modified" portland cement and mineral admixture; or
3. A combination of Type V portland cement and mineral admixture.

• Type III portland cement shall be used only as allowed in the special provisions or with the approval of the Engineer.
• Class 1 concrete shall contain not less than 400 kg of cementitious material per cubic meter.
• Class 2 concrete shall contain not less than 350 kg of cementitious material per cubic meter.
• Class 3 concrete shall contain not less than 300 kg of cementitious material per cubic meter.
• Class 4 concrete shall contain not less than 250 kg of cementitious material per cubic meter.
• Minor concrete shall contain not less than 325 kg of cementitious material per cubic meter unless otherwise specified in these specifications or the special provisions.
• Unless otherwise designated on the plans or specified in these specifications or the special provisions, the amount of cementitious material used per cubic meter of concrete in structures or portions of structures shall conform to the following:

Use	Cementitious Material Content (kg/m3)
Concrete designated by compressive strength:	
Deck slabs and slab spans of bridges	400 min., 475 max.
Roof sections of exposed top box culverts	400 min., 475 max.
Other portions of structures	350 min., 475 max.
Concrete not designated by compressive strength:	
Deck slabs and slab spans of bridges	400 min.
Roof sections of exposed top box culverts	400 min.
Prestressed members	400 min.
Seal courses	400 min.
Other portions of structures	350 min.
Concrete for precast members	350 min., 550 max.

• Whenever the 28-day compressive strength shown on the plans is greater than 25 MPa, the concrete shall be designated by compressive strength. If the plans show a 28-day compressive strength that is 28 MPa or greater, an additional 14 days will be allowed to obtain the specified strength. The 28-day compressive strengths shown on the plans that are 25 MPa or less are shown for design information only and are not a requirement for acceptance of the concrete.
• Concrete designated by compressive strength shall be proportioned such that the concrete will attain the strength shown on the plans or specified in the special provisions.
• Before using concrete for which the mix proportions have been determined by the Contractor, or in advance of revising those mix proportions, the Contractor shall submit in writing to the Engineer a copy of the mix design.
• Compliance with cementitious material content requirements will be verified in conformance with procedures described in California Test 518 for cement content. For testing purposes, mineral admixture shall be considered to be cement. Batch proportions shall be adjusted as necessary to produce concrete having the specified cementitious material content.
• If any concrete has a cementitious material, portland cement, or mineral admixture content that is less than the minimum required, the concrete shall be removed. However, if the Engineer determines that the concrete is structurally adequate, the concrete may remain in place and the Contractor shall pay to the State $0.55 for each kilogram of cementitious material, portland cement, or mineral admixture that is less than the minimum required. The Department may deduct the amount from any moneys due, or that may become due, the Contractor under the contract. The deductions will not be made unless the difference between the contents required and those actually provided exceeds the batching tolerances permitted by Section 90-5, "Proportioning." No deductions will be made based on the results of California Test 518.
• The requirements of the preceding paragraph shall not apply to minor concrete or commercial quality concrete.

90-2 MATERIALS

90-2.01 CEMENT

• Unless otherwise specified, cement shall be either "Type IP (MS) Modified" cement, "Type II Modified" portland cement or Type V portland cement.

• "Type IP (MS) Modified" cement shall conform to the requirements for Type IP (MS) cement in ASTM Designation: C 595, and shall be comprised of an intimate and uniform blend of Type II cement and not more than 35 percent by mass of mineral admixture. The type and minimum amount of mineral admixture used in the manufacture of "Type IP (MS) Modified" cement shall be in conformance with the provisions in Section 90-4.08, "Required Use of Mineral Admixtures."

• "Type II Modified" portland cement shall conform to the requirements for Type II portland cement in ASTM Designation: C 150-02a.

• In addition, "Type IP (MS) Modified" cement and "Type II Modified" portland cement shall conform to the following requirements:

A. The cement shall not contain more than 0.60-percent by mass of alkalies, calculated as the percentage of Na_2O plus 0.658 times the percentage of K_2O, when determined by either direct intensity flame photometry or by the atomic absorption method. The instrument and procedure used shall be qualified as to precision and accuracy in conformance with the requirements in ASTM Designation: C 114;
B. The autoclave expansion shall not exceed 0.50-percent; and
C. Mortar, containing the cement to be used and Ottawa sand, when tested in conformance with California Test 527, shall not expand in water more than 0.010 percent and shall not contract in air more than 0.048 percent, except that when cement is to be used for precast prestressed concrete piling, precast prestressed concrete members, or steam cured concrete products, the mortar shall not contract in air more than 0.053 percent.

• Type III and Type V portland cements shall conform to the requirements in ASTM Designation: C 150-02a and the additional requirements listed above for "Type II Modified" portland cement, except that when tested in conformance with California Test 527, mortar containing Type III portland cement shall not contract in air more than 0.075 percent.

• Cement used in the manufacture of cast-in-place concrete for exposed surfaces of like elements of a structure shall be from the same cement mill.

• Cement shall be protected from exposure to moisture until used. Sacked cement shall be piled to permit access for tally, inspection, and identification of each shipment.

• Adequate facilities shall be provided to assure that cement meeting the provisions specified in this Section 90-2.01 shall be kept separate from other cement in order to prevent any but the specified cement from entering the work. Safe and suitable facilities for sampling cement shall be provided at the weigh hopper or in the feed line immediately in advance of the hopper, in conformance with California Test 125.

• If cement is used prior to sampling and testing as provided in Section 6-1.07, "Certificates of Compliance," and the cement is delivered directly to the site of the work, the Certificate of Compliance shall be signed by the cement manufacturer or supplier of the cement. If the cement is used in ready-mixed concrete or in precast concrete products purchased as such by the Contractor, the Certificate of Compliance shall be signed by the manufacturer of the concrete or product.

• Cement furnished without a Certificate of Compliance shall not be used in the work until the Engineer has had sufficient time to make appropriate tests and has approved the cement for use.

90-2.02 AGGREGATES

• Aggregates shall be free from deleterious coatings, clay balls, roots, bark, sticks, rags, and other extraneous material.

• Natural aggregates shall be thoroughly and uniformly washed before use.

• The Contractor, at the Contractor's expense, shall provide safe and suitable facilities, including necessary splitting devices for obtaining samples of aggregates, in conformance with California Test 125.

• Aggregates shall be of such character that it will be possible to produce workable concrete within the limits of water content provided in Section 90-6.06, "Amount of Water and Penetration."

• Aggregates shall have not more than 10 percent loss when tested for soundness in conformance with the requirements in California Test 214. The soundness requirement for fine aggregate will be waived, provided that the durability index, D_f, of the fine aggregate is 60, or greater, when tested for durability in conformance with California Test 229.

• If the results of any one or more of the Cleanness Value, Sand Equivalent, or aggregate grading tests do not meet the requirements specified for "Operating Range" but all meet the "Contract Compliance" requirements, the placement of

concrete shall be suspended at the completion of the current pour until tests or other information indicate that the next material to be used in the work will comply with the requirements specified for "Operating Range."

- If the results of either or both the Cleanness Value and coarse aggregate grading tests do not meet the requirements specified for "Contract Compliance," the concrete that is represented by the tests shall be removed. However, if the Engineer determines that the concrete is structurally adequate, the concrete may remain in place, and the Contractor shall pay to the State $4.60 per cubic meter for paving concrete and $7.20 per cubic meter for all other concrete for the concrete represented by these tests and left in place. The Department may deduct the amount from any moneys due, or that may become due, the Contractor under the contract.
- If the results of either or both the Sand Equivalent and fine aggregate grading tests do not meet the requirements specified for "Contract Compliance," the concrete which is represented by the tests shall be removed. However, if the Engineer determines that the concrete is structurally adequate, the concrete may remain in place, and the Contractor shall pay to the State $4.60 per cubic meter for paving concrete and $7.20 per cubic meter for all other concrete for the concrete represented by these tests and left in place. The Department may deduct the amount from any moneys due, or that may become due, the Contractor under the contract.
- The 2 preceding paragraphs apply individually to the "Contract Compliance" requirements for coarse aggregate and fine aggregate. When both coarse aggregate and fine aggregate do not conform to the "Contract Compliance" requirements, both paragraphs shall apply. The payments specified in those paragraphs shall be in addition to any payments made in conformance with the provisions in Section 90-1.01, "Description."
- No single Cleanness Value, Sand Equivalent or aggregate grading test shall represent more than 250 m^3 of concrete or one day's pour, whichever is smaller.
- When the source of an aggregate is changed, the Contractor shall adjust the mix proportions and submit in writing to the Engineer a copy of the mix design before using the aggregates.

90-2.02A Coarse Aggregate

- Coarse aggregate shall consist of gravel, crushed gravel, crushed rock, crushed air-cooled iron blast furnace slag or combinations thereof. Crushed air-cooled blast furnace slag shall not be used in reinforced or prestressed concrete.
- Coarse aggregate shall conform to the following quality requirements:

Tests	California Test	Requirements
Loss in Los Angeles Rattler (after 500 revolutions)	211	45% max.
Cleanness Value		
Operating Range	227	75 min.
Contract Compliance	227	71 min.

- In lieu of the above Cleanness Value requirements, a Cleanness Value "Operating Range" limit of 71, minimum, and a Cleanness Value "Contract Compliance" limit of 68, minimum, will be used to determine the acceptability of the coarse aggregate if the Contractor furnishes a Certificate of Compliance, as provided in Section 6-1.07, "Certificates of Compliance," certifying that:

1. coarse aggregate sampled at the completion of processing at the aggregate production plant had a Cleanness Value of not less than 82 when tested by California Test 227; and
2. prequalification tests performed in conformance with the requirements in California Test 549 indicated that the aggregate would develop a relative strength of not less than 95 percent and would have a relative shrinkage not greater than 105 percent, based on concrete.

90-2.02B Fine Aggregate

- Fine aggregate shall consist of natural sand, manufactured sand produced from larger aggregate or a combination thereof. Manufactured sand shall be well graded.

- Fine aggregate shall conform to the following quality requirements:

Test	California Test	Requirements
Organic Impurities	213	Satisfactory[a]
Mortar Strengths Relative to Ottawa Sand	515	95%, min.
Sand Equivalent:		
Operating Range	217	75, min.
Contract Compliance	217	71, min.

a Fine aggregate developing a color darker than the reference standard color solution may be accepted if it is determined by the Engineer, from mortar strength tests, that a darker color is acceptable.

• In lieu of the above Sand Equivalent requirements, a Sand Equivalent "Operating Range" limit of 71 minimum and a Sand Equivalent "Contract Compliance" limit of 68 minimum will be used to determine the acceptability of the fine aggregate if the Contractor furnishes a Certificate of Compliance, as provided in Section 6-1.07, "Certificates of Compliance," certifying that:

1. fine aggregate sampled at the completion of processing at the aggregate production plant had a Sand Equivalent value of not less than 82 when tested by California Test 217; and
2. prequalification tests performed in conformance with California Test 549 indicated that the aggregate would develop a relative strength of not less than 95 percent and would have a relative shrinkage not greater than 105 percent, based on concrete.

90-2.03 WATER

• In conventionally reinforced concrete work, the water for curing, for washing aggregates, and for mixing shall be free from oil and shall not contain more than 1000 parts per million of chlorides as Cl, when tested in conformance with California Test 422, nor more than 1300 parts per million of sulfates as SO_4, when tested in conformance with California Test 417. In prestressed concrete work, the water for curing, for washing aggregates, and for mixing shall be free from oil and shall not contain more than 650 parts per million of chlorides as Cl, when tested in conformance with California Test 422, nor more than 1300 parts per million of sulfates as SO_4, when tested in conformance with California Test 417. In no case shall the water contain an amount of impurities that will cause either: 1) a change in the setting time of cement of more than 25 percent when tested in conformance with the requirements in ASTM Designation: C 191 or ASTM Designation: C 266 or 2) a reduction in the compressive strength of mortar at 14 days of more than 5 percent, when tested in conformance with the requirements in ASTM Designation: C 109, when compared to the results obtained with distilled water or deionized water, tested in conformance with the requirements in ASTM Designation: C 109.

• In non-reinforced concrete work, the water for curing, for washing aggregates and for mixing shall be free from oil and shall not contain more than 2000 parts per million of chlorides as Cl, when tested in conformance with California Test 422, or more than 1500 parts per million of sulfates as SO_4, when tested in conformance with California Test 417.

• In addition to the above provisions, water for curing concrete shall not contain impurities in a sufficient amount to cause discoloration of the concrete or produce etching of the surface.

• Water reclaimed from mixer wash-out operations may be used in mixing concrete. The water shall not contain coloring agents or more than 300 parts per million of alkalis ($Na_2O + 0.658\ K_2O$) as determined on the filtrate. The specific gravity of the water shall not exceed 1.03 and shall not vary more than ±0.010 during a day's operations.

90-2.04 ADMIXTURE MATERIALS

• Admixture materials shall conform to the requirements in the following ASTM Designations:

A. Chemical Admixtures—ASTM Designation: C 494.
B. Air-entraining Admixtures—ASTM Designation: C 260.
C. Calcium Chloride—ASTM Designation: D 98.
D. Mineral Admixtures—Coal fly ash; raw or calcined natural pozzolan as specified in ASTM Designation: C 618; silica fume conforming to the requirements in ASTM Designation: C 1240, with reduction of mortar expansion of 80 percent, minimum, using the cement from the proposed mix design.

• Unless otherwise specified in the special provisions, mineral admixtures shall be used in conformance with the provisions in Section 90-4.08, "Required Use of Mineral Admixtures."

90-3 AGGREGATE GRADINGS

90-3.01 GENERAL

• Before beginning concrete work, the Contractor shall submit in writing to the Engineer the gradation of the primary aggregate nominal sizes that the Contractor proposes to furnish. If a primary coarse aggregate or the fine aggregate is separated into 2 or more sizes, the proposed gradation shall consist of the gradation for each individual size, and the proposed proportions of each individual size, combined mathematically to indicate one proposed gradation. The proposed gradation shall meet the grading requirements shown in the table in this section, and shall show the percentage passing each of the sieve sizes used in determining the end result.

• The Engineer may waive, in writing, the gradation requirements in this Section 90-3.01 and in Sections 90-3.02, "Coarse Aggregate Grading," 90-3.03, "Fine Aggregate Grading," and 90-3.04, "Combined Aggregate Gradings," if, in the Engineer's opinion, furnishing the gradation is not necessary for the type or amount of concrete work to be constructed.

• Gradations proposed by the Contractor shall be within the following percentage passing limits:

Primary Aggregate Nominal Size	Sieve Size	Limits of Proposed Gradation
37.5-mm x 19-mm	25-mm	19 - 41
25-mm x 4.75-mm	19-mm	52 - 85
25-mm x 4.75-mm	9.5-mm	15 - 38
12.5-mm x 4.75-mm	9.5-mm	40 - 78
9.5-mm x 2.36-mm	9.5-mm	50 - 85
Fine Aggregate	1.18-mm	55 - 75
Fine Aggregate	600-µm	34 - 46
Fine Aggregate	300-µm	16 - 29

• Should the Contractor change the source of supply, the Contractor shall submit in writing to the Engineer the new gradations before their intended use.

90-3.02 COARSE AGGREGATE GRADING

• The grading requirements for coarse aggregates are shown in the following table for each size of coarse aggregate:

	Percentage Passing Primary Aggregate Nominal Sizes							
	37.5-mm x 19-mm		25-mm x 4.75-mm		12.5-mm x 4.75-mm		9.5-mm x 2.36-mm	
Sieve Sizes	Operating Range	Contract Compliance	Operating Range	Contract Compliance	Operating Range	Contract Compliance	Operating Range	Contract Compliance
50-mm	100	100	—	—	—	—	—	—
37.5-mm	88-100	85-100	100	100	—	—	—	—
25-mm	x ± 18	X ± 25	88-100	86-100	—	—	—	—
19-mm	0-17	0-20	X ± 15	X ± 22	100	100	—	—
12.5-mm	—	—	—	—	82-100	80-100	100	100
9.5-mm	0-7	0-9	X ± 15	X ± 22	X ± 15	X ± 22	X ± 15	X ± 20
4.75-mm	—	—	0-16	0-18	0-15	0-18	0-25	0-28
2.36-mm	—	—	0-6	0-7	0-6	0-7	0-6	0-7

• In the above table, the symbol X is the gradation that the Contractor proposes to furnish for the specific sieve size as provided in Section 90-3.01, "General."

• Coarse aggregate for the 37.5-mm, maximum, combined aggregate grading as provided in Section 90-3.04, "Combined Aggregate Gradings," shall be furnished in 2 or more primary aggregate nominal sizes. Each primary aggregate nominal size may be separated into 2 sizes and stored separately, provided that the combined material conforms to the grading requirements for that particular primary aggregate nominal size.

• When the 25-mm, maximum, combined aggregate grading as provided in Section 90-3.04, "Combined Aggregate Gradings," is to be used, the coarse aggregate may be separated into 2 sizes and stored separately, provided that the combined material shall conform to the grading requirements for the 25-mm x 4.75-mm primary aggregate nominal size.

90-3.03 FINE AGGREGATE GRADING

- Fine aggregate shall be graded within the following limits:

Sieve Sizes	Percentage Passing	
	Operating Range	Contract Compliance
9.5-mm	100	100
4.75-mm	95-100	93-100
2.36-mm	65-95	61-99
1.18-mm	X ± 10	X ± 13
600-µm	X ± 9	X ± 12
300-µm	X ± 6	X ± 9
150-µm	2-12	1-15
75-µm	0-8	0-10

- In the above table, the symbol X is the gradation that the Contractor proposes to furnish for the specific sieve size as provided in Section 90-3.01, "General."
- In addition to the above required grading analysis, the distribution of the fine aggregate sizes shall be such that the difference between the total percentage passing the 1.18-mm sieve and the total percentage passing the 600-µm sieve shall be between 10 and 40, and the difference between the percentage passing the 600-µm and 300-µm sieves shall be between 10 and 40.
- Fine aggregate may be separated into 2 or more sizes and stored separately, provided that the combined material conforms to the grading requirements specified in this Section 90-3.03.

90-3.04 COMBINED AGGREGATE GRADINGS

- Combined aggregate grading limits shall be used only for the design of concrete mixes. Concrete mixes shall be designed so that aggregates are combined in proportions that shall produce a mixture within the grading limits for combined aggregates as specified herein.
- The combined aggregate grading, except when otherwise specified in these specifications or the special provisions, shall be either the 37.5-mm, maximum grading, or the 25-mm, maximum grading, at the option of the Contractor.

Grading Limits of Combined Aggregates

Sieve Sizes	Percentage Passing			
	37.5-mm Max.	25-mm Max.	12.5-mm Max.	9.5-mm Max.
50-mm	100	—	—	—
37.5-mm	90-100	100	—	—
25-mm	50-86	90-100	—	—
19-mm	45-75	55-100	100	—
12.5-mm	—	—	90-100	100
9.5-mm	38-55	45-75	55-86	50 - 100
4.75-mm	30-45	35-60	45-63	45 - 63
2.36-mm	23-38	27-45	35-49	35 - 49
1.18-mm	17-33	20-35	25-37	25 - 37
600-µm	10-22	12-25	15-25	15 - 25
300-µm	4-10	5-15	5-15	5 - 15
150-µm	1-6	1-8	1-8	1 - 8
75-µm	0-3	0-4	0-4	0 - 4

- Changes from one grading to another shall not be made during the progress of the work unless permitted by the Engineer.

90-4 ADMIXTURES

90-4.01 GENERAL

- Admixtures used in portland cement concrete shall conform to and be used in conformance with the provisions in this Section 90-4 and the special provisions. Admixtures shall be used when specified or ordered by the Engineer and may be used at the Contractor's option as provided herein.

- Chemical admixtures and air-entraining admixtures containing chlorides as Cl in excess of one percent by mass of admixture, as determined by California Test 415, shall not be used in prestressed or reinforced concrete.
- Calcium chloride shall not be used in concrete except when otherwise specified.
- Mineral admixture used in concrete for exposed surfaces of like elements of a structure shall be from the same source and of the same percentage.
- Admixtures shall be uniform in properties throughout their use in the work. Should it be found that an admixture as furnished is not uniform in properties, its use shall be discontinued.
- If more than one admixture is used, the admixtures shall be compatible with each other so that the desirable effects of all admixtures used will be realized.

90-4.02 MATERIALS

- Admixture materials shall conform to the provisions in Section 90–2.04, "Admixture Materials."

90-4.03 ADMIXTURE APPROVAL

- No admixture brand shall be used in the work unless it is on the Department's current list of approved brands for the type of admixture involved.
- Admixture brands will be considered for addition to the approved list if the manufacturer of the admixture submits to the Transportation Laboratory a sample of the admixture accompanied by certified test results demonstrating that the admixture complies with the requirements in the appropriate ASTM Designation and these specifications. The sample shall be sufficient to permit performance of all required tests. Approval of admixture brands will be dependent upon a determination as to compliance with the requirements, based on the certified test results submitted, together with tests the Department may elect to perform.
- When the Contractor proposes to use an admixture of a brand and type on the current list of approved admixture brands, the Contractor shall furnish a Certificate of Compliance from the manufacturer, as provided in Section 6-1.07, "Certificates of Compliance," certifying that the admixture furnished is the same as that previously approved. If a previously approved admixture is not accompanied by a Certificate of Compliance, the admixture shall not be used in the work until the Engineer has had sufficient time to make the appropriate tests and has approved the admixture for use. The Engineer may take samples for testing at any time, whether or not the admixture has been accompanied by a Certificate of Compliance.
- If a mineral admixture is delivered directly to the site of the work, the Certificate of Compliance shall be signed by the manufacturer or supplier of the mineral admixture. If the mineral admixture is used in ready-mix concrete or in precast concrete products purchased as such by the Contractor, the Certificate of Compliance shall be signed by the manufacturer of the concrete or product.

90-4.04 REQUIRED USE OF CHEMICAL ADMIXTURES AND CALCIUM CHLORIDE

- When the use of a chemical admixture or calcium chloride is specified, the admixture shall be used at the dosage specified, except that if no dosage is specified, the admixture shall be used at the dosage normally recommended by the manufacturer of the admixture.
- Calcium chloride shall be dispensed in liquid, flake, or pellet form. Calcium chloride dispensed in liquid form shall conform to the provisions for dispensing liquid admixtures in Section 90-4.10, "Proportioning and Dispensing Liquid Admixtures."

90-4.05 OPTIONAL USE OF CHEMICAL ADMIXTURES

- The Contractor will be permitted to use Type A or F, water-reducing; Type B, retarding; or Type D or G, water-reducing and retarding admixtures as described in ASTM Designation: C 494 to conserve cementitious material or to facilitate any concrete construction application subject to the following conditions:

A. When a water-reducing admixture or a water-reducing and retarding admixture is used, the cementitious material content specified or ordered may be reduced by a maximum of 5 percent by mass, except that the resultant cementitious material content shall be not less than 300 kilograms per cubic meter; and
B. When a reduction in cementitious material content is made, the dosage of admixture used shall be the dosage used in determining approval of the admixture.

- Unless otherwise specified, a Type C accelerating chemical admixture conforming to the requirements in ASTM Designation: C 494, may be used in portland cement concrete. Inclusion in the mix design submitted for approval will not be required provided that the admixture is added to counteract changing conditions that contribute to delayed setting of the portland cement concrete, and the use or change in dosage of the admixture is approved in writing by the Engineer.

90-4.06 REQUIRED USE OF AIR-ENTRAINING ADMIXTURES

• When air-entrainment is specified or ordered by the Engineer, the air-entraining admixture shall be used in amounts to produce a concrete having the specified air content as determined by California Test 504.

90-4.07 OPTIONAL USE OF AIR-ENTRAINING ADMIXTURES

• When air-entrainment has not been specified or ordered by the Engineer, the Contractor will be permitted to use an air-entraining admixture to facilitate the use of any construction procedure or equipment provided that the average air content, as determined by California Test 504, of 3 successive tests does not exceed 4 percent, and no single test value exceeds 5.5 percent. If the Contractor elects to use an air-entraining admixture in concrete for pavement, the Contractor shall so indicate at the time the Contractor designates the source of aggregate as provided in Section 40-1.015, "Cement Content."

90-4.08 REQUIRED USE OF MINERAL ADMIXTURES

• Unless otherwise specified, mineral admixture shall be combined with cement to make cementitious material.

• The calcium oxide content shall not exceed 10 percent when determined in conformance with the requirements in ASTM Designation: C 114. The available alkali content (as sodium oxide equivalent) shall not exceed 1.5 percent when determined in conformance with the requirements in ASTM Designation: C 311, or the total alkali content (as sodium oxide equivalent) shall not exceed 5.0 percent when determined in conformance with the requirements in ASTM Designation: D 4326.

• The amounts of cement and mineral admixture used in cementitious material shall be sufficient to satisfy the minimum cementitious material content requirements specified in Section 90-1.01, "Description," or Section 90-4.05, "Optional Use of Chemical Admixtures," and shall conform to the following:

A. The minimum amount of cement shall not be less than 75 percent by mass of the specified minimum cementitious material content;
B. The minimum amount of mineral admixture to be combined with cement shall be determined using one of the following criteria:

    1. When the calcium oxide content of a mineral admixture is equal to or less than 2 percent by mass, the amount of mineral admixture shall not be less than 15 percent by mass of the total amount of cementitious material to be used in the mix;
    2. When the calcium oxide content of a mineral admixture is greater than 2 percent, the amount of mineral admixture shall not be less than 25 percent by mass of the total amount of cementitious material to be used in the mix;
    3. When a mineral admixture that conforms to the provisions for silica fume in Section 90-2.04, "Admixture Materials," is used, the amount of mineral admixture shall not be less than 10 percent by mass of the total amount of cementitious material to be used in the mix

C. The total amount of mineral admixture shall not exceed 35 percent by mass of the total amount of cementitious material to be used in the mix. Where Section 90-1.01, "Description," specifies a maximum cementitious content in kilograms per cubic meter, the total mass of cement and mineral admixture per cubic meter shall not exceed the specified maximum cementitious material content.

90-4.09 BLANK

90-4.10 PROPORTIONING AND DISPENSING LIQUID ADMIXTURES

• Chemical admixtures and air-entraining admixtures shall be dispensed in liquid form. Dispensers for liquid admixtures shall have sufficient capacity to measure at one time the prescribed quantity required for each batch of concrete. Each dispenser shall include a graduated measuring unit into which liquid admixtures are measured to within ±5 percent of the prescribed quantity for each batch. Dispensers shall be located and maintained so that the graduations can be accurately read from the point at which proportioning operations are controlled to permit a visual check of batching accuracy prior to discharge. Each measuring unit shall be clearly marked for the type and quantity of admixture.

• Each liquid admixture dispensing system shall be equipped with a sampling device consisting of a valve located in a safe and readily accessible position such that a sample of the admixture may be withdrawn slowly by the Engineer.

• If more than one liquid admixture is used in the concrete mix, each liquid admixture shall have a separate measuring unit and shall be dispensed by injecting equipment located in such a manner that the admixtures are not mixed at high concentrations and do not interfere with the effectiveness of each other. When air-entraining admixtures are used in conjunction with other liquid admixtures, the air-entraining admixture shall be the first to be incorporated into the mix.

• When automatic proportioning devices are required for concrete pavement, dispensers for liquid admixtures shall operate automatically with the batching control equipment. The dispensers shall be equipped with an automatic warning system in good operating condition that will provide a visible or audible signal at the point at which proportioning operations are controlled when the quantity of admixture measured for each batch of concrete varies from the preselected dosage by more than 5 percent, or when the entire contents of the measuring unit are not emptied from the dispenser into each batch of concrete.

• Unless liquid admixtures are added to premeasured water for the batch, their discharge into the batch shall be arranged to flow into the stream of water so that the admixtures are well dispersed throughout the batch, except that air-entraining admixtures may be dispensed directly into moist sand in the batching bins provided that adequate control of the air content of the concrete can be maintained.

• Liquid admixtures requiring dosages greater than 2.5 L/m^3 shall be considered to be water when determining the total amount of free water as specified in Section 90-6.06, "Amount of Water and Penetration."

• Special admixtures, such as "high range" water reducers that may contribute to a high rate of slump loss, shall be measured and dispensed as recommended by the admixture manufacturer and as approved by the Engineer.

90-4.11 STORAGE, PROPORTIONING, AND DISPENSING OF MINERAL ADMIXTURES

• Mineral admixtures shall be protected from exposure to moisture until used. Sacked material shall be piled to permit access for tally, inspection and identification for each shipment.

• Adequate facilities shall be provided to assure that mineral admixtures meeting the specified requirements are kept separate from other mineral admixtures in order to prevent any but the specified mineral admixtures from entering the work. Safe and suitable facilities for sampling mineral admixtures shall be provided at the weigh hopper or in the feed line immediately in advance of the hopper.

• Mineral admixtures shall be incorporated into concrete using equipment conforming to the requirements for cement weigh hoppers, and charging and discharging mechanisms in ASTM Designation: C 94, in Section 90-5.03, "Proportioning," and in this Section 90-4.11.

• When concrete is completely mixed in stationary paving mixers, the mineral admixture shall be weighed in a separate weigh hopper conforming to the provisions for cement weigh hoppers and charging and discharging mechanisms in Section 90-5.03A, "Proportioning for Pavement," and the mineral admixture and cement shall be introduced simultaneously into the mixer proportionately with the aggregate. If the mineral admixture is not weighed in a separate weigh hopper, the Contractor shall provide certification that the stationary mixer is capable of mixing the cement, admixture, aggregates and water uniformly prior to discharge. Certification shall contain the following:

A. Test results for 2 compressive strength test cylinders of concrete taken within the first one-third and 2 compressive strength test cylinders of concrete taken within the last one-third of the concrete discharged from a single batch from the stationary paving mixer. Strength tests and cylinder preparation will be in conformance with the provisions of Section 90-9, "Compressive Strength;"
B. Calculations demonstrating that the difference in the averages of 2 compressive strengths taken in the first one-third is no greater than 7.5 percent different than the averages of 2 compressive strengths taken in the last one-third of the concrete discharged from a single batch from the stationary paving mixer. Strength tests and cylinder preparation will be in conformance with the provisions of Section 90-9, "Compressive Strength;" and
C. The mixer rotation speed and time of mixing prior to discharge that are required to produce a mix that meets the requirements above.

90-5 PROPORTIONING

90-5.01 STORAGE OF AGGREGATES

• Aggregates shall be stored or stockpiled in such a manner that separation of coarse and fine particles of each size shall be avoided and also that the various sizes shall not become intermixed before proportioning.

• Aggregates shall be stored or stockpiled and handled in a manner that shall prevent contamination by foreign materials. In addition, storage of aggregates at batching or mixing facilities that are erected subsequent to the award of the contract and that furnish concrete to the project shall conform to the following:

A. Intermingling of the different sizes of aggregates shall be positively prevented. The Contractor shall take the necessary measures to prevent intermingling. The preventive measures may include, but are not necessarily limited to, physical separation of stockpiles or construction of bulkheads of adequate length and height; and
B. Contamination of aggregates by contact with the ground shall be positively prevented. The Contractor shall take the necessary measures to prevent contamination. The preventive measures shall include, but are not necessarily limited

to, placing aggregates on wooden platforms or on hardened surfaces consisting of portland cement concrete, asphalt concrete, or cement treated material.

• In placing aggregates in storage or in moving the aggregates from storage to the weigh hopper of the batching plant, any method that may cause segregation, degradation, or the combining of materials of different gradings that will result in any size of aggregate at the weigh hopper failing to meet the grading requirements, shall be discontinued. Any method of handling aggregates that results in excessive breakage of particles shall be discontinued. The use of suitable devices to reduce impact of falling aggregates may be required by the Engineer.

90-5.02 PROPORTIONING DEVICES

• Weighing, measuring, or metering devices used for proportioning materials shall conform to the requirements in Section 9-1.01, "Measurement of Quantities," and this Section 90-5.02. In addition, automatic weighing systems shall comply with the requirements for automatic proportioning devices in Section 90-5.03A, "Proportioning for Pavement." Automatic devices shall be automatic to the extent that the only manual operation required for proportioning the aggregates, cement, and mineral admixture for one batch of concrete is a single operation of a switch or starter.

• Proportioning devices shall be tested at the expense of the Contractor as frequently as the Engineer may deem necessary to ensure their accuracy.

• Weighing equipment shall be insulated against vibration or movement of other operating equipment in the plant. When the plant is in operation, the mass of each batch of material shall not vary from the mass designated by the Engineer by more than the tolerances specified herein.

• Equipment for cumulative weighing of aggregate shall have a zero tolerance of ±0.5 percent of the designated total batch mass of the aggregate. For systems with individual weigh hoppers for the various sizes of aggregate, the zero tolerance shall be ±0.5 percent of the individual batch mass designated for each size of aggregate. Equipment for cumulative weighing of cement and mineral admixtures shall have a zero tolerance of ±0.5 percent of the designated total batch mass of the cement and mineral admixture. Equipment for weighing cement or mineral admixture separately shall have a zero tolerance of ±0.5 percent of their designated individual batch masses. Equipment for measuring water shall have a zero tolerance of ±0.5 percent of its designated mass or volume.

• The mass indicated for any batch of material shall not vary from the preselected scale setting by more than the following:

A. Aggregate weighed cumulatively shall be within 1.0 percent of the designated total batch mass of the aggregate. Aggregates weighed individually shall be within 1.5 percent of their respective designated batch masses; and
B. Cement shall be within 1.0 percent of its designated batch mass. When weighed individually, mineral admixture shall be within 1.0 percent of its designated batch mass. When mineral admixture and cement are permitted to be weighed cumulatively, cement shall be weighed first to within 1.0 percent of its designated batch mass, and the total for cement and mineral admixture shall be within 1.0 percent of the sum of their designated batch masses; and
C. Water shall be within 1.5 percent of its designated mass or volume.

• Each scale graduation shall be approximately 0.001 of the total capacity of the scale. The capacity of scales for weighing cement, mineral admixture, or cement plus mineral admixture and aggregates shall not exceed that of commercially available scales having single graduations indicating a mass not exceeding the maximum permissible mass variation above, except that no scale shall be required having a capacity of less than 500 kg, with 0.5-kg graduations.

90-5.03 PROPORTIONING

• Proportioning shall consist of dividing the aggregates into the specified sizes, each stored in a separate bin, and combining them with cement, mineral admixture, and water as provided in these specifications. Aggregates shall be proportioned by mass.

• At the time of batching, aggregates shall have been dried or drained sufficiently to result in a stable moisture content such that no visible separation of water from aggregate will take place during transportation from the proportioning plant to the point of mixing. In no event shall the free moisture content of the fine aggregate at the time of batching exceed 8 percent of its saturated, surface-dry mass.

• Should separate supplies of aggregate material of the same size group, but of different moisture content or specific gravity or surface characteristics affecting workability, be available at the proportioning plant, withdrawals shall be made from one supply exclusively and the materials therein completely exhausted before starting upon another.

• Bulk "Type IP (MS) Modified" cement shall be weighed in an individual hopper and shall be kept separate from the aggregates until the ingredients are released for discharge into the mixer.

• Bulk cement and mineral admixture may be weighed in separate, individual weigh hoppers or may be weighed in the same weigh hopper and shall be kept separate from the aggregates until the ingredients are released for discharge into the mixer. If the cement and mineral admixture are weighed cumulatively, the cement shall be weighed first.

• When cement and mineral admixtures are weighed in separate weigh hoppers**,** the weigh systems for the proportioning of the aggregate, the cement, and the mineral admixture shall be individual and distinct from all other weigh systems. Each weigh system shall be equipped with a hopper, a lever system, and an indicator to constitute an individual and independent material weighing device. The cement and the mineral admixture shall be discharged into the mixer simultaneously with the aggregate.

• The scales and weigh hoppers for bulk weighing cement, mineral admixture, or cement plus mineral admixture shall be separate and distinct from the aggregate weighing equipment.

• For batches with a volume of one cubic meter or more, the batching equipment shall conform to one of the following combinations:

A. Separate boxes and separate scale and indicator for weighing each size of aggregate.
B. Single box and scale indicator for all aggregates.
C. Single box or separate boxes and automatic weighing mechanism for all aggregates.

• In order to check the accuracy of batch masses, the gross mass and tare mass of batch trucks, truck mixers, truck agitators, and non-agitating hauling equipment shall be determined when ordered by the Engineer. The equipment shall be weighed at the Contractor's expense on scales designated by the Engineer.

90-5.03A Proportioning for Pavement

• Aggregates and bulk cement, mineral admixture, and cement plus mineral admixture for use in pavement shall be proportioned by mass by means of automatic proportioning devices of approved type conforming to these specifications.

• The Contractor shall install and maintain in operating condition an electronically actuated moisture meter that will indicate, on a readily visible scale, changes in the moisture content of the fine aggregate as it is batched within a sensitivity of 0.5 percent by mass of the fine aggregate.

• The batching of cement, mineral admixture, or cement plus mineral admixture and aggregate shall be interlocked so that a new batch cannot be started until all weigh hoppers are empty, the proportioning devices are within zero tolerance, and the discharge gates are closed. The interlock shall permit no part of the batch to be discharged until all aggregate hoppers and the cement and mineral admixture hoppers or the cement plus mineral admixture hopper are charged with masses that are within the tolerances specified in Section 90-5.02, "Proportioning Devices."

• When interlocks are required for cement and mineral admixture charging mechanisms and cement and mineral admixtures are weighed cumulatively, their charging mechanisms shall be interlocked to prevent the introduction of mineral admixture until the mass of cement in the cement weigh hopper is within the tolerances specified in Section 90-5.02, "Proportioning Devices."

• The discharge gate on the cement and mineral admixture hoppers or the cement plus mineral admixture hopper shall be designed to permit regulating the flow of cement, mineral admixture, or cement plus mineral admixture into the aggregate as directed by the Engineer.

• When separate weigh boxes are used for each size of aggregate, the discharge gates shall permit regulating the flow of each size of aggregate as directed by the Engineer.

• Material discharged from the several bins shall be controlled by gates or by mechanical conveyors. The means of withdrawal from the several bins, and of discharge from the weigh box, shall be interlocked so that not more than one bin can discharge at a time, and so that the weigh box cannot be tripped until the required quantity from each of the several bins has been deposited therein. Should a separate weigh box be used for each size of aggregate, all may be operated and discharged simultaneously.

• When the discharge from the several bins is controlled by gates, each gate shall be actuated automatically so that the required mass is discharged into the weigh box, after which the gate shall automatically close and lock.

• The automatic weighing system shall be designed so that all proportions required may be set on the weighing controller at the same time.

90-6 MIXING AND TRANSPORTING

90-6.01 GENERAL

• Concrete shall be mixed in mechanically operated mixers, except that when permitted by the Engineer, batches not exceeding 0.25 m^3 may be mixed by hand methods in conformance with the provisions in Section 90-6.05, "Hand-Mixing."

• Equipment having components made of aluminum or magnesium alloys that would have contact with plastic concrete during mixing, transporting, or pumping of portland cement concrete shall not be used.

• Concrete shall be homogeneous and thoroughly mixed, and there shall be no lumps or evidence of undispersed cement, mineral admixture, or cement plus mineral admixture.

• Uniformity of concrete mixtures will be determined by differences in penetration as determined by California Test 533, or slump as determined by ASTM Designation: C 143, and by variations in the proportion of coarse aggregate as determined by California Test 529.

• When the mix design specifies a penetration value, the difference in penetration, determined by comparing penetration tests on 2 samples of mixed concrete from the same batch or truck mixer load, shall not exceed 10 mm. When the mix design specifies a slump value, the difference in slump, determined by comparing slump tests on 2 samples of mixed concrete from the same batch or truck mixer load, shall not exceed the values given in the table below. Variation in the proportion of coarse aggregate will be determined by comparing the results of tests of 2 samples of mixed concrete from the same batch or truck mixer load and the difference between the 2 results shall not exceed 100 kg per cubic meter of concrete.

Average Slump	Maximum Permissible Difference
Less than 100-mm	25-mm
100-mm to 150-mm	38-mm
Greater than 150-mm to 225-mm	50-mm

• The Contractor, at the Contractor's expense, shall furnish samples of the freshly mixed concrete and provide satisfactory facilities for obtaining the samples.

90-6.02 MACHINE MIXING

• Concrete mixers may be of the revolving drum or the revolving blade type, and the mixing drum or blades shall be operated uniformly at the mixing speed recommended by the manufacturer. Mixers and agitators that have an accumulation of hard concrete or mortar shall not be used.

• The temperature of mixed concrete, immediately before placing, shall be not less than 10°C or more than 32°C. Aggregates and water shall be heated or cooled as necessary to produce concrete within these temperature limits. Neither aggregates nor mixing water shall be heated to exceed 65°C. If ice is used to cool the concrete, discharge of the mixer will not be permitted until all ice is melted.

• The batch shall be so charged into the mixer that some water will enter in advance of cementitious materials and aggregates. All water shall be in the drum by the end of the first one-fourth of the specified mixing time.

• Cementitious materials shall be batched and charged into the mixer by means that will not result either in loss of cementitious materials due to the effect of wind, in accumulation of cementitious materials on surfaces of conveyors or hoppers, or in other conditions that reduce or vary the required quantity of cementitious material in the concrete mixture.

• Paving and stationary mixers shall be operated with an automatic timing device. The timing device and discharge mechanism shall be interlocked so that during normal operation no part of the batch will be discharged until the specified mixing time has elapsed.

• The total elapsed time between the intermingling of damp aggregates and all cementitious materials and the start of mixing shall not exceed 30 minutes.

• The size of batch shall not exceed the manufacturer's guaranteed capacity.

• When producing concrete for pavement or base, suitable batch counters shall be installed and maintained in good operating condition at jobsite batching plants and stationary mixers. The batch counters shall indicate the exact number of batches proportioned and mixed.

• Concrete shall be mixed and delivered to the jobsite by means of one of the following combinations of operations:

A. Mixed completely in a stationary mixer and the mixed concrete transported to the point of delivery in truck agitators or in non-agitating hauling equipment (central-mixed concrete).
B. Mixed partially in a stationary mixer, and the mixing completed in a truck mixer (shrink-mixed concrete).
C. Mixed completely in a truck mixer (transit-mixed concrete).
D. Mixed completely in a paving mixer.

• Agitators may be truck mixers operating at agitating speed or truck agitators. Each mixer and agitator shall have attached thereto in a prominent place a metal plate or plates on which is plainly marked the various uses for which the equipment is designed, the manufacturer's guaranteed capacity of the drum or container in terms of the volume of mixed concrete and the speed of rotation of the mixing drum or blades.

• Truck mixers shall be equipped with electrically or mechanically actuated revolution counters by which the number of revolutions of the drum or blades may readily be verified.

• When shrink-mixed concrete is furnished, concrete that has been partially mixed at a central plant shall be transferred to a truck mixer and all requirements for transit-mixed concrete shall apply. No credit in the number of revolutions at mixing speed shall be allowed for partial mixing in a central plant.

90-6.03 TRANSPORTING MIXED CONCRETE

• Mixed concrete may be transported to the delivery point in truck agitators or truck mixers operating at the speed designated by the manufacturer of the equipment as agitating speed, or in non-agitating hauling equipment, provided the consistency and workability of the mixed concrete upon discharge at the delivery point is suitable for adequate placement and consolidation in place, and provided the mixed concrete after hauling to the delivery point conforms to the provisions in Section 90-6.01, "General."

• Truck agitators shall be loaded not to exceed the manufacturer's guaranteed capacity and shall maintain the mixed concrete in a thoroughly mixed and uniform mass during hauling.

• Bodies of non-agitating hauling equipment shall be constructed so that leakage of the concrete mix, or any part thereof, will not occur at any time.

• Concrete hauled in open-top vehicles shall be protected during hauling against rain or against exposure to the sun for more than 20 minutes when the ambient temperature exceeds 24°C.

• No additional mixing water shall be incorporated into the concrete during hauling or after arrival at the delivery point, unless authorized by the Engineer. If the Engineer authorizes additional water to be incorporated into the concrete, the drum shall be revolved not less than 30 revolutions at mixing speed after the water is added and before discharge is commenced.

• The rate of discharge of mixed concrete from truck mixer-agitators shall be controlled by the speed of rotation of the drum in the discharge direction with the discharge gate fully open.

• When a truck mixer or agitator is used for transporting concrete to the delivery point, discharge shall be completed within 1.5 hours or before 250 revolutions of the drum or blades, whichever occurs first, after the introduction of the cement to the aggregates. Under conditions contributing to quick stiffening of the concrete, or when the temperature of the concrete is 30°C or above, the time allowed may be less than 1.5 hours.

• When non-agitating hauling equipment is used for transporting concrete to the delivery point, discharge shall be completed within one hour after the addition of the cement to the aggregates. Under conditions contributing to quick stiffening of the concrete, or when the temperature of the concrete is 30°C or above, the time between the introduction of cement to the aggregates and discharge shall not exceed 45 minutes.

• Each load of concrete delivered at the jobsite shall be accompanied by a weighmaster certificate showing the mix identification number, non-repeating load number, date and time at which the materials were batched, the total amount of water added to the load, and for transit-mixed concrete, the reading of the revolution counter at the time the truck mixer is charged with cement. This weighmaster certificate shall also show the actual scale masses (kilograms) for the ingredients batched. Theoretical or target batch masses shall not be used as a substitute for actual scale masses.

• Weighmaster certificates shall be provided in printed form, or if approved by the Engineer, the data may be submitted in electronic media. Electronic media shall be presented in a tab-delimited format on a 90 mm diskette with a capacity of at least 1.4 megabytes. Captured data, for the ingredients represented by each batch shall be "line feed, carriage return" (LFCR) and "one line, separate record" with allowances for sufficient fields to satisfy the amount of data required by these specifications.

• The Contractor may furnish a weighmaster certificate accompanied by a separate certificate that lists the actual batch masses or measurements for a load of concrete provided that both certificates are imprinted with the same non-repeating load number that is unique to the contract and delivered to the jobsite with the load.

• Weighmaster certificates furnished by the Contractor shall conform to the provisions in Section 9-1.01, "Measurement of Quantities."

90-6.04 TIME OR AMOUNT OF MIXING

• Mixing of concrete in paving or stationary mixers shall continue for the required mixing time after all ingredients, except water and admixture, if added with the water, are in the mixing compartment of the mixer before any part of the batch is released. Transfer time in multiple drum mixers shall not be counted as part of the required mixing time.

• The required mixing time, in paving or stationary mixers, of concrete used for concrete structures, except minor structures, shall be not less than 90 seconds or more than 5 minutes, except that when directed by the Engineer in writing, the requirements of the following paragraph shall apply.

• The required mixing time, in paving or stationary mixers, except as provided in the preceding paragraph, shall be not less than 50 seconds or more than 5 minutes.

• The minimum required revolutions at the mixing speed for transit-mixed concrete shall not be less than that recommended by the mixer manufacturer, but in no case shall the number of revolutions be less than that required to consistently produce concrete conforming to the provisions for uniformity in Section 90-6.01, "General."

90-6.05 HAND-MIXING

• Hand-mixed concrete shall be made in batches of not more than 0.25 m^3 and shall be mixed on a watertight, level platform. The proper amount of coarse aggregate shall be measured in measuring boxes and spread on the platform and the fine aggregate shall be spread on this layer, the 2 layers being not more than 0.3 meters in total depth. On this mixture shall be spread the dry cement and mineral admixture and the whole mass turned no fewer than 2 times dry; then sufficient clean water shall be added, evenly distributed, and the whole mass again turned no fewer than 3 times, not including placing in the carriers or forms.

90-6.06 AMOUNT OF WATER AND PENETRATION

• The amount of water used in concrete mixes shall be regulated so that the penetration of the concrete as determined by California Test 533 or the slump of the concrete as determined by ASTM Designation: C 143 is within the "Nominal" values shown in the following table. When the penetration or slump of the concrete is found to exceed the nominal values listed, the mixture of subsequent batches shall be adjusted to reduce the penetration or slump to a value within the nominal range shown. Batches of concrete with a penetration or slump exceeding the maximum values listed shall not be used in the work. When Type F or Type G chemical admixtures are added to the mix, the penetration requirements shall not apply and the slump shall not exceed 225 mm after the chemical admixtures are added.

Type of Work	Nominal		Maximum	
	Penetration (mm)	Slump (mm)	Penetration (mm)	Slump (mm)
Concrete Pavement	0-25	—	40	—
Non-reinforced concrete facilities	0-35	—	50	—
Reinforced concrete structures				
Sections over 300-mm thick	0-35	—	65	—
Sections 300-mm thick or less	0-50	—	75	—
Concrete placed under water	—	150-200	—	225
Cast-in-place concrete piles	65-90	130-180	100	200

• The amount of free water used in concrete shall not exceed 183 kg/m^3, plus 20 kg for each required 100 kg of cementitious material in excess of 325 kg/m^3.

• The term free water is defined as the total water in the mixture minus the water absorbed by the aggregates in reaching a saturated surface-dry condition.

• Where there are adverse or difficult conditions that affect the placing of concrete, the above specified penetration and free water content limitations may be exceeded providing the Contractor is granted permission by the Engineer in writing to increase the cementitious material content per cubic meter of concrete. The increase in water and cementitious material shall be at a ratio not to exceed 30 kg of water per added 100 kg of cementitious material per cubic meter. The cost of additional cementitious material and water added under these conditions shall be at the Contractor's expense and no additional compensation will be allowed therefor.

• The equipment for supplying water to the mixer shall be constructed and arranged so that the amount of water added can be measured accurately. Any method of discharging water into the mixer for a batch shall be accurate within 1.5 percent of the quantity of water required to be added to the mix for any position of the mixer. Tanks used to measure water shall be designed so that water cannot enter while water is being discharged into the mixer and discharge into the mixer shall be made rapidly in one operation without dribbling. All equipment shall be arranged so as to permit checking the amount of water delivered by discharging into measured containers.

90-7 CURING CONCRETE

90-7.01 METHODS OF CURING

• Newly placed concrete shall be cured by the methods specified in this Section 90-7.01 and the special provisions.

90-7.01A Water Method

• The concrete shall be kept continuously wet by the application of water for a minimum curing period of 7 days after the concrete has been placed.

• When a curing medium consisting of cotton mats, rugs, carpets, or earth or sand blankets is to be used to retain the moisture, the entire surface of the concrete shall be kept damp by applying water with a nozzle that so atomizes the flow that a mist and not a spray is formed, until the surface of the concrete is covered with the curing medium. The moisture from the

nozzle shall not be applied under pressure directly upon the concrete and shall not be allowed to accumulate on the concrete in a quantity sufficient to cause a flow or wash the surface. At the expiration of the curing period, the concrete surfaces shall be cleared of all curing mediums.

- At the option of the Contractor, a curing medium consisting of white opaque polyethylene sheeting extruded onto burlap may be used to cure concrete structures. The polyethylene sheeting shall have a minimum thickness of 100 µm, and shall be extruded onto 283.5 gram burlap.
- At the option of the Contractor, a curing medium consisting of polyethylene sheeting may be used to cure concrete columns. The polyethylene sheeting shall have a minimum thickness of 250 µm achieved in a single layer of material.
- If the Contractor chooses to use polyethylene sheeting or polyethylene sheeting on burlap as a curing medium as specified above, these mediums and any joints therein shall be secured as necessary to provide moisture retention and shall be within 75 mm of the concrete at all points along the surface being cured. When these mediums are used, the temperature of the concrete shall be monitored during curing. If the temperature of the concrete cannot be maintained below 60°C, this method of curing shall be discontinued, and one of the other curing methods allowed for the concrete shall be used.
- When concrete bridge decks and flat slabs are to be cured without the use of a curing medium, the entire surface of the bridge deck or slab shall be kept damp by the application of water with an atomizing nozzle as specified in the preceding paragraph, until the concrete has set, after which the entire surface of the concrete shall be sprinkled continuously with water for a period of not less than 7 days.

90-7.01B Curing Compound Method

- Surfaces of the concrete that are exposed to the air shall be sprayed uniformly with a curing compound.
- Curing compounds to be used shall be as follows:

1. Pigmented curing compound conforming to the requirements in ASTM Designation: C 309, Type 2, Class B, except the resin type shall be poly-alpha-methylstyrene.
2. Pigmented curing compound conforming to the requirements in ASTM Designation: C 309, Type 2, Class B.
3. Pigmented curing compound conforming to the requirements in ASTM Designation: C 309, Type 2, Class A.
4. Non-pigmented curing compound conforming to the requirements in ASTM Designation: C 309, Type 1, Class B.
5. Non-pigmented curing compound conforming to the requirements in ASTM Designation: C 309, Type 1, Class A.
6. Non-pigmented curing compound with fugitive dye conforming to the requirements in ASTM Designation: C 309, Type 1-D, Class A.

- The infrared scan for the dried vehicle from curing compound (1) shall match the infrared scan on file at the Transportation Laboratory.
- The loss of water for each type of curing compound, when tested in conformance with the requirements in California Test 534, shall not be more than 0.15-kg/m^2 in 24 hours.
- The curing compound to be used will be specified elsewhere in these specifications or in the special provisions.
- When the use of curing compound is required or permitted elsewhere in these specifications or in the special provisions and no specific kind is specified, any of the curing compounds listed above may be used.
- Curing compound shall be applied at a nominal rate of 3.7 m^2/L, unless otherwise specified.
- At any point, the application rate shall be within ±1.2 m^2/L of the nominal rate specified, and the average application rate shall be within ±0.5 m^2/L of the nominal rate specified when tested in conformance with the requirements in California Test 535. Runs, sags, thin areas, skips, or holidays in the applied curing compound shall be evidence that the application is not satisfactory.
- Curing compounds shall be applied using power operated spray equipment. The power operated spraying equipment shall be equipped with an operational pressure gage and a means of controlling the pressure. Hand spraying of small and irregular areas that are not reasonably accessible to mechanical spraying equipment, in the opinion of the Engineer, may be permitted.
- The curing compound shall be applied to the concrete following the surface finishing operation, immediately before the moisture sheen disappears from the surface, but before any drying shrinkage or craze cracks begin to appear. In the event of any drying or cracking of the surface, application of water with an atomizing nozzle as specified in Section 90-7.01A, "Water Method," shall be started immediately and shall be continued until application of the compound is resumed or started; however, the compound shall not be applied over any resulting freestanding water. Should the film of compound be damaged from any cause before the expiration of 7 days after the concrete is placed in the case of structures and 72 hours in the case of pavement, the damaged portion shall be repaired immediately with additional compound.
- At the time of use, compounds containing pigments shall be in a thoroughly mixed condition with the pigment uniformly dispersed throughout the vehicle. A paddle shall be used to loosen all settled pigment from the bottom of the container, and a power driven agitator shall be used to disperse the pigment uniformly throughout the vehicle.
- Agitation shall not introduce air or other foreign substance into the curing compound.

- The manufacturer shall include in the curing compound the necessary additives for control of sagging, pigment settling, leveling, de-emulsification, or other requisite qualities of a satisfactory working material. Pigmented curing compounds shall be manufactured so that the pigment does not settle badly, does not cake or thicken in the container, and does not become granular or curdled. Settlement of pigment shall be a thoroughly wetted, soft, mushy mass permitting the complete and easy vertical penetration of a paddle. Settled pigment shall be easily redispersed, with minimum resistance to the sideways manual motion of the paddle across the bottom of the container, to form a smooth uniform product of the proper consistency.
- Curing compounds shall remain sprayable at temperatures above 4°C and shall not be diluted or altered after manufacture.
- The curing compound shall be packaged in clean 1040-L totes, 210-L barrels

or 19-L pails shall be supplied from a suitable storage tank located at the jobsite. The containers shall comply with "Title 49, Code of Federal Regulations, Hazardous Materials Regulations." The 1040-L totes and the 210-L barrels shall have removable lids and airtight fasteners. The 19-L pails shall be round and have standard full open head and bail. Lids with bungholes shall not be permitted. Settling or separation of solids in containers, except tanks, must be completely redispersed with low speed mixing prior to use, in conformance with these specifications and the manufacturer's recommendations. Mixing shall be accomplished either manually by use of a paddle or by use of a mixing blade driven by a drill motor, at low speed. Mixing blades shall be the type used for mixing paint. On site storage tanks shall be kept clean and free of contaminants. Each tank shall have a permanent system designed to completely redisperse settled material without introducing air or other foreign substances.

- Steel containers and lids shall be lined with a coating that will prevent destructive action by the compound or chemical agents in the air space above the compound. The coating shall not come off the container or lid as skins. Containers shall be filled in a manner that will prevent skinning. Plastic containers shall not react with the compound.
- Each container shall be labeled with the manufacturer's name, kind of curing compound, batch number, volume, date of manufacture, and volatile organic compound (VOC) content. The label shall also warn that the curing compound containing pigment shall be well stirred before use. Precautions concerning the handling and the application of curing compound shall be shown on the label of the curing compound containers in conformance with the Construction Safety Orders and General Industry Safety Orders of the State of California.
- Containers of curing compound shall be labeled to indicate that the contents fully comply with the rules and regulations concerning air pollution control in the State of California.
- When the curing compound is shipped in tanks or tank trucks, a shipping invoice shall accompany each load. The invoice shall contain the same information as that required herein for container labels.
- Curing compound will be sampled by the Engineer at the source of supply or at the jobsite or at both locations.
- Curing compound shall be formulated so as to maintain the specified properties for a minimum of one year. The Engineer may require additional testing before use to determine compliance with these specifications if the compound has not been used within one year or whenever the Engineer has reason to believe the compound is no longer satisfactory.
- Tests will be conducted in conformance with the latest ASTM test methods and methods in use by the Transportation Laboratory.

90-7.01C Waterproof Membrane Method

- The exposed finished surfaces of concrete shall be sprayed with water, using a nozzle that so atomizes the flow that a mist and not a spray is formed, until the concrete has set, after which the curing membrane shall be placed. The curing membrane shall remain in place for a period of not less than 72 hours.
- Sheeting material for curing concrete shall conform to the requirements in AASHTO Designation: M 171 for white reflective materials.
- The sheeting material shall be fabricated into sheets of such width as to provide a complete cover for the entire concrete surface. Joints in the sheets shall be securely cemented together in such a manner as to provide a waterproof joint. The joint seams shall have a minimum lap of 100 mm.
- The sheets shall be securely weighted down by placing a bank of earth on the edges of the sheets or by other means satisfactory to the Engineer.
- Should any portion of the sheets be broken or damaged before the expiration of 72 hours after being placed, the broken or damaged portions shall be immediately repaired with new sheets properly cemented into place.
- Sections of membrane that have lost their waterproof qualities or have been damaged to such an extent as to render them unfit for curing the concrete shall not be used.

90-7.01D Forms-In-Place Method

- Formed surfaces of concrete may be cured by retaining the forms in place. The forms shall remain in place for a minimum period of 7 days after the concrete has been placed, except that for members over 0.5-m in least dimension the forms shall remain in place for a minimum period of 5 days.

• Joints in the forms and the joints between the end of forms and concrete shall be kept moisture tight during the curing period. Cracks in the forms and cracks between the forms and the concrete shall be resealed by methods subject to the approval of the Engineer.

90-7.02 CURING PAVEMENT

• The entire exposed area of the pavement, including edges, shall be cured by the waterproof membrane method, or curing compound method using curing compound (1) or (2) as the Contractor may elect. Should the side forms be removed before the expiration of 72 hours following the start of curing, the exposed pavement edges shall also be cured. If the pavement is cured by means of the curing compound method, the sawcut and all portions of the curing compound that have been disturbed by sawing operations shall be restored by spraying with additional curing compound.

• Curing shall commence as soon as the finishing process provided in Section 40-1.10, "Final Finishing," has been completed. The method selected shall conform to the provisions in Section 90-7.01, "Methods of Curing."

• When the curing compound method is used, the compound shall be applied to the entire pavement surface by mechanical sprayers. Spraying equipment shall be of the fully atomizing type equipped with a tank agitator that provides for continual agitation of the curing compound during the time of application. The spray shall be adequately protected against wind, and the nozzles shall be so oriented or moved mechanically transversely as to result in the minimum specified rate of coverage being applied uniformly on exposed faces. Hand spraying of small and irregular areas, and areas inaccessible to mechanical spraying equipment, in the opinion of the Engineer, will be permitted. When the ambient air temperature is above 15°C, the Contractor shall fog the surface of the concrete with a fine spray of water as specified in Section 90-7.01A, "Water Method." The surface of the pavement shall be kept moist between the hours of 10:00 a.m. and 4:30 p.m. on the day the concrete is placed. However, the fogging done after the curing compound has been applied shall not begin until the compound has set sufficiently to prevent displacement. Fogging shall be discontinued if ordered in writing by the Engineer.

90-7.03 CURING STRUCTURES

• Newly placed concrete for cast-in-place structures, other than highway bridge decks, shall be cured by the water method, the forms-in-place method, or, as permitted herein, by the curing compound method, in conformance with the provisions in Section 90-7.01, "Methods of Curing."

• The curing compound method using a pigmented curing compound may be used on concrete surfaces of construction joints, surfaces that are to be buried underground, and surfaces where only Ordinary Surface Finish is to be applied and on which a uniform color is not required and that will not be visible from a public traveled way. If the Contractor elects to use the curing compound method on the bottom slab of box girder spans, the curing compound shall be curing compound (1).

• The top surface of highway bridge decks shall be cured by both the curing compound method and the water method. The curing compound shall be curing compound (1).

• Concrete surfaces of minor structures, as defined in Section 51-1.02, "Minor Structures," shall be cured by the water method, the forms-in-place method or the curing compound method.

• When deemed necessary by the Engineer during periods of hot weather, water shall be applied to concrete surfaces being cured by the curing compound method or by the forms-in-place method, until the Engineer determines that a cooling effect is no longer required. Application of water for this purpose will be paid for as extra work as provided in Section 4-1.03D, "Extra Work."

90-7.04 CURING PRECAST CONCRETE MEMBERS

• Precast concrete members shall be cured in conformance with any of the methods specified in Section 90-7.01, "Methods of Curing." Curing shall be provided for the minimum time specified for each method or until the concrete reaches its design strength, whichever is less. Steam curing may also be used for precast members and shall conform to the following provisions:

A. After placement of the concrete, members shall be held for a minimum 4-hour presteaming period. If the ambient air temperature is below 10°C, steam shall be applied during the presteaming period to hold the air surrounding the member at a temperature between 10°C and 32°C.
B. To prevent moisture loss on exposed surfaces during the presteaming period, members shall be covered as soon as possible after casting or the exposed surfaces shall be kept wet by fog spray or wet blankets.
C. Enclosures for steam curing shall allow free circulation of steam about the member and shall be constructed to contain the live steam with a minimum moisture loss. The use of tarpaulins or similar flexible covers will be permitted, provided they are kept in good repair and secured in such a manner as to prevent the loss of steam and moisture.
D. Steam at the jets shall be at low pressure and in a saturated condition. Steam jets shall not impinge directly on the concrete, test cylinders, or forms. During application of the steam, the temperature rise within the enclosure shall

not exceed 22°C per hour. The curing temperature throughout the enclosure shall not exceed 65°C and shall be maintained at a constant level for a sufficient time necessary to develop the required transfer strength. Control cylinders shall be covered to prevent moisture loss and shall be placed in a location where temperature is representative of the average temperature of the enclosure.

E. Temperature recording devices that will provide an accurate, continuous, permanent record of the curing temperature shall be provided. A minimum of one temperature recording device per 60 m of continuous bed length will be required for checking temperature.

F. Members in pretension beds shall be detensioned immediately after the termination of steam curing while the concrete and forms are still warm, or the temperature under the enclosure shall be maintained above 15°C until the stress is transferred to the concrete.

G. Curing of precast concrete will be considered completed after termination of the steam curing cycle.

90-7.05 CURING PRECAST PRESTRESSED CONCRETE PILES

• Newly placed concrete for precast prestressed concrete piles shall be cured in conformance with the provisions in Section 90-7.04, "Curing Precast Concrete Members," except that piles in a corrosive environment shall be cured as follows:

A. Piles shall be either steam cured or water cured. If water curing is used, the piles shall be kept continuously wet by the application of water in conformance with the provisions in Section 90-7.01A, "Water Method."

B. If steam curing is used, the steam curing provisions in Section 90-7.04, "Curing Precast Concrete Members," shall apply except that the piles shall be kept continuously wet for their entire length for a period of not less than 3 days, including the holding and steam curing periods.

90-7.06 CURING SLOPE PROTECTION

• Concrete slope protection shall be cured in conformance with any of the methods specified in Section 90-7.01, "Methods of Curing."

• Concreted-rock slope protection shall be cured in conformance with any of the methods specified in Section 90-7.01, "Methods of Curing," or with a blanket of earth kept wet for 72 hours, or by sprinkling with a fine spray of water every 2 hours during the daytime for a period of 3 days.

90-7.07 CURING MISCELLANEOUS CONCRETE WORK

• Exposed surfaces of curbs shall be cured by pigmented curing compounds as specified in Section 90-7.01B, "Curing Compound Method."

• Concrete sidewalks, gutter depressions, island paving, curb ramps, driveways, and other miscellaneous concrete areas shall be cured in conformance with any of the methods specified in Section 90-7.01, "Methods of Curing."

• Shotcrete shall be cured for at least 72 hours by spraying with water, or by a moist earth blanket, or by any of the methods provided in Section 90-7.01, "Methods of Curing."

• Mortar and grout shall be cured by keeping the surface damp for 3 days.

• After placing, the exposed surfaces of sign structure foundations, including pedestal portions, if constructed, shall be cured for at least 72 hours by spraying with water, or by a moist earth blanket, or by any of the methods provided in Section 90-7.01, "Methods of Curing."

90-8 PROTECTING CONCRETE

90-8.01 GENERAL

• In addition to the provisions in Section 7-1.16, "Contractor's Responsibility for the Work and Materials," the Contractor shall protect concrete as provided in this Section 90-8.

• Concrete shall not be placed on frozen or ice-coated ground or subgrade nor on ice-coated forms, reinforcing steel, structural steel, conduits, precast members, or construction joints.

• Under rainy conditions, placing of concrete shall be stopped before the quantity of surface water is sufficient to damage surface mortar or cause a flow or wash of the concrete surface, unless the Contractor provides adequate protection against damage.

• Concrete that has been frozen or damaged by other causes, as determined by the Engineer, shall be removed and replaced by the Contractor at the Contractor's expense.

90-8.02 PROTECTING CONCRETE STRUCTURES

• Structure concrete and shotcrete used as structure concrete shall be maintained at a temperature of not less than 7°C for 72 hours after placing and at not less than 4°C for an additional 4 days. When required by the Engineer, the Contractor shall submit a written outline of the proposed methods for protecting the concrete.

90-8.03 PROTECTING CONCRETE PAVEMENT

• Pavement concrete shall be maintained at a temperature of not less than 4°C for 72 hours. When required by the Engineer, the Contractor shall submit a written outline of the proposed methods for protecting the concrete.

• Except as provided in Section 7-1.08, "Public Convenience," the Contractor shall protect concrete pavement against construction and other activities that abrade, scar, discolor, reduce texture depth, lower coefficient of friction, or otherwise damage the surface. Stockpiling, drifting, or excessive spillage of soil, gravel, petroleum products, and concrete or asphalt mixes on the surface of concrete pavement is prohibited unless otherwise specified in these specifications, the special provisions or permitted by the Engineer.

• When ordered by the Engineer or shown on the plans or specified in the special provisions, pavement crossings shall be constructed for the convenience of public traffic. The material and work necessary for the construction of the crossings, and their subsequent removal and disposal, will be paid for at the contract unit prices for the items of work involved and if there are no contract items for the work involved, payment for pavement crossings will be made by extra work as provided in Section 4-1.03D, "Extra Work.". Where public traffic will be required to cross over the new pavement, Type III portland cement may be used in concrete, if permitted in writing by the Engineer. The pavement may be opened to traffic as soon as the concrete has developed a modulus of rupture of 3.8 MPa. The modulus of rupture will be determined by California Test 523.

• No traffic or Contractor's equipment, except as hereinafter provided, will be permitted on the pavement before a period of 10 days has elapsed after the concrete has been placed, nor before the concrete has developed a modulus of rupture of at least 3.8 MPa. Concrete that fails to attain a modulus of rupture of 3.8 MPa within 10 days shall not be opened to traffic until directed by the Engineer.

• Equipment for sawing weakened plane joints will be permitted on the pavement as specified in Section 40-1.08B, "Weakened Plane Joints."

• When requested in writing by the Contractor, the tracks on one side of paving equipment will be permitted on the pavement after a modulus of rupture of 2.4 MPa has been attained, provided that:

A. Unit pressure exerted on the pavement by the paver shall not exceed 135 kPa;
B. Tracks with cleats, grousers, or similar protuberances shall be modified or shall travel on planks or equivalent protective material, so that the pavement is not damaged; and
C. No part of the track shall be closer than 0.3-m from the edge of pavement.

• In case of visible cracking of, or other damage to the pavement, operation of the paving equipment on the pavement shall be immediately discontinued.

• Damage to the pavement resulting from early use of pavement by the Contractor's equipment as provided above shall be repaired by the Contractor at the Contractor's expense.

• The State will furnish the molds and machines for testing the concrete for modulus of rupture, and the Contractor, at the Contractor's expense, shall furnish the material and whatever labor the Engineer may require.

90-9 COMPRESSIVE STRENGTH

90-9.01 GENERAL

• Concrete compressive strength requirements consist of a minimum strength that shall be attained before various loads or stresses are applied to the concrete and, for concrete designated by strength, a minimum strength at the age of 28 days or at the age otherwise allowed in Section 90-1.01, "Description." The various strengths required are specified in these specifications or the special provisions or are shown on the plans.

• The compressive strength of concrete will be determined from test cylinders that have been fabricated from concrete sampled in conformance with the requirements of California Test 539. Test cylinders will be molded and initially field cured in conformance with California Test 540. Test cylinders will be cured and tested after receipt at the testing laboratory in conformance with the requirements of California Test 521. A strength test shall consist of the average strength of 2 cylinders fabricated from material taken from a single load of concrete, except that, if any cylinder should show evidence of improper sampling, molding, or testing, that cylinder shall be discarded and the strength test shall consist of the strength of the remaining cylinder.

• When concrete compressive strength is specified as a prerequisite to applying loads or stresses to a concrete structure or member, test cylinders for other than steam cured concrete will be cured in conformance with Method 1 of

California Test 540. The compressive strength of concrete determined for these purposes will be evaluated on the basis of individual tests.

- When concrete is designated by 28-day compressive strength rather than by cementitious material content, the concrete strength to be used as a basis for acceptance of other than steam cured concrete will be determined from cylinders cured in conformance with Method 1 of California Test 540. If the result of a single compressive strength test at the maximum age specified or allowed is below the specified strength but is 95 percent or more of the specified strength, the Contractor shall, at the Contractor's expense, make corrective changes, subject to approval of the Engineer, in the mix proportions or in the concrete fabrication procedures, before placing additional concrete, and shall pay to the State $14 for each in-place cubic meter of concrete represented by the deficient test. If the result of a single compressive strength test at the maximum age specified or allowed is below 95 percent of the specified strength, but is 85 percent or more of the specified strength, the Contractor shall make the corrective changes specified above, and shall pay to the State $20 for each in place cubic meter of concrete represented by the deficient test. In addition, such corrective changes shall be made when the compressive strength of concrete tested at 7 days indicates, in the judgment of the Engineer, that the concrete will not attain the required compressive strength at the maximum age specified or allowed. Concrete represented by a single test that indicates a compressive strength of less than 85 percent of the specified 28-day compressive strength will be rejected in conformance with the provisions in Section 6-1.04, "Defective Materials."
- If the test result indicates that the compressive strength at the maximum curing age specified or allowed is below the specified strength, but is 85 percent or more of the specified strength, payments to the State as required above shall be made, unless the Contractor, at the Contractor's expense, obtains and submits evidence acceptable to the Engineer that the strength of the concrete placed in the work meets or exceeds the specified 28-day compressive strength. If the test result indicates a compressive strength at the maximum curing age specified or allowed below 85 percent, the concrete represented by that test will be rejected, unless the Contractor, at the Contractor's expense, obtains and submits evidence acceptable to the Engineer that the strength and quality of the concrete placed in the work are acceptable. If the evidence consists of tests made on cores taken from the work, the cores shall be obtained and tested in conformance with the requirements in ASTM Designation: C 42.
- No single compressive strength test shall represent more than 250 m^3.
- When a precast concrete member is steam cured, the compressive strength of the concrete will be determined from test cylinders that have been handled and stored in conformance with Method 3 of California Test 540. The compressive strength of steam cured concrete will be evaluated on the basis of individual tests representing specific portions of production. When the concrete is designated by 28-day compressive strength rather than by cementitious material content, the concrete shall be considered to be acceptable whenever its compressive strength reaches the specified 28-day compressive strength provided that strength is reached in not more than the maximum number of days specified or allowed after the member is cast.
- When concrete is specified by compressive strength, prequalification of materials, mix proportions, mixing equipment, and procedures proposed for use will be required prior to placement of the concrete. Prequalification shall be accomplished by the submission of acceptable certified test data or trial batch reports by the Contractor. Prequalification data shall be based on the use of materials, mix proportions, mixing equipment, procedures, and size of batch proposed for use in the work.
- Certified test data, in order to be acceptable, shall indicate that not less than 90 percent of at least 20 consecutive tests exceed the specified strength at the maximum number of cure days specified or allowed, and none of those tests are less than 95 percent of specified strength. Strength tests included in the data shall be the most recent tests made on concrete of the proposed mix design and all shall have been made within one year of the proposed use of the concrete.
- Trial batch test reports, in order to be acceptable, shall indicate that the average compressive strength of 5 consecutive concrete cylinders, taken from a single batch, at not more than 28 days (or the maximum age allowed) after molding shall be at least 4 MPa greater than the specified 28-day compressive strength, and no individual cylinder shall have a strength less than the specified strength at the maximum age specified or allowed. Data contained in the report shall be from trial batches that were produced within one year of the proposed use of specified strength concrete in the project. Whenever air-entrainment is required, the air content of trial batches shall be equal to or greater than the air content specified for the concrete without reduction due to tolerances.
- Tests shall be performed in conformance with either the appropriate California Test methods or the comparable ASTM test methods. Equipment employed in testing shall be in good condition and shall be properly calibrated. If the tests are performed during the life of the contract, the Engineer shall be notified sufficiently in advance of performing the tests in order to witness the test procedures.
- The certified test data and trial batch test reports shall include the following information:

A. Date of mixing.
B. Mixing equipment and procedures used.
C. The size of batch in cubic meters and the mass, type, and source of all ingredients used.
D. Penetration of the concrete.

E. The air content of the concrete if an air-entraining admixture is used.
F. The age at time of testing and strength of all concrete cylinders tested.

- Certified test data and trial batch test reports shall be signed by an official of the firm that performed the tests.
- When approved by the Engineer, concrete from trial batches may be used in the work at locations where concrete of a lower quality is required and the concrete will be paid for as the type or class of concrete required at that location.
- After materials, mix proportions, mixing equipment, and procedures for concrete have been prequalified for use, additional prequalification by testing of trial batches will be required prior to making changes that, in the judgment of the Engineer, could result in a strength of concrete below that specified.
- The Contractor's attention is directed to the time required to test trial batches and the Contractor shall be responsible for production of trial batches at a sufficiently early date so that the progress of the work is not delayed.
- When precast concrete members are manufactured at the plant of an established manufacturer of precast concrete members, the mix proportions of the concrete shall be determined by the Contractor, and a trial batch and prequalification of the materials, mix proportions, mixing equipment, and procedures will not be required.

90-10 MINOR CONCRETE

90-10.01 GENERAL

- Concrete for minor structures, slope paving, curbs, sidewalks and other concrete work, when designated as minor concrete on the plans, in the specifications, or in the contract item, shall conform to the provisions specified herein.
- The Engineer, at the Engineer's discretion, will inspect and test the facilities, materials and methods for producing the concrete to ensure that minor concrete of the quality suitable for use in the work is obtained.

90-10.02 MATERIALS

- Minor concrete shall conform to the following requirements:

90-10.02A Cementitious Material

- Cementitious material shall conform to the provisions in Section 90-1.01, "Description."

90-10.02B Aggregate

- Aggregate shall be clean and free from deleterious coatings, clay balls, roots, and other extraneous materials.
- The Contractor shall submit to the Engineer for approval, a grading of the combined aggregate proposed for use in the minor concrete. After acceptance of the grading, aggregate furnished for minor concrete shall conform to that grading, unless a change is authorized in writing by the Engineer.
- The Engineer may require the Contractor to furnish periodic test reports of the aggregate grading furnished. The maximum size of aggregate used shall be at the option of the Contractor, but in no case shall the maximum size be larger than 37.5 mm or smaller than 19 mm.
- The Engineer may waive, in writing, the gradation requirements in this Section 90-10.02B, if, in the Engineer's opinion, the furnishing of the gradation is not necessary for the type or amount of concrete work to be constructed.

90-10.02C Water

- Water used for washing, mixing, and curing shall be free from oil, salts, and other impurities that would discolor or etch the surface or have an adverse affect on the quality of the concrete.

90-10.02D Admixtures

- The use of admixtures shall conform to the provisions in Section 90-4, "Admixtures."

90-10.03 PRODUCTION

- Cementitious material, water, aggregate, and admixtures shall be stored, proportioned, mixed, transported, and discharged in conformance with recognized standards of good practice that will result in concrete that is thoroughly and uniformly mixed, that is suitable for the use intended, and that conforms to requirements specified herein. Recognized standards of good practice are outlined in various industry publications such as are issued by American Concrete Institute, AASHTO, or the Department.
- The cementitious material content of minor concrete shall conform to the provisions in Section 90-1.01, "Description."

- The amount of water used shall result in a consistency of concrete conforming to the provisions in Section 90-6.06, "Amount of Water and Penetration." Additional mixing water shall not be incorporated into the concrete during hauling or after arrival at the delivery point, unless authorized by the Engineer.
- Discharge of ready-mixed concrete from the transporting vehicle shall be made while the concrete is still plastic and before stiffening occurs. An elapsed time of 1.5 hours (one hour in non-agitating hauling equipment), or more than 250 revolutions of the drum or blades, after the introduction of the cementitious material to the aggregates, or a temperature of concrete of more than 32°C will be considered conditions contributing to the quick stiffening of concrete. The Contractor shall take whatever action is necessary to eliminate quick stiffening, except that the addition of water will not be permitted.
- The required mixing time in stationary mixers shall be not less than 50 seconds or more than 5 minutes.
- The minimum required revolutions at mixing speed for transit-mixed concrete shall be not less than that recommended by the mixer manufacturer, and shall be increased, if necessary, to produce thoroughly and uniformly mixed concrete.
- Each load of ready-mixed concrete shall be accompanied by a weighmaster certificate that shall be delivered to the Engineer at the discharge location of the concrete, unless otherwise directed by the Engineer. The weighmaster certificate shall be clearly marked with the date and time of day when the load left the batching plant and, if hauled in truck mixers or agitators, the time the mixing cycle started.
- A Certificate of Compliance conforming to the provisions in Section 6–1.07, "Certificates of Compliance," shall be furnished to the Engineer, prior to placing minor concrete from a source not previously used on the contract, stating that minor concrete to be furnished meets contract requirements, including minimum cementitious material content specified.

90-10.04 CURING MINOR CONCRETE

- Curing minor concrete shall conform to the provisions in Section 90-7, "Curing Concrete."

90-10.05 PROTECTING MINOR CONCRETE

- Protecting minor concrete shall conform to the provisions in Section 90-8, "Protecting Concrete," except the concrete shall be maintained at a temperature of not less than 4°C for 72 hours after placing.

90-10.06 MEASUREMENT AND PAYMENT

- Minor concrete will be measured and paid for in conformance with the provisions specified in the various sections of these specifications covering concrete construction when minor concrete is specified in the specifications, shown on the plans, or indicated by contract item in the Engineer's Estimate.

90-11 MEASUREMENT AND PAYMENT

90-11.01 MEASUREMENT

- Portland cement concrete will be measured in conformance with the provisions specified in the various sections of these specifications covering construction requiring concrete.
- When it is provided that concrete will be measured at the mixer, the volume in cubic meters shall be computed as the total mass of the batch in kilograms divided by the density of the concrete in kilograms per cubic meter. The total mass of the batch shall be calculated as the sum of all materials, including water, entering the batch. The density of the concrete will be determined in conformance with the requirements in California Test 518.

90-11.02 PAYMENT

- Portland cement concrete will be paid for in conformance with the provisions specified in the various sections of these specifications covering construction requiring concrete.
- Full compensation for furnishing and incorporating admixtures required by these specifications or the special provisions will be considered as included in the contract prices paid for the concrete involved and no additional compensation will be allowed therefor.
- Should the Engineer order the Contractor to incorporate any admixtures in the concrete when their use is not required by these specifications or the special provisions, furnishing the admixtures and adding them to the concrete will be paid for as extra work as provided in Section 4-1.03D, "Extra Work."
- Should the Contractor use admixtures in conformance with the provisions in Section 90-4.05, "Optional Use of Chemical Admixtures," or Section 90-4.07, "Optional Use of Air-entraining Admixtures," or should the Contractor request and obtain permission to use other admixtures for the Contractor’s benefit, the Contractor shall furnish those admixtures and incorporate them into the concrete at the Contractor’s expense and no additional compensation will be allowed therefor.

SECTION 91: PAINT

Issue Date: November 18, 2005

Section 91-3, "Paints for Timber," of the Standard Specifications is amended to read:

91-3 PAINTS FOR TIMBER

91-3.01 WOOD PRIMER, LATEX-BASE

Classification:

- This specification covers a ready-mixed priming paint for use on unpainted wood or exterior woodwork. It shall conform with the requirements in the Detailed Performance Standards of the Master Painters Institute (MPI) for exterior wood primers, and be listed on the Exterior Latex Wood Primer MPI List Number 6.

91-3.02 PAINT; LATEX-BASE FOR EXTERIOR WOOD, WHITE AND TINTS

Classification:

- This specification covers a ready-mixed paint for use on wood surfaces subject to outside exposures. This paint shall conform to the requirements in the Detailed Performance Standards of the Master Painters Institute (MPI) for Paint, Latex, Exterior, and shall be listed on the following MPI Approved Products List:

A. Exterior Latex, Flat MPI Gloss Level 1, MPI List Number 10.
B. Exterior Latex, Semi-Gloss, MPI Gloss Level 5, MPI List Number 11.
C. Exterior Latex, Gloss, MPI Gloss Level 6, MPI List Number 119.

- Unpainted wood shall first be primed with wood primer conforming to the provisions in Section 91-3.01, "Wood Primer, Latex-Base."

Section 91-4, "Miscellaneous Paints," of the Standard Specifications is amended to read:

91-4 MISCELLANEOUS PAINTS

91-4.01 THROUGH 91-4.04 (BLANK)

91-4.05 PAINT; ACRYLIC EMULSION, EXTERIOR WHITE AND LIGHT AND MEDIUM TINTS

Classification:

- This specification covers an acrylic emulsion paint designed for use on exterior masonry. This paint shall conform to the requirements in the Detailed Performance Standards of the Master Painters Institute (MPI) for Paint, Latex, Exterior, and shall be listed on the following MPI Approved Products Lists:

A. Exterior Latex, Flat MPI Gloss Level 1, MPI List Number 10.
B. Exterior Latex, Semi-Gloss, MPI Gloss Level 5, MPI List Number 11.
C. Exterior Latex, Gloss, MPI Gloss Level 6, MPI List Number 119.

- This paint may be tinted by using "universal" or "all purpose" concentrates.

SECTION 92: ASPHALTS

Issue Date: November 18, 2005

Section 92, "Asphalts," of the Standard Specifications is amended to read:

92-1.01 DESCRIPTION

- Asphalt shall consist of refined petroleum or a mixture of refined liquid asphalt and refined solid asphalt, prepared from crude petroleum. Asphalt shall be:

A. Free from residues caused by the artificial distillation of coal, coal tar, or paraffin.
B. Free from water.
C. Homogeneous.

92-1.02 MATERIALS

92-1.02(A) General

- The Contractor shall furnish asphalt under the Department's "Certification Program for Suppliers of Asphalt." The Department maintains the program requirements, procedures, and a list of approved suppliers at:

http://www.dot.ca.gov/hq/esc/Translab/fpmcoc.htm

- The Contractor shall ensure the safe transportation, storage, use, and disposal of asphalt.
- The Contractor shall prevent the formation of carbonized particles caused by overheating asphalt during manufacturing or construction.

92-1.02(B) Grades

- Performance graded (PG) asphalt binder shall conform to the following:

Performance Graded Asphalt Binder

Property	AASHTO Test Method	Specification Grade				
		PG 58-22 [a]	PG 64-10	PG 64-16	PG 64-28	PG 70-10
Original Binder						
Flash Point, Minimum °C	T48	230	230	230	230	230
Solubility, Minimum % [b]	T44	99	99	99	99	99
Viscosity at 135°C, [c] Maximum, Pa·s	T316	3.0	3.0	3.0	3.0	3.0
Dynamic Shear, Test Temp. at 10 rad/s, °C	T315	58	64	64	64	70
Minimum G*/sin(delta), kPa		1.00	1.00	1.00	1.00	1.00
RTFO Test, [e] Mass Loss, Maximum, %	T240	1.00	1.00	1.00	1.00	1.00
RTFO Test Aged Binder						
Dynamic Shear, Test Temp. at 10 rad/s, °C	T315	58	64	64	64	70
Minimum G*/sin(delta), kPa		2.20	2.20	2.20	2.20	2.20
Ductility at 25°C Minimum, cm	T51	75	75	75	75	75
PAV [f] Aging, Temperature, °C	R28	100	100	100	100	110
RTFO Test and PAV Aged Binder						
Dynamic Shear, Test Temp. at 10 rad/s, °C	T315	22 [d]	31 [d]	28 [d]	22 [d]	34 [d]
Maximum G*/sin(delta), kPa		5000	5000	5000	5000	5000
Creep Stiffness, Test Temperature, °C	T313	-12	0	-6	-18	0
Maximum S-value, Mpa		300	300	300	300	300
Minimum M-value		0.300	0.300	0.300	0.300	0.300

Notes:

a. For use as asphalt rubber base stock for high mountain and high desert area.
b. The Engineer will waive this specification if the supplier is a Quality Supplier as defined by the Department's "Certification Program for Suppliers of Asphalt."
c. The Engineer will waive this specification if the supplier certifies the asphalt binder can be adequately pumped and mixed at temperatures meeting applicable safety standards.
d. Test the sample at 3°C higher if it fails at the specified test temperature. G*sin(delta) shall remain 5000 kPa maximum.
e. "RTFO Test" means the asphaltic residue obtained using the Rolling Thin Film Oven Test, AASHTO Test Method T240 or ASTM Designation: D 2872.
f. "PAV" means Pressurized Aging Vessel.

- Performance based asphalt (PBA) binder shall conform to the following:

Performance Based Asphalt Binder

Property	AASHTO Test Method	Specification Grade PBA 6a	PBA 6a(mod)	PBA 6b	PBA 7
Absolute Viscosity (60°C), Pa·s(x10^{-1})[a]	T202				
Original Binder, Minimum		2000	2000	2000	1100
RTFO Aged Residue [b], Minimum		5000	5000	5000	3000
Kinematic Viscosity (135°C), $m^2/s(x10^{-6})$	T201				
Original Binder, Maximum		2000	2000	2000	2000
RTFO Aged Residue, Minimum		275	275	275	275
Absolute Viscosity Ratio (60°C), Maximum RTFO Test Visc./Orig. Visc.	—	4.0	4.0	4.0	4.0
Flash Point, Cleveland Open Cup, °C, [d]	T48				
Original Binder, Minimum		232	232	232	232
Mass Loss After RTFO Test, %	T240	0.60	0.60	0.60	0.60
Solubility in Trichloroethylene, % [c]	T44				
Original Binder, Minimum		Report	Report	Report	Report
Ductility (25°C, 5 cm/min), cm	T51				
RTFO Test Aged Residue [b], Minimum		60	60	60	75
On RTFO Test Aged Residue, °C:	[f]				
1 to 10 rad/sec: SSD ≥ 0 and Phase Angle (at 1 rad/sec) < 72°		—	35	—	—
On Residue from	R28				
PAV [g] at temp., °C		100	100	100	110
Or Residue from Tilt Oven[f] (@113°C), hours		36	36	36	72
[e] SSD ≥ -115(SSV)-50.6, °C	[f]	—	—	—	25
Stiffness,	T313				
Test Temperature, °C		-24	-24	-30	-6
Maximum S-value, MPa		300	300	300	300
Minimum M-value		0.300	0.300	0.300	0.300

Notes:

a. Absolute viscosity (60°C) will be determined at one sec^{-1} using ASTM Designation: D 4957 with Asphalt Institute vacuum capillary viscometers.
b. "RTFO Aged Residue" means the asphaltic residue obtained using the Rolling Thin Film Oven Test (RTFO Test), AASHTO Test Method T240 or ASTM Designation: D 2872.
c. There is no requirement; however results of the test shall be part of the certified copy of test results furnished with the Certificate of Compliance.
d. "Residue from Tilt Oven " means the asphalt obtained using California Test 374, Method B, "Method for Determining Asphalt Durability Using the California Tilt-Oven Durability Test."
e. "SSD" means Shear Susceptibility of Delta; "SSV" means Shear Susceptibility of Viscosity.
f. California Test 381.
g. "PAV" means Pressurized Aging Vessel.

92-1.02(C) Sampling

• The Contractor shall provide a sampling device in the asphalt feed line connecting the plant storage tanks to the asphalt weighing system or spray bar. The sampling device shall be accessible between 600 mm and 750 mm above the platform. The Contractor shall provide a receptacle for flushing the sampling device.

• The sampling device shall include a valve:

A. With a diameter between 10 mm and 20 mm.
B. Manufactured in a manner that a one-liter sample may be taken slowly at any time during plant operations.
C. Maintained in good condition.

- The Contractor shall replace failed valves.
- In the presence of the Engineer, the Contractor will take 2 one-liter samples per operating day. The Contractor shall provide round, friction top, one-liter containers for storing samples.

92-1.03 APPLYING ASPHALT

- Unless otherwise specified, the Contractor shall heat and apply asphalt in conformance with the provisions in Section 93, "Liquid Asphalts."
- The Contractor shall apply paving asphalt at a temperature between 120°C and 190°C. The Engineer will determine the exact temperature of paving asphalt.

92-1.04 MEASUREMENT

- If asphalt is paid as a contract work item on a mass basis, the Department will measure asphalt by the tonne under the provisions for determining the mass for payment of liquid asphalt in Section 93, "Liquid Asphalt."
- The Engineer will determine the mass of asphalt from volumetric measurements if the Contractor:

A. Uses partial loads of asphalt.
B. Uses asphalt at locations other than a mixing plant and no suitable scales are available within 35 km.
C. Delivers asphalt meeting either of the following:

   1. In calibrated trucks and each tank is accompanied by its measuring stick and calibration card.
   2. In trucks equipped with a calibrated thermometer that determines the asphalt temperature at the time of delivery and equipped with a vehicle tank meter meeting Section 9-1.01, "Measurement of Quantities," for weighing, measuring, and metering devices.

- If the Contractor furnishes asphalt concrete from a mixing plant producing material for only one project, the Department will determine the amount of asphalt from volumetric measurements by measuring the amount in the tank at the start and the end of the project provided the tank is calibrated and equipped with its measuring stick and calibration card. The Engineer will determine pay quantities in conformance with the following:

A. Before converting the volume to mass, the Engineer will reduce the volume measured to that which the asphalt would occupy at 15°C.
B. The Engineer will use 981 L/tonne and 1020 g/L for the average weight and volume for both PG and PBA grades of asphalt at 15°C.
C. The Engineer will use the Conversion Table in Section 93, "Liquid Asphalts."

SECTION 93: LIQUID ASPHALTS

Issue Date: November 18, 2005

The ninth paragraph of Section 93-1.04, "Measurement," of the Standard Specifications is amended to read:

- The following Legend and Conversion Table is to be used for converting volumes of liquid asphalt products, Grades 70 to 3000, inclusive, and paving asphalt Grades PG 58-22, PG 64-10, PG 64-16, PG 64-28, and PG 70-10, and Grades PBA 6a, PBA 6a (mod), PBA 6b, and PBA 7.

SECTION 95: EPOXY

Issue Date: June 30, 2006

Section 95, "Epoxy," of the Standard Specifications is amended to read:

95-1 GENERAL

95-1.01 DESCRIPTION

- These specifications are intended to specify epoxy that will meet service requirements for highway construction.
- Epoxy shall be furnished as 2 components, which shall be mixed together at the site of the work.

95-1.02 SAMPLING AND TESTING

• Epoxy shall not be used prior to sampling and testing unless its use is permitted prior to sampling and testing in conformance with the provisions in Section 6-1.07, "Certificates of Compliance."

• Tests will be conducted in conformance with the latest test methods of the American Society for Testing and Materials, and California Test Methods in use by the Transportation Laboratory.

• Epoxy components shall be formulated to maintain the specified properties for a minimum of one year. The Engineer may require additional testing of any epoxy component that has not been used within one year of manufacture.

95-1.03 PACKAGING, LABELING AND STORING

• Each component shall be packaged in containers of size proportional to the amount of that component in the mix so that one container of each component is used in mixing one batch of epoxy. The containers shall be of such design that all of the contents may be readily removed and shall be well sealed to prevent leakage. The containers and labeling shall meet U.S. Department of Transportation Hazardous Material Shipping Regulations, and the containers shall be of a material, or lined with a material, of such character as to resist any action by the components. Each container shall be clearly labeled with the ASTM Designation: C881 Class and Type; designation (Component A or B); manufacturer's name; date of manufacture; batch number (a batch shall consist of a single charge of all components in a mixing chamber); all directions for use (as specified elsewhere) and such warning or precautions concerning the contents as may be required by State or Federal Laws and Regulations. The manufacturer of the finished epoxy components shall furnish a Certificate of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," and a copy of the label for each material. The certificate shall include a list, by Title and Section, of the State and Federal packaging and labeling laws and regulations that the manufacturer has complied with.

• Attention is directed to the characteristic of some epoxy components to crystallize or thicken excessively prior to use when stored at temperatures below 2ºC. Any material which shows evidence of crystallization or a permanent increase in viscosity or settling of pigments which cannot be readily redispersed with a paddle shall not be used.

95-1.04 DIRECTIONS FOR USE

• At the time of mixing, components A and B shall be at a temperature between 15°C and 30°C, unless otherwise specified. Any heating of the adhesive components shall be done by application of indirect heat. Immediately prior to mixing, each component shall be thoroughly mixed with a paddle. Separate paddles shall be used to stir each component. Immediately prior to use, the 2 components shall be thoroughly mixed together in the specified ratios. No solvent shall be added to any epoxy.

• After mixing, epoxies shall be placed in the work and any overlaying or inserted material which is to be bonded to the work by the epoxy shall also be placed before thickening of the epoxy has begun. Surfaces upon which epoxy is to be placed shall be free of rust, paint, grease, asphalt, and loose and deleterious material. When epoxy is used as a binder to make epoxy concrete or mortar, the 2 components of epoxy shall be thoroughly mixed together before the aggregate is added and, unless otherwise specified, the mix proportions shall consist of one part of binder to approximately 4 parts of aggregate, by volume. Aggregate for use in epoxy concrete and mortar shall be clean and shall have a moisture content of not more than 0.50-percent when tested by California Test 226. Surfaces against which epoxy concrete and mortar are to be placed shall be primed with a coat of the epoxy used just prior to placing the concrete or mortar.

95-2 TYPES OF EPOXIES

95-2.01 BINDER (ADHESIVE), EPOXY RESING BASE

Classification:

• This specification covers a low viscosity epoxy formulated primarily for use in making high-strength epoxy concrete and epoxy mortar and in pressure grouting of cracks in concrete. For load bearing applications, use ASTM Designation: C 881, Type IV, Grade 1, Class B or C. Class B or C shall be used depending on the substrate and ambient temperatures. Use Grade B for atmospheric and surface temperatures as low as 4°C. Use Class C when temperatures are 15°C or higher. For non-load bearing applications use ASTM Designation: C881, Type I, Grade 1, Class B or C. Apply no thicker than recommended by the manufacturer. Thick sections of this epoxy are not suitable for use in freeze thaw environments. In a freeze-thaw environment, increase the aggregate loading to improve the properties of the epoxy concrete.

Directions for Use:

• Mix in conformance with the manufacturer's written recommendations. No more material shall be mixed than can be used within the pot-life from the time mixing operations are started.

95-2.02 (BLANK)

95-2.03 EPOXY RESIN ADHESIVE FOR BONDING NEW CONCRET TO OLD CONCRETE

Classification:

• This specification covers a low viscosity paste epoxy formulated primarily for use in bonding new portland cement concrete to hardened portland cement concrete. The epoxy shall meet the specification requirements of ASTM Designation: C 881, Type V, Grade 2. This epoxy is available in 2 Classes: Class C for general use at temperature greater than 15°C and Class B for use when cure temperatures are below 15°C and above 4°C, or when a faster cure is required.

Directions for Use:

• The mixing ratio and use shall be in conformance with the manufacturer's written recommendations. When measuring as individual Components A and B, stir and tap the measuring containers to remove possible air voids. The ingredients in Components A and B shall be thoroughly dispersed such that each component forms a uniform paste. Do not mix more material than can be spread within the pot life from the time mixing operations are started. The spreading rate shall be sufficient to thoroughly coat the surface. Spread the mixed adhesive by brush or roller over blast-cleaned concrete at a rate recommended by the manufacturer. The new concrete shall be placed against the adhesive coating on the old concrete before the adhesive has set. If the adhesive has set and is not tacky prior to placing the new concrete, a new coating of adhesive shall be applied.

95-2.04 RAPID SET EPOXY ADHESIVE FOR PAVEMENT MARKERS

Classification:

• This specification covers a high viscosity paste, rapid set epoxy formulated primarily for use in bonding pavement markers to portland cement concrete and asphalt concrete. The adhesive shall meet ASTM Designation: C 881, Type IV, Grade 3, Class B and C except that the gel time may be shorter than 30 minutes. The adhesive shall conform to these requirements and the following.

Characteristics of Combined Components:

• All tests shall be performed in conformance with the requirements in California Test 434.

Property	Requirement
Gel time, minutes, maximum, at 25°C	30
Bond Strength to Concrete, Time, minutes (maximum) to reach not less than 1.4 MPa	
at 25ºC ±1ºC	35
at 10ºC ±1ºC	45
Slant Shear Strength	
2 days at 25ºC ±1ºC, MPa	7
14 days at 25ºC ±1ºC, plus water soak, MPa	10.5
Tensile Adhesion and Cohesion	
Ceramic marker bottom, MPa	4.8 min.
Ceramic marker bottom, including post cure, MPa	4.8 min.
Retroreflective pavement marker bottom, MPa	3.4 min.
Color of mixed epoxy	gray
Glass transition temperature, Tg, samples conditioned at 25°C for 24 hours, ASTM Designation: D 4065	30ºC min.

Directions for Use:

• Components A and B shall be mixed in conformance with the manufacturer's written recommendations. When an automatic proportioning and mixing machine is used, the temperature of the components shall be maintained by indirect heating or cooling, so that the adhesive will meter, mix and extrude properly. The maximum temperature shall be such that after proper mixing no excess adhesive shall flow from under the marker other than that specified in Section 85-1.06, "Placement."

95-2.05 STANDARD SET EPOXY ADHESIVE FOR PAVEMENT MARKERS

Classification:

• This specification covers a high viscosity paste standard set epoxy formulated primarily for use in bonding pavement markers to portland cement concrete and asphalt concrete. The epoxy shall meet ASTM Designation: C 881, Type IV, Viscosity Grade 3, Classes B or C, except that the gel time may be shorter than 30 minutes.

Characteristics of Combined Components:

• All tests shall be performed in conformance with the requirements in California Test 434.

Property	Requirement
Gel time, minutes, maximum, at 25ºC	30
Bond Strength to Concrete, Time (maximum) to reach not less than 1.4 MPa	
at 25ºC ±1ºC	3.5 hours
at 13ºC ±1ºC	24 hours
Slant Shear Strength	
2 days at 25ºC ±1ºC, MPa	7 min.
14 days at 25ºC ±1ºC, plus water soak, MPa	10.5 min.
Tensile Adhesion and Cohesion	
Ceramic marker bottom, MPa	4.8 min.
Ceramic marker bottom, including post cure, MPa	4.8 min.
Reflective pavement marker bottom, MPa	3.4 min.
Color of Mixed Components	gray
Glass transition temperature, Tg, samples conditioned at 25ºC for 24 hours, ASTM Designation: D 4065	30ºC min.

Directions for Use:

• Components A and B shall be mixed in conformance with the manufacturer's written recommendations. When an automatic proportioning and mixing machine is used, the temperature of the components shall be maintained by indirect heating or cooling, so that the adhesive will meter, mix and extrude properly. The maximum temperature shall be such that after proper mixing no excess adhesive shall flow from under the marker other than that specified in Section 85-1.06, "Placement."

95-2.06 (BLANK)

95-2.07 (BLANK)

95-2.08 (BLANK)

95-2.09 EPOXY SEALANT FOR INDUCTIVE LOOPS

Classification:

• This specification covers a high viscosity liquid epoxy formulated primarily for use in sealing inductive wire loops and leads imbedded in asphalt concrete and portland cement concrete for traffic signal controls and vehicle counters. This epoxy is to be used for repair work on existing spalls, cracks and other deformations in and around saw cuts housing inductor loops and leads. The rapid cure allows minimum traffic delay. This sealant is suitable for use in freeze-thaw areas. The epoxy shall meet ASTM Designation: C 881, Type I, Grade 2 and the following requirements.

Characteristics of Combined Components:

• All tests shall be performed in conformance with the requirements in California Test 434.

Property	Requirement
Gel time, minutes, maximum	30
On 3-mm cast sheet, cured 18 hours at 25ºC, + 5 hours at 70ºC	
Tensile Strength, MPa	2.7 min.
Elongation, percent	90 min.
Shore D Hardness	45 min.

Directions for Use:

- Saw cuts shall be cleaned with compressed air to remove all excess moisture and debris. For repairing damaged saw cuts, all loose spalled material shall be cleaned away from the saw cut, chipping back to sound asphalt concrete or portland cement concrete and all loose material cleaned from loop wires.
- The mixing ratio shall be in conformance with the manufacturer's recommendations. No more material shall be mixed than can be used within the gel time from the time mixing operations are started.
- When automatic mixing equipment is used for mixing the sealant, the provisions in the twelfth paragraph in Section 85-1.06, "Placement," shall apply.

95-2.10 (BLANK)

95-2.11 EPOXY RESIN ADHESIVE FOR INJECTION GROUTING OF PORTLAND CEMENT CONCRETE PAVEMENTS

Directions for Use:

- Both components and the mixed material shall contain no solvents. The mixing ratio of the components in terms of volume and mass shall be clearly stated. The material shall be suitable for use in the mixing equipment used by the applicator. Epoxy adhesive samples shall be furnished to the Engineer for testing at least 12 days before the expected time of use.

Characteristics of Adhesive:

Test[a]	California Test	Requirement
Brookfield Viscosity, No. 3 Spindle at 20 rpm, Pa·s at 25ºC	434, Part 4	0.9 max.
Gel time, minutes	434, Part 1	2 to 15
Slant Shear Strength on Dry Concrete, MPa, after 4 days of cure in air at 25ºC ±1ºC	434, Part 5[b]	41.4 min.
Slant Shear Strength on Wet Concrete, MPa, after 4 days of cure in air at 25ºC ±1ºC	434, Part 5[b]	21.1 min.
Tensile Strength, Mpa	434, Part 7, except test after 4 days of cure at 25ºC ±1ºC	31.0 min.
Elongation, %	434, Part 7, except test after 4 days of cure at 25ºC ±1ºC	10 max.

a The mixing ratio used will be that recommended by the manufacturer.

b For slant shear strength on concrete, delete Sections B-1 and B-5 of California Test 434, Part 5. For dry concrete, use Step "2" below only. For wet concrete, use both Steps "1" & "2":

1 Soak blocks in water for 24 hours at 25ºC ±1ºC. Remove and wipe off excess water.

2 Mix epoxy as described in California Test 434, Part 1, and apply a coat approximately 250 µm-inch thick to each diagonal surface. Place four 3-mm square pieces of shim stock 305 µm thick on one block to control final film thickness. Before pressing the coated surfaces together, leave the blocks so that the coated surfaces are horizontal until the epoxy reacts slightly to prevent excessive flow.

END OF AMENDMENTS

SECTION 2. PROPOSAL REQUIREMENTS AND CONDITIONS:

2-1.01 GENERAL

The bidder's attention is directed to the provisions in Section 2, "Proposal Requirements and Conditions," of the Standard Specifications and these special provisions for the requirements and conditions which the bidder must observe in the preparation of the Proposal form and the submission of the bid.

The proposal shall set forth in clearly legible figures and in the respective spaces provided:

A. Unit Prices
B. Item Totals
C. TOTAL BID (A)
D. Number of working days bid for completion of the work, except plant establishment
E. TOTAL BID (B) - product of the working days bid and the cost per day shown on the Engineer's Estimate
F. TOTAL BASIS FOR COMPARISON OF BIDS (A+B)

The proposal shall be signed by the bidder, who shall fill out the blanks in the proposal form as therein required.

The Bidder's Bond form mentioned in the last paragraph in Section 2-1.07, "Proposal Guaranty," of the Standard Specifications will be found following the signature page of the Proposal.

The amount of the bidder's security required in Section 2-1.07, "Proposal Guaranty," of the Standard Specifications shall be based on the "TOTAL BID (A)" set forth on the proposal form.

Submit request for substitution of an "or equal" item, and the data substantiating the request to the Department of Transportation, Submit request for substitution of an "or equal" item, and the data substantiating the request to the Department of Transportation, Division of Construction – Duty Senior, Mail Station: 3 – B, 111 Grand Avenue / P. O. Box

23660, Oakland, CA 94623-0660, so that the request is received by the Department by close of business on the fourth day, not including Saturdays, Sundays and legal holidays, following bid opening.

In conformance with Public Contract Code Section 7106, a Noncollusion Affidavit is included in the Proposal. Signing the Proposal shall also constitute signature of the Noncollusion Affidavit.

The Contractor, sub recipient or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The Contractor shall carry out applicable requirements of title 49, part 26, Code of Federal Regulations (49 CFR 26) in the award and administration of USDOT-assisted contracts. Failure by the Contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the recipient deems appropriate. Each subcontract signed by the bidder must include this assurance.

Failure of the bidder to fulfill the requirements of the Special Provisions for submittals required to be furnished after bid opening, including but not limited to escrowed bid documents, where applicable, may subject the bidder to a determination of the bidder's responsibility in the event it is the apparent low bidder on a future public works contracts.

2-1.015 FEDERAL LOBBYING RESTRICTIONS

Section 1352, Title 31, United States Code prohibits Federal funds from being expended by the recipient or any lower tier subrecipient of a Federal-aid contract to pay for any person for influencing or attempting to influence a Federal agency or Congress in connection with the awarding of any Federal-aid contract, the making of any Federal grant or loan, or the entering into of any cooperative agreement.

If any funds other than Federal funds have been paid for the same purposes in connection with this Federal-aid contract, the recipient shall submit an executed certification and, if required, submit a completed disclosure form as part of the bid documents.

A certification for Federal-aid contracts regarding payment of funds to lobby Congress or a Federal agency is included in the Proposal. Standard Form - LLL, "Disclosure of Lobbying Activities," with instructions for completion of the Standard Form is also included in the Proposal. Signing the Proposal shall constitute signature of the Certification.

The above-referenced certification and disclosure of lobbying activities shall be included in each subcontract and any lower-tier contracts exceeding $100,000. All disclosure forms, but not certifications, shall be forwarded from tier to tier until received by the Engineer.

The Contractor, subcontractors and any lower-tier contractors shall file a disclosure form at the end of each calendar quarter in which there occurs any event that requires disclosure or that materially affects the accuracy of the information contained in any disclosure form previously filed by the Contractor, subcontractors and any lower-tier contractors. An event that materially affects the accuracy of the information reported includes:

A. A cumulative increase of $25,000 or more in the amount paid or expected to be paid for influencing or attempting to influence a covered Federal action; or
B. A change in the person(s) or individual(s) influencing or attempting to influence a covered Federal action; or,
C. A change in the officer(s), employee(s), or Member(s) contacted to influence or attempt to influence a covered Federal action.

2-1.02 DISADVANTAGED BUSINESS ENTERPRISE (DBE)

This project is subject to title 49, part 26, Code of Federal Regulations (49 CFR 26) entitled "Participation by Disadvantaged Business Enterprises in Department of Transportation Financial Assistance Programs." In order to ensure the Department achieves its federally mandated statewide overall DBE goal, the Department encourages the participation of Disadvantaged Business Enterprises (DBEs), as defined in 49 CFR 26 in the performance of contracts financed in whole or in part with Federal Funds. The Contractor shall not discriminate on the basis of race, color, national origin, or sex in the award and performance of subcontracts.

Bidders shall be fully informed respecting the requirements of the Regulations. The Regulations in their entirety are incorporated herein by this reference Attention is directed to the following matters:

A. A DBE must be a small business concern as defined pursuant to Section 3 of U.S. Small Business Act and relevant regulations promulgated pursuant thereto.
B. A DBE may participate as a prime contractor, subcontractor, joint venture partner with a prime or subcontractor, vendor of material or supplies, or as a trucking company.
C. A DBE joint venture partner must be responsible for specific contract items of work, or clearly defined portions thereof. Responsibility means actually performing, managing and supervising the work with its own forces. The DBE joint venture partner must share in the capital contribution, control, management, risks and profits of the joint venture commensurate with its ownership interest.

D. A DBE must perform a commercially useful function, i.e., must be responsible for the execution of a distinct element of the work and must carry out its responsibility by actually performing, managing and supervising the work.

E. DBEs must be certified by the California Unified Certification Program (CUCP). Listings of DBEs certified by the CUCP are available from the following sources:

1. The Department's web site at http://www.dot.ca.gov/hq/bep.
2. The Department's DBE Directory. This Directory may be obtained from the Department of Transportation, Materiel Operations Branch, Publication Distribution Unit, 1900 Royal Oaks Drive, Sacramento, California 95815, Telephone: (916) 445-3520.

F. When reporting DBE participation, bidders may count the cost of materials or supplies purchased from DBEs as follows:

1. If the materials or supplies are obtained from a DBE manufacturer, count 100 percent of the cost of the materials or supplies. A DBE manufacturer is a firm that operates or maintains a factory or establishment that produces, on the premises, the materials, supplies, articles, or equipment required under the contract and of the general character described by the specifications.
2. If the materials or supplies are purchased from a DBE regular dealer, count 60 percent of the cost of the materials or supplies. A DBE regular dealer is a firm that owns, operates, or maintains a store, warehouse, or other establishment in which the materials, supplies, articles or equipment of the general character described by the specifications and required under the contract are bought, kept in stock, and regularly sold or leased to the public in the usual course of business. To be a DBE regular dealer, the firm must be an established, regular business that engages, as its principal business and under its own name, in the purchase and sale or lease of the products in question. A person may be a DBE regular dealer in such bulk items as petroleum products, steel, cement, gravel, stone, or asphalt without owning, operating, or maintaining a place of business as provided in this paragraph F.2. if the person both owns and operates distribution equipment for the products. Any supplementing of regular dealers' own distribution equipment shall be by a long-term lease agreement and not on an ad hoc or contract-by-contract basis. Packagers, brokers, manufacturers' representatives, or other persons who arrange or expedite transactions are not DBE regular dealers within the meaning of this paragraph F.2.
3. If the DBE is neither a manufacturer nor a regular dealer, count only the entire amount of fees or commissions charged for assistance in the procurement of the materials and supplies, or fees or transportation charges for the delivery of materials or supplies required on a job site, provided the fees are reasonable and not excessive as compared with fees charged for similar services.

G. When reporting DBE participation, bidders may count the participation of DBE trucking companies as follows:

1. The DBE must be responsible for the management and supervision of the entire trucking operation for which it is responsible on a particular contract.
2. The DBE must itself own and operate at least one fully licensed, insured, and operational truck used on the contract.
3. The DBE receives credit for the total value of the transportation services it provides on the contract using trucks its owns, insures, and operates using drivers it employs.
4. The DBE may lease trucks from another DBE firm, including an owner-operator who is certified as a DBE. The DBE who leases trucks from another DBE receives credit for the total value of the transportation services the lessee DBE provides on the contract.
5. The DBE may also lease trucks from a non-DBE firm, including an owner-operator. The DBE who leases trucks from a non-DBE is entitled to credit only for the fee or commission it receives as a result of the lease arrangement. The DBE does not receive credit for the total value of the transportation services provided by the lessee, since these services are not provided by a DBE.
6. For the purposes of this paragraph G, a lease must indicate that the DBE has exclusive use of and control over the truck. This does not preclude the leased truck from working for others during the term of the lease with the consent of the DBE, so long as the lease gives the DBE absolute priority for use of the leased truck. Leased trucks must display the name and identification number of the DBE.

H. Bidders are encouraged to use services offered by financial institutions owned and controlled by DBEs.

2-1.03 DBE AVAILABILITY ADVISORY

As required by federal law, the Department has established a statewide overall DBE goal. In order to ascertain whether that statewide overall DBE goal is being achieved, the Department is tracking DBE participation on all Federal-aid contracts.

To assist bidders in ascertaining DBE availability for specific items of work, the Department advises that it has determined that DBEs could reasonably be expected to compete for subcontracting opportunities on this project, and their likely availability for work on this project is 8 percent. The Department also advises that participation of DBEs in the specified percentage is not a condition of award.

SECTION 3. AWARD AND EXECUTION OF CONTRACT

The bidder's attention is directed to the provisions in Section 3, "Award and Execution of Contract," of the Standard Specifications and these special provisions for the requirements and conditions concerning award and execution of contract.

Requests for relief of bid and bid protests are to be delivered to the following address: Department of Transportation, MS 43, Attn: Office Engineer, 1727 30th Street, Sacramento, CA 95816 or by facsimile to the Office Engineer at (916) 227-6282.

Bids will be compared on the basis of the Engineer's Estimate of the quantities of work to be done and the number of working days bid for completion of the work, except plant establishment. The award of the contract, if it be awarded, will be to the lowest responsible bidder whose proposal complies with all the requirements prescribed. The lowest bid will be determined on the basis of the "Total Basis for Comparison of Bids (A+B)" set forth in the proposal. The contract price for the awarded contract will be the "Total Bid (A)" set forth in the proposal.

Bids in which the number of working days bid for completion of the work, except plant establishment, exceed 650 will be considered non-responsive and will be rejected.

The contract shall be executed by the successful bidder and shall be returned, together with the contract bonds and the documents identified in Section 3-1.025, "Insurance Policies," of the Standard Specifications, to the Department so that it is received within 10 days, not including Saturdays, Sundays and legal holidays, after the bidder has received the contract for execution. Failure to do so shall be just cause for forfeiture of the proposal guaranty. The executed contract documents shall be delivered to the following address: Department of Transportation MS 43, Attn: Office Engineer, 1727 30th Street, Sacramento, CA 95816.

A "CALTRANS BIDDER – DBE INFORMATION" form will be included in the contract documents to be executed by the successful bidder. The purpose of the form is to collect data required under 49 CFR 26. Even if no DBE participation will be reported, the successful bidder must execute and return the form.

The bidder's "CALTRANS BIDDER – DBE INFORMATION" form should include the names, addresses and phone numbers of DBE firms that will participate, with a complete description of work or supplies to be provided by each, and the dollar value of each DBE transaction. When 100 percent of a contract item of work is not to be performed or furnished by a DBE, a description of the exact portion of that work to be performed or furnished by the DBE should be included in the DBE information, including the planned location of that work. A bidder certified as a DBE should describe the work it has committed to performing with its own forces as well as any other work that it has committed to be performed by DBE subcontractors, suppliers and trucking companies.

The bidder is encouraged to provide written confirmation from each DBE that the DBE is participating in the contract. A copy of a DBE's quote will serve as written confirmation that the DBE is participating in the contract. If a DBE is participating as a joint venture partner, the bidder is encouraged to submit a copy of the joint venture agreement.

The "CALTRANS BIDDER – DBE INFORMATION" form should be returned to the Department by the successful bidder with the executed contract, contract bonds and the documents identified in Section 3-1.025, "Insurance Policies," of the Standard Specifications.

A "Payee Data Record" form will be included in the contract documents to be executed by the successful bidder. The purpose of the form is to facilitate the collection of taxpayer identification data. The form shall be completed and returned to the Department by the successful bidder with the executed contract, contract bonds and the documents identified in Section 3-1.025, "Insurance Policies," of the Standard Specifications. For the purposes of the form, payee shall be deemed to mean the successful bidder. The form is not to be completed for subcontractors or suppliers. Failure to complete and return the "Payee Data Record" form to the Department as provided herein will result in the retention of 31 percent of payments due the Contractor and penalties of up to $20,000. This retention of payments for failure to complete the "Payee Data Record" form is in addition to any other retention of payments due the Contractor.

SECTION 4. BEGINNING OF WORK, TIME OF COMPLETION AND LIQUIDATED DAMAGES

Attention is directed to the provisions in Sections 8-1.03, "Beginning of Work," 8-1.06, "Time of Completion," 8-1.07, "Liquidated Damages," and 20-4.08, "Plant Establishment Work," of the Standard Specifications and these special provisions.

The Contractor shall begin work within 15 calendar days after the contract has been approved by the Attorney General or the attorney appointed and authorized to represent the Department of Transportation.

The work, except plant establishment work, shall be diligently prosecuted to completion before the expiration of **the NUMBER OF WORKING DAYS BID** beginning on the fifteenth calendar day after approval of the contract.

The Contractor shall pay to the State of California the sum of $30,900 per day, for each and every calendar day's delay in finishing the work, except plant establishment work, after expiration of the number of working days bid, until work requiring closure of lanes or shoulders on State Highway Route 101 is complete.

The Contractor shall pay to the State of California the sum of $16,300 per day, for each and every calendar day's delay in finishing the work, except plant establishment work, after expiration of the number of working days bid, if no further lane or shoulder closures are required on State Highway Route 101 to complete the remaining work.

The Contractor shall diligently prosecute the plant establishment work to completion within the period of time specified in Section 10-2.04, "Highway Planting," of these special provisions. The Contractor shall pay to the State of California the sum of $600 per day, for each and every calendar day's delay in completing the plant establishment work in excess of the number of working days specified.

In no case will liquidated damages of more than $ 30,900 per day be assessed.

SECTION 5. GENERAL

SECTION 5-1. MISCELLANEOUS

5-1.01 PLANS AND WORKING DRAWINGS

When the specifications require working drawings to be submitted to the Division of Structure Design, the drawings shall be submitted to: Division of Structure Design, Documents Unit, Mail Station 9, 1801 30th Street, Sacramento, CA 95816, Telephone 916 227-8252.

5-1.013 LINES AND GRADES

Attention is directed to Section 5-1.07, "Lines and Grades," of the Standard Specifications.

Stakes or marks will be set by the Engineer in conformance with the requirements in Chapter 12, "Construction Surveys," of the Department's Surveys Manual.

5-1.017 CONTRACT BONDS

Attention is directed to Section 3-1.02, "Contract Bonds," of the Standard Specifications and these special provisions.

The payment bond shall be in a sum not less than one hundred percent of the total amount payable by the terms of the contract.

5-1.018 GUARANTEE

GENERAL

The Contractor shall guarantee the work is in accordance with contract requirements and remains free from substantial defects in materials and workmanship for a period of one year after contract acceptance. For certain portions of the work where the Director relieves the Contractor of responsibility in accordance with Section 7-1.15, "Relief from Maintenance and Responsibility," of the Standard Specifications, the guarantee period starts on the relief date and ends one year therefrom.

Substantial defects in materials and workmanship means defective work objectively manifested by damaged, displaced, or missing parts or components and workmanship resulting in improper function of materials, components, equipment, or systems, as installed or manufactured by the Contractor, subcontractor, supplier, or manufacturer.

During the guarantee period, the Contractor shall repair or replace contract work and associated work which is not in accordance with contract requirements or has substantial defects in materials and workmanship. The Contractor shall perform the corrective work with no expense to the Department other than State-provided field inspection services.

The guarantee of work excludes damage or displacement that is outside the control of the Contractor and caused by normal wear and tear, improper operation, insufficient maintenance, abuse, unauthorized modification, or natural disaster as described in Section 7-1.165, "Damage by Storm, Flood, Tsunami or Earthquake," of the Standard Specifications.

The Contractor shall have the same insurance coverage during corrective work operations as prior to contract acceptance, in accordance with Section 7-1.12, "Indemnification and Insurance," of the Standard Specifications.

The contract bonds furnished in accordance with Section 3-1.02, "Contract Bonds," of the Standard Specifications must remain in full force and effect during the guarantee period and until all corrective work is complete.

In the case of conflict between this guarantee provision and any warranty provision included in the contract, the warranty provision shall govern for the specific construction product or feature covered.

CORRECTIVE WORK

During the guarantee period, the Department will monitor performance of the highway facilities completed by the Contractor and will perform a thorough review of the contract work at least 60 days before the expiration of the one-year guarantee.

If the Engineer discovers contract work not in compliance with contract requirements or that has substantial defects in materials and workmanship, at any time during the guarantee period, a list of items that require corrective work will be developed and forwarded to the Contractor. Within 15 days of receipt of a list, the Contractor shall submit to the Engineer a detailed plan for performing corrective work. The work plan shall include a start to finish schedule. It shall include a list of labor, equipment, materials, and any special services intended to be used. It shall clearly show related work including traffic control, temporary delineation, and permanent delineation.

The Contractor shall start the corrective and related work within 15 days of receiving notice from the Engineer that the Contractor's work plan is approved. The corrective work shall be diligently prosecuted and completed within the time allotted in the approved work plan.

If the Engineer determines that corrective work, covered by the guarantee, is urgently needed to prevent injury or property damage, the Engineer will give the Contractor a request to start emergency repair work and a list of items that require repair work. The Contractor shall mobilize within 24 hours and diligently perform emergency repair work on the damaged highway facilities. The Contractor shall submit a work plan within 5 days of starting emergency repair work.

If the Contractor fails to commence and execute, with due diligence, corrective work and related work required under the guarantee in the time allotted, the Engineer may proceed to have the work performed by State forces or other forces at the Contractor's expense. Upon demand, the Contractor shall pay all costs incurred by the Department for work performed by State forces or other forces including labor, equipment, material, and special services.

PAYMENT

Full compensation for performing corrective work; and related work such as traffic control, temporary delineation, and permanent delineation, and to maintain insurance coverage and bonds, shall be considered as included in the contract prices paid for the various contract items of work and no separate payment will be made therefor.

5-1.019 COST REDUCTION INCENTIVE

Attention is directed to Section 5-1.14, "Cost Reduction Incentive," of the Standard Specifications.

Prior to preparing a written cost reduction proposal, the Contractor shall request a meeting with the Engineer to discuss the proposal in concept. Items of discussion will also include permit issues, impact on other projects, impact on the project schedule, peer reviews, overall merit of the proposal, and review times required by the Department and other agencies.

If a cost reduction proposal submitted by the Contractor, and subsequently approved by the Engineer, provides for a reduction in contract time, 50 percent of that contract time reduction shall be credited to the State by reducing the contract working days, not including plant establishment. Attention is directed to "Beginning of Work, Time of Completion and Liquidated Damages" of these special provisions regarding the working days.

If a cost reduction proposal submitted by the Contractor, and subsequently approved by the Engineer, provides for a reduction in traffic congestion or avoids traffic congestion during construction, 60 percent of the estimated net savings in construction costs attributable to the cost reduction proposal will be paid to the Contractor. In addition to the requirements in Section 5-1.14, "Cost Reduction Incentive," of the Standard Specifications, the Contractor shall provide detailed comparisons of the traffic handling between the existing contract and the proposed change, and estimates of the traffic volumes and congestion.

5-1.02 LABOR NONDISCRIMINATION

Attention is directed to the following Notice that is required by Chapter 5 of Division 4 of Title 2, California Code of Regulations.

NOTICE OF REQUIREMENT FOR NONDISCRIMINATION PROGRAM

(GOV. CODE, SECTION 12990)

Your attention is called to the "Nondiscrimination Clause", set forth in Section 7-1.01A(4), "Labor Nondiscrimination," of the Standard Specifications, which is applicable to all nonexempt State contracts and subcontracts, and to the "Standard California Nondiscrimination Construction Contract Specifications" set forth therein. The specifications are applicable to all nonexempt State construction contracts and subcontracts of $5000 or more.

5-1.022 EXCLUSION OF RETENTION

In conformance with 49 CFR, Part 26, Subpart B, Section 26.29 (b)(1), the retention of proceeds required by Public Contract Code Section 10261 shall not apply. In conformance with Public Contract Code 7200 (b), in subcontracts between the Contractor and a subcontractor and in subcontracts between a subcontractor and any subcontractor thereunder, retention proceeds shall not be withheld, and the exceptions provided in Public Contract Code 7200 (c) shall not apply. At the option of the Contractor, subcontractors may be required to furnish payment and performance bonds issued by an admitted surety insurer.

The third paragraph of Section 9-1.06, "Partial Payments," of the Standard Specifications, and Section 9-1.065, "Payment of Withheld Funds," of the Standard Specifications shall not apply.

5-1.023 UNSATISFACTORY PROGRESS

If the number of working days charged to the contract exceeds 75 percent of the working days in the current time of completion and the percent working days elapsed exceeds the percent work completed by more than 15 percentage points, the Department will withhold 10 percent of the amount due on the current monthly estimate.

The percent working days elapsed will be determined from the number of working days charged to the contract divided by the number of contract working days in the current time of completion, expressed as a percentage. The number of contract working days in the current time of completion shall consist of the original contract working days increased or decreased by time adjustment s approved by the Engineer.

The percent work completed will be determined by the Engineer from the sum of payments made to date plus the amount due on the current monthly estimate, divided by the current total estimated value of the work, expressed as a percentage.

When the percent of working days elapsed minus the percent of work completed is less than or equal to 15 percentage points, the funds withheld shall be returned to the Contractor with the next monthly progress payment.

Funds kept or withheld from payment, due to the failure of the Contractor to comply with the provisions of the contract, will not be subject to the requirements of Public Contract Code 7107 or to the payment of interest pursuant to Public Contract Code Section 10261.5.

5-1.03 INTEREST ON PAYMENTS

Interest shall be payable on progress payments, payments after acceptance, final payments, extra work payments, and claim payments as follows:

A. Unpaid progress payments, payment after acceptance, and final payments shall begin to accrue interest 30 days after the Engineer prepares the payment estimate.
B. Unpaid extra work bills shall begin to accrue interest 30 days after preparation of the first pay estimate following receipt of a properly submitted and undisputed extra work bill. To be properly submitted, the bill must be submitted within 7 days of the performance of the extra work and in conformance with the provisions in Section 9-1.03C, "Records," and Section 9-1.06, "Partial Payments," of the Standard Specifications. An undisputed extra work bill not submitted within 7 days of performance of the extra work will begin to accrue interest 30 days after the preparation of the second pay estimate following submittal of the bill.
C. The rate of interest payable for unpaid progress payments, payments after acceptance, final payments, and extra work payments shall be 10 percent per annum.
D. The rate of interest payable on a claim, protest or dispute ultimately allowed under this contract shall be 6 percent per annum. Interest shall begin to accrue 61 days after the Contractor submits to the Engineer information in sufficient detail to enable the Engineer to ascertain the basis and amount of said claim, protest or dispute.

The rate of interest payable on any award in arbitration shall be 6 percent per annum if allowed under the provisions of Civil Code Section 3289.

5-1.04 PUBLIC SAFETY

The Contractor shall provide for the safety of traffic and the public in conformance with the provisions in Section 7-1.09, "Public Safety," of the Standard Specifications and these special provisions.

The Contractor shall install temporary railing (Type K) between a lane open to public traffic and an excavation, obstacle or storage area when the following conditions exist:

A. Excavations—The near edge of the excavation is 3.6 m or less from the edge of the lane, except:

    1. Excavations covered with sheet steel or concrete covers of adequate thickness to prevent accidental entry by traffic or the public.
    2. Excavations less than 0.3-m deep.

3. Trenches less than 0.3-m wide for irrigation pipe or electrical conduit, or excavations less than 0.3-m in diameter.
4. Excavations parallel to the lane for the purpose of pavement widening or reconstruction.
5. Excavations in side slopes, where the slope is steeper than 1:4 (vertical:horizontal).
6. Excavations protected by existing barrier or railing.

B. Temporarily Unprotected Permanent Obstacles—The work includes the installation of a fixed obstacle together with a protective system, such as a sign structure together with protective railing, and the Contractor elects to install the obstacle prior to installing the protective system; or the Contractor, for the Contractor's convenience and with permission of the Engineer, removes a portion of an existing protective railing at an obstacle and does not replace such railing complete in place during the same day.
C. Storage Areas—Material or equipment is stored within 3.6 m of the lane and the storage is not otherwise prohibited by the provisions of the Standard Specifications and these special provisions.

The approach end of temporary railing (Type K), installed in conformance with the provisions in this section "Public Safety" and in Section 7-1.09, "Public Safety," of the Standard Specifications, shall be offset a minimum of 4.6 m from the edge of the traffic lane open to public traffic. The temporary railing shall be installed on a skew toward the edge of the traffic lane of not more than 0.3-m transversely to 3 m longitudinally with respect to the edge of the traffic lane. If the 4.6-m minimum offset cannot be achieved, the temporary railing shall be installed on the 10 to 1 skew to obtain the maximum available offset between the approach end of the railing and the edge of the traffic lane, and an array of temporary crash cushion modules shall be installed at the approach end of the temporary railing.

Except for installing, maintaining and removing traffic control devices, whenever work is performed or equipment is operated in the following work areas, the Contractor shall close the adjacent traffic lane unless otherwise provided in the Standard Specifications and these special provisions:

Approach Speed of Public Traffic (Posted Limit) (Kilometers Per Hour)	Work Areas
Over 72 (45 Miles Per Hour)	Within 1.8 m of a traffic lane but not on a traffic lane
56 to 72 (35 to 45 Miles Per Hour)	Within 0.9-m of a traffic lane but not on a traffic lane

The lane closure provisions of this section shall not apply if the work area is protected by permanent or temporary railing or barrier.

When traffic cones or delineators are used to delineate a temporary edge of a traffic lane, the line of cones or delineators shall be considered to be the edge of the traffic lane, however, the Contractor shall not reduce the width of an existing lane to less than 3 m without written approval from the Engineer.

When work is not in progress on a trench or other excavation that required closure of an adjacent lane, the traffic cones or portable delineators used for the lane closure shall be placed off of and adjacent to the edge of the traveled way. The spacing of the cones or delineators shall be not more than the spacing used for the lane closure.

Suspended loads or equipment shall not be moved nor positioned over public traffic or pedestrians.

Full compensation for conforming to the provisions in this section "Public Safety," including furnishing and installing temporary railing (Type K) and temporary crash cushion modules, shall be considered as included in the contract prices paid for the various items of work involved and no additional compensation will be allowed therefor.

5-1.05 TESTING

Testing of materials and work shall conform to the provisions in Section 6-3, "Testing," of the Standard Specifications and these special provisions.

Whenever the provisions of Section 6-3.01, "General," of the Standard Specifications refer to tests or testing, it shall mean tests to assure the quality and to determine the acceptability of the materials and work.

The Engineer will deduct the costs for testing of materials and work found to be unacceptable, as determined by the tests performed by the Department, and the costs for testing of material sources identified by the Contractor which are not used for the work, from moneys due or to become due to the Contractor. The amount deducted will be determined by the Engineer.

5-1.06 REMOVAL OF ASBESTOS AND HAZARDOUS SUBSTANCES

When the presence of asbestos or hazardous substances are not shown on the plans or indicated in the specifications and the Contractor encounters materials which the Contractor reasonably believes to be asbestos or a hazardous substance as defined in Section 25914.1 of the Health and Safety Code, and the asbestos or hazardous substance has not been rendered harmless, the Contractor may continue work in unaffected areas reasonably believed to be safe. The Contractor shall immediately cease work in the affected area and report the condition to the Engineer in writing.

In conformance with Section 25914.1 of the Health and Safety Code, removal of asbestos or hazardous substances including exploratory work to identify and determine the extent of the asbestos or hazardous substance will be performed by separate contract.

If delay of work in the area delays the current controlling operation, the delay will be considered a right of way delay and the Contractor will be compensated for the delay in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

5-1.065 SOLID WASTE DISPOSAL AND RECYCLING REPORT

This work shall consist of reporting disposal and recycling of construction solid waste, as specified in these special provisions. For the purposes of this section, solid waste includes construction and demolition waste debris, but not hazardous waste.

Annually by the fifteenth day of January, the Contractor shall complete and certify Form CEM-2025, "Solid Waste Disposal and Recycling Report," which quantifies solid waste generated by the work performed and disposed of in landfills or recycled during the previous calendar year. The amount and type of solid waste disposed of or recycled shall be reported in either metric tonnes or cubic meters. The Contractor shall also complete and certify Form CEM-2025 within 5 days following contract acceptance.

Form CEM-2025, "Solid Waste Disposal and Recycling Report" can be downloaded from the following website:

http://www.dot.ca.gov/hq/construc/manual2001

If the Contractor has not submitted Form CEM-2025, by the dates specified above, the Department will withhold the amount of $10,000 for each missing or incomplete report. The moneys withheld will be released for payment on the next monthly estimate for partial payment following the date that a complete and acceptable Form CEM-2025 is submitted to the Engineer. Upon completion of all contract work and submittal of the final Form CEM-2025, remaining withheld funds associated with this section, "Solid Waste Disposal and Recycling Report," will be released for payment. Withheld funds in conformance with this section shall be in addition to other moneys withheld provided for in the contract. No interest will be due the Contractor on withheld amounts.

Full compensation for preparing and submitting Form CEM-2025, "Solid Waste Disposal and Recycling Report," shall be considered as included in the contract price for the various items of work involved and no additional compensation will be allowed therefor.

5-1.07 (BLANK)

5-1.075 BUY AMERICA REQUIREMENTS

Attention is directed to the "Buy America" requirements of the Surface Transportation Assistance Act of 1982 (Section 165) and the Intermodal Surface Transportation Efficiency Act of 1991 (ISTEA) Sections 1041(a) and 1048(a), and the regulations adopted pursuant thereto. In conformance with the law and regulations, all manufacturing processes for steel and iron materials furnished for incorporation into the work on this project shall occur in the United States; with the exception that pig iron and processed, pelletized and reduced iron ore manufactured outside of the United States may be used in the domestic manufacturing process for such steel and iron materials. The application of coatings, such as epoxy coating, galvanizing, painting, and other coatings that protect or enhance the value of steel or iron materials shall be considered a manufacturing process subject to the "Buy America" requirements.

A Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications shall be furnished for steel and iron materials. The certificates, in addition to certifying that the materials comply with the specifications, shall specifically certify that all manufacturing processes for the materials occurred in the United States, except for the above exceptions.

The requirements imposed by the law and regulations do not prevent a minimal use of foreign steel and iron materials if the total combined cost of the materials used does not exceed one-tenth of one percent (0.1 percent) of the total contract cost or $2500, whichever is greater. The Contractor shall furnish the Engineer acceptable documentation of the quantity and value of the foreign steel and iron prior to incorporating the materials into the work.

5-1.08 SUBCONTRACTOR AND DBE RECORDS

The Contractor shall maintain records showing the name and business address of each first-tier subcontractor. The records shall also show the name and business address of every DBE subcontractor, DBE vendor of materials and DBE trucking company, regardless of tier. The records shall show the date of payment and the total dollar figure paid to all of these firms. DBE prime contractors shall also show the date of work performed by their own forces along with the corresponding dollar value of the work.

Upon completion of the contract, a summary of these records shall be prepared on Form CEM-2402 (F) and certified correct by the Contractor or the Contractor's authorized representative, and shall be furnished to the Engineer. The form shall be furnished to the Engineer within 90 days from the date of contract acceptance. $10,000 will be withheld from payment until the Form CEM-2402 (F) is submitted. The amount will be returned to the Contractor when a satisfactory Form CEM-2402 (F) is submitted.

Prior to the fifteenth of each month, the Contractor shall submit documentation to the Engineer showing the amount paid to DBE trucking companies. The Contractor shall also obtain and submit documentation to the Engineer showing the amount paid by DBE trucking companies to all firms, including owner-operators, for the leasing of trucks. If the DBE leases trucks from a non-DBE, the Contractor may count only the fee or commission the DBE receives as a result of the lease arrangement.

The Contractor shall also obtain and submit documentation to the Engineer showing the truck number, owner's name, California Highway Patrol CA number, and if applicable, the DBE certification number of the owner of the truck for all trucks used during that month. This documentation shall be submitted on Form CEM-2404 (F).

5-1.083 DBE CERTIFICATION STATUS

If a DBE subcontractor is decertified during the life of the project, the decertified subcontractor shall notify the Contractor in writing with the date of decertification. If a subcontractor becomes a certified DBE during the life of the project, the subcontractor shall notify the Contractor in writing with the date of certification. The Contractor shall furnish the written documentation to the Engineer.

Upon completion of the contract, Form CEM-2403 (F) indicating the DBE's existing certification status shall be signed and certified correct by the Contractor. The certified form shall be furnished to the Engineer within 90 days from the date of contract acceptance.

5-1.086 PERFORMANCE OF SUBCONTRACTORS

The subcontractors listed by the Contractor in conformance with Section 2-1.054, "Required Listing of Proposed Subcontractors," of the Standard Specifications, shall perform the work and supply the materials for which they are listed, unless the Contractor has received prior written authorization to perform the work with other forces or to obtain the materials from other sources.

The Contractor should notify the Engineer in writing of any changes to its anticipated DBE participation. This notice should be provided prior to the commencement of that portion of the work.

5-1.09 SUBCONTRACTING

Attention is directed to the provisions in Section 8-1.01, "Subcontracting," of the Standard Specifications, and these special provisions.

The provisions in the third paragraph of Section 8-1.01, "Subcontracting," of the Standard Specifications, that the Contractor shall perform with the Contractor's own organization contract work amounting to not less than 50 percent of the original contract price, is not changed by the Federal Aid requirement specified under "Required Contract Provisions Federal-Aid Construction Contracts" in Section 14 of these special provisions that the Contractor perform not less than 30 percent of the original contract work with the Contractor's own organization.

Each subcontract and lower tier subcontracts that may in turn be made shall include the "Required Contract Provisions Federal-Aid Construction Contracts" in Section 14 of these special provisions. Noncompliance shall be corrected. Payment for subcontracted work involved will be withheld from progress payments due, or to become due, until correction is made. Failure to comply may result in termination of the contract.

Pursuant to the provisions of Section 1777.1 of the Labor Code, the Labor Commissioner publishes and distributes a list of contractors ineligible to perform work as a subcontractor on a public works project. This list of debarred contractors is available from the Department of Industrial Relations web site at:

http://www.dir.ca.gov/DLSE/Debar.html.

5-1.10 PROMPT PROGRESS PAYMENT TO SUBCONTRACTORS

Attention is directed to the provisions in Sections 10262 and 10262.5 of the Public Contract Code concerning prompt payment to subcontractors.

5-1.103 RECORDS

The Contractor shall maintain cost accounting records for the contract pertaining to, and in such a manner as to provide a clear distinction between, the following six categories of costs of work during the life of the contract:

A. Direct costs of contract item work.
B. Direct costs of changes in character in conformance with Section 4-1.03C, "Changes in Character of Work," of the Standard Specifications.
C. Direct costs of extra work in conformance with Section 4-1.03D, "Extra Work," of the Standard Specifications.
D. Direct costs of work not required by the contract and performed for others.
E. Direct costs of work performed under a notice of potential claim in conformance with the provisions in Section 9-1.04, "Notice of Potential Claim," of the Standard Specifications.
F. Indirect costs of overhead.

Cost accounting records shall include the information specified for daily extra work reports in Section 9-1.03C, "Records," of the Standard Specifications. The requirements for furnishing the Engineer completed daily extra work reports shall only apply to work paid for on a force account basis.

The cost accounting records for the contract shall be maintained separately from other contracts, during the life of the contract, and for a period of not less than 3 years after the date of acceptance of the contract. If the Contractor intends to file claims against the Department, the Contractor shall keep the cost accounting records specified above until complete resolution of all claims has been reached.

5-1.104 INTERNET DAILY EXTRA WORK REPORT

When extra work is being paid for on a force account basis, the Contractor shall submit daily extra work reports in conformance with the provisions in Section 9-1.03C, "Records," of the Standard Specifications and these special provisions.

The Contractor shall send daily extra work reports to the Engineer using the Department's Internet extra work billing system. The reports shall conform to the requirements in the "iCAS User's Guide" (Guide). The Guide is available from the Department, and is also found on the Internet at:

http://www.dot.ca.gov/hq/construc/ewb/EWB_INSTRUCTION.pdf

The Department will provide system accounts to the Contractor's authorized representatives when at least one of the representatives has received training. The Department will provide system training to at least one of the Contractor's authorized representatives within 30 days of the Contractor's request for training. The Department will assign an account and user identification to the Contractor's authorized representatives, and each Contractor's authorized representative shall maintain a unique password. A daily extra work report that the Contractor's authorized representative sends to the Department using the Internet extra work billing system will be considered signed by the Contractor. A daily extra work report that the Engineer approves using the Internet extra work billing system will be considered signed by the Engineer.

Daily extra work reports that include billing for materials shall be substantiated by a valid copy of a vendor's invoice in conformance to the requirements in Section 9-1.03C, "Records," of the Standard Specifications. Each materials invoice shall clearly identify the relative daily extra work report and the associated cost of the materials. In addition to postal service and parcel service and if approved by the Engineer, invoices may be sent by facsimile or as an electronic-mail attachment.

The Contractor shall maintain the Contractor's interface with the Department's Internet extra work billing system. If the Contractor is using the file transfer process to submit extra work reports, it shall conform to the file transfer format and process defined in the Guide.

5-1.11 PARTNERING

The State will promote the formation of a "Partnering" relationship with the Contractor in order to effectively complete the contract to the benefit of both parties. The purpose of this relationship is to maintain a cooperative communication and to mutually resolve conflicts at the lowest responsible management level.

The Contractor may request the formation of a "Partnering" relationship by submitting a request in writing to the Engineer after approval of the contract. If the Contractor's request for "Partnering" is approved by the Engineer, scheduling of a "Partnering Workshop," selecting the "Partnering" facilitator and workshop site, and other administrative details shall be as agreed to by both parties. If agreed to by the parties, additional "Partnering Workshops" will be conducted as needed throughout the life of the contract.

A one-day "Training in Partnering Concepts" session will be conducted regardless of whether the Contractor requests the formation of a "Partnering" relationship. The "Training in Partnering Concepts" session will be conducted locally for the Contractor's and the Engineer's project representatives. The Contractor shall be represented by a minimum of 2 representatives, one being the Contractor's authorized representative pursuant to Section 5-1.06, "Superintendence," of the Standard Specifications. Scheduling of the "Training in Partnering Concepts" session and selection of the trainer and training site shall be determined cooperatively by the Contractor and the Engineer. If, upon the Contractor's request, "Partnering" is approved by the Engineer, the "Training in Partnering Concepts" session shall be conducted prior to the initial "Partnering Workshop."

The costs involved in providing the "Training in Partnering Concepts" trainer and training site will be borne entirely by the State. The costs will be determined in conformance with the provisions in Section 9-1.03B, "Work Performed by Special Forces or Other Special Services," of the Standard Specifications, and paying to the Contractor the sum of that cost, except no markups will be allowed.

The costs involved in providing the "Partnering Workshop" facilitator and workshop site will be borne equally by the State and the Contractor. The division of cost will be made by determining the cost in providing the "Partnering Workshop" facilitator and workshop site in conformance with the provisions in Section 9-1.03B, "Work Performed by Special Forces or Other Special Services," of the Standard Specifications, and paying to the Contractor one-half of that cost, except no markups will be allowed.

All other costs associated with "Training in Partnering Concepts" and "Partnering Workshops" will be borne separately by the party incurring the costs, such as wages and travel expenses, and no additional compensation will be allowed therefor.

The establishment of a "Partnering" relationship will not change or modify the terms and conditions of the contract and will not relieve either party of the legal requirements of the contract.

5-1.114 VALUE ANALYSIS

The Contractor may submit to the Engineer, in writing, a request for a "Value Analysis" workshop. The purpose for having a workshop is to identify value enhancing opportunities and to consider modifications to the plans and specifications that will reduce either the total cost, time of construction or traffic congestion, without impairing, in any manner, the essential functions or characteristics of the project including, but not limited to, service life, economy of operation, ease of maintenance, benefits to the travelling public, desired appearance, or design and safety standards.

To maximize the potential benefits of a workshop, the request should be submitted to the Engineer early in the project after approval of the contract. If the Contractor's request for a "Value Analysis" workshop is approved by the Engineer, scheduling of a workshop, selecting the facilitator and workshop site, and other administrative details shall be determined cooperatively by the Contractor and the Engineer.

The workshop shall be conducted in conformance with the methodology described in the Department's "Value Analysis Team Guide" available at the Department's web site at:

http://www.dot.ca.gov/hq/oppd/value/

The facilitator shall be a Certified Value Specialist (CVS) as recognized by the Society of American Value Engineers (SAVE) International, which may be contacted as follows:

SAVE International, 60 Revere Drive, Northbrook, IL 60062
Telephone 1-847-480-1730, FAX 1-847-480-9282

The Contractor may submit recommendations resulting from a "Value Analysis" workshop for approval by the Engineer as cost reduction incentive proposals in conformance with the provisions in Section 5-1.14, "Cost Reduction Incentive," of the Standard Specifications.

The costs involved in providing the "Value Analysis" facilitator and workshop site will be borne equally by the State and the Contractor. The division of cost will be made by determining the cost in providing the "Value Analysis" facilitator and workshop site in conformance with the provisions in Section 9-1.03B, "Work Performed by Special Forces or Other Special Services," of the Standard Specifications, and paying to the Contractor one-half of that cost, except no markups will be allowed.

All other costs associated with the "Value Analysis" workshop will be borne separately by the party incurring the costs, such as wages and travel expenses, and no additional compensation will be allowed therefor.

5-1.12 DISPUTE REVIEW BOARD

GENERAL

To assist in the resolution of disputes or potential claims arising out of the work of this project, a Dispute Review Board, hereinafter referred to as the "DRB," shall be established by the Engineer and Contractor cooperatively upon approval of the contract. The DRB is intended to assist the contract administrative claims resolution process as specified in the provisions in Section 9-1.04, "Notice of Potential Claim," and Section 9-1.07B, "Final Payment and Claims," of the Standard Specifications and these special provisions. The DRB shall not serve as a substitute for provisions in the specifications in regard to filing potential claims. The requirements and procedures established in this section shall be a prerequisite to filing a claim, filing for arbitration, or filing for litigation prior or subsequent to project completion.

The DRB shall be utilized when dispute or potential claim resolution at the project level is unsuccessful. The DRB shall function as specified herein until the day of acceptance of the contract, at which time the work of the DRB will cease except for completion of unfinished reports. No DRB dispute meetings shall take place later than 30 days prior to acceptance of

contract. After acceptance of contract, disputes or potential claims which have followed the dispute resolution processes of the Standard Specifications and these special provisions, but have not been resolved, shall be stated or restated by the Contractor, in response to the Proposed Final Estimate within the time limits provided in Section 9-1.07B, "Final Payment and Claims," of the Standard Specifications. The State will review those claims in conformance with the provisions in Section 9-1.07B of the Standard Specifications. Following the adherence to and completion of the contractual administrative claims procedure, the Contractor may file for arbitration in conformance with the provisions in Section 9-1.10, "Arbitration," of the Standard Specifications and these special provisions.

Disputes, as used in this section, shall include differences of opinion, properly noticed as provided hereinafter, between the State and Contractor on matters related to the work and other subjects considered by the State or Contractor, or by both, to be of concern to the DRB on this project, except matters relating to Contractor, subcontractor or supplier potential claims not actionable against the Department as specified in these special provisions or quantification of disputes for overhead type expenses or costs. Disputes for overhead type expenses or costs shall conform to the requirements of Section 9-1.07B, "Final Payment and Claims," of the Standard Specifications. Whenever the term "dispute" or "disputes" is used herein, it shall be deemed to include potential claims as well as disputes.

The DRB shall serve as an advisory body to assist in the resolution of disputes between the State and the Contractor, hereinafter referred to as the "parties." The DRB shall consider disputes referred to it, and furnish written reports containing findings and recommendations pertaining to those disputes, to the parties to aid in resolution of the differences between them. DRB findings and recommendations are not binding on the parties.

SELECTION PROCESS, DISCLOSURE AND APPOINTMENTS

The DRB shall consist of one member selected by the State and approved by the Contractor, one member selected by the Contractor and approved by the State, and a third member selected by the first 2 members and approved by both the State and the Contractor. The third member shall act as the DRB Chairperson.

DRB members shall be especially knowledgeable in the type of construction and contract documents potentially anticipated by the contract. DRB members shall discharge their responsibilities impartially as an independent body, considering the facts and circumstances related to the matters under consideration, pertinent provisions of the contract and applicable laws and regulations.

The State and the Contractor shall nominate and approve DRB members in conformance with the terms and conditions of the Dispute Review Board Agreement and these special provisions, within 45 days of the approval of the contract. Each party shall provide written notification to the other of the name of their selected DRB nominee along with the prospective member's complete written disclosure statement.

Disclosure statements shall include a resume of the prospective member's experience and a declaration statement describing past, present, anticipated, and planned relationships, including indirect relationships through the prospective member's primary or full-time employer, to this project and with the parties involved in this construction contract, including but not limited to, relevant subcontractors or suppliers to the parties, parties' principals, or parties' counsel. DRB members shall also include a full disclosure of close professional or personal relationships with all key members of the contract. Objections to nominees must be based on a specific breech or violation of nominee responsibilities or on nominee qualifications under these provisions unless otherwise specified. The Contractor or the State may, on a one-time basis, object to the other's nominee without specifying a reason and this person will not be selected for the DRB. Another person shall then be nominated within 15 days.

The first duty of the State and Contractor selected members of the DRB shall be to select and recommend a prospective third DRB member to the parties for final selection and approval. The first 2 DRB members shall proceed with the selection of the third DRB member immediately upon receiving written notification from the State of their selection, and shall provide their recommendation simultaneously to the parties within 15 days of the notification.

The first 2 DRB members shall select a third DRB member subject to mutual approval of the parties or may mutually concur on a list of potentially acceptable third DRB members and submit the list to the parties for final selection and approval of the third member. The goal in the selection of the third member is to complement the professional experience of the first 2 members and to provide leadership for the DRB's activities.

The third prospective DRB member shall supply a full disclosure statement to the first 2 DRB members and to the parties prior to appointment.

An impasse shall be considered to have been reached if the parties are unable to approve a third member within 15 days of receipt of the recommendation of the first 2 DRB members, or if the first 2 DRB members are unable to agree upon a recommendation within their 15 day time limit. In the event of an impasse in selection of third DRB member the State and the Contractor shall each propose 3 candidates for the third DRB member position. The parties shall select the candidates proposed under this paragraph from the current list of arbitrators certified by the Public Works Contract Arbitration Committee created by Article 7.2 (commencing with Section 10245) of the State Contract Act. The first 2 DRB members shall then select one of the 6 proposed candidates in a blind draw.

No DRB member shall have prior direct involvement in this contract. No member shall have a financial interest in this contract or the parties thereto, within a period of 6 months prior to award of this contract or during the contract, except as follows:

A. Compensation for services on this DRB.
B. Ownership interest in a party or parties, documented by the prospective DRB member, that has been reviewed and determined in writing by the State to be sufficiently insignificant to render the prospective member acceptable to the State.
C. Service as a member of other Dispute Review Boards on other contracts.
D. Retirement payments or pensions received from a party that are not tied to, dependent on or affected by the net worth of the party.
E. The above provisions apply to parties having a financial interest in this contract, including but not limited to contractors, subcontractors, suppliers, consultants, and legal and business services.

The Contractor or the State may reject any of the three DRB members who fail to fully comply at all times with all required employment and financial disclosure conditions of DRB membership as described in the Dispute Review Board Agreement and as specified herein. A copy of the Dispute Review Board Agreement is included in this section.

The Contractor, the State, and the 3 members of the DRB shall complete and adhere to the Dispute Review Board Agreement in administration of this DRB within 15 days of the parties' concurrence in the selection of the third member. No DRB meeting shall take place until the Dispute Review Board Agreement has been signed by all parties. The State authorizes the Engineer to execute and administer the terms of the Agreement. The person(s) designated by the Contractor as authorized to execute contract change orders shall be authorized to execute and administer the terms of this agreement, or to delegate the authority in writing. The operation of the DRB shall be in conformance with the terms of the Dispute Review Board Agreement.

COMPENSATION

The State and the Contractor shall bear the costs and expenses of the DRB equally. Each DRB member shall be compensated at an agreed rate of $1,200 per day if time spent per meeting, including on-site time plus one hour of travel time, is greater than 4 hours. Each DRB member shall be compensated at an agreed rate of $700 per day if time spent per meeting, including on-site time plus one hour of travel time, is less than or equal to 4 hours. The agreed rates shall be considered full compensation for on-site time, travel expenses, transportation, lodging, time for travel and incidentals for each day, or portion thereof, that the DRB member is at an authorized DRB meeting. No additional compensation will be made for time spent by DRB members in review and research activities outside the official DRB meetings unless that time, (such as time spent evaluating and preparing recommendations on specific issues presented to the DRB), has been specifically agreed to in advance by the State and Contractor. Time away from the project, which has been specifically agreed to in advance by the parties, will be compensated at an agreed rate of $125 per hour. The agreed amount of $125 per hour shall include all incidentals including expenses for telephone, fax, and computer services. Members serving on more than one DRB involving the Department, regardless of the number of meetings per day, shall not be paid more than the all inclusive rate per day or rate per hour for an individual project. The State will provide, at no cost to the Contractor, administrative services such as conference facilities and secretarial services to the DRB. These special provisions and the Dispute Review Board Agreement state the provisions for compensation and expenses of the DRB. DRB members shall be compensated at the same daily and hourly rate. The Contractor shall make direct payments to each DRB member for their participation in authorized meetings and approved hourly rate charges from invoices submitted by each DRB member. The State will reimburse the Contractor for the State's share of the costs. There will be no markups applied to expenses connected with the DRB, either by the DRB members or by the Contractor when requesting payment of the State's share of DRB expenses. Regardless of the DRB recommendation, neither party shall be entitled to reimbursement of DRB costs from the other party.

REPLACEMENT OF DRB MEMBERS

Service of a DRB member may be terminated at any time with not less than 15 days notice as follows:

A. The State may terminate service of the State appointed member.
B. The Contractor may terminate service of the Contractor appointed member.
C. Upon the written recommendation of the State and Contractor appointed members for the removal of the third member.
D. Upon resignation of a member.
E. The State or Contractor may terminate the service of any member who fails to fully comply with all required employment and financial disclosure conditions of DRB membership

When a member of the DRB is replaced, the replacement member shall be appointed in the same manner as the replaced member was appointed. The appointment of a replacement DRB member will begin promptly upon determination of the need for replacement and shall be completed within 15 days. Changes in either of the DRB members chosen by the two parties will not require re-selection of the third member, unless both parties agree to such re-selection in writing. The Dispute Review Board Agreement shall be amended to reflect the change of a DRB member.

OPERATION

The following procedure shall be used for dispute resolution:

A. If the Contractor objects to any decision, act or order of the Engineer, the Contractor shall give written notice of potential claim in conformance with the provisions in Section 9-1.04, "Notice of Potential Claim," of the Standard Specifications and these special provisions, including the provision of applicable cost documentation; or file written protests or notices in conformance with the provisions in the Standard Specifications and these special provisions.
B. The Engineer will respond, in writing, to the Contractor's written supplemental notice of potential claim within 20 days of receipt of the notice.
C. Within 15 days after receipt of the Engineer's written response, the Contractor shall, if the Contractor still objects, file a written reply with the Engineer, stating clearly and in detail the basis of the objection.
D. Following an objection to the Engineer's written response, the Contractor shall refer the dispute to the DRB if the Contractor wishes to further pursue the objection to the Engineer's decision. The Contractor shall make the referral in writing to the DRB, simultaneously copied to the State, within 21 days after receipt of the written response from the Engineer. The written dispute referral shall describe the disputed matter in individual discrete segments so that it will be clear to both parties and the DRB what discrete elements of the dispute have been resolved, and which remain unresolved, and shall include an estimate of the cost of the affected work and impacts, if any, on project completion.
E. By failing to submit the written notice of referral to the DRB, within 21 days after receipt of the Engineer's written response to the supplemental notice of potential claim, the Contractor waives future claims and arbitration on the matter in contention.
F. The Contractor and the State shall each be afforded an opportunity to be present and to be heard by the DRB, and to offer evidence. Either party furnishing written evidence or documentation to the DRB must furnish copies of such information to the other party a minimum of 15 days prior to the date the DRB is scheduled to convene the meeting for the dispute. Either party shall produce such additional evidence as the DRB may deem necessary to reach an understanding and a determination of the dispute. The party furnishing additional evidence shall furnish copies of such additional evidence to the other party at the same time the evidence is provided to the DRB. The DRB shall not consider evidence not furnished in conformance with the terms specified herein.
G. Upon receipt by the DRB of a written referral of a dispute, the DRB shall convene to review and consider the dispute. The dispute meeting shall be held no earlier than 30 days and no later than 60 days after receipt of the written referral unless otherwise agreed to by all parties. The DRB shall determine the time and location of the DRB dispute meeting, with due consideration for the needs and preferences of the parties while recognizing the paramount importance of a timely hearing of the dispute.
H. There shall be no participation of either party's attorneys at DRB dispute meetings.
I. There shall be no participation of persons who are not directly involved in the contract or who do not have direct knowledge of the dispute, including but not limited to consultants, except for expert testimony allowed at the discretion of the DRB and with approval prior to the dispute meeting by both parties.
J. The DRB shall furnish a report, containing findings and recommendations as described in the Dispute Review Board Agreement, in writing to both the State and the Contractor. The DRB may request clarifying information of either party within 10 days after the DRB dispute meeting. Requested information shall be submitted to the DRB within 10 days of the DRB request. The DRB shall complete its report, including minority opinion, if any, and submit it to the parties within 30 days of the DRB dispute meeting, except that time extensions may be granted at the request of the DRB with the written concurrence of both parties. The report shall include the facts and circumstances related to the matters under consideration, pertinent provisions of the contract, applicable laws and regulations, and actual costs and time incurred as shown on the Contractor's cost accounting records. The DRB shall make recommendations on the merit of the dispute and, if appropriate, recommend guidelines for determining compensation.
K. Within 30 days after receiving the DRB's report, both the State and the Contractor shall respond to the DRB in writing signifying that the dispute is either resolved or remains unresolved. Failure to provide the written response within the time specified, or a written rejection of the DRB's recommendation or response to a request for reconsideration presented in the report by either party, shall conclusively indicate that the party(s) failing to respond

accepts the DRB recommendation. Immediately after responses have been received from both parties, the DRB shall provide copies of both responses to the parties simultaneously. Either party may request clarification of elements of the DRB's report from the DRB prior to responding to the report. The DRB shall consider any clarification request only if submitted within 10 days of receipt of the DRB's report, and if submitted simultaneously in writing to both the DRB and the other party. Each party may submit only one request for clarification for any individual DRB report. The DRB shall respond, in writing, to requests for clarification within 10 days of receipt of such requests.

L. The DRB's recommendations, stated in the DRB's reports, are not binding on either party. Either party may seek a reconsideration of a recommendation of the DRB. The DRB shall only grant a reconsideration based upon submission of new evidence and if the request is submitted within the 30-day time limit specified for response to the DRB's written report. Each party may submit only one request for reconsideration regarding an individual DRB recommendation.

M. If the State and the Contractor are able to resolve their dispute with the aid of the DRB's report, the State and Contractor shall promptly accept and implement the recommendations of the DRB. If the parties cannot agree on compensation within 60 days of the acceptance by both parties of the DRB's recommendation, either party may request the DRB to make a recommendation regarding compensation.

N. The State or the Contractor shall not call DRB members who served on the DRB for this contract as witnesses in arbitration proceedings which may arise from this contract, and all documents created by the DRB shall be inadmissible as evidence in subsequent arbitration proceedings, except the DRB's final written reports on each issue brought before it.

O. The State and Contractor shall jointly indemnify and hold harmless the DRB members from and against all claims, damages, losses, and expenses, including but not limited to attorney's fees, arising out of and resulting from the findings and recommendations of the DRB.

P. The DRB members shall have no claim against the State or the Contractor, or both, from claimed harm arising out of the parties' evaluations of the DRB's report.

DISPUTES INVOLVING SUBCONTRACTOR POTENTIAL CLAIMS

For purposes of this section, a "subcontractor potential claim" shall include any potential claim by a subcontractor (including also any pass through potential claims by a lower tier subcontractor or supplier) against the Contractor that is actionable by the Contractor against the Department which arises from the work, services, or materials provided or to be provided in connection with the contract. If the Contractor determines to pursue a dispute against the Department that includes a subcontractor potential claim, the dispute shall be processed and resolved in conformance with these special provisions and in conformance with the following:

A. The Contractor shall identify clearly in submissions pursuant to this section, that portion of the dispute that involves a subcontractor potential claim or potential claims.

B. The Contractor shall include, as part of its submission pursuant to Step D above, a certification (False Claims Act Certification) by the subcontractor's or supplier's officer, partner, or authorized representative with authority to bind the subcontractor and with direct knowledge of the facts underlying the subcontractor potential claim. The Contractor shall submit a certification that the subcontractor potential claim is acknowledged and forwarded by the Contractor. The form for these certifications is available from the Engineer.

C. At DRB dispute meetings involving one or more subcontractor potential claims, the Contractor shall require that each subcontractor involved in the dispute have present an authorized representative with actual knowledge of the facts underlying the subcontractor potential claim to assist in presenting the subcontractor potential claim and to answer questions raised by the DRB members or the Department's representatives.

D. Failure by the Contractor to declare a subcontractor potential claim on behalf of its subcontractor (including lower tier subcontractors' and suppliers' pass through potential claims) at the time of submission of the Contractor's potential claims, as provided hereunder, shall constitute a release of the State by the Contractor of such subcontractor potential claim.

E. The Contractor shall include in all subcontracts under this contract that subcontractors and suppliers of any tier (a) agree to submit subcontractor potential claims to the Contractor in a proper form and in sufficient time to allow processing by the Contractor in conformance with the Dispute Review Board resolution specifications; (b) agree to be bound by the terms of the Dispute Review Board provisions to the extent applicable to subcontractor potential claims; (c) agree that, to the extent a subcontractor potential claim is involved, completion of all steps required under these Dispute Review Board special provisions shall be a condition precedent to pursuit by the subcontractor of other remedies permitted by law, including without limitation of a lawsuit against the Contractor; and (d) agree that the existence of a dispute resolution process for disputes involving subcontractor potential claims shall not be deemed to create any claim, right, or cause of action by any subcontractor or supplier against the Department.

Notwithstanding the foregoing, this Dispute Review Board special provision shall not apply to, and the DRB shall not have the authority to consider, subcontractor potential claims between the subcontractor(s) or supplier(s) and the Contractor that are not actionable by the Contractor against the Department.

RETENTION

Failure of the Contractor to nominate and approve DRB members in conformance with the terms and conditions of the Dispute Review Board Agreement and these special provisions shall result in the retention of 25 percent of the estimated value of all work performed during each estimate period in which the Contractor fails to comply with the requirements of this section as determined by the Engineer. DRB retentions will be released for payment on the next monthly estimate for partial payment following the date that the Contractor has nominated and approved DRB members and no interest will be due the Contractor.

DISPUTE REVIEW BOARD AGREEMENT

A copy of the "Dispute Review Board Agreement" to be executed by the Contractor, State and the 3 DRB members after approval of the contract follows:

Form 6202 Rev (09/01/02)

DISPUTE REVIEW BOARD AGREEMENT

_____
(Contract Identification)

Contract No. _____

THIS DISPUTE REVIEW BOARD AGREEMENT, hereinafter called "AGREEMENT", made and entered into this _____ day of _____, _____, between the State of California, acting through the California Department of Transportation and the Director of Transportation, hereinafter called the "STATE," _____ _____ hereinafter called the "CONTRACTOR," and the Dispute Review Board, hereinafter called the "DRB" consisting of the following members:

_____ ,
(Contractor Appointee)

_____ ,
(State Appointee)

and _____
(Third Person)

WITNESSETH, that

WHEREAS, the STATE and the CONTRACTOR, hereinafter called the "parties," are now engaged in the construction on the State Highway project referenced above; and

WHEREAS, the special provisions for the above referenced contract provides for the establishment and operation of the DRB to assist in resolving disputes; and

WHEREAS, the DRB is composed of three members, one selected by the STATE, one selected by the CONTRACTOR, and the third member selected by the other two members and approved by the parties;

NOW THEREFORE, in consideration of the terms, conditions, covenants, and performance contained herein, or attached and incorporated and made a part hereof, the STATE, the CONTRACTOR, and the DRB members hereto agree as follows:

SECTION I DESCRIPTION OF WORK

To assist in the resolution of disputes between the parties, the contract provides for the establishment and the operation of the DRB. The intent of the DRB is to fairly and impartially consider disputes placed before it and provide written

recommendations for resolution of these disputes to both parties. The members of this DRB shall perform the services necessary to participate in the DRB's actions as designated in Section II, Scope of Work.

SECTION II SCOPE OF WORK

The scope of work of the DRB includes, but is not limited to, the following:

A. OBJECTIVE

The principal objective of the DRB is to assist in the timely resolution of disputes between the parties arising from performance of this contract. It is not intended for either party to default on their normal responsibility to amicably and fairly settle their differences by indiscriminately assigning them to the DRB. It is intended that the mere existence of the DRB will encourage the parties to resolve disputes without resorting to this review procedure. But when a dispute that is serious enough to warrant the DRB's review does develop, the process for prompt and efficient action will be in place.

B. PROCEDURES

The DRB shall render written reports on disputes between the parties arising from the construction contract. Prior to consideration of a dispute, the DRB shall establish rules and regulations that will govern the conduct of its business and reporting procedures in conformance with the requirements of the contract and the terms of this AGREEMENT. DRB recommendations, resulting from its consideration of a dispute, shall be furnished in writing to both parties. The recommendations shall be based on facts and circumstances involved in the dispute, pertinent contract provisions, applicable laws and regulations. The recommendations shall find one responsible party in a dispute; shared or "jury" determinations shall not be rendered. The DRB shall make recommendations on the merit of the dispute, and if appropriate, recommend guidelines for determining compensation. If the parties cannot agree on compensation within 60 days of the acceptance by both parties of the DRB's recommendation, either party may request the DRB to make a recommendation regarding compensation.

The DRB shall refrain from officially giving advice or consulting services to anyone involved in the contract. The individual members shall act in a completely independent manner and while serving as members of the DRB shall have no consulting business connections with either party or its principals or attorneys or other affiliates (subcontractors, suppliers, etc.) who have a beneficial interest in the contract.

During scheduled meetings of the DRB as well as during dispute meetings, DRB members shall refrain from expressing opinions on the merits of statements on matters under dispute or potential dispute. Opinions of DRB members expressed in private sessions shall be kept strictly confidential. Individual DRB members shall not meet with, or discuss contract issues with individual parties, except as directed by the DRB Chairperson. Such discussions or meetings shall be disclosed to both parties. Other discussions regarding the project between the DRB members and the parties shall be in the presence of all three members and both parties. Individual DRB members shall not undertake independent investigations of any kind pertaining to disputes or potential disputes, except with the knowledge of both parties and as expressly directed by the DRB Chairperson.

C. CONSTRUCTION SITE VISITS, PROGRESS MEETINGS AND FIELD INSPECTIONS

The DRB members shall visit the project site and meet with representatives of the parties to keep abreast of construction activities and to develop familiarity with the work in progress. Scheduled progress meetings shall be held at or near the project site. The DRB shall meet at least once at the start of the project, and at least once every 4 months thereafter. The frequency, exact time, and duration of additional site visits and progress meetings shall be as recommended by the DRB and approved by the parties consistent with the construction activities or matters under consideration and dispute. Each meeting shall consist of a round table discussion and a field inspection of the work being performed on the contract, if necessary. Each meeting shall be attended by representatives of both parties. The agenda shall generally be as follows:

1. Meeting opened by the DRB Chairperson.
2. Remarks by the STATE's representative.
3. A description by the CONTRACTOR's representative of work accomplished since the last meeting; the current schedule status of the work; and a forecast for the coming period.
4. An outline by the CONTRACTOR's representative of potential problems and a description of proposed solutions.
5. An outline by the STATE's representative of the status of the work as the STATE views it.
6. A brief description by the CONTRACTOR's or STATE's representative of potential claims or disputes which have surfaced since the last meeting.
7. A summary by the STATE's representative, the CONTRACTOR's representative, or the DRB of the status of past disputes and potential claims.

The STATE's representative will prepare minutes of all progress meetings and circulate them for revision and approval by all concerned within 10 days of the meeting.

The field inspection shall cover all active segments of the work, the DRB being accompanied by both parties' representatives. The field inspection may be waived upon mutual agreement of the parties.

D. DRB CONSIDERATION AND HANDLING OF DISPUTES

Upon receipt by the DRB of a written referral of a dispute, the DRB shall convene to review and consider the dispute. The dispute meeting shall be held no earlier than 30 days and no later than 60 days after receipt of the written referral, unless otherwise agreed to by all parties. The DRB shall determine the time and location of DRB dispute meetings, with due consideration for the needs and preferences of the parties while recognizing the paramount importance of speedy resolution of issues. No dispute meetings shall take place later than 30 days prior to acceptance of contract.

Normally, dispute meetings shall be conducted at or near the project site. However, any location that would be more convenient and still provide required facilities and access to necessary documentation shall be satisfactory.

Both parties shall be given the opportunity to present their evidence at these dispute meetings. It is expressly understood that the DRB members are to act impartially and independently in the consideration of the contract provisions, applicable laws and regulations, and the facts and conditions surrounding any dispute presented by either party, and that the recommendations concerning any such dispute are advisory and nonbinding on the parties.

The DRB may request that written documentation and arguments from both parties be sent to each DRB member, through the DRB Chairperson, for review before the dispute meeting begins. A party furnishing written documentation to the DRB shall furnish copies of such information to the other party at the same time that such information is supplied to the DRB.

DRB dispute meetings shall be informal. There shall be no testimony under oath or cross-examination. There shall be no reporting of the procedures by a shorthand reporter or by electronic means. Documents and verbal statements shall be received by the DRB in conformance with acceptance standards established by the DRB. These standards need not comply with prescribed legal laws of evidence.

The third DRB member shall act as Chairperson for dispute meetings and all other DRB activities. The parties shall have a representative at all dispute meetings. Failure to attend a duly noticed dispute meeting by either of the parties shall be conclusively considered by the DRB as indication that the non-attending party considers written submittals as their entire and complete argument. The claimant shall discuss the dispute, followed by the other party. Each party shall then be allowed one or more rebuttals until all aspects of the dispute are thoroughly covered. DRB members shall ask questions, seek clarification, and request further data from either of the parties as may be necessary to assist in making a fully informed recommendation. The DRB may request from either party documents or information that would assist the DRB in making its findings and recommendations including, but not limited to, documents used by the CONTRACTOR in preparing the bid for the project. A refusal by a party to provide information requested by the DRB may be considered by the DRB as an indication that the requested material would tend to disprove that party's position. In large or complex cases, additional dispute meetings may be necessary in order to consider all the evidence presented by both parties. All involved parties shall maintain the confidentiality of all documents and information, as provided in this AGREEMENT.

During dispute meetings, no DRB member shall express an opinion concerning the merit of any facet of the case. DRB deliberations shall be conducted in private, with interim individual views kept strictly confidential.

After dispute meetings are concluded, the DRB shall meet in private and reach a conclusion supported by 2 or more members. Private sessions of the DRB may be held at a location other than the job site or by electronic conferencing as deemed appropriate, in order to expedite the process.

The DRB's findings and recommendations, along with discussion of reasons therefor, shall then be submitted as a written report to both parties. Recommendations shall be based on the pertinent contract provisions, applicable laws and regulations, and facts and circumstances related to the dispute. The report shall be thorough in discussing the facts considered, the contract language, law or regulation viewed by the DRB as pertinent to the issues, and the DRB's interpretation and philosophy in arriving at its conclusions and recommendations. The DRB's report shall stand on its own, without attachments or appendices. The DRB Chairperson shall furnish a copy of the written recommendation report to the DRB Coordinator, Division of Construction, MS 44, P.O. Box 942874, Sacramento, CA 94274.

With prior written approval of both parties, the DRB may obtain technical services necessary to adequately review the disputes presented, including audit, geotechnical, schedule analysis and other services. The parties' technical staff may supply those services as appropriate. The cost of technical services, as agreed to by the parties, shall be borne equally by the 2 parties as specified in an approved contract change order. The CONTRACTOR will not be entitled to markups for the payments made for these services.

The DRB shall resist submittal of incremental portions of information by either party, in the interest of making a fully informed decision and recommendation.

The DRB shall make every effort to reach a unanimous decision. If this proves impossible, the dissenting member shall prepare a minority opinion, which shall be included in the DRB's report.

Although both parties should place weight upon the DRB's recommendations, they are not binding. Either party may appeal a recommendation to the DRB for reconsideration. However, reconsideration shall only be allowed when there is new evidence to present, and the DRB shall accept only one appeal from each party pertaining to an individual DRB

recommendation. The DRB shall hear appeals in conformance with the terms described in the Section entitled "Dispute Review Board" in the special provisions.

E. DRB MEMBER REPLACEMENT

Should the need arise to appoint a replacement DRB member, the replacement DRB member shall be appointed in the same manner as the original DRB members were appointed. The selection of a replacement DRB member shall begin promptly upon notification of the necessity for a replacement and shall be completed within 15 days. This AGREEMENT shall be amended to indicate change in DRB membership.

SECTION III CONTRACTOR RESPONSIBILITIES

The CONTRACTOR shall furnish to each DRB member one copy of pertinent documents that are or may become necessary for the DRB to perform their function. Pertinent documents are written notices of potential claim, responses to those notices, drawings or sketches, calculations, procedures, schedules, estimates, or other documents which are used in the performance of the work or in justifying or substantiating the CONTRACTOR's position. The CONTRACTOR shall also furnish a copy of such pertinent documents to the STATE, in conformance with the terms outlined in the special provisions.

SECTION IV STATE RESPONSIBILITIES

The STATE will furnish the following services and items:

A. CONTRACT RELATED DOCUMENTS

The STATE will furnish to each DRB member one copy of Notice to Contractors and Special Provisions, Proposal and Contract, Plans, Standard Specifications, and Standard Plans, change orders, written instructions issued by the STATE to the CONTRACTOR, or other documents pertinent to any dispute that has been referred to the DRB and necessary for the DRB to perform its function.

B. COORDINATION AND SERVICES

The STATE, through the Engineer, will, in cooperation with the CONTRACTOR, coordinate the operations of the DRB. The Engineer will arrange or provide conference facilities at or near the project site and provide secretarial and copying services to the DRB without charge to the CONTRACTOR.

SECTION V TIME FOR BEGINNING AND COMPLETION

Once established, the DRB shall be in operation until the day of acceptance of the contract. The DRB members shall not begin work under the terms of this AGREEMENT until authorized in writing by the STATE.

SECTION VI PAYMENT

A. ALL INCLUSIVE RATE PAYMENT

The STATE and the CONTRACTOR shall bear the costs and expenses of the DRB equally. Each DRB member shall be compensated at an agreed rate of $1,200 per day if time spent per meeting, including on-site time plus one hour of travel time, is greater than 4 hours. Each DRB member shall be compensated at an agreed rate of $700 per day if time spent per meeting, including on-site time plus one hour of travel time, is less than or equal to 4 hours. The agreed rates shall be considered full compensation for on-site time, travel expenses, transportation, lodging, time for travel and incidentals for each day, or portion thereof, that the DRB member is at an authorized DRB meeting. No additional compensation will be made for time spent by DRB members in review and research activities outside the official DRB meetings unless that time has been specifically agreed to in advance by the STATE and CONTRACTOR. Time away from the project that has been specifically agreed to in advance by the parties will be compensated at an agreed rate of $125 per hour. The agreed amount of $125 per hour shall include all incidentals including expenses for telephone, fax, and computer services. Members serving on more than one DRB involving the State, regardless of the number of meetings per day, shall not be paid more than the all inclusive rate per day or rate per hour for an individual project. The STATE will provide, at no cost to the CONTRACTOR, administrative services such as conference facilities and secretarial services to the DRB.

B. PAYMENTS

DRB members shall be compensated at the same rate. The CONTRACTOR shall make direct payments to each DRB member for their participation in authorized meetings and approved hourly rate charges from invoices submitted by each DRB member. The STATE will reimburse the CONTRACTOR for its share of the costs of the DRB.

The DRB members may submit invoices to the CONTRACTOR for partial payment for work performed and services rendered for their participation in authorized meetings not more often than once per month during the progress of the work. The invoices shall be in a format approved by the parties and accompanied by a general description of activities performed

during that billing period. Payment for hourly fees, at the agreed rate, shall not be paid to a DRB member until the amount and extent of those fees are approved by the STATE and CONTRACTOR.

Invoices shall be accompanied by original supporting documents, which the CONTRACTOR shall include with the extra work billing when submitting for reimbursement of the STATE's share of cost from the STATE. The CONTRACTOR will be reimbursed for one-half of approved costs of the DRB. No markups will be added to the CONTRACTOR's payment.

C. INSPECTION OF COSTS RECORDS

The DRB members and the CONTRACTOR shall keep available for inspection by representatives of the STATE and the United States, for a period of 3 years after final payment, the cost records and accounts pertaining to this AGREEMENT. If any litigation, claim, or audit arising out of, in connection with, or related to this contract is initiated before the expiration of the 3-year period, the cost records and accounts shall be retained until such litigation, claim, or audit involving the records is completed.

SECTION VII ASSIGNMENT OF TASKS OF WORK

The DRB members shall not assign the work of this AGREEMENT.

SECTION VIII TERMINATION OF DRB MEMBERS

DRB members may resign from the DRB by providing not less than 15 days written notice of the resignation to the STATE and CONTRACTOR. DRB members may be terminated by their original appointing power or by either party, for failing to fully comply at all times with all required employment and financial disclosure conditions of DRB membership in conformance with the terms of the contract.

SECTION IX LEGAL RELATIONS

The parties hereto mutually understand and agree that the DRB member in the performance of duties on the DRB, is acting in the capacity of an independent agent and not as an employee of either party.

No party to this AGREEMENT shall bear a greater responsibility for damages or personal injury than is normally provided by Federal or State of California Law.

Notwithstanding the provisions of this contract that require the CONTRACTOR to indemnify and hold harmless the STATE, the parties shall jointly indemnify and hold harmless the DRB members from and against all claims, damages, losses, and expenses, including but not limited to attorney's fees, arising out of and resulting from the findings and recommendations of the DRB.

SECTION X CONFIDENTIALITY

The parties hereto mutually understand and agree that all documents and records provided by the parties in reference to issues brought before the DRB, which documents and records are marked "Confidential - for use by the DRB only," shall be kept in confidence and used only for the purpose of resolution of subject disputes, and for assisting in development of DRB findings and recommendations; that such documents and records will not be utilized or revealed to others, except to officials of the parties who are authorized to act on the subject disputes, for any purposes, during the life of the DRB. Upon termination of this AGREEMENT, said confidential documents and records, and all copies thereof, shall be returned to the parties who furnished them to the DRB. However, the parties understand that such documents shall be subsequently discoverable and admissible in court or arbitration proceedings unless a protective order has been obtained by the party seeking further confidentiality.

SECTION XI DISPUTES

Disputes between the parties hereto, including disputes between the DRB members and either party or both parties, arising out of the work or other terms of this AGREEMENT, which cannot be resolved by negotiation and mutual concurrence between the parties, or through the administrative process provided in the contract, shall be resolved by arbitration as provided in Section 9-1.10, "Arbitration," of the Standard Specifications.

SECTION XII VENUE, APPLICABLE LAW, AND PERSONAL JURISDICTION

In the event that any party, including an individual member of the DRB, deems it necessary to institute arbitration proceedings to enforce any right or obligation under this AGREEMENT, the parties hereto agree that such action shall be initiated in the Office of Administrative Hearings of the State of California. The parties hereto agree that all questions shall be resolved by arbitration by application of California law and that the parties to such arbitration shall have the right of appeal from such decisions to the Superior Court in conformance with the laws of the State of California. Venue for the arbitration shall be Sacramento or any other location as agreed to by the parties.

SECTION XIII FEDERAL REVIEW AND REQUIREMENTS

On Federal-Aid contracts, the Federal Highway Administration shall have the right to review the work of the DRB in progress, except for private meetings or deliberations of the DRB.

Other Federal requirements in this agreement shall only apply to Federal-Aid contracts.

SECTION XIV CERTIFICATION OF THE CONTRACTOR, THE DRB MEMBERS, AND THE STATE

IN WITNESS WHEREOF, the parties hereto have executed this AGREEMENT as of the day and year first above written.

DRB MEMBER

By: _____

Title: _____

DRB MEMBER

By: _____

Title : _____

DRB MEMBER

By : _____

Title : _____

CONTRACTOR

By: _____

Title: _____

CALIFORNIA STATE DEPARTMENT
OF TRANSPORTATION

By: _____

Title: _____

5-1.13 FORCE ACCOUNT PAYMENT

Payment for extra work at force account will be determined by either non-subcontracted or subcontracted force account payment unless otherwise specified.

Non-Subcontracted Force Account Payment:

When extra work to be paid for on a force account basis is performed by the Contractor, compensation will be determined in accordance with Section 9-1.03, "Force Account Payment," of the Standard Specifications and these special provisions.

The second, third and fourth paragraphs of Section 9-1.03A, "Work Performed by Contractor," in the Standard Specifications, shall not apply.

Attention is directed to "Time-Related Overhead" of these special provisions.

To the total of the direct costs for work performed on a force account basis, computed as provided in Sections 9-1.03A(1), "Labor," 9-1.03A(2), "Materials," and 9-1.03A(3), "Equipment Rental," of the Standard Specifications, there will be added the following markups:

Cost	Percent Markup
Labor	28
Materials	10
Equipment Rental	10

The above markups shall be applied to work performed on a force account basis, regardless of whether the work revises the current contract completion date.

The above markups, together with payments made for time-related overhead pursuant to "Time-Related Overhead" of these special provisions, shall constitute full compensation for all overhead costs for work performed on a force account basis. These overhead costs shall be deemed to include all items of expense not specifically designated as cost or equipment rental in conformance with the provisions in Sections 9-1.03A(1), "Labor," 9-1.03A(2), "Materials," and 9-1.03A(3), "Equipment Rental," of the Standard Specifications. The total payment made as provided above and in the first paragraph of

Section 9-1.03A, "Work Performed by Contractor," of the Standard Specifications shall be deemed to be the actual cost of the work performed on a force account basis, and shall constitute full compensation therefor.

Full compensation for overhead costs for work performed on a force account basis, and for which no adjustment is made to the lump sum price bid for time-related overhead conforming to the provisions in "Time-Related Overhead" of these special provisions, shall be considered as included in the markups specified above, and no additional compensation will be allowed therefor.

Subcontracted Force Account Payment:

When extra work to be paid for on a force account basis is performed by a subcontractor approved in conformance with the provisions in Section 8-1.01, "Subcontracting," of the Standard Specifications, compensation will be determined in accordance with the provisions in Section 9-1.03, "Force Account Payment," of the Standard Specifications.

5-1.14 RESPONSIBILITY TO OTHER ENTITIES

The Contractor shall be responsible for any liability imposed by law and for injuries to or death of any person including, but not limited to, workers and the public or damage to property, and shall indemnify and save harmless any county, city or district, its officers and employees connected with the work, within the limits of which county, city or district the work is being performed, all in the same manner and to the same extent conforming to the provisions in Section 7-1.12, "Indemnification and Insurance," of the Standard Specifications, for the protection of the State of California and all officers and employees thereof connected with the work.

5-1.15 COMPENSATION ADJUSTMENTS FOR PRICE INDEX FLUCTUATIONS

The provisions of this section shall apply only to the following contract items:

ITEM CODE	ITEM
390155	ASPHALT CONCRETE (TYPE A)
397001	ASPHALTIC EMULSION (Paint Binder)
390107	ASPHALT CONCRETE (LEVELING)
390165	ASPHALT CONCRETE (OPEN GRADED)
395000	LIQUID ASPHALT (PRIME COAT)

The compensation payable for asphalt concrete, asphaltic emulsion (paint binder) and liquid asphalt (prime coat) will be increased or decreased in conformance with the provisions of this section for paving asphalt price fluctuations exceeding 10 percent (Iu/Ib is greater than 1.10 or less than 0.90) which occur during performance of the work.

The quantity of paving asphalt used in asphaltic emulsion (paint binder) will be determined by multiplying the item quantity for asphaltic emulsion (paint binder) included in a monthly estimate by the minimum percent residue specified in Section 94, "Asphaltic Emulsions," of the Standard Specifications. The asphaltic emulsion minimum percent residue will be based on the type of emulsion used by the Contractor.

At the Contractor's option, the Contractor may provide actual daily test results for paving asphalt residue for the asphaltic emulsion (paint binder) used. Test results provided by the Contractor shall be from an independent testing laboratory that participates in the AASHTO Proficiency Sample Program. The Contractor shall take samples of asphaltic emulsion from the distributor truck at mid-load from a sampling tap or thief. Two separate 2-liter samples shall be taken in the presence of the Engineer. The Contractor shall provide one sample to the Contractor's independent testing laboratory, with 24 hours of sampling. The second sample shall be given to the Engineer. The test results from the Contractor's independent testing laboratory shall be delivered to the Engineer within 10 days from sample date.

The adjustment in compensation will be determined in conformance with the following formulae when the item of asphalt concrete, asphaltic emulsion or liquid asphalt (prime coat) is included in a monthly estimate:

A. Total monthly adjustment = AQ

B. For an increase in paving asphalt price index exceeding 10 percent:

$$A = 0.90\ (1.1023)\ (Iu/Ib - 1.10)\ Ib$$

C. For a decrease in paving asphalt price index exceeding 10 percent:

$$A = 0.90\ (1.1023)\ (Iu/Ib - 0.90)\ Ib$$

Where:

A = Adjustment in dollars per tonne of paving asphalt used to produce asphalt concrete, asphaltic emulsion residue used as paint binder and used as a binder for pavement reinforcing fabric rounded to the nearest $0.01.

Iu = The California Statewide Paving Asphalt Price Index which is in effect on the first business day of the month within the pay period in which the quantity subject to adjustment was included in the estimate.

Ib = The California Statewide Paving Asphalt Price Index for the month in which the bid opening for the project occurred.

Q = Quantity in tonnes of paving asphalt that was used as liquid asphalt (prime coat) plus the quantity of paving asphalt that was used in producing the quantity of asphalt concrete shown under "This Estimate" on the monthly estimate using the amount of asphalt determined by the Engineer plus the quantity in tonnes of paving asphalt that would have been used as residue in the asphaltic emulsion (paint binder) shown under "This Estimate" on the monthly estimate.

The adjustment in compensation will also be subject to the following:

A. The compensation adjustments provided herein will be shown separately on payment estimates. The Contractor shall be liable to the State for decreased compensation adjustments and the Department may deduct the amount thereof from any moneys due or that may become due the Contractor.
B. Compensation adjustments made under this section will be taken into account in making adjustments in conformance with the provisions in Section 4-1.03B, "Increased or Decreased Quantities," of the Standard Specifications.
C. In the event of an overrun of contract time, adjustment in compensation for paving asphalt included in estimates during the overrun period will be determined using the California Statewide Paving Asphalt Price Index in effect on the first business day of the month within the pay period in which the overrun began.

The California Statewide Paving Asphalt Price Index is determined each month on the first business day of the month by the Department using the median of posted prices in effect as posted by Chevron, Mobil, and Unocal for the Buena Vista, Huntington Beach, Kern River, Long Beach, Midway Sunset, and Wilmington fields.

In the event that the companies discontinue posting their prices for a field, the Department will determine an index from the remaining posted prices. The Department reserves the right to include in the index determination the posted prices of additional fields.

The California Statewide Paving Asphalt Price Index is available on the Division of Engineering Services website at:

http://www.dot.ca.gov/hq/esc/oe/asphalt_index/astable.html

5-1.16 AREAS FOR CONTRACTOR'S USE

Attention is directed to the provisions in Section 7-1.19, "Rights in Land and Improvements," of the Standard Specifications and these special provisions.

The highway right of way shall be used only for purposes that are necessary to perform the required work. The Contractor shall not occupy the right of way, or allow others to occupy the right of way, for purposes which are not necessary to perform the required work.

No area is available within the contract limits for the exclusive use of the Contractor. However, temporary storage of equipment and materials on State property may be arranged with the Engineer, subject to the prior demands of State maintenance forces and to other contract requirements. Use of the Contractor's work areas and other State-owned property shall be at the Contractor's own risk, and the State shall not be held liable for damage to or loss of materials or equipment located within such areas.

Areas available for the exclusive use of the Contractor are designated on the plans. Use of the Contractor's work areas and other State-owned property shall be at the Contractor's own risk, and the State shall not be held liable for damage to or loss of materials or equipment located within these areas.

Residence trailers will not be allowed within the highway right of way, except that one trailer will be allowed for yard security purposes.

The Contractor shall remove equipment, materials, and rubbish from the work areas and other State-owned property which the Contractor occupies. The Contractor shall leave the areas in a presentable condition in conformance with the provisions in Section 4-1.02, "Final Cleaning Up," of the Standard Specifications.

The Contractor shall secure, at the Contractor's own expense, areas required for plant sites, storage of equipment or materials or for other purposes, if sufficient area is not available to the Contractor within the contract limits, or at the sites designated on the plans outside the contract limits.

5-1.17 PAYMENTS

Attention is directed to Sections 9-1.06, "Partial Payments," and 9-1.07, "Payment After Acceptance," of the Standard Specifications and these special provisions.

For the purpose of making partial payments pursuant to Section 9-1.06, "Partial Payments," of the Standard Specifications, the amount set forth for the contract items of work hereinafter listed shall be deemed to be the maximum value of the contract item of work which will be recognized for progress payment purposes:

A.	Clearing and Grubbing	$225,000
B.	Develop Water Supply	$112,500
C.	Prepare Storm Water Pollution Prevention Plan	$ 13,500
D.	Progress Schedule (Critical Path Method)	$ 45,000
E.	Non-Storm Water Discharge	$150,000

After acceptance of the contract pursuant to the provisions in Section 7-1.17, "Acceptance of Contract," of the Standard Specifications, the amount, if any, payable for a contract item of work in excess of the maximum value for progress payment purposes hereinabove listed for the item, will be included for payment in the first estimate made after acceptance of the contract.

In determining the partial payments to be made to the Contractor, only the following listed materials will be considered for inclusion in the payment as materials furnished but not incorporated in the work:

A. Irrigation Controllers and Cabinets
B. Pipe (Irrigation Systems)
C. Sprinklers
D. Valves
E. Piling
F. Prestressing Steel for Cast-in-Place member (sealed package only)
G. Prestressing Anchorage and Ducts
H. Tieback Anchors
I. Joint Seal
J. Joint Seal Assemblies
K. Sound Wall (Masonry Block)
L. Bar Reinforcing Steel
M. Culvert Pipes
N. Timber Lagging
O. Miscellaneous Iron and Steel
P. Miscellaneous Metal
Q. Bridge Deck Drainage System
R. Fences and Gates
S. Crash Cushions
T. Pavement Markers
U. Lighting Fixtures
V. Luminaires
W. Controller Assemblies
X. Precast Concrete Members
Y. Metal Railing
Z. Signal and Lighting Standards
AA. Mounting Heads and Mounting Brackets
BB. Camera Assembly
CC. Fiber Optic Pull Boxes
DD. Fiber Optic Conduits

5-1.18 PROJECT INFORMATION

The information in this section has been compiled specifically for this project and is made available for bidders and Contractors. Other information referenced in the Standard Specifications and these special provisions do not appear in this

section. The information is subject to the conditions and limitations set forth in Section 2-1.03, "Examination of Plans, Specifications, Contract, and Site of Work," and Section 6-2, "Local Materials," of the Standard Specifications. Bidders and Contractors shall be responsible for knowing the procedures for obtaining information.

Information attached to the project plans is as follows:

Logs of Test Borings for the following structures:

Peninsula Avenue Overcrossing (Replace) (Bridge No. 35-0088)
Monte Diablo Avenue Pedestrian Overcrossing (Replace) (Bridge No. 35-0134)
Broadway Avenue Pedestrian Overcrossing (Bridge No. 35-0342)
Retaining Wall No. 1 (Soldier-Pile) (Bridge No. 35E0002)
Retaining Wall No. 2 (Bridge No. 35E0003)
Retaining Wall No. 3 (MSE)(Bridge No. 35E0004)
Retaining Wall No. 4 (MSE) (Bridge No. 35E0005)
Retaining Wall No. 5 (Bridge No. 35E0006)
Retaining Wall No. 6 (Bridge No. 35E0022)
Retaining Wall No. 7 (Bridge No. 35E0023)
Retaining Wall No. 8 (Bridge No. 35E0024)

Information available for inspection at the District Office is as follows:

A. Foundation Reports for the following structures:

Peninsula Avenue Overcrossing (Replace) (Bridge No. 35-0088), dated December, 2005
Monte Diablo Avenue Pedestrian Overcrossing (Replace) (Bridge No. 35-0134), dated October, 2004
Broadway Avenue Pedestrian Overcrossing (Bridge No. 35-0342), dated December, 2005

B. Geotechnical Design and Materials Report dated April, 2006 for the following structures:

Retaining Wall No. 1 (Soldier-Pile) (Bridge No. 35E0002)
Retaining Wall No. 2 (Bridge No. 35E0003)
Retaining Wall No. 3 (MSE)(Bridge No. 35E0004)
Retaining Wall No. 4 (MSE) (Bridge No. 35E0005)
Retaining Wall No. 5 (Bridge No. 35E0006)
Retaining Wall No. 6 (Bridge No. 35E0022)
Retaining Wall No. 7 (Bridge No. 35E0023)
Retaining Wall No. 8 (Bridge No. 35E0024)

C. Cal-OSHA M&T unit classification
D. Geotechnical Design Material Report by Parikh Consultants, dated December, 2005.
E. Aerially Deposited Lead File Investigation Report by Geocon Consultants, Inc., dated December 2002.
F. Asbestos Survey Report by Geocon Consultants, Inc., dated December 27, 2002.
G. Preliminary File Investigation Report by Kleinfelder, dated March 2003.
H. "Eucalyptus Planting Tree Evaluation at San Meteo Municipal Golf Course" Report, dated December 14, 2003.

Cross sections are available in paper or electronic copy.

The District Office in which the work is situated is located at 111 Grand Avenue, Oakland, CA-94612-3717

Plans of the existing bridges may be requested by fax from the Office of Structure Maintenance and Investigations, 1801 30th Street, Sacramento, CA, Fax (916) 227-8357.

Plans of the existing bridges available to bidders and Contractors are reproductions of the original contract plans, with significant changes noted, and working drawings, and do not necessarily show normal construction tolerances and variances. Where dimensions of new construction required by this contract are dependent on the dimensions of the existing bridges, the Contractor shall verify the controlling field dimensions and shall be responsible for adjusting dimensions of the work to fit existing conditions.

5-1.19 SOUND CONTROL REQUIREMENTS

Sound control shall conform to these special provisions.

The noise level from the Contractor's operations, between the hours of 9:00 p.m. and 6:00 a.m., shall not exceed 86 dBa (Lmax) at a distance of 15 m, except for the following work:

A. Bridge Removal from midnight to 5 a.m., Monday through Sunday.

The Contractor shall provide one "Type 1" sound level meter and one acoustic calibrator which will be used by the Department during the life of the contract. The Contractor shall provide training by a person trained in noise monitoring to one Department employee designated by the Engineer. The sound level meter shall be calibrated and certified by the manufacturer or other independent acoustical laboratory prior to delivery to the Department. The Contractor shall provide annual recalibration by the manufacturer or other independent acoustical laboratory. All equipment shall be capable of taking measurements using the A-weighting network and the "slow" response of the sound level meter. The measurement microphone shall be fitted with an appropriate windscreen. All equipment shall be returned to the Contractor at the acceptance of the contract. Equipment damaged by actions of the Department or the public shall be paid for as extra work as provided in Section 4-1.03D for the Standard Specifications.

Each internal combustion engine, used for any purpose on the job or related to the job, shall be equipped with a muffler of a type recommended by the manufacturer. No internal combustion engine shall be operated on the project without the muffler.

The noise level requirement shall apply to the equipment on the job or related to the job, including but not limited to trucks, transit mixers or transient equipment that may or may not be owned by the Contractor. The use of loud sound signals shall be avoided in favor of light warnings except those required by safety laws for the protection of personnel.

Full compensation for conforming to the requirements of this section shall be considered as included in the prices paid for the various contract items of work involved and no additional compensation will be allowed therefor.

5-1.20 RELATIONS WITH CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD

The location of the Project is within an area controlled by the Regional Water Quality Control Board. Regional Water Quality Control Board Order No. 2178.07 (HTK) has been issued covering work to be performed under this contract. The Contractor shall be fully informed of rules, regulations, and conditions that may govern the Contractor's operations in the areas and shall conduct the work accordingly.

Copies of the order may be obtained at the Department of Transportation, Plans and Bid Documents Section, MS 26, 1120 N Street, Room 200, Sacramento, CA 95814, Telephone 916-654-4490, and are available for inspection at the office of the District Director of Transportation at 111 Grand Avenue, Oakland, California 94623.

Attention is directed to Section 7-1.11, "Preservation of Property," and Section 7-1.12, "Indemnification and Insurance," of the Standard Specifications.

Changes in the above listed conditions proposed by the Contractor shall be submitted to the Engineer for transmittal to the Regional Water Quality Control Board for their approval. Changes shall not be implemented until approved in writing by the Regional Water Quality Control Board.

Attention is directed to Section 8-1.06, "Time of Completion," of the Standard Specifications. Days when the Contractor's operations are restricted by the requirements of this section shall not be considered to be nonworking days whether or not the controlling operation is delayed.

5-1.21 RELATIONS WITH UNITED STATES ARMY CORPS OF ENGINEERS

A portion of this project is located within the jurisdiction of the United State Army Corps of Engineer. The Contractor shall be fully informed of the requirements of the nationwide permit conditions as well as rules, regulations, and conditions that may govern the Contractor's operations in these areas and shall conduct the work accordingly.

Copies of the nationwide permit may be obtained at the Department of Transportation, Plans and Bid Documents Section, MS 26, 1120 N Street, Room 200, Sacramento, CA 95814, Telephone (916) 654-4490, and are available for inspection at the office of the District Director of Transportation at 1976 E. Charter Way, Stockton, CA 95205.

Attention is directed to Sections 7-1.01, "Laws to be Observed," 7-1.01G, "Water Pollution," and 7-1.12, "Indemnification and Insurance," of the Standard Specifications.

Modifications to the nationwide permit between the Department of Transportation and the United State Corps of Engineers which are proposed by the Contractor shall be submitted in writing to the Engineer for transmittal to the United State Corps of Engineers .

When the Contractor is notified by the Engineer that a modification to the nationwide permit is under consideration, no work shall be performed which is inconsistent with the original agreement or proposed modification until the Departments take action on the proposed modifications. Compensation for delay will be determined in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

The provisions of this section shall be made a part of every subcontract executed pursuant to this contract.

Modifications to the nationwide permit between the Department of Transportation and the United State Corps of Engineers will be fully binding on the Contractor. The provisions of this section shall be made a part of every subcontract executed pursuant to this contract.

5-1.22 AERIALLY DEPOSITED LEAD

Aerially deposited lead is present within the project limits. Aerially deposited lead is lead deposited within unpaved areas or formerly unpaved areas, primarily due to vehicle emissions.

Attention is directed to "Material Containing Aerially Deposited Lead" and "Project Information" of these special provisions.

Portions of the site investigation report are included in the "Material Information" handout. The complete report, entitled "Aerially Deposited Lead Site Investigation Report, Route 101 Improvement Project, Millbrae Avenue to Third Avenue, San Mateo County, California by GEOCON, December 2002," is available for inspection at the Department of Transportation, Duty Senior's Desk, 111 Grand Avenue, Oakland, California 94623, Telephone (510)286-5209.

Once the Contractor has completed the placement of material containing aerially deposited lead in conformance with these special provisions and as directed by the Engineer, the Contractor shall have no responsibility for such materials. The Department will not consider the Contractor a generator of such contaminated materials.

Excavation, reuse, and disposal of material with aerially deposited lead shall be in conformance with all rules and regulations including, but not limited to, those of the following agencies:

A. United States Department of Transportation,
B. United States Environmental Protection Agency,
C. California Environmental Protection Agency,
D. California Department of Health Services,
E. Department of Toxic Substances Control,
F. California Division of Occupational Safety and Health Administration,
G. Integrated Waste Management Board,
H. Regional Water Quality Control Board, Region 2, San Francisco Bay,
I. State Air Resources Control Board, and
J. Bay Area Air Quality Management District.

Materials containing hazardous levels of lead shall be transported and disposed of in conformance with Federal and State laws and regulations, as amended, and county and municipal ordinances and regulations, as amended. Laws and regulations that govern this work include, but are not limited to:

A. Health and Safety Code, Division 20, Chapter 6.5 (California Hazardous Waste Control Act),
B. Title 22, California Code of Regulations, Division 4.5 (Environmental Health Standards for the Management of Hazardous Waste), and
C. Title 8, California Code of Regulations.

5-1.23 ENVIRONMENTALLY SENSITIVE AREA

An environmentally sensitive area (ESA) shall consist of an area within and near the limits of construction where access is prohibited or limited for the preservation of archeological site or existing vegetation, or protection of biological habitat as shown on the plans. The Engineer will determine the exact location of the boundaries of the ESA. No work shall be conducted within the ESA.

Attention is directed to Section 7—1.01 "Laws to be Observed," and Section 7—1.04 "Permits and Licenses," of the Standard Specifications regarding State and Federal regulations, permits, or agreements which pertain to an ESA.

Prior to beginning work, the boundaries of the ESA shall be clearly delineated by the placement of temporary fence (Type ESA).

Prior to beginning work, temporary exclusion fence shall be clearly delineated and installed adjacent to and outside of the boundaries of ESA.

Vehicle access, storage or transport of materials or equipment, or other project related activities are prohibited within the boundaries of ESA.

The Contractor shall mitigate damage or impacts to the ESA caused by the Contractor's operations, at the Contractor's expense. If the Engineer determines mitigation work will be performed by others, or if mitigation fees are assessed the Department, deductions from moneys due or to become due the Contractor will be made for the mitigation costs.

5-1.24 PRESERVATION OF PROPERTY

Attention is directed to Section 7-1.11, "Preservation of Property," of the Standard Specifications, and these special provisions.

Existing trees, shrubs and other plants, that are not to be removed as shown on the plans or specified in these special provisions, and are injured or damaged by reason of the Contractor's operations, shall be replaced by the Contractor. The minimum size of tree replacement shall be 610 mm box and the minimum size of shrub replacement shall be No. 15 container. Replacement ground cover plants shall be from flats and shall be planted 300 mm on center. Replacement of Carpobrotus ground cover plants shall be from cuttings and shall be planted 300 mm on center. Replacement planting shall conform to the requirements in Section 20-4.07, "Replacement," of the Standard Specifications. The Contractor shall water replacement plants in conformance with the provisions in Section 20-4.06, "Watering," of the Standard Specifications.

Damaged or injured plants shall be removed and disposed of outside the highway right of way in conformance with the provisions in Section 7-l.13 of the Standard Specifications. At the option of the Contractor, removed trees and shrubs may be reduced to chips. The chipped material shall be spread within the highway right of way at locations designated by the Engineer.

Replacement planting of injured or damaged trees, shrubs, and other plants shall be completed prior to the start of the plant establishment period. Replacement planting shall conform to the provisions in Section 20-4.05, "Planting," of the Standard Specifications.

5-1.25 PRESERVE EXISTING EUCALYPTUS TREES

This work shall consist of protecting existing eucalyptus trees within the limits of Poplar Creek Golf Course, 1201 E. Poplar Avenue, in San Mateo, that are within the project limits as shown on the plans. Existing eucalyptus trees shall be protected in accordance with Section 7-1.11, "Preservation of Property," and Section 16, "Clearing and Grubbing," of the Standard Specifications, and these special provisions.

Existing eucalyptus trees, as shown on the plans, shall be protected using temporary fence (Type ESA), conforming to the provisions under "Temporary Fence (Type ESA)," of these special provisions. Temporary fence (Type ESA) shall be placed at the limit of drip line of each existing eucalyptus tree to be protected. If existing site conditions prevents the placement of temporary fence (Type ESA), the fence perimeter shall be placed as far as possible from the trunk of the tree, as directed by the Engineer.

In addition to placing temporary fence (Type ESA), the Contractor shall ensure that the following protective measures are carried out throughout the life of the Contract:

A. Excavation, filling, parking of equipment, or storage of any materials shall not be allowed within the fenced area. If, because of restrictive site conditions, and trenching or excavation work is required within the temporary fence area, the Contractor shall request written approval from the Engineer prior to commencing any trenching or excavation work.
B. Roots that are encountered during trenching or excavation work that is 38 mm or greater in diameter shall be pruned and removed by hand, or other methods as approved by the Engineer.
C. Branches and tree limbs, that may conflict with the proposed structures work shall be trimmed in accordance with Section 16, "Clearing and Grubbing," and Section 20-4.055, "Pruning," of the Standard Specifications.

Any damage or injury to the existing eucalyptus trees, as a result of the Contractor’s operation, shall be repaired. Existing eucalyptus trees that are injured or damaged by reason of the Contractor’s operation, shall be repaired or treated by an International Society of Arboriculture (ISA) Certified Arborist or Tree Surgeon, as approved by the Engineer. Repairs and treatment for the damaged or injured tree will be made at the Contractor’s expense.

The trees shall be maintained in accordance to the provisions in Section 20, "Erosion Control and Highway Planting," of the Standard Specifications, and as directed by the Engineer. Maintaining existing eucalyptus trees will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

Full compensation for preserving existing eucalyptus trees, including the procuring of the services of an ISA Certified Arborist or Tree Surgeon, shall be considered as included in the contract prices paid for other items of work, and no additional compensation will be allowed therefore.

5-1.26 DAMAGE REPAIR

Attention is directed to Section 7-1.16, "Contractor's Responsibility for the Work and Materials," and Section 7-1.165, "Damage by Storm, Flood, Tsunami or Earthquake," of the Standard Specifications and these special provisions.

When as a result of freezing conditions (as defined herein) during the plant establishment period, plants have died or, in the opinion of the Engineer, have deteriorated to a point beyond which the plants will not mature as typical examples of their species, the Engineer may direct replacement of the affected plants. The total cost of ordered plant replacement work will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications. A freezing condition, for the purpose

of this specification, occurs when the temperature at or near the affected area has been officially recorded below 0°C and plants have been killed or damaged to the degree described above.

When, as a result of drought conditions (as defined herein) during the plant establishment period, plants have died or, in the opinion of the Engineer, have deteriorated to a point beyond which the plants will not mature as typical examples of their species, the Engineer may direct replacement of the affected plants. The total cost of ordered plant replacements, after water has been restricted or stopped, will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications. Restriction or shutoff of available water shall not relieve the Contractor from performing other contract work. A drought condition occurs when the Department, or its supplier, restricts or stops delivery of water to the Contractor to the degree that plants have died or deteriorated as described above.

When the provisions in Section 7-1.165, "Damage by Storm, Flood, Tsunami or Earthquake," of the Standard Specifications are applicable, the provisions above for payment of costs for repair of damage due to rain, freezing conditions and drought shall not apply.

5-1.27 RELIEF FROM MAINTENANCE AND RESPONSIBILITY

The Contractor may be relieved of the duty of maintenance and protection for those items not directly connected with plant establishment work in conformance with the provisions in Section 7-1.15, "Relief From Maintenance and Responsibility," of the Standard Specifications. Water pollution control, maintain existing planted areas, and maintain existing irrigation facilities, shall not be relieved of maintenance.

5-1.28 TUNNEL SAFETY ORDERS

The work to be performed at the following locations: Station "US101" 183+28 (4-1200 mm jacked WSP), Station "US101" 184+00 (900 mm jacked WSP), Station "US101" 193+07 (3-1200 mm jacked WSP), Station "US101" 196+40 (900 mm jacked WSP), Station "US101" 196+90 (5-1200 mm jacked WSP), Station "US101" 198+15 (900 mm jacked WSP), Station "US101" 201+60 (900 mm jacked WSP), and Station "US101" 187+35 (jacked 610 mm steel pipe), has been classified "Potentially Gassy" by the State Division of Occupational Safety and Health under Section 8422 of the Tunnel Safety Orders of the California Code of Regulations.

The Contractor's attention is directed to Section 7-1.06, "Safety and Health Provisions," of the Standard Specifications. A change to the work as a direct result of the Contractor's planned operations that would cause work activities to fall under the requirements of the Tunnel Safety Orders, and that has not been shown on the plans or specified in these special provisions shall be reason for suspension of the work. The Contractor shall notify the Engineer not less than 20 days prior to worker exposure to a facility meeting the definition of a tunnel or shaft as described in Sections 8403 or 8405 of the Tunnel Safety Orders. The Department will obtain additional location classifications as may be necessary to allow the work to proceed.

The Contractor shall prominently post a notice of the classification and any special orders, rules, special conditions, or regulations at the tunnel work site, and all personnel shall be informed of the classification.

At least 7 days prior to beginning work covered by these provisions, the Contractor shall submit the name of the person designated as the on-site Safety Representative to the Engineer along with proof of certification by the Division of Occupational Safety and Health as having met the requirements of Section 8406 of the Tunnel Safety Orders of the California Code of Regulations.

SECTION 6. (BLANK)

SECTION 7. (BLANK)

SECTION 8. MATERIALS

SECTION 8-1. MISCELLANEOUS

8-1.01 SUBSTITUTION OF NON-METRIC MATERIALS AND PRODUCTS

Only materials and products conforming to the requirements of the specifications shall be incorporated in the work. When metric materials and products are not available, and when approved by the Engineer, and at no cost to the State, materials and products in the United States Standard Measures which are of equal quality and of the required properties and characteristics for the purpose intended, may be substituted for the equivalent metric materials and products, subject to the following provisions:

A. Materials and products shown on the plans or in the special provisions as being equivalent may be substituted for the metric materials and products specified or detailed on the plans.

B. Before other non-metric materials and products will be considered for use, the Contractor shall furnish, at the Contractor's expense, evidence satisfactory to the Engineer that the materials and products proposed for use are equal to or better than the materials and products specified or detailed on the plans. The burden of proof as to the quality and suitability of substitutions shall be upon the Contractor and the Contractor shall furnish necessary information as required by the Engineer. The Engineer will be the sole judge as to the quality and suitability of the substituted materials and products and the Engineer's decision will be final.

C. When the Contractor elects to substitute non-metric materials and products, including materials and products shown on the plans or in the special provisions as being equivalent, the list of sources of material specified in Section 6-1.01, "Source of Supply and Quality of Materials," of the Standard Specification shall include a list of substitutions to be made and contract items involved. In addition, for a change in design or details, the Contractor shall submit plans and working drawings in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. The plans and working drawings shall be submitted at least 7 days before the Contractor intends to begin the work involved.

Unless otherwise specified, the following substitutions of materials and products will be allowed:

SUBSTITUTION TABLE FOR PLAIN WIRE REINFORCEMENT
ASTM Designation: A 82

METRIC SIZE SHOWN ON THE PLANS mm^2	SIZE TO BE SUBSTITUTED $inch^2$ x 100
MW9	W1.4
MW10	W1.6
MW13	W2.0
MW15	W2.3
MW19	W2.9
MW20	W3.1
MW22	W3.5
MW25	W3.9, except W3.5 in piles only
MW26	W4.0
MW30	W4.7
MW32	W5.0
MW35	W5.4
MW40	W6.2
MW45	W6.5
MW50	W7.8
MW55	W8.5, except W8.0 in piles only
MW60	W9.3
MW70	W10.9, except W11.0 in piles only
MW80	W12.4
MW90	W14.0
MW100	W15.5

SUBSTITUTION TABLE FOR BAR REINFORCEMENT

METRIC BAR DESIGNATION NUMBER[1] SHOWN ON THE PLANS	BAR DESIGNATION NUMBER[2] TO BE SUBSTITUTED
10	3
13	4
16	5
19	6
22	7
25	8
29	9
32	10
36	11
43	14
57	18

[1]Bar designation numbers approximate the number of millimeters of the nominal diameter of the bars.

[2]Bar numbers are based on the number of eighths of an inch included in the nominal diameter of the bars.

No adjustment will be required in spacing or total number of reinforcing bars due to a difference in minimum yield strength between metric and non-metric bars.

SUBSTITUTION TABLE FOR SIZES OF:

(1) STEEL FASTENERS FOR GENERAL APPLICATIONS (ASTM Designation: A 307 or AASHTO Designation: M 314, Grade 36 or 55), and

(2) HIGH STRENGTH STEEL FASTENERS (ASTM Designation: A 325 or A 449)

METRIC SIZE SHOWN ON THE PLANS mm	SIZE TO BE SUBSTITUTED inch
6 or 6.35	1/4
8 or 7.94	5/16
10 or 9.52	3/8
11 or 11.11	7/16
13, 12.70, or M12	1/2
14 or 14.29	9/16
16, 15.88, or M16	5/8
19, 19.05, or M20	3/4
22, 22.22, or M22	7/8
24, 25, 25.40, or M24	1
29, 28.58, or M27	1-1/8
32, 31.75, or M30	1-1/4
35 or 34.93	1-3/8
38, 38.10, or M36	1-1/2
44 or 44.45	1-3/4
51 or 50.80	2
57 or 57.15	2-1/4
64 or 63.50	2-1/2
70 or 69.85	2-3/4
76 or 76.20	3
83 or 82.55	3-1/4
89 or 88.90	3-1/2
95 or 95.25	3-3/4
102 or 101.60	4

SUBSTITUTION TABLE FOR NOMINAL THICKNESS OF SHEET METAL

UNCOATED HOT AND COLD ROLLED SHEETS		HOT-DIPPED ZINC COATED SHEETS (GALVANIZED)	
METRIC THICKNESS SHOWN ON THE PLANS mm	GAGE TO BE SUBSTITUTED inch	METRIC THICKNESS SHOWN ON THE PLANS mm	GAGE TO BE SUBSTITUTED inch
7.94	0.3125	4.270	0.1681
6.07	0.2391	3.891	0.1532
5.69	0.2242	3.510	0.1382
5.31	0.2092	3.132	0.1233
4.94	0.1943	2.753	0.1084
4.55	0.1793	2.372	0.0934
4.18	0.1644	1.994	0.0785
3.80	0.1495	1.803	0.0710
3.42	0.1345	1.613	0.0635
3.04	0.1196	1.461	0.0575
2.66	0.1046	1.311	0.0516
2.28	0.0897	1.158	0.0456
1.90	0.0747	1.006 or 1.016	0.0396
1.71	0.0673	0.930	0.0366
1.52	0.0598	0.853	0.0336
1.37	0.0538	0.777	0.0306
1.21	0.0478	0.701	0.0276
1.06	0.0418	0.627	0.0247
0.91	0.0359	0.551	0.0217
0.84	0.0329	0.513	0.0202
0.76	0.0299	0.475	0.0187
0.68	0.0269	--------	--------
0.61	0.0239	--------	--------
0.53	0.0209	--------	--------
0.45	0.0179	--------	--------
0.42	0.0164	--------	--------
0.38	0.0149	--------	--------

SUBSTITUTION TABLE FOR WIRE

METRIC THICKNESS SHOWN ON THE PLANS mm	WIRE THICKNESS TO BE SUBSTITUTED inch	GAGE NO.
6.20	0.244	3
5.72	0.225	4
5.26	0.207	5
4.88	0.192	6
4.50	0.177	7
4.11	0.162	8
3.76	0.148	9
3.43	0.135	10
3.05	0.120	11
2.69	0.106	12
2.34	0.092	13
2.03	0.080	14
1.83	0.072	15
1.57	0.062	16
1.37	0.054	17
1.22	0.048	18
1.04	0.041	19
0.89	0.035	20

SUBSTITUTION TABLE FOR PIPE PILES

METRIC SIZE SHOWN ON THE PLANS mm x mm	SIZE TO BE SUBSTITUTED inch x inch
PP 360 x 4.55	NPS 14 x 0.179
PP 360 x 6.35	NPS 14 x 0.250
PP 360 x 9.53	NPS 14 x 0.375
PP 360 x 11.12	NPS 14 x 0.438
PP 406 x 12.70	NPS 16 x 0.500
PP 460 x T	NPS 18 x T"
PP 508 x T	NPS 20 x T"
PP 559 x T	NPS 22 x T"
PP 610 x T	NPS 24 x T"
PP 660 x T	NPS 26 x T"
PP 711 x T	NPS 28 x T"
PP 762 x T	NPS 30 x T"
PP 813 x T	NPS 32 x T"
PP 864 x T	NPS 34 x T"
PP 914 x T	NPS 36 x T"
PP 965 x T	NPS 38 x T"
PP 1016 x T	NPS 40 x T"
PP 1067 x T	NPS 42 x T"
PP 1118 x T	NPS 44 x T"
PP 1219 x T	NPS 48 x T"
PP 1524 x T	NPS 60 x T"

The thickness in millimeters (T) represents an exact conversion of the thickness in inches (T").

SUBSTITUTION TABLE FOR CIDH CONCRETE PILING

METRIC SIZE SHOWN ON THE PLANS	ACTUAL AUGER SIZE TO BE SUBSTITUTED inches
350 mm	14
400 mm	16
450 mm	18
600 mm	24
750 mm	30
900 mm	36
1.0 m	42
1.2 m	48
1.5 m	60
1.8 m	72
2.1 m	84
2.4 m	96
2.7 m	108
3.0 m	120
3.3 m	132
3.6 m	144
4.0 m	156

SUBSTITUTION TABLE FOR STRUCTURAL TIMBER AND LUMBER

METRIC MINIMUM DRESSED DRY, SHOWN ON THE PLANS mm x mm	METRIC MINIMUM DRESSED GREEN, SHOWN ON THE PLANS mm x mm	NOMINAL SIZE TO BE SUBSTITUTED inch x inch
19x89	20x90	1x4
38x89	40x90	2x4
64x89	65x90	3x4
89x89	90x90	4x4
140x140	143x143	6x6
140x184	143x190	6x8
184x184	190x190	8x8
235x235	241x241	10x10
286x286	292x292	12x12

SUBSTITUTION TABLE FOR NAILS AND SPIKES

METRIC COMMON NAIL, SHOWN ON THE PLANS Length, mm Diameter, mm	METRIC BOX NAIL, SHOWN ON THE PLANS Length, mm Diameter, mm	METRIC SPIKE, SHOWN ON THE PLANS Length, mm Diameter, mm	SIZE TO BE SUBSTITUTED Penny-weight
50.80 2.87	50.80 2.51	_____	6d
63.50 3.33	63.50 2.87	_____	8d
76.20 3.76	76.20 3.25	76.20 4.88	10d
82.55 3.76	82.55 3.25	82.55 4.88	12d
88.90 4.11	88.90 3.43	88.90 5.26	16d
101.60 4.88	101.60 3.76	101.60 5.72	20d
114.30 5.26	114.30 3.76	114.30 6.20	30d
127.00 5.72	127.00 4.11	127.00 6.68	40d
_____	_____	139.70 7.19	50d
_____	_____	152.40 7.19	60d

SUBSTITUTION TABLE FOR IRRIGATION COMPONENTS

METRIC WATER METERS, TRUCK LOADING STANDPIPES, VALVES, BACKFLOW PREVENTERS, FLOW SENSORS, WYE STRAINERS, FILTER ASSEMBLY UNITS, PIPE SUPPLY LINES, AND PIPE IRRIGATION SUPPLY LINES SHOWN ON THE PLANS DIAMETER NOMINAL (DN) mm	NOMINAL SIZE TO BE SUBSTITUTED inch
15	1/2
20	3/4
25	1
32	1-1/4
40	1-1/2
50	2
65	2-1/2
75	3
100	4
150	6
200	8
250	10
300	12
350	14
400	16

Unless otherwise specified, substitutions of United States Standard Measures standard structural shapes corresponding to the metric designations shown on the plans and in conformance with the requirements in ASTM Designation: A 6/A 6M, Annex 2, will be allowed.

8-1.02 PREQUALIFIED AND TESTED SIGNING AND DELINEATION MATERIALS

The Department maintains the following list of Prequalified and Tested Signing and Delineation Materials. The Engineer shall not be precluded from sampling and testing products on the list of Prequalified and Tested Signing and Delineation Materials.

The manufacturer of products on the list of Prequalified and Tested Signing and Delineation Materials shall furnish the Engineer a Certificate of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for each type of traffic product supplied.

For those categories of materials included on the list of Prequalified and Tested Signing and Delineation Materials, only those products shown within the listing may be used in the work. Other categories of products, not included on the list of Prequalified and Tested Signing and Delineation Materials, may be used in the work provided they conform to the requirements of the Standard Specifications.

Materials and products may be added to the list of Prequalified and Tested Signing and Delineation Materials if the manufacturer submits a New Product Information Form to the New Product Coordinator at the Transportation Laboratory. Upon a Departmental request for samples, sufficient samples shall be submitted to permit performance of required tests. Approval of materials or products will depend upon compliance with the specifications and tests the Department may elect to perform.

PAVEMENT MARKERS, PERMANENT TYPE

Retroreflective With Abrasion Resistant Surface (ARS)

A. Apex, Model 921AR (100 mm x 100 mm)
B. Avery Dennison, Models C88 (100 mm x 100 mm), 911 (100 mm x 100 mm) and 953 (70 mm x 114 mm)
C. Ray-O-Lite, Model "AA" ARS (100 mm x 100 mm)
D. 3M Series 290 (89 mm x 100 mm)
E. 3M Series 290 PSA, with pressure sensitive adhesive pad (89 mm x 100 mm)

Retroreflective With Abrasion Resistant Surface (ARS)

(for recessed applications only)

A. Avery Dennison, Model 948 (58 mm x 119 mm)
B. Avery Dennison, Model 944SB (51 mm x 100 mm)*
C. Ray-O-Lite, Model 2002 (58 mm x 117 mm)
D. Ray-O-Lite, Model 2004 ARS (51 mm x 100 mm)*

*For use only in 114 mm wide (older) recessed slots

Non-Reflective, 100 mm Round

A. Apex Universal (Ceramic)
B. Apex Universal, Models 929 (ABS) and 929PP (Polypropylene)
C. Glowlite, Inc. (Ceramic)
D. Hi-Way Safety, Inc., Models P20-2000W and 2001Y (ABS)
E. Interstate Sales, "Diamond Back" (Polypropylene)
F. Novabrite Models Cdot (White) Cdot-y (Yellow), Ceramic
G. Novabrite Models Pdot-w (White) Pdot-y (Yellow), Polypropylene
H. Three D Traffic Works TD10000 (ABS), TD10500 (Polypropylene)

PAVEMENT MARKERS, TEMPORARY TYPE

Temporary Markers For Long Term Day/Night Use (6 months or less)

A. Vega Molded Products "Temporary Road Marker" (75 mm x 100 mm)

Temporary Markers For Short Term Day/Night Use (14 days or less)

(For seal coat or chip seal applications, clear protective covers are required)

A. Apex Universal, Model 932
B. Bunzl Extrusion, Models T.O.M., T.R.P.M., and "HH" (High Heat)
C. Hi-Way Safety, Inc., Model 1280/1281
D. Glowlite, Inc., Model 932

STRIPING AND PAVEMENT MARKING MATERIAL

Permanent Traffic Striping and Pavement Marking Tape

A. Advanced Traffic Marking, Series 300 and 400
B. Brite-Line, Series 1000
C. Brite-Line, "DeltaLine XRP"
D. Swarco Industries, "Director 35" (For transverse application only)
E. Swarco Industries, "Director 60"
F. 3M, "Stamark" Series 380 and 5730
G. 3M, "Stamark" Series 420 (For transverse application only)

Temporary (Removable) Striping and Pavement Marking Tape (6 months or less)

A. Advanced Traffic Marking, Series 200
B. Brite-Line, Series 100
C. Garlock Rubber Technologies, Series 2000
D. P.B. Laminations, Aztec, Grade 102
E. Swarco Industries, "Director-2"
F. Trelleborg Industries, R140 Series
G. 3M, Series 620 "CR", and Series A750

H. 3M, Series A145, Removable Black Line Mask
(Black Tape: for use only on Asphalt Concrete Surfaces)
I. Advanced Traffic Marking Black "Hide-A-Line"
(Black Tape: for use only on Asphalt Concrete Surfaces)
J. Brite-Line "BTR" Black Removable Tape
(Black Tape: for use only on Asphalt Concrete Surfaces)
K. Trelleborg Industries, RB-140
(Black Tape: for use only on Asphalt Concrete Surfaces)

Preformed Thermoplastic (Heated in place)

A. Avery Dennison, "Hotape"
B. Flint Trading, "Premark," "Premark 20/20 Flex," and "Premark 20/20 Flex Plus"
C. Ennis Paint Inc., "Flametape"

Ceramic Surfacing Laminate, 150 mm x 150 mm

A. Highway Ceramics, Inc.

CLASS 1 DELINEATORS

One Piece Driveable Flexible Type, 1700 mm

A. Bunzl Extrusion, "Flexi-Guide Models 400 and 566"
B. Carsonite, Curve-Flex CFRM-400
C. Carsonite, Roadmarker CRM-375
D. FlexStake, Model 654 TM
E. GreenLine Models HWD1-66 and CGD1-66

Special Use Type, 1700 mm

A. Bunzl Extrusion, Model FG 560 (with 450 mm U-Channel base)
B. Carsonite, "Survivor" (with 450 mm U-Channel base)
C. Carsonite, Roadmarker CRM-375 (with 450 mm U-Channel base)
D. FlexStake, Model 604
E. GreenLine Models HWDU and CGD (with 450 mm U-Channel base)
F. Impact Recovery Model D36, with #105 Driveable Base
G. Safe-Hit with 200 mm pavement anchor (SH248-GP1)
H. Safe-Hit with 380 mm soil anchor (SH248-GP2) and with 450 mm soil anchor (SH248-GP3)

Surface Mount Type, 1200 mm

A. Bent Manufacturing Company, Masterflex Model MF-180EX-48
B. Carsonite, "Super Duck II"
C. FlexStake, Surface Mount, Models 704 and 754 TM
D. Impact Recovery Model D48, with #101 Fixed (Surface-Mount) Base
E. Three D Traffic Works "Channelflex" ID No. 522248W

CHANNELIZERS

Surface Mount Type, 900 mm

A. Bent Manufacturing Company, Masterflex Models MF-360-36 (Round) and MF-180-36 (Flat)
B. Bunzl Extrusion, Flexi-Guide Models FG300PE and FG300UR
C. Carsonite, "Super Duck" (Flat SDF-436, Round SDR-336)
D. Carsonite, "Super Duck II" Model SDCF203601MB "The Channelizer"
E. FlexStake, Surface Mount, Models 703 and 753 TM
F. GreenLine, Model SMD-36
G. Hi-Way Safety, Inc. "Channel Guide Channelizer" Model CGC36
H. Impact Recovery Model D36, with #101 Fixed (Surface-Mount) Base
I. Repo, Models 300 and 400
J. Safe-Hit, Guide Post, Model SH236SMA
K. Three D Traffic Works "Channelflex" ID No. 522053W

Lane Separation System

A. Bunzl "Flexi-Guide (FG) 300 Curb System"
B. Qwick Kurb, "Klemmfix Guide System"
C. Recycled Technology, Inc. "Safe-Lane System"

CONICAL DELINEATORS, 1070 mm

(For 700 mm Traffic Cones, see Standard Specifications)
A. Bent Manufacturing Company "T-Top"
B. Plastic Safety Systems "Navigator-42"
C. Radiator Specialty Company "Enforcer"
D. Roadmaker Company "Stacker"
E. TrafFix Devices "Grabber"
F. Three D Traffic Works "Ringtop" TD7000, ID No. 742143

OBJECT MARKERS

Type "K", 450 mm

A. Bunzl, Model FG318PE
B. Carsonite, Model SMD 615
C. FlexStake, Model 701 KM
D. Repo, Models 300 and 400
E. Safe-Hit, Model SH718SMA

Type "K-4" / "Q" Object Markers, 600 mm

A. Bent Manufacturing "Masterflex" Model MF-360-24
B. Bunzl Extrusion, Model FG324PE
C. Carsonite, Super Duck II
D. FlexStake, Model 701KM
E. Repo, Models 300 and 400
F. Safe-Hit, Models SH8 24SMA_WA and SH8 24GP3_WA
G. The Line Connection, Model DP21-4Q
H. Three D Traffic Works "Q" Marker, ID No. 531702W

CONCRETE BARRIER MARKERS AND
TEMPORARY RAILING (TYPE K) REFLECTORS

Impactable Type

A. ARTUK, "FB"
B. Bunzl Extrusion, Models PCBM-12 and PCBM-T12
C. Duraflex Corp., "Flexx 2020" and "Electriflexx"
D. Hi-Way Safety, Inc., Model GMKRM100
E. Plastic Safety Systems "BAM" Models OM-BARR and OM-BWAR
F. Three D Traffic Works "Roadguide" Model TD 9304

Non-Impactable Type

A. ARTUK, JD Series
B. Plastic Safety Systems "BAM" Models OM-BITARW and OM-BITARA
C. Vega Molded Products, Models GBM and JD
D. Plastic Vacuum Forming, “Cap-It C400"

METAL BEAM GUARD RAIL POST MARKERS

(For use to the left of traffic)
A. Bunzl Extrusion, "Mini" (75 mm x 254 mm)
B. Creative Building Products, "Dura-Bull, Model 11201"
C. Duraflex Corp., "Railrider"
D. Plastic Vacuum Forming, “Cap-It C300"

CONCRETE BARRIER DELINEATORS, 400 mm

(For use to the right of traffic)

A. Bunzl Extrusion, Model PCBM T-16
B. Safe-Hit, Model SH216RBM

CONCRETE BARRIER-MOUNTED MINI-DRUM (260 mm x 360 mm x 570 mm)

A. Stinson Equipment Company "SaddleMarker"

SOUND WALL DELINEATOR

(Applied vertically. Place top of 75 mm x 300 mm reflective element at 1200 mm above roadway)

A. Bunzl Extrusion, PCBM S-36

GUARD RAILING DELINEATOR

(Place top of reflective element at 1200 mm above plane of roadway)

Wood Post Type, 686 mm

A. Bunzl Extrusion, FG 427 and FG 527
B. Carsonite, Model 427
C. FlexStake, Model 102 GR
D. GreenLine GRD 27
E. Safe-Hit, Model SH227GRD
F. Three D Traffic Works "Guardflex" TD9100

Steel Post Type

A. Carsonite, Model CFGR-327 with CFGRBK300 Mounting Bracket

RETROREFLECTIVE SHEETING

Channelizers, Barrier Markers, and Delineators

A. Avery Dennison T-6500 Series (For rigid substrate devices only)
B. Avery Dennison WR-6100 Series
C. Nippon Carbide Industries, Flexible Ultralite Grade (ULG) II
D. Reflexite, PC-1000 Metalized Polycarbonate
E. Reflexite, AC-1000 Acrylic
F. Reflexite, AP-1000 Metalized Polyester
G. Reflexite, Conformalight, AR-1000 Abrasion Resistant Coating
H. 3M, High Intensity

Traffic Cones, 330 mm Sleeves

A. Reflexite SB (Polyester), Vinyl or "TR" (Semi-transparent)

Traffic Cones, 100 mm and 150 mm Sleeves

A. Nippon Carbide Industries, Flexible Ultralite Grade (ULG) II
B. Reflexite, Vinyl, "TR" (Semi-transparent) or "Conformalight"
C. 3M Series 3840
D. Avery Dennison S-9000C

Barrels and Drums

A. Avery Dennison WR-6100
B. Nippon Carbide Industries, Flexible Ultralite Grade (ULG) II
C. Reflexite, "Conformalight", "Super High Intensity" or "High Impact Drum Sheeting"
D. 3M Series 3810

Barricades: Type I, Medium-Intensity (Typically Enclosed Lens, Glass-Bead Element)

A. American Decal, Adcolite
B. Avery Dennison, T-1500 and T-1600 series

C. 3M Engineer Grade, Series 3170

Barricades: Type II, Medium-High-Intensity (Typically Enclosed Lens, Glass-Bead Element)

A. Avery Dennison, T-2500 Series
B. Kiwalite Type II
C. Nikkalite 1800 Series

Signs: Type II, Medium-High-Intensity (Typically Enclosed Lens, Glass-Bead Element)

A. Avery Dennison, T-2500 Series
B. Kiwalite, Type II
C. Nikkalite 1800 Series

Signs: Type III, High-Intensity (Typically Encapsulated Glass-Bead Element)

A. Avery Dennison, T-5500 and T-5500A Series
B. Nippon Carbide Industries, Nikkalite Brand Ultralite Grade II
C. 3M Series 3870

Signs: Type IV, High-Intensity (Typically Unmetallized Microprismatic Element)

A. Avery Dennison, T-6500 Series
B. Nippon Carbide Industries, Crystal Grade, 94000 Series
C. Nippon Carbide Industries, Model No. 94847 Fluorescent Orange
D. Nippon Carbide Industries, Model No. 94844 Fluorescent Yellow Green

Signs: Type VI, Elastomeric (Roll-Up) High-Intensity, without Adhesive

A. Avery Dennison, WU-6014
B. Novabrite LLC, "Econobrite"
C. Reflexite "Vinyl"
D. Reflexite "SuperBright"
E. Reflexite "Marathon"
F. 3M Series RS34 Orange and RS20 Fluorescent Orange

Signs: Type VII, Super-High-Intensity (Typically Unmetallized Microprismatic Element)

A. 3M LDP Series 3924 Fluorescent Orange
B. 3M LDP Series 3970

Signs: Type VIII, Super-High-Intensity (Typically Unmetallized Microprismatic Element)

A. Avery Dennison, T-7500 Series
B. Avery Dennison, T-7511 Fluorescent Yellow
C. Avery Dennison, T-7513 Fluorescent Yellow Green
D. Avery Dennison, W-7514 Fluorescent Orange
E. Nippon Carbide Industries, Nikkalite Crystal Grade Series 92800
F. Nippon Carbide Industries, Nikkalite Crystal Grade Model 92844 Fluorescent Yellow/Green
G. Nippon Carbide Industries, Nikkalite Crystal Grade Model 92847 Fluorescent Orange

Signs: Type IX, Very-High-Intensity (Typically Unmetallized Microprismatic Element)

A. 3M VIP Series 3981 Diamond Grade Fluorescent Yellow
B. 3M VIP Series 3983 Diamond Grade Fluorescent Yellow/Green
C. 3M VIP Series 3990 Diamond Grade

SPECIALTY SIGNS

A. Hallmark Technologies, Inc., All Sign STOP Sign (All Plastic), 750 mm
B. Reflexite "Endurance" Work Zone Sign (with Semi-Rigid Plastic Substrate)

SIGN SUBSTRATE

Fiberglass Reinforced Plastic (FRP)

A. Fiber-Brite

B. Sequentia, "Polyplate"
C. Inteplast Group "InteCel" (13 mm for Post-Mounted CZ Signs, 1200 mm or less)

Aluminum Composite

A. Alcan Composites "Dibond Material, 2 mm" (for temporary construction signs only)
B. Mitsubishi Chemical America, Alpolic 350 (for temporary construction signs only)

8-1.03 STATE-FURNISHED MATERIALS

Attention is directed to Section 6-1.02, "State-Furnished Materials," of the Standard Specifications and these special provisions.

The following materials will be furnished to the Contractor:

A. Padlocks for backflow preventer assembly enclosures, walk gates, and irrigation controller enclosure cabinets.
B. Marker panels, including reflectors, for Type N, Type P, and Type R object markers.
C. LED modules for traffic signals, pedestrian signals and flashing beacons.
D. Incandescent lamps for flashing beacon sign light fixture.
E. Loop detector unit sensor units.
F. Model 170 controller assemblies, including controller unit, completely wired controller cabinet, and inductive loop detector sensor units.
G. Changeable message sign cable.

Completely wired controller cabinets, with auxiliary equipment but without controller unit, will be furnished to the Contractor at Caltrans Electrical Maintenance Station, 30 Rickard St, San Francisco, CA 94134.

The Contractor shall notify the District Warehouse Manager, Telephone (415)-330-6509 and the Engineer not less than 48 hours before State-furnished material is to be picked up by the Contractor. A full description of the material and the time the material will be picked up shall be provided. The number, type, and size of the sign panels, and the contract number shall also be provided to the District Warehouse Manager.

8-1.04 ENGINEERING FABRICS

Engineering fabrics shall conform to the provisions in Section 88, "Engineering Fabrics," of the Standard Specifications and these special provisions.

Filter fabric for this project shall be ultraviolet (UV) ray protected.

8-1.05 ASPHALTIC EMULSION

Asphaltic emulsion shall conform to the provisions in Section 94, "Asphaltic Emulsions," of the Standard Specifications and these special provisions.

When tested in conformance with the "Residue and Oil Distallate by Distallation" test of AASHTO Designation: T 59, the composition of SS1 asphaltic emulsion shall be a minimum 57 percent of residue.

SECTION 8-2. CONCRETE

8-2.01 PORTLAND CEMENT CONCRETE

Portland cement concrete shall conform to the provisions in Section 90, "Portland Cement Concrete," of the Standard Specifications and these special provisions.

References to Section 90-2.01, "Portland Cement," of the Standard Specifications shall mean Section 90-2.01, "Cement," of the Standard Specifications.

Mineral admixture shall be combined with cement in conformance with the provisions in Section 90-4.08, "Required Use of Mineral Admixtures," of the Standard Specifications for the concrete materials specified in Section 56-2, "Roadside Signs," of the Standard Specifications.

The requirements of Section 90-4.08, "Required Use of Mineral Admixture," of the Standard Specifications shall not apply to Section 19-3.025C, "Soil Cement Bedding," of the Standard Specifications.

The Department maintains a list of sources of fine and coarse aggregate that have been approved for use with a reduced amount of mineral admixture in the total amount of cementitious material to be used. A source of aggregate will be considered for addition to the approved list if the producer of the aggregate submits to the Transportation Laboratory certified test results from a qualified testing laboratory that verify the aggregate complies with the requirements. Prior to starting the testing, the aggregate test shall be registered with the Department. A registration number can be obtained by calling (916) 227-7228. The registration number shall be used as the identification for the aggregate sample in correspondence with the

Department. Upon request, a split of the tested sample shall be provided to the Department. Approval of aggregate will depend upon compliance with the specifications, based on the certified test results submitted, together with any replicate testing the Department may elect to perform. Approval will expire 3 years from the date the most recent registered and evaluated sample was collected from the aggregate source.

Qualified testing laboratories shall conform to the following requirements:

A. Laboratories performing ASTM Designation: C 1293 shall participate in the Cement and Concrete Reference Laboratory (CCRL) Concrete Proficiency Sample Program and shall have received a score of 3 or better on all tests of the previous 2 sets of concrete samples.
B. Laboratories performing ASTM Designation: C 1260 shall participate in the Cement and Concrete Reference Laboratory (CCRL) Pozzolan Proficiency Sample Program and shall have received a score of 3 or better on the shrinkage and soundness tests of the previous 2 sets of pozzolan samples.

Aggregates on the list shall conform to one of the following requirements:

A. When the aggregate is tested in conformance with the requirements in California Test 554 and ASTM Designation: C 1293, the average expansion at one year shall be less than or equal to 0.040 percent; or
B. When the aggregate is tested in conformance with the requirements in California Test 554 and ASTM Designation: C 1260, the average of the expansion at 16 days shall be less than or equal to 0.15 percent.

The amounts of cement and mineral admixture used in cementitious material shall be sufficient to satisfy the minimum cementitious material content requirements specified in Section 90-1.01, "Description," or Section 90-4.05, "Optional Use of Chemical Admixtures," of the Standard Specifications and shall conform to the following:

A. The minimum amount of cement shall not be less than 75 percent by mass of the specified minimum cementitious material content.
B. The minimum amount of mineral admixture to be combined with cement shall be determined using one of the following criteria:

    1. When the calcium oxide content of a mineral admixture is equal to or less than 2 percent by mass, the amount of mineral admixture shall not be less than 15 percent by mass of the total amount of cementitious material to be used in the mix.
    2. When the calcium oxide content of a mineral admixture is greater than 2 percent by mass, and any of the aggregates used are not listed on the approved list as specified in these special provisions, then the amount of mineral admixture shall not be less than 25 percent by mass of the total amount of cementitious material to be used in the mix.
    3. When the calcium oxide content of a mineral admixture is greater than 2 percent by mass and the fine and coarse aggregates are listed on the approved list as specified in these special provisions, then the amount of mineral admixture shall not be less than 15 percent by mass of the total amount of cementitious material to be used in the mix.
    4. When a mineral admixture that conforms to the provisions for silica fume in Section 90-2.04, "Admixture Materials," of the Standard Specifications is used, the amount of mineral admixture shall not be less than 10 percent by mass of the total amount of cementitious material to be used in the mix.
    5. When a mineral admixture that conforms to the provisions for silica fume in Section 90-2.04, "Admixture Materials," of the Standard Specifications is used and the fine and coarse aggregates are listed on the approved list as specified in these special provisions, then the amount of mineral admixture shall not be less than 7 percent by mass of the total amount of cementitious material to be used in the mix.

C. The total amount of mineral admixture shall not exceed 35 percent by mass of the total amount of cementitious material to be used in the mix. Where Section 90-1.01, "Description," of the Standard Specifications specifies a maximum cementitious content in kilograms per cubic meter, the total mass of cement and mineral admixture per cubic meter shall not exceed the specified maximum cementitious material content.

Unless otherwise specified, mineral admixture will not be required in portland cement concrete used for precast concrete girders.

The Contractor will be permitted to use Type III portland cement for concrete used in the manufacture of precast concrete members.

8-2.02 CORROSION CONTROL FOR PORTLAND CEMENT CONCRETE

Portland cement concrete at Broadway POC is considered to be in a corrosive environment and shall conform to the provisions in Section 90, "Portland Cement Concrete," of the Standard Specifications and these special provisions.

Cementitious material to be used in portland cement concrete shall conform to the provisions for cement and mineral admixtures in Section 90-2, "Materials," of the Standard Specifications, and shall be a combination of "Type II Modified" portland cement and mineral admixture.

Concrete in a corrosive environment shall contain not less than 400 kg of cementitous material per cubic meter.

No reduction in the cementitious material content specified or ordered, in conformance with the provisions in Section 90-4.05, "Optional Use of Chemical Admixtures," of the Standard Specifications, will be allowed for concrete in a corrosive environment.

Unless otherwise specified, for concrete in a corrosive environment, the amount of cement shall be 75 percent by mass, and the amount of mineral admixture to be combined with cement shall be 25 percent by mass, of the total amount of cementitious material to be used in the concrete mix. The calcium oxide content of mineral admixtures shall not exceed 10 percent.

Except for concrete at Broadway POC, Retaining Wall No. 1, Retaining Wall No. 2, Retaining Wall No. 4 and Sound Wall No. 1, the mineral admixture for concrete in a corrosive environment shall conform to ASTM Designation: C618 Class F or N.

For concrete at Broadway POC, Retaining Wall No. 1, Retaining Wall No. 2, Retaining Wall No. 4 and Sound Wall No. 1, the cementitious material shall be comprised of either:

- 20 percent by mass of mineral admixture conforming to ASTM Designation: C618 Class F or N, 5 percent by mass of mineral admixture conforming to ASTM Designation: C1240, and 75 percent by mass of cement.
- 10 percent by mass of mineral admixture conforming to ASTM Designation: C1240, and 90 percent by mass of cement.
- 10 percent by mass of metakaolin conforming to ASTM Designation: C618 Class N, and 90 percent by mass of cement. Metakaolin shall also conform to the following chemical and physical requirements:

Chemical Requirements	Percent
Silicon Dioxide (SiO2) + Aluminum Oxide (Al2O3)	92.0 min.
Calcium Oxide (CaO)	1.0 max
Sulfur Trioxide (SO3)	1.0 max.
Loss on ignition	1.2 max.
Available Alkalies (as Na2O) equivalent	1.0 max.

Physical Requirements	Percent
Retained 45-µm (No. 325) sieve	2.0 max
Strength Activity Index with portland cement 7 days 28 days	 100 (minimum % of control) 100 (minimum % of control)

The amount of free water used in concrete in a corrosive environment shall not exceed 160 kg/ m^3, plus 40 kg for each 100 kg of cementitious material in excess of 400 kg/ m^3.

Full compensation for conforming to the above requirements shall be considered as included in the contract prices paid for the various contract items of work and no additional compensation will be allowed therefor.

8-2.03 PRECAST CONCRETE QUALITY CONTROL

GENERAL

Precast concrete quality control shall conform to these special provisions.

Unless otherwise specified, precast concrete quality control shall apply when any precast concrete members are fabricated in conformance with the provisions in Section 49, "Piling," or Section 51, "Concrete Structures," of the Standard Specifications.

Quality Control (QC) shall be the responsibility of the Contractor. The Contractor's QC inspectors shall perform inspection and testing prior to precasting, during precasting, and after precasting, and as specified in this section and additionally as necessary to ensure that materials and workmanship conform to the details shown on the plans and specifications.

Quality Assurance (QA) is the prerogative of the Engineer. Regardless of the acceptance for a given precast element by the Contractor, the Engineer will evaluate the precast element. The Engineer will reject any precast element that does not conform to the approved Precast Concrete Quality Control Plan (PCQCP), the details shown on the plans, and these special provisions.

The Contractor shall designate in writing a precast Quality Control Manager (QCM) for each precasting facility. The QCM shall be responsible directly to the Contractor for the quality of precasting, including materials and workmanship, performed by the Contractor and all subcontractors. The QCM shall be the sole individual responsible to the Contractor for submitting, receiving, and approving all correspondence, required submittals, and reports to and from the Engineer. The QCM shall not be employed or compensated by any subcontractor, or other persons or entities hired by subcontractors, or suppliers, who will provide other services or materials for the project. The QCM may be an employee of the Contractor.

Prior to submitting the PCQCP required herein, a meeting between the Engineer, the Contractor's QCM, and a representative from each entity performing precast concrete operations for this project, shall be held to discuss the requirements for precast quality control.

QC Inspectors shall either be 1) licensed as Civil Engineers in the State of California, or 2) have a current Plant Quality Personnel Certification, Level II, from the Precast/Prestressed Concrete Institute. A QC Inspector shall witness all precast concrete operations.

PRECAST CONCRETE QUALIFICATION AUDIT

Unless otherwise specified, no Contractors or subcontractors performing precast concrete operations for the project shall commence work without having successfully completed the Department's Precast Fabrication Qualification Audit, hereinafter referred to as the audit. The Engineer will perform the audit, and copies of the audit form, along with procedures for requesting and completing the audit, are available at the Transportation Laboratory or the following website:

http://www.dot.ca.gov/hq/esc/Translab/smbresources.htm

An audit that was previously approved by the Engineer no more than three years prior to the beginning of work on this contract will be acceptable for the entire period of this contract, provided the Engineer determines the audit is for the same type of work that is to be performed on this contract.

Successful completion of an audit shall not relieve the Contractor of the responsibility for furnishing materials or producing finished work of the quality specified in these special provisions and as shown on the plans.

PRECAST CONCRETE QUALITY CONTROL PLAN

Prior to performing any precasting operations, the Contractor shall submit to the Engineer, in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications, 3 copies of a separate PCQCP for each item of work which is to be precast. A separate PCQCP shall be submitted for each facility. As a minimum, each PCQCP shall include the following:

A. The name of the precasting firm, the concrete plants to be used, and any concrete testing firm to be used;
B. A manual prepared by the precasting firm that includes equipment, testing procedures, safety plan, and the names, qualifications, and documentation of certifications for all personnel to be used;
C. The name of the QCM and the names, qualifications, and documentation of certifications for all QC inspection personnel to be used;
D. An organizational chart showing all QC personnel and their assigned QC responsibilities;
E. The methods and frequencies for performing all required quality control procedures, including all inspections, material testing, and any required survey procedures for all components of the precast elements including prestressing systems, concrete, grout, reinforcement, steel components embedded or attached to the precast member, miscellaneous metal, and formwork;
F. A system for identification and tracking of required precast element repairs, and a procedure for the re-inspection of any repaired precast element. The system shall have provisions for a method of reporting nonconforming precast elements to the Engineer; and
G. Forms to be used for Certificates of Compliance, daily production logs, and daily reports.

The Engineer shall have 4 weeks to review the PCQCP submittal after a complete plan has been received. No precasting shall be performed until the PCQCP is approved in writing by the Engineer.

A PCQCP that was previously approved by the Engineer no more than one year prior to the beginning of work on this contract will be acceptable for the entire period of this contract, provided the Engineer determines the PCQCP is for the same type of work that is to be performed on this contract.

An amended PCQCP or addendum shall be submitted to, and approved in writing by the Engineer, for any proposed revisions to the approved PCQCP. An amended PCQCP or addendum will be required for any revisions to the PCQCP, including but not limited to changes in concrete plants or source materials, changes in material testing procedures and testing labs, changes in procedures and equipment, changes in QC personnel, or updated systems for tracking and identifying precast elements. The Engineer shall have 2 weeks to complete the review of the amended PCQCP or addendum, once a complete submittal has been received. Work that is affected by any of the proposed revisions shall not be performed until the amended PCQCP or addendum has been approved.

After final approval of the PCQCP, amended PCQCP, or addendum, the Contractor shall submit 7 copies to the Engineer of each of these approved documents.

It is expressly understood that the Engineer's approval of the Contractor's PCQCP shall not relieve the Contractor of any responsibility under the contract for the successful completion of the work in conformance with the requirements of the plans and specifications. The Engineer's approval shall neither constitute a waiver of any of the requirements of the plans and specifications nor relieve the Contractor of any obligation thereunder, and defective work, materials, and equipment may be rejected notwithstanding approval of the PCQCP.

REPORTING

The QC Inspector shall provide reports to the QCM on a daily basis for each day that precasting operations are performed.

A daily production log for precasting shall be kept by the QCM for each day that precasting operations, including setting forms, placing reinforcement, setting prestressing steel, casting, curing, post tensioning, and form release, are performed. The log shall include the facility location, and shall include specific description of casting or related operations, any problems or deficiencies discovered, any testing or repair work performed, and the names of all QC personnel and the specific QC inspections they performed that day. The daily report from each QC Inspector shall also be included in the log. This daily log shall be available for viewing by the Engineer, at the precasting facility.

All reports regarding material tests and any required survey checks shall be signed by the person that performed the test or check, and then submitted directly to the QCM for review and signature prior to submittal to the Engineer. Corresponding names shall be clearly printed or typewritten next to all signatures.

The Engineer shall be notified immediately in writing when any precasting problems or deficiencies are discovered and also of the proposed repair or process changes required to correct them. The Engineer shall have 4 weeks to review these procedures. No remedial work shall begin until the Engineer approves these procedures in writing.

The following items shall be included in a Precast Report that is to be submitted to the Engineer following the completion of any precast element:

A. Reports of all material tests and any required survey checks;
B. Documentation that the Contractor has evaluated all tests and corrected all rejected deficiencies, and all repairs have been re-examined with the required tests and found acceptable; and
C. Daily production log.

At the completion of any precast element, and if the QCM determines that element is in conformance with these special provisions, the QCM shall sign and furnish to the Engineer, a certificate of compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. This certificate of compliance shall be submitted with the Precast Report. The certificate shall state that all of the materials and workmanship incorporated in the work, and all required tests and inspections of this work, have been performed in conformance with the details shown on the plans and the provisions of the Standard Specifications and these special provisions.

PAYMENT

In the event the Engineer fails to complete the review of 1) a PCQCP, 2) an amended PCQCP or addendum, or 3) a proposed repair or process change, within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

All required repair work or process changes required to correct precasting operation deficiencies, whether discovered by the QCM, QC Inspector, or by the Engineer, and any associated delays or expenses to the Contractor caused by performing these repairs, shall be at the Contractor's expense.

Full compensation for conforming to the requirements of this section shall be considered as included in the contract prices paid for the various items of work involved, and no additional compensation will be allowed therefor.

SECTION 8-3. WELDING

8-3.01 WELDING

GENERAL

Flux core welding electrodes conforming to the requirements of AWS A5.20 E6XT-4 or E7XT-4 shall not be used to perform welding for this project.

Wherever reference is made to the following AWS welding codes in the Standard Specifications, on the plans, or in these special provisions, the year of adoption for these codes shall be as listed:

AWS Code	Year of Adoption
D1.1	2002
D1.4	1998
D1.5	2002
D1.6	1999

Requirements of the AWS welding codes shall apply unless specified otherwise in the Standard Specifications, on the plans, or in these special provisions. Wherever the abbreviation AWS is used, it shall be equivalent to the abbreviations ANSI/AWS or AASHTO/AWS.

Section 6.1.1.1 of AWS D1.5 is replaced with the following:

Quality Control (QC) shall be the responsibility of the Contractor. As a minimum, the Contractor shall perform inspection and testing of each weld joint prior to welding, during welding, and after welding as specified in this section and as necessary to ensure that materials and workmanship conform to the requirements of the contract documents.

Sections 6.1.3 through 6.1.4.3 of AWS D1.1, Section 7.1.2 of AWS D1.4, and Sections 6.1.1.2 through 6.1.3.3 of AWS D1.5 are replaced with the following:

The QC Inspector shall be the duly designated person who acts for and on behalf of the Contractor for inspection, testing, and quality related matters for all welding.

Quality Assurance (QA) is the prerogative of the Engineer. The QA Inspector is the duly designated person who acts for and on behalf of the Engineer.

The QC Inspector shall be responsible for quality control acceptance or rejection of materials and workmanship, and shall be currently certified as an AWS Certified Welding Inspector (CWI) in conformance with the requirements in AWS QC1, " Standard for AWS Certification of Welding Inspectors."

The QC Inspector may be assisted by an Assistant QC Inspector provided that this individual is currently certified as an AWS Certified Associate Welding Inspector (CAWI) in conformance with the requirements in AWS QC1, "Standard for AWS Certification of Welding Inspectors." The Assistant QC Inspector may perform inspection under the direct supervision of the QC Inspector provided the Assistant is always within visible and audible range of the QC Inspector. The QC Inspector shall be responsible for signing all reports and for determining if welded materials conform to workmanship and acceptance criteria. The ratio of QC Assistants to QC Inspectors shall not exceed 5 to 1.

When the term "Inspector" is used without further qualification, it shall refer to the QC Inspector.

Section 6.14.6, "Personnel Qualification," of AWS D1.1, Section 7.8, "Personnel Qualification," of AWS D1.4, and Section 6.1.3.4, "Personnel Qualification," of AWS D1.5 are replaced with the following:

Personnel performing nondestructive testing (NDT) shall be qualified and certified in conformance with the requirements of the American Society for Nondestructive Testing (ASNT) Recommended Practice No. SNT-TC-1A and the Written Practice of the NDT firm. The Written Practice of the NDT firm shall meet or exceed the guidelines of the ASNT Recommended Practice No. SNT-TC-1A. Individuals who perform NDT, review the results, and prepare the written reports shall be either:

A. Certified NDT Level II technicians, or;
B. Level III technicians who hold a current ASNT Level III certificate in that discipline and are authorized and certified to perform the work of Level II technicians.

Section 6.5.4 of AWS D1.5 is replaced with the following:

The QC Inspector shall inspect and approve each joint preparation, assembly practice, welding technique, joint fit-up, and the performance of each welder, welding operator, and tack welder to make certain that the applicable requirements of this code and the approved Welding Procedure Specification (WPS) are met. The QC Inspector shall examine the work to make certain that it meets the requirements of Sections 3 and 6.26. The size and contour of all welds shall be measured using suitable gages. Visual inspection for cracks in welds and base metal, and for other discontinuities should be aided by strong light magnifiers, or such other devices as may be helpful. Acceptance criteria different from those specified in this code may be used when approved by the Engineer.

Section 6.6.5, "Nonspecified NDT Other than Visual," of AWS D1.1, Section 6.6.5 of AWS D1.4 and Section 6.6.5 of AWS D1.5 shall not apply.

For any welding, the Engineer may direct the Contractor to perform NDT that is in addition to the visual inspection or NDT specified in the AWS or other specified welding codes, in the Standard Specifications, or in these special provisions. Additional NDT required by the Engineer will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications. Should any welding deficiencies be discovered by this additional NDT, all costs associated with the repair of the deficient area, including NDT of the weld and of the weld repair, and any delays caused by the repair, shall be at the Contractor's expense.

Repair work to correct welding deficiencies discovered by visual inspection or NDT, or by additional NDT directed or performed by the Engineer, and any associated delays or expenses caused to the Contractor by performing these repairs, shall be at the Contractor's expense.

The Engineer shall have the authority to verify the qualifications or certifications of any welder, QC Inspector, or NDT personnel to specified levels by retests or other means approved by the Engineer.

Continuous inspection shall be provided when any welding is being performed. Continuous inspection, as a minimum, shall include having a QC Inspector within such close proximity of all welders or welding operators so that inspections by the QC Inspector of each welding operation at each welding location shall not lapse for a period exceeding 30 minutes.

Inspection and approval of all joint preparations, assembly practices, joint fit-ups, welding techniques, and the performance of each welder, welding operator, and tack welder shall be documented by the QC Inspector on a daily basis for each day welding is performed. For each inspection, including fit-up, Welding Procedure Specification (WPS) verification, and final weld inspection, the QC Inspector shall confirm and document compliance with the requirements of the AWS or other specified code criteria and the requirements of these special provisions on all welded joints before welding, during welding, and after the completion of each weld.

When joint weld details that are not prequalified to the details of Section 3 of AWS D1.1 or to the details of Figure 2.4 or 2.5 of AWS D1.5 are proposed for use in the work, the joint details, their intended locations, and the proposed welding parameters and essential variables, will be approved by the Engineer. The Engineer shall have 2 weeks to complete the review of the proposed joint detail locations. In the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications. Upon approval of the proposed joint detail locations and qualification of the proposed joint details, welders and welding operators using these details shall perform a qualification test plate using the WPS variables and the joint detail to be used in production. The test plate shall have the maximum thickness to be used in production and a minimum length of 180 mm and minimum finish welded width 460 mm. The test plate shall be mechanically and radiographically tested. Mechanical and radiographic testing and acceptance criteria shall be as specified in the applicable AWS codes.

In addition to the requirements specified in the applicable code, the period of effectiveness for a welder's or welding operator's qualification shall be a maximum of 3 years for the same weld process, welding position, and weld type. If production welding will be performed without gas shielding, then qualification shall also be without gas shielding. Excluding welding of fracture critical members, a valid qualification at the beginning of work on a contract will be acceptable for the entire period of the contract, as long as the welder's or welding operator's work remains satisfactory.

The Engineer will witness all qualification tests for WPSs that were not previously approved by the Department. An approved independent third party will witness the qualification tests for welders or welding operators. The independent third party shall be a current CWI and shall not be employed by the contractor performing the welding. The Engineer shall have 2 weeks to review the qualifications and copy of the current certification of the independent third party. In the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications. The Contractor shall notify the Engineer one week prior to performing any qualification tests. Witnessing of qualification tests by the Engineer shall not constitute approval of the intended joint locations, welding parameters, or essential variables.

In addition to the requirements of AWS D1.5 Section 5.12 or 5.13, welding procedures qualification, for work welded in conformance with that code, shall conform to the following requirements:

A. Unless considered prequalified, fillet welds, including reinforcing fillet welds, shall be qualified in each position. The fillet weld soundness test shall be conducted using the essential variables of the WPS as established by the Procedure Qualification Record (PQR.)
B. For qualification of joints that do not conform to Figures 2.4 and 2.5 of AWS D1.5, two WPS qualification tests are required. The tests conforming to AWS D1.5 Section 5.13 shall be conducted using both Figure 5.1 and Figure 5.3. The test conforming to Figure 5.3 shall be conducted using the same welding electrical parameters that were established for the test conducted conforming to Figure 5.1.
C. The travel speed, current, and voltage values that are used for tests conducted per AWS D1.5 Section 5.12 or 5.13 shall be consistent for each weld joint, and shall in no case vary by more than 10 percent for travel speed, 10 percent for current, and 7 percent for voltage.
D. For a WPS qualified in conformance with AWS D1.5 Section 5.13, the values to be used for calculating ranges for current and voltage shall be based on the average of all weld passes made in the test. Heat input shall be calculated using the average of current and voltage of all weld passes made in the test for a WPS qualified in conformance with Section 5.12 or 5.13.
E. To qualify for unlimited material thickness, two qualification tests are required for WPSs utilized for welding material thicknesses greater than 38 mm. One test shall be conducted using 20-mm thick test plates, and one test shall be conducted using test plates with a thickness between 38 mm and 50 mm. Two maximum heat input tests may be conducted for unlimited thickness qualification.
F. Macroetch tests are required for WPS qualification tests, and acceptance shall be per AWS D1.5 Section 5.19.3.
G. When a weld joint is to be made using a combination of qualified WPSs, each process shall be qualified separately.
H. When a weld joint is to be made using a combination of qualified and prequalified processes, the WPS shall reflect both processes and the limitations of essential variables, including weld bead placement, for both processes.
I. Prior to preparing mechanical test specimens, the PQR welds shall be inspected by visual and radiographic tests. Backing bar shall be 75 mm in width and shall remain in place during NDT testing. Results of the visual and radiographic tests shall comply with AWS D1.5 Section 6.26.2, excluding Section 6.26.2.2. Test plates that do not comply with both tests shall not be used.

WELDING QUALITY CONTROL

Welding quality control shall conform to the requirements in the AWS or other specified welding codes, the Standard Specifications, and these special provisions.

Unless otherwise specified, welding quality control shall apply when any work is welded in conformance with the provisions in Section 49, "Piling," Section 52, "Reinforcement," Section 55, "Steel Structures," or Section 75-1.035, "Bridge Joint Restrainer Units," of the Standard Specifications.

The welding of fracture critical members (FCMs) shall conform to the provisions specified in the Fracture Control Plan (FCP) and herein.

The Contractor shall designate in writing a welding Quality Control Manager (QCM). The QCM shall be responsible directly to the Contractor for the quality of welding, including materials and workmanship, performed by the Contractor and subcontractors.

The QCM shall be the sole individual responsible to the Contractor for submitting, receiving, reviewing, and approving all correspondence, required submittals, and reports to and from the Engineer. The QCM shall be a registered professional engineer or shall be currently certified as a CWI or a CAWI.

The QCM shall not be employed or compensated by any subcontractor, or by other persons or entities hired by subcontractors, who will provide other services or materials for the project. The QCM may be an employee of the Contractor.

Welding inspection personnel or NDT firms to be used in the work shall not be employed or compensated by any subcontractor, or by other persons or entities hired by subcontractors, who will provide other services or materials for the project, except for the following conditions:

A. The work is welded in conformance with AWS D1.5 and is performed at a permanent fabrication or manufacturing facility which is certified under the AISC Quality Certification Program, Category Cbr, Major Steel Bridges and Fracture Critical endorsement F.
B. The welding is performed on pipe pile material at a permanent pipe manufacturing facility authorized to apply the American Petroleum Institute (API) monogram for API 5L pipe.

For welding performed at such facilities, the inspection personnel or NDT firms may be employed or compensated by the facility performing the welding.

Prior to submitting the Welding Quality Control Plan (WQCP) required herein, a pre-welding meeting between the Engineer, the Contractor's QCM, and a representative from each entity performing welding or inspection for this project, shall be held to discuss the requirements for the WQCP.

The Contractor shall submit to the Engineer, in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications, 2 copies of a separate WQCP for each subcontractor or supplier for each item of work for which welding is to be performed.

The Contractor shall allow the Engineer 2 weeks to review the WQCP submittal after a complete plan has been received. No welding shall be performed until the WQCP is approved in writing by the Engineer. In the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

An amended WQCP or any addendum to the approved WQCP shall be submitted to, and approved in writing by the Engineer, for proposed revisions to the approved WQCP. An amended WQCP or addendum will be required for revisions to the WQCP, including but not limited to a revised WPS; additional welders; changes in NDT firms, QC, or NDT personnel or procedures; or updated systems for tracking and identifying welds. The Engineer shall have 1 week to complete the review of the amended WQCP or addendum. Work affected by the proposed revisions shall not be performed until the amended WQCP or addendum has been approved. In the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

Information regarding the contents, format, and organization of a WQCP, is available at the Transportation Laboratory or the following website:

http://www.dot.ca.gov/hq/esc/Translab/smbresources.htm

After final approval of the WQCP, amended WQCP, or addendum, the Contractor shall submit 7 copies to the Engineer of the approved documents. A copy of the Engineer approved document shall be available at each location where welding is to be performed.

A daily production log for welding shall be kept for each day that welding is performed. The log shall clearly indicate the locations of all welding. The log shall include the welders' names, amount of welding performed, any problems or deficiencies discovered, and any testing or repair work performed, at each location. The daily report from each QC Inspector shall also be included in the log.

The following items shall be included in a Welding Report that is to be submitted to the Engineer within 10 days following the performance of any welding:

A. Reports of all visual weld inspections and NDT.
B. Radiographs and radiographic reports, and other required NDT reports.
C. Documentation that the Contractor has evaluated all radiographs and other nondestructive tests and corrected all rejectable deficiencies, and all repaired welds have been reexamined by the required NDT and found acceptable.
D. Daily production log.

The following information shall be clearly written on the outside of radiographic envelopes: name of the QCM, name of the nondestructive testing firm, name of the radiographer, date, contract number, complete part description, and all included weld numbers or a report number, as detailed in the WQCP. In addition, all innerleaves shall have clearly written on them the part description and all included weld numbers, as detailed in the WQCP.

Reports regarding NDT shall be signed by both the NDT technician and the person that performed the review, and then submitted directly to the QCM for review and signature prior to submittal to the Engineer. Corresponding names shall be clearly printed or typewritten next to all signatures.

The Engineer will review the Welding Report to determine if the Contractor is in conformance with the WQCP. Unless otherwise specified, the Engineer shall be allowed 10 days to review the report and respond in writing after a complete Welding Report has been received. Prior to receiving notification from the Engineer of the Contractor's conformance with the WQCP, the Contractor may encase in concrete or cover welds for which a Welding Report has been submitted. However, should the Contractor elect to encase or cover those welds prior to receiving notification from the Engineer, it is expressly understood that the Contractor shall not be relieved of the responsibility for incorporating material in the work that conforms to the requirements of the plans and specifications. Material not conforming to these requirements will be subject to rejection. Should the Contractor elect to wait to encase or cover welds pending notification by the Engineer, and in the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be

compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

The QC Inspector shall provide reports to the QCM on a daily basis for each day that welding is performed.

Except for noncritical weld repairs, the Engineer shall be notified immediately in writing when welding problems, deficiencies, base metal repairs, or any other type of repairs not submitted in the WQCP are discovered, and also of the proposed repair procedures to correct them. The Contractor shall allow the Engineer one week to review these procedures. No remedial work shall begin until the repair procedures are approved in writing by the Engineer. In the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

The QCM shall sign and furnish to the Engineer, a Certificate of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for each item of work for which welding was performed. The certificate shall state that all of the materials and workmanship incorporated in the work, and all required tests and inspections of this work, have been performed in conformance with the details shown on the plans, the Standard Specifications, and these special provisions.

WELDING FOR OVERHEAD SIGN AND POLE STRUCTURES

The Contractor shall meet the following requirements for any work welded in conformance with the provisions in Section 56-1, "Overhead Sign Structures," or Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications.

Welding inspection personnel or NDT firms to be used in the work shall not be employed or compensated by any subcontractor, or by other persons or entities hired by subcontractors, who will provide other services or materials for the project, except for when the welding is performed at a permanent fabrication or manufacturing facility which is certified under the AISC Quality Certification Program, Category Sbd, Conventional Steel Building Structures.

Welding Qualification Audit

Contractors or subcontractors performing welding operations for overhead sign and pole structures shall not deliver materials to the project without having successfully completed the Department's "Manufacturing Qualification Audit for Overhead Sign and Pole Structures," hereinafter referred to as the audit, not more than one year prior to the delivery of the materials. The Engineer will perform the audit. Copies of the audit form, and procedures for requesting and completing the audit, are available at the Transportation Laboratory or the following website:

http://www.dot.ca.gov/hq/esc/Translab/smbresources.htm

An audit that was approved by the Engineer no more than one year prior to the beginning of work on this contract will be acceptable for the entire period of this contract, provided the Engineer determines the audit was for the same type of work that is to be performed on this contract.

Successful completion of an audit shall not relieve the Contractor of the responsibility for furnishing materials or producing finished work of the quality specified in these special provisions and as shown on the plans.

Welding Report

For work welded in conformance with the provisions in Section 56-1, "Overhead Sign Structures," or Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications, a Welding Report shall be submitted in conformance with the provisions in "Welding Quality Control," of these special provisions.

PAYMENT

Full compensation for conforming to the requirements of "Welding" shall be considered as included in the contract prices paid for the various items of work involved and no additional compensation will be allowed therefor.

SECTION 9. DESCRIPTION OF BRIDGE WORK

The work to be done consists, in general, of constructing the new following structures:

Peninsula Avenue Overcrossing (Replace)
(Bridge No. 35-0088)

A four span cast-in-place prestressed box girder bridge approximately 122 m long on driven pile foundations (replace).

Monte Diablo Avenue Pedestrian Overcrossing (Replace)
(Bridge No. 35-0134)

A two span precast prestressed concrete girder bridge approximately 71.6 m long on driven pile foundation.

Broadway Avenue Pedestrian Overcrossing
(Bridge No. 35-0342)

A nine span cast-in-place reinforced concrete box girder bridge approximately 217 m long on driven pile foundation.

Retaining Wall No. 1 (Soldier-Pile)
(Bridge No. 35E0002)

A steel soldier-pile wall with timber lagging approximately 885 m long with a maximum height of approximately 2.4 m

Retaining Wall No. 2
(Bridge No. 35E0003)

A steel soldier-pile tie back wall with timber lagging approximately 338 m long with a maximum height of approximately 6.8 m

Retaining Wall No. 3 (MSE)
(Bridge No. 35E0004)

A mechanically stabilized embankment wall approximately 144 m long with a maximum height of approximately 8 m.

Retaining Wall No. 4 (MSE)
(Bridge No. 35E0005)

A mechanically stabilized embankment wall approximately 353 m long with a maximum height of approximately 4.9 m.

Retaining wall No. 5
(Bridge No. 35E0006)

A reinforced concrete wall approximately 271 m long with a maximum height of approximately 3.7 m.

Retaining Wall No. 6
(Bridge No. 350022)

A reinforced concrete wall approximately 61.8 m long with a maximum height of approximately 2.5 m.

Retaining Wall No. 7
(Bridge No. 35E0023)

A reinforced concrete wall approximately 61.1 m long with a maximum height of approximately 2.4 m.

Retaining Wall No. 8
(Bridge No. 35E0024)

A reinforced concrete wall approximately 31.5 m long with a maximum height of approximately 8.3 m.

SECTION 10. CONSTRUCTION DETAILS

SECTION 10-1. GENERAL

10-1.00 CONSTRUCTION PROJECT INFORMATION SIGNS

Before any major physical construction work readily visible to highway users is started on this contract, the Contractor shall furnish and erect 2 Type 2 Construction Project Information signs and 6 Type 1 Construction Project Information signs at the locations shown on the plans and as designated by the Engineer.

The signs and overlays shall be of a type and material consistent with the estimated time of completion of the project and shall conform to the details shown on the plans.

The sign letters, border and the Department's construction logos shall conform to the colors (non-reflective) and details shown on the plans, and shall be on a white background (non-reflective). The colors blue and orange shall conform to PR Color Number 3 and Number 6, respectively, as specified in the Federal Highway Administration's Color Tolerance Chart.

The sign message to be used for fund types shall consist of the following, in the order shown:

FEDERAL HIGHWAY TRUST FUNDS
STATE HIGHWAY FUNDS
SAN MATEO COUNTY TRANSPORTATION FUNDS

The sign message to be used for type of work shall consist of the following:

HIGHWAY CONSTRUCTION

The sign message to be used for the Year of Completion of Project Construction will be furnished by the Engineer. The Contractor shall furnish and install the "Year" sign overlay within 10 working days of notification of the year date to be used.

The letter sizes to be used shall be as shown on the plans. The information shown on the signs shall be limited to that shown on the plans.

The signs shall be kept clean and in good repair by the Contractor.

Upon completion of the work, the signs shall be removed and disposed of outside the highway right of way in conformance with the provisions in Section 7-1.13 of the Standard Specifications.

Full compensation for furnishing, erecting, maintaining, and removing and disposing of the construction project information signs shall be considered as included in the contract lump sum price paid for construction area signs and no additional compensation will be allowed therefor.

10-1.01 ORDER OF WORK

Order of work shall conform to the provisions in Section 5-1.05, "Order of Work," of the Standard Specifications and these special provisions.

Prior to the start of the operation for cold plane asphalt concrete pavement, the contractor shall have a certified asphalt concrete plant and an approved mix design for the initial asphalt concrete paving layer.

Any area that is cold planed in a work period shall be paved with the first layer of asphalt concrete within the same work period before the area is opened to public traffic.

Advance Information Sign as shown on the plans shall be placed at least fourteen (14) days before ramps are to be closed to public traffic. The Contractor shall provide minimum ten (10) days notification to the Engineer to notify the media on lane closures.

Temporary fences or temporary K-rail with traffic screen shall be constructed prior to removal of any access control fences. Application of erosion control requires several move-in/move-outs of erosion control equipment. Attention is directed to "Move-in/Move-out (Erosion Control)" in these Special Provisions.

The Contractor, as first order of work, shall perform potholing along Sound Walls #1 and #6 as shown at the plans in order to avoid any utilities conflict with Sound Walls #1 and #6 construction. Full compensation for performing potholing, as shown on the plans, shall be considered as included in the contract prices paid for the various items of work and no separate payment will be made therefor.

Attention is directed to "Clearing and Grubbing," of these special provisions.

The Contractor, as first order of work, shall begin clearing and grubbing at areas adjacent or on the Poplar Creek Golf Course, as shown on the plans.

Attention is directed to "Beginning of Work, Time of Completion and Liquidated Damages," of these special provisions.

Removal of existing Monte Diablo Pedestrian Overcrossing and construction of the new Monte Diablo Pedestrian Overcrossing shall begin at the end of the spring semester of public schools, June 15. The new Monte Diablo Pedestrian Overcrossing shall be completed before the beginning of the fall semester of public schools, August 15 in the same year.

Traffic on Airport Blvd. and Coyote Point Dr., as shown on the plans, shall only be closed for fourteen (14) calendar days for the work to construct the new intersection of Airport Blvd and Coyote Point Dr., within the limits of temporary retaining walls A, E, G and H.

Attention is directed to Section 7-1.04, "Permits and Licenses" of the Standard Specifications regarding work within the City limits of Burlingame, Millbrae and San Mateo.

Attention is directed to "Bridge Removal" of these special provisions.

Temporary railing (Type K) and temporary crash cushions shall be secured in place prior to commencing work for which the temporary railing and crash cushions are required.

Attention is directed to "Environmentally Sensitive Area" and "Temporary Fence (Type ESA)" of these special provisions. Prior to beginning work, the boundaries of the Environmentally Sensitive Areas (ESA) shall be clearly delineated in the field. The boundaries shall be delineated by the installation of temporary fence (Type ESA).

Attention is directed to "Water Pollution Control" of these special provisions regarding the submittal and approval of the Storm Water Pollution Prevention Plan prior to performing work having potential to cause water pollution.

The first order of work shall be to place the order for the traffic signal equipment. The Engineer shall be furnished a statement from the vendor that the order for the traffic signal equipment has been received and accepted by the vendor.

The uppermost layer of new pavement shall not be placed until all underlying conduits and loop detectors have been installed.

Prior to commencement of the traffic signal functional test at any location, all items of work related to signal control shall be completed and all roadside signs, pavement delineation, and pavement markings shall be in place at that location.

No overhead sign panel shall be installed until the overhead sign lighting is completely operational.

No above ground electrical work shall be performed on any system within the project site until all Contractor furnished electrical materials for that individual system have been tested and delivered to the Contractor.

Attention is directed to "Maintaining Traffic" and "Temporary Pavement Delineation" of these special provisions and to the stage construction sheets of the plans.

Attention is directed to "Progress Schedule (Critical Path Method)" of these special provisions regarding the submittal of a general time-scaled logic diagram within 10 days after approval of the contract. The diagram shall be submitted prior to performing any work that may be affected by any proposed deviations to the construction staging of the project.

The work shall be performed in conformance with the stages of construction shown on the plans. Nonconflicting work in subsequent stages may proceed concurrently with work in preceding stages, provided satisfactory progress is maintained in the preceding stages of construction.

In each stage, after completion of the preceding stage, the first order of work shall be the removal of existing pavement delineation as directed by the Engineer. Pavement delineation removal shall be coordinated with new delineation so that lane lines are provided at all times on traveled ways open to public traffic.

Before obliterating any pavement delineation (traffic stripes, pavement markings, and pavement markers) that is to be replaced on the same alignment and location, as determined by the Engineer, the pavement delineation shall be referenced by the Contractor, with a sufficient number of control points to reestablish the alignment and location of the new pavement delineation. The references shall include the limits or changes in striping pattern, including one- and 2-way barrier lines, limit lines, crosswalks and other pavement markings. Full compensation for referencing existing pavement delineation shall be considered as included in the contract prices paid for new pavement delineation and no additional compensation will be allowed therefor.

Prior to applying Asphalt Concrete (Leveling), the Contractor shall cover all manholes, valve and monument covers, grates, or other exposed facilities located within the area of application, using a plastic or oil resistant construction paper secured to the facility being covered by tape or adhesive. The covered facilities shall be referenced by the Contractor, with a sufficient number of control points to relocate the facilities after the Asphalt Concrete (Leveling) has been placed. After completion of the Asphalt Concrete (Leveling) operation, all covers shall be removed and disposed of in a manner

satisfactory to the Engineer. Full compensation for covering manholes, valve and monument covers, grates, or other exposed facilities, referencing, and removing temporary cover shall be considered as included in the contract price paid per tonne for Asphalt Concrete (Leveling), and no additional compensation

At the end of each working day if a difference in excess of 0.045 meter exists between the elevation of the existing pavement and the elevation of excavations within 1.5 m of the traveled way, material shall be placed and compacted against the vertical cuts adjacent to the traveled way. During excavation operations, native material may be used for this purpose; however, once placing of the structural section commences, structural material shall be used. The material shall be placed to the level of the elevation of the top of existing pavement and tapered at a slope of 1:4 (vertical:horizontal) or flatter to the bottom of the excavation. Treated base shall not be used for the taper. Full compensation for placing the material on a 1:4 slope, regardless of the number of times the material is required, and subsequent removing or reshaping of the material to the lines and grades shown on the plans shall be considered as included in the contract price paid for the materials involved and no additional compensation will be allowed therefor. No payment will be made for material placed in excess of that required for the structural section.

At those locations exposed to public traffic where guard railings or barriers are to be constructed, reconstructed, or removed and replaced, the Contractor shall schedule operations so that at the end of each working day there shall be no post holes open nor shall there be any railing or barrier posts installed without the blocks and rail elements assembled and mounted thereon.

Some plants required for this project may not be readily available and may have to be grown specifically for this project. Within 30 days after the contract has been approved, the Contractor shall furnish the Engineer a statement from the vendor that the order for the plants to be grown for this contract, including inspection plants and replacement plants, has been received and accepted by the vendor. The statement from the vendor shall include the names, sizes, and quantities of plants ordered and the anticipated dates of delivery. The Contractor shall notify the Engineer, in writing, when the vendor has started to grow the plants.

Not less than 60 days prior to planting the plants, the Contractor shall furnish the Engineer a statement from the vendor that the order for the plants required for this contract, including inspection plants, has been received and accepted by the vendor. The statement from the vendor shall include the names, sizes, and quantities of plants ordered and the anticipated date of delivery.

The Contractor shall place orders for replacement plants with the vendor at the appropriate time so that the roots of the replacement plants are not in a root-bound condition.

Not less than 60 days prior to applying seeds, the Contractor shall furnish the Engineer a statement from the vendor that the order for the seed required for this contract has been received and accepted by the vendor. The statement from the vendor shall include the names and quantity of seed ordered and the anticipated date of delivery.

Attention is directed to "Maintain Existing Planted Areas" of these special provisions regarding checking for deficiencies of existing plants that are to remain in place, prior to the start of irrigation work.

Attention is directed to "Irrigation Systems Functional Test" of these special provisions, regarding restrictions for planting operations.

Attention is directed to "Locate Existing Crossovers and Conduits" of these special provisions regarding locating existing irrigation water line crossovers and conduits shown on the plans to be incorporated in the new work. Existing irrigation water line crossovers and conduits shall be located prior to performing work on the irrigation system.

Unless otherwise shown on the plans or specified in these special provisions, conduits to be jacked or drilled or installed by the open trench method for water line crossovers and sprinkler control crossovers shall be installed prior to the installation of other pipe supply lines.

Clearing, grubbing, and earthwork operations shall not be performed in areas where existing irrigation facilities are to remain in place until existing irrigation facilities have been checked for proper operation in conformance with the provisions in "Existing Highway Irrigation Facilities" of these special provisions.

Attention is directed to Section 20-5.027B, "Wiring Plans and Diagrams," of the Standard Specifications regarding submittal of working drawings.

Attention is directed to "Irrigation Controller Enclosure Cabinet" of these special provisions regarding preinstalling irrigation components in the irrigation controller enclosure cabinet prior to field installation.

When embankment settlement periods or surcharge embankment settlement periods are specified, the settlement periods and the deferment of portions of the work shall comply with the provisions in Section 19-6.025, "Settlement Period," of the Standard Specifications and in "Earthwork" of these special provisions.

10-1.02 WATER POLLUTION CONTROL

Water pollution control work shall conform to the provisions in Section 7-1.01G, "Water Pollution," of the Standard Specifications and these special provisions.

This project lies within the boundaries of the San Francisco Bay Regional Water Quality Control Board (RWQCB).

The State Water Resources Control Board (SWRCB) has issued a permit to the Department which governs storm water and non-storm water discharges from its properties, facilities and activities. The Department's Permit is entitled: "Order No. 99-06-DWQ, NPDES No. CAS000003, National Pollutant Discharge Elimination System (NPDES) Permit, Storm Water Permit and Waste Discharge Requirements (WDRs) for the State of California, Department of Transportation Properties, Facilities, and Activities." Copies of the Department's Permit are available for review from the SWRCB, Storm Water Permit Unit, 1001 "I" Street, P.O. Box 1977, Sacramento, California 95812-1977, Telephone: (916) 341-5254, and may also be obtained from the SWRCB Internet website at: http://www.swrcb.ca.gov/stormwtr/caltrans.html.

The Department's Permit references and incorporates by reference the current Statewide General Permit issued by the SWRCB entitled "Order No. 99-08-DWQ, National Pollutant Discharge Elimination System (NPDES) General Permit No. CAS000002, Waste Discharge Requirements (WDRs) for Discharges of Storm Water Associated with Construction Activity," which regulates discharges of storm water and non-storm water from construction activities disturbing 0.4-hectare or more of soil in a common plan of development. Sampling and analysis requirements as specified in SWRCB Resolution No. 2001-46 are added to the Statewide General Permit. Copies of the Statewide General Permit and modifications thereto are available for review from the SWRCB, Storm Water Permit Unit, 1001 "I" Street, P.O. Box 1977, Sacramento, California 95812-1977, Telephone: (916) 341-5254 and may also be obtained from the SWRCB Internet website at: http://www.swrcb.ca.gov/stormwtr/construction.html.

The NPDES permits that regulate this project, as referenced above, are hereafter collectively referred to as the "Permits."

This project shall conform to the Permits and modifications thereto. The Contractor shall maintain copies of the Permits at the project site and shall make the Permits available during construction.

The Permits require the preparation of a Storm Water Pollution Prevention Plan (SWPPP). The SWPPP shall be prepared in conformance with the requirements of the Permits, the Department's "Storm Water Pollution Prevention Plan (SWPPP) and Water Pollution Control Program (WPCP) Preparation Manual," and the Department's "Construction Site Best Management Practices (BMPs) Manual," including addenda to those permits and manuals issued up to and including the date of advertisement of the project. These manuals are hereinafter referred to, respectively, as the "Preparation Manual" and the "Construction Site BMPs Manual," and collectively, as the "Manuals." Copies of the Manuals may be obtained from the Department of Transportation, Material Operations Branch, Publication Distribution Unit, 1900 Royal Oaks Drive, Sacramento, California 95815, Telephone: (916) 445-3520, and may also be obtained from the Department's Internet website at: http://www.dot.ca.gov/hq/construc/stormwater/stormwater1.htm.

The Contractor shall know and fully comply with applicable provisions of the Permits and all modifications thereto, the Manuals, and Federal, State, and local regulations and requirements that govern the Contractor's operations and storm water and non-storm water discharges from both the project site and areas of disturbance outside the project limits during construction. Attention is directed to Sections 7-1.01, "Laws to be Observed," and 7-1.12, "Indemnification and Insurance," of the Standard Specifications.

The Permits shall apply to storm water and certain permitted non-storm water discharges from areas outside the project site which are directly related to construction activities for this contract including, but not limited to, asphalt batch plants, material borrow areas, concrete plants, staging areas, storage yards and access roads. The Contractor shall comply with the Permits and the Manuals for those areas and shall implement, inspect and maintain the required water pollution control practices. The Engineer shall be allowed full access to these areas during construction to assure Contractor's proper implementation of water pollution control practices. Installing, inspecting and maintaining water pollution control practices on areas outside the highway right of way not specifically arranged and provided for by the Department for the execution of this contract, will not be paid for.

The Contractor shall be responsible for penalties assessed or levied on the Contractor or the Department as a result of the Contractor's failure to comply with the provisions in this section "Water Pollution Control" including, but not limited to, compliance with the applicable provisions of the Permits, the Manuals, and Federal, State and local regulations and requirements as set forth therein.

Penalties as used in this section, "Water Pollution Control," shall include fines, penalties and damages, whether proposed, assessed, or levied against the Department or the Contractor, including those levied under the Federal Clean Water Act and the State Porter-Cologne Water Quality Control Act, by governmental agencies or as a result of citizen suits. Penalties shall also include payments made or costs incurred in settlement for alleged violations of the Permits, the Manuals, or applicable laws, regulations, or requirements. Costs incurred could include sums spent instead of penalties, in mitigation or to remediate or correct violations.

RETENTION OF FUNDS

Notwithstanding any other remedies authorized by law, the Department may retain money due the Contractor under the contract, in an amount determined by the Department, up to and including the entire amount of Penalties proposed, assessed, or levied as a result of the Contractor's violation of the Permits, the Manuals, or Federal or State law, regulations or requirements. Funds may be retained by the Department until final disposition has been made as to the Penalties. The

Contractor shall remain liable for the full amount of Penalties until such time as they are finally resolved with the entity seeking the Penalties.

Retention of funds for failure to conform to the provisions in this section, "Water Pollution Control," shall be in addition to the other retention amounts required by the contract. The amounts retained for the Contractor's failure to conform to provisions in this section will be released for payment on the next monthly estimate for partial payment following the date when an approved SWPPP has been implemented and maintained, and when water pollution has been adequately controlled, as determined by the Engineer.

When a regulatory agency identifies a failure to comply with the Permits and modifications thereto, the Manuals, or other Federal, State or local requirements, the Department may retain money due the Contractor, subject to the following:

A. The Department will give the Contractor 30 days notice of the Department's intention to retain funds from partial payments which may become due to the Contractor prior to acceptance of the contract. Retention of funds from payments made after acceptance of the contract may be made without prior notice to the Contractor.
B. No retention of additional amounts out of partial payments will be made if the amount to be retained does not exceed the amount being withheld from partial payments pursuant to Section 9-1.06, "Partial Payments," of the Standard Specifications.
C. If the Department has retained funds, and it is subsequently determined that the State is not subject to the entire amount of the Costs and Liabilities assessed or proposed in connection with the matter for which the retention was made, the Department shall be liable for interest on the amount retained for the period of the retention. The interest rate payable shall be 6 percent per annum.

During the first estimate period that the Contractor fails to conform to the provisions in this section, "Water Pollution Control," the Department may retain an amount equal to 25 percent of the estimated value of the contract work performed.

The Contractor shall notify the Engineer immediately upon request from the regulatory agencies to enter, inspect, sample, monitor, or otherwise access the project site or the Contractor's records pertaining to water pollution control work. The Contractor and the Department shall provide copies of correspondence, notices of violation, enforcement actions or proposed fines by regulatory agencies to the requesting regulatory agency.

STORM WATER POLLUTION PREVENTION PLAN PREPARATION, APPROVAL AND AMENDMENTS

As part of the water pollution control work, a Storm Water Pollution Prevention Plan (SWPPP) is required for this contract. The SWPPP shall conform to the provisions in Section 7-1.01G, "Water Pollution," of the Standard Specifications, the requirements in the Manuals, the requirements of the Permits, and these special provisions. Upon the Engineer's approval of the SWPPP, the SWPPP shall be considered to fulfill the provisions in Section 7-1.01G, "Water Pollution," of the Standard Specifications for development and submittal of a Water Pollution Control Program.

No work having potential to cause water pollution, shall be performed until the SWPPP has been approved by the Engineer. Approval shall not constitute a finding that the SWPPP complies with applicable requirements of the Permits, the Manuals and applicable Federal, State and local laws, regulations, and requirements.

The Contractor shall designate a Water Pollution Control Manager. The Water Pollution Control Manager shall be responsible for the preparation of the SWPPP and required modifications or amendments, and shall be responsible for the implementation and adequate functioning of the various water pollution control practices employed. The Contractor may designate different Water Pollution Control Managers to prepare the SWPPP and to implement the water pollution control practices. The Water Pollution Control Managers shall serve as the primary contact for issues related to the SWPPP or its implementation. The Contractor shall submit to the Engineer a statement of qualifications, describing the training, previous work history and expertise of the individual selected by the Contractor to serve as Water Pollution Control Manager. The Water Pollution Control Manager shall have a minimum of 24 hours of formal storm water management training or certification as a Certified Professional in Erosion and Sediment Control (CPESC). The Engineer will reject the Contractor's submission of a Water Pollution Control Manager if the submitted qualifications are deemed to be inadequate.

The SWPPP shall apply to the areas within and those outside of the highway right of way that are directly related to construction operations including, but not limited to, asphalt batch plants, material borrow areas, concrete plants, staging areas, storage yards, and access roads.

The SWPPP shall incorporate water pollution control practices in the following categories:

A. Soil stabilization.
B. Sediment control.
C. Wind erosion control.
D. Tracking control.
E. Non-storm water management.
F. Waste management and materials pollution control.

The following contract items of work shall be incorporated into the SWPPP as "Temporary Water Pollution Control Practices": Temporary Construction Entrance, Temporary Drainage Inlet Protection, Temporary Cover, Temporary Check Dam, Temporary Silt Fence, Temporary Concrete Washout Facility, Temporary Erosion Control Blanket, Temporary Fiber Roll and Non-Storm Water Discharges. The Contractor's attention is directed to the special provisions provided for Temporary Water Pollution Control Practices.

The SWPPP shall include, but not be limited to, the items described in the Manuals, Permits and related information contained in the contract documents. The SWPPP shall also include a copy of the following: Notice of Construction, California Department of Fish and Game Permit, RWQCB 401 Certification, Section 404 Permit from US Army Corps of Engineers.

The Contractor shall develop and include in the SWPPP the Sampling and Analysis Plan(s) as required by the Permits, and modifications thereto, and as required in "Sampling and Analytical Requirements" of this section.

The Contractor shall develop a Water Pollution Control Schedule that describes the timing of grading or other work activities that could affect water pollution. The Water Pollution Control Schedule shall be updated by the Contractor to reflect changes in the Contractor's operations that would affect the necessary implementation of water pollution control practices.

The Contractor shall complete the "Construction Site BMPs Consideration Checklist" presented in the Preparation Manual and shall incorporate water pollution control practices into the SWPPP. Water pollution control practices include the "Minimum Requirements" and other Contractor-selected water pollution control practices from the "Construction Site BMPs Consideration Checklist" and the "Project-Specific Minimum Requirements" identified in the Water Pollution Control Cost Break-Down of this section.

Within 20 working days after the approval of the contract, the Contractor shall submit 3 copies of the draft SWPPP to the Engineer. The Engineer will have 10 working days to review the SWPPP. If revisions are required, as determined by the Engineer, the Contractor shall revise and resubmit the SWPPP within 10 working days of receipt of the Engineer's comments. The Engineer will have 5 working days to review the revisions. Upon the Engineer's approval of the SWPPP, 4 approved copies of the SWPPP, incorporating the required changes, shall be submitted to the Engineer. In order to allow construction activities to proceed, the Engineer may conditionally approve the SWPPP while minor revisions are being completed. In the event the Engineer fails to complete the review within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for resulting losses, and an extension of time will be granted, in the same manner as provided for in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

The Contractor shall prepare an amendment to the SWPPP when there is a change in construction activities or operations which may affect the discharge of pollutants to surface waters, ground waters, municipal storm drain systems, or when the Contractor's activities or operations violate a condition of the Permits, or when directed by the Engineer. Amendments shall identify additional water pollution control practices or revised operations, including those areas or operations not identified in the initially approved SWPPP. Amendments to the SWPPP shall be prepared and submitted for review and approval within a time approved by the Engineer, but in no case longer than the time specified for the initial submittal and review of the SWPPP. At a minimum, the SWPPP shall be amended annually and submitted to the Engineer 25 days prior to the defined rainy season.

The Contractor shall keep one copy of the approved SWPPP and approved amendments at the project site. The SWPPP shall be made available upon request by a representative of the Regional Water Quality Control Board, State Water Resources Control Board, United States Environmental Protection Agency, or the local storm water management agency. Requests by the public shall be directed to the Engineer.

COST BREAK-DOWN

The Contractor shall include a Water Pollution Control Cost Break-Down in the SWPPP which itemizes the contract lump sum for water pollution control work. The Contractor shall use the Water Pollution Control Cost Break-Down provided in this section as the basis for the cost break-down submitted with the SWPPP. The Contractor shall use the Water Pollution Control Cost Break-Down to identify items, quantities and values for water pollution control work, excluding Temporary Water Pollution Control Practices for which there are separate bid items. The Contractor shall be responsible for the accuracy of the quantities and values used in the cost break-down submitted with the SWPPP. Partial payment for the item of water pollution control will not be made until the Water Pollution Control Cost Break-Down is approved by the Engineer.

Attention is directed to "Time-Related Overhead" of these special provisions regarding compensation for time-related overhead.

Line items indicated in the Water Pollution Control Cost Break-Down in this section with a specified Estimated Quantity shall be considered "Project-Specific Minimum Requirements." The Contractor shall incorporate Project-Specific Minimum Requirements with Contractor-designated quantities and values into the Water Pollution Control Cost Break-Down submitted with the SWPPP.

Line items indicated in the Water Pollution Control Cost Break-Down in this section without a specified Estimated Quantity shall be considered by the Contractor for selection to meet the applicable "Minimum Requirements" as defined in the Manuals, or for other water pollution control work as identified in the "Construction Site BMPs Consideration Checklist" presented in the Preparation Manual. In the Water Pollution Control Cost Break-Down submitted with the SWPPP, the Contractor shall list only those water pollution control practices selected for the project, including quantities and values required to complete the work for those items.

The sum of the amounts for the items of work listed in the Water Pollution Control Cost Break-Down shall be equal to the contract lump sum price bid for water pollution control. Overhead and profit, except for time-related overhead, shall be included in the individual items listed in the cost break-down.

WATER POLLUTION CONTROL COST BREAK-DOWN
Contract No. 04-264204

ITEM	ITEM DESCRIPTION	UNIT	ESTIMATED QUANTITY	VALUE	AMOUNT
SS-3	Hydraulic Mulch	M2			
SS-4	Hydroseeding	M2			
SS-5	Soil Binders	M2			
SS-6	Straw Mulch	M2			
SS-8	Wood Mulching	M2			
SS-9	Earth Dikes/Drainage Swales & Lined Ditches	M			
SS-10	Outlet Protection/Velocity Dissipation Devices	EA	18		
SS-11	Slope Drains	EA			
SC-2	Sediment/Desilting Basin	EA			
SC-3	Sediment Trap	EA	5		
SC-6	Gravel Bag Berm	M			
SC-7	Street Sweeping and Vacuuming	LS	Lump Sum		
SC-8	Sandbag Barrier	M			
SC-9	Straw Bale Barrier	M			
WE-1	Wind Erosion Control	LS	Lump Sum		
TC-2	Stabilized Construction Roadway	EA	8		
TC-3	Entrance/Outlet Tire Wash	EA	8		
NS-1	Water Conservation Practices	LS	Lump Sum		
NS-3	Paving and Grinding Operations	LS	Lump Sum		
NS-6	Illicit Connection/Illegal Discharge Detection and Reporting	LS	Lump Sum		
NS-7	Potable Water/Irrigation	LS	Lump Sum		
NS-8	Vehicle and Equipment Cleaning	LS	Lump Sum		
NS-9	Vehicle and Equipment Fueling	LS	Lump Sum		
NS-10	Vehicle and Equipment Maintenance	LS	Lump Sum		
NS-11	Pile Driving Operations	LS	Lump Sum		
NS-12	Concrete Curing	LS	Lump Sum		
NS-13	Material and Equipment Use over Water	LS	Lump Sum		
NS-14	Concrete Finishing	LS	Lump Sum		

ITEM	ITEM DESCRIPTION	UNIT	ESTIMATED QUANTITY	VALUE	AMOUNT
NS-15	Structure Demolition/Removal Over or Adjacent to Water	LS	Lump Sum		
WM-1	Material Delivery and Storage	LS	Lump Sum		
WM-2	Material Use	LS	Lump Sum		
WM-3	Stockpile Management	LS	Lump Sum		
WM-4	Spill Prevention and Control	LS	Lump Sum		
WM-5	Solid Waste Management	LS	Lump Sum		
WM-6	Hazardous Waste Management	LS	Lump Sum		
WM-7	Contaminated Soil Management	LS	Lump Sum		
WM-8	Concrete Waste Management	LS	Lump Sum		
WM-9	Sanitary/Septic Waste Management	LS	Lump Sum		
WM-10	Liquid Waste Management	LS	Lump Sum		

TOTAL _____

Adjustments in the items of work and quantities listed in the approved cost break-down shall be made when required to address amendments to the SWPPP, except when the adjusted items are paid for as extra work.

No adjustment in compensation will be made to the contract lump sum price paid for water pollution control due to differences between the quantities shown in the approved cost break-down and the quantities required to complete the work as shown on the approved SWPPP. No adjustment in compensation will be made for ordered changes to correct SWPPP work resulting from the Contractor's own operations or from the Contractor's negligence.

The approved cost break-down will be used to determine partial payments during the progress of the work and as the basis for calculating the adjustment in compensation for the item of water pollution control due to increases or decreases of quantities ordered by the Engineer. When an ordered change increases or decreases the quantities of an approved cost break-down item, the adjustment in compensation will be determined in the same manner specified for increases and decreases in the quantity of a contract item of work in conformance with the provisions in Section 4-1.03B, "Increased or Decreased Quantities," of the Standard Specifications. If an ordered change requires a new item which is not on the approved cost break-down, the adjustment in compensation will be determined in the same manner specified for extra work in conformance with Section 4-1.03D, "Extra Work," of the Standard Specifications.

If requested by the Contractor and approved by the Engineer, changes to the water pollution control practices listed in the approved cost break-down, including addition of new water pollution control practices, will be allowed. Changes shall be included in the approved amendment of the SWPPP. If the requested changes result in a net cost increase to the lump sum price for water pollution control, an adjustment in compensation will be made without change to the water pollution control item. The net cost increase to the water pollution control item will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

SWPPP IMPLEMENTATION

Unless otherwise specified, upon approval of the SWPPP, the Contractor shall be responsible throughout the duration of the project for installing, constructing, inspecting, maintaining, removing, and disposing of the water pollution control practices specified in the SWPPP and in the amendments. Unless otherwise directed by the Engineer, the Contractor's responsibility for SWPPP implementation shall continue throughout temporary suspensions of work ordered in conformance with the provisions in Section 8-1.05, "Temporary Suspension of Work," of the Standard Specifications. Requirements for installation, construction, inspection, maintenance, removal, and disposal of water pollution control practices shall conform to the requirements in the Manuals and these special provisions.

If the Contractor or the Engineer identifies a deficiency in the implementation of the approved SWPPP or amendments, the deficiency shall be corrected immediately unless requested by the Contractor and approved by the Engineer in writing, but shall be corrected prior to the onset of precipitation. If the Contractor fails to correct the identified deficiency by the date agreed or prior to the onset of precipitation, the project shall be in nonconformance with this section, "Water Pollution Control." Attention is directed to Section 5-1.01, "Authority of Engineer," of the Standard Specifications, and to "Retention of Funds" of this section for possible nonconformance penalties.

If the Contractor fails to conform to the provisions of this section, "Water Pollution Control," the Engineer may order the suspension of construction operations until the project complies with the requirements of this section.

Implementation of water pollution control practices may vary by season. The Construction Site BMPs Manual and these special provisions shall be followed for control practice selection of year-round, rainy season and non-rainy season water pollution control practices.

Year-Round Implementation Requirements

The Contractor shall have a year-round program for implementing, inspecting and maintaining water pollution control practices for wind erosion control, tracking control, non-storm water management, and waste management and materials pollution control.

The National Weather Service weather forecast shall be monitored and used by the Contractor on a daily basis. An alternative weather forecast proposed by the Contractor may be used if approved by the Engineer. If precipitation is predicted, the necessary water pollution control practices shall be deployed prior to the onset of the precipitation.

Disturbed soil areas shall be considered active whenever the soil disturbing activities have occurred, continue to occur or will occur during the ensuing 21 days. Non-active areas shall be protected as prescribed in the Construction Site BMPs Manual within 14 days of cessation of soil disturbing activities or prior to the onset of precipitation, whichever occurs first.

In order to provide effective erosion control, the Contractor may be directed by the Engineer to apply permanent erosion control in small or multiple units. The Contractor’s attention is directed to "Erosion Control (Type D)", and "Move-In/Move-Out (Erosion Control)" of these special provisions.

The Contractor shall implement, maintain and inspect the following temporary sediment control practices on a year-round basis. The listed practices shall remain in place until their use is no longer needed, as determined by the Engineer.

YEAR-ROUND SEDIMENT CONTROL PRACTICES	LOCATION USED
Temporary Silt Fence	At edges of streambeds and SF Bay tidal areas.
Street Sweeping and Vacuuming	All active construction zone.
Stabilized Construction Entrance/Exit	Primary construction zone access points.
Contaminated Soil Management	Areas of ADL soil transport.

Rainy Season Implementation Requirements

Soil stabilization and sediment control practices shall be provided throughout the rainy season, defined as between October 15 and April 15

An implementation schedule of required soil stabilization and sediment control practices for disturbed soil areas shall be completed no later than 20 days prior to the beginning of each rainy season. The implementation schedule shall identify the soil stabilization and sediment control practices and the dates when the implementation will be 25 percent, 50 percent and 100 percent complete, respectively. For construction activities beginning during the rainy season, the Contractor shall implement applicable soil stabilization and sediment control practices.

Throughout the defined rainy season, the active disturbed soil area of the project site shall be not more than 2 hectares. The Engineer may approve, on a case-by-case basis, expansions of the active disturbed soil area limit. Soil stabilization and sediment control materials shall be maintained on site sufficient to protect disturbed soil areas. A detailed plan for the mobilization of sufficient labor and equipment shall be maintained to deploy the water pollution control practices required to protect disturbed soil areas prior to the onset of precipitation.

Non-Rainy Season Implementation Requirements

The non-rainy season shall be defined as days outside the defined rainy season. The Contractor's attention is directed to the Construction Site BMPs Manual for soil stabilization and sediment control implementation requirements on disturbed soil areas during the non-rainy season. Disturbed soil areas within the project shall be protected in conformance with the requirements in the Construction Site BMPs Manual with an effective combination of soil stabilization and sediment control.

MAINTENANCE

To ensure the proper implementation and functioning of water pollution control practices, the Contractor shall regularly inspect and maintain the construction site for the water pollution control practices identified in the SWPPP. The construction site shall be inspected by the Contractor as follows:

A. Prior to a forecast storm.
B. After a precipitation event which causes site runoff.
C. At 24 hour intervals during extended precipitation events.
D. Routinely, a minimum of once every two weeks outside of the defined rainy season.
E. Routinely, a minimum of once every week during the defined rainy season.

The Contractor shall use the Storm Water Quality Construction Site Inspection Checklist provided in the Preparation Manual or an alternative inspection checklist provided by the Engineer. One copy of each site inspection record shall be submitted to the Engineer within 24 hours of completing the inspection.

REPORTING REQUIREMENTS

Report of Discharges, Notices or Orders

If the Contractor identifies discharges into surface waters or drainage systems in a manner causing, or potentially causing, a condition of pollution, or if the project receives a written notice or order from a regulatory agency, the Contractor shall immediately inform the Engineer. The Contractor shall submit a written report to the Engineer within 7 days of the discharge event, notice or order. The report shall include the following information:

A. The date, time, location, nature of the operation, and type of discharge, including the cause or nature of the notice or order.
B. The water pollution control practices deployed before the discharge event, or prior to receiving the notice or order.
C. The date of deployment and type of water pollution control practices deployed after the discharge event, or after receiving the notice or order, including additional measures installed or planned to reduce or prevent reoccurrence.
D. An implementation and maintenance schedule for affected water pollution control practices.

Report of First-Time Non-Storm Water Discharge

The Contractor shall notify the Engineer at least 3 days in advance of first-time non-storm water discharge events, excluding exempted discharges. The Contractor shall notify the Engineer of the operations causing non-storm water discharges and shall obtain field approval for first-time non-storm water discharges. Non-storm water discharges shall be monitored at first-time occurrences and routinely thereafter.

Annual Certifications

By June 15 of each year, the Contractor shall complete and submit an Annual Certification of Compliance, as contained in the Preparation Manual, to the Engineer.

SAMPLING AND ANALYTICAL REQUIREMENTS

The Contractor is required to implement specific sampling and analytical procedures to determine whether BMPs implemented on the construction site are:

A. preventing pollutants that are known or should be known by permittees to occur on construction sites that are not visually detectable in storm water discharges, to cause or contribute to exceedances of water quality objectives

Non-Visible Pollutants

The project has the potential to discharge non-visible pollutants in storm water from the construction site. The project SWPPP shall contain a Sampling and Analysis Plan (SAP) that describes the sampling and analysis strategy and schedule to be implemented on the project for monitoring non-visible pollutants in conformance with this section.

The SAP shall identify potential non-visible pollutants that are known or should be known to occur on the construction site associated with the following: (1) construction materials, wastes or operations; (2) known existing contamination due to historical site usage; or (3) application of soil amendments, including soil stabilization products, with the potential to alter pH or contribute toxic pollutants to storm water. Planned material and waste storage areas, locations of known existing contamination, and areas planned for application of soil amendments shall be shown on the SWPPP Water Pollution Control Drawings.

The SAP shall identify a sampling schedule for collecting a sample down gradient from the applicable non-visible pollutant source and a sufficiently large uncontaminated control sample during the first two hours of discharge from rain events during daylight hours which result in a sufficient discharge for sample collection. If run-on occurs onto the non-visible pollutant source, a run-on sample that is immediately down gradient of the run-on to the Department's right of way shall be collected. A minimum of 72 hours of dry weather shall occur between rain events to distinguish separate rain events.

The SAP shall state that water quality sampling will be triggered when any of the following conditions are observed during the required storm water inspections conducted before or during a rain event:

A. Materials or wastes containing potential non-visible pollutants are not stored under watertight conditions.
B. Materials or wastes containing potential non-visible pollutants are stored under watertight conditions, but (1) a breach, leakage, malfunction, or spill is observed; and (2) the leak or spill has not been cleaned up prior to the rain event; and (3) there is the potential for discharge of non-visible pollutants to surface waters or drainage system.
C. Construction activities, such as application of fertilizer, pesticide, herbicide, methyl methacrylate concrete sealant, or non-pigmented curing compound have occurred during a rain event or within 24 hours preceding a rain event, and there is the potential for discharge of pollutants to surface waters or drainage system.
D. Soil amendments, including soil stabilization products, with the potential to alter pH levels or contribute toxic pollutants to storm water runoff have been applied, and there is the potential for discharge of pollutants to surface waters or drainage system (unless independent test data are available that demonstrate acceptable concentration levels of non-visible pollutants in the soil amendment).
E. Storm water runoff from an area contaminated by historical usage of the site is observed to combine with storm water, and there is the potential for discharge of pollutants to surface waters or drainage system.

The SAP shall identify sampling locations for collecting down gradient and control samples, and the rationale for their selection. The control sampling location shall be selected where the sample does not come into contact with materials, wastes or areas associated with potential non-visible pollutants or disturbed soil areas. Sampling locations shall be shown on the SWPPP Water Pollution Control Drawings. Only trained personnel shall collect water quality samples and be identified in the SAP. Qualifications of designated sampling personnel shall describe training and experience, and shall be included in the SWPPP. The SAP shall state monitoring preparation, sample collection procedures, quality assurance/quality control,

sample labeling procedures, sample collection documentation, sample shipping and chain of custody procedures, sample numbering system, and reference the construction site health and safety plan.

The SAP shall identify the analytical method to be used for analyzing down gradient and control samples for potential non-visible pollutants on the project. For samples analyzed in the field by sampling personnel, collection, analysis, and equipment calibration shall be in conformance with the Manufacturer's specifications. For samples that will be analyzed by a laboratory, sampling, preservation, and analysis shall be performed by a State-certified laboratory in conformance with 40 CFR 136. The SAP shall identify the specific State-certified laboratory, sample containers, preservation requirements, holding times, and analysis method to be used. A list of State-certified laboratories that are approved by the Department is available at the following internet site: http://www.dhs.ca.gov/ps/ls/elap/html/lablist_county.htm.

Analytical Results and Evaluation

The Contractor shall submit a hard copy and electronic copy of water quality analytical results and quality assurance/quality control data to the Engineer within 5 days of sampling for field analyses and within 30 days for laboratory analyses. Analytical results shall be accompanied by an evaluation from the Contractor to determine if down gradient samples show elevated levels of the tested parameter relative to levels in the control sample. If down gradient or downstream samples, as applicable, show increased levels, the Contractor will assess the BMPs, site conditions, and surrounding influences to determine the probable cause for the increase. As determined by the assessment, the Contractor will repair or modify BMPs to address increases and amend the SWPPP as necessary. Electronic results (in one of the following file formats: .xls, .txt, .csv, .dbs, or .mdb) shall have at a minimum the following information: sample identification number, contract number, constituent, reported value, method reference, method detection limit, and reported detection limit. The Contractor shall document sample collection during rain events.

Water quality sampling documentation and analytical results shall be maintained with the SWPPP on the project site until a Notice of Completion has been submitted and approved.

If construction activities or knowledge of site conditions change, such that discharges or sampling locations change, the Contractor shall amend the SAP in conformance with this section, "Water Pollution Control."

PAYMENT

The contract lump sum price paid for prepare storm water pollution prevention plan shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals for doing all the work involved in developing, preparing, obtaining approval of, revising, and amending the SWPPP, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Attention is directed to Section 9-1.06, "Partial Payments," and Section 9-1.07, "Payment After Acceptance," of the Standard Specifications. Payments for prepare storm water pollution prevention plan will be made as follows:

A. After the SWPPP has been approved by the Engineer, 75 percent of the contract item price for prepare storm water pollution prevention plan will be included in the monthly partial payment estimate.
B. After acceptance of the contract in conformance with the provisions in Section 7-1.17, "Acceptance of Contract," of the Standard Specifications, payment for the remaining 25 percent of the contract item price for prepare storm water pollution prevention plan will be made in conformance with the provisions in Section 9-1.07.

The contract lump sum price paid for water pollution control shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in installing, constructing, removing, and disposing of water pollution control practices, including non-storm water management, and waste management and materials pollution water pollution control practices, except those for which there is a contract item of work as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Storm water sampling and analysis will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications. No payment will be made for the preparation, collection, analysis, and reporting of storm water samples required where appropriate BMPs are not implemented prior to a rain event, or if a failure of a BMP is not corrected prior to a rain event.

For items identified on the approved Water Pollution Control Cost Break-Down, the cost of maintaining the temporary water pollution control practices shall be divided equally by the State and the Contractor as follows:

Soil Stabilization

Temporary water pollution control practices except:
SS-1 Scheduling
SS-2 Preservation of Existing Vegetation

Sediment Control

Temporary water pollution control practices except:
SC-7 Street Sweeping and Vacuuming

Wind Erosion Control

No sharing of maintenance costs will be allowed.

Tracking Control

TC-1 Stabilized Construction Entrance/Exit.

Non-Storm Water Management

No sharing of maintenance costs will be allowed.

Waste Management & Materials Pollution Control

No sharing of maintenance costs will be allowed.

The division of cost will be made by determining the cost of maintaining water pollution control practices in conformance with the provisions in Section 9-1.03, "Force Account Payment," of the Standard Specifications and paying to the Contractor one-half of that cost. Cleanup, repair, removal, disposal, improper installation, and replacement of water pollution control practices damaged by the Contractor's negligence, shall not be considered as included in the cost for performing maintenance.

The provisions for sharing maintenance costs shall not relieve the Contractor from the responsibility for providing appropriate maintenance on items with no shared maintenance costs.

Full compensation for non-shared maintenance costs of water pollution control practices, as specified in this section, "Water Pollution Control," shall be considered as included in the contract lump sum price paid for water pollution control and no additional compensation will be allowed therefor.

Water pollution control practices for which there is a contract item of work, will be measured and paid for as that contract item of work.

10-1.03 NON-STORM WATER DISCHARGES

Non-storm water discharges shall conform to the requirements in Section 7-1.01G, “Water Pollution” of the Standard Specifications and these special provisions.

Conformance with the requirements of this section shall in no way relieve the Contractor from the Contractor's responsibilities, as provided in Section 7-1.11, "Preservation of Property," and Section 7-1.12, "Responsibility for Damage," of the Standard Specifications.

Suspended solids shall be removed during the dewatering operation for piles and cofferdams, as specified in these special provisions.

Suspended solids shall be removed to the extent that visible, floating products are not apparent within the discharge. Also, the discharge shall be of a purity such that turbidity and apparent color beyond present natural background levels are not apparent within the receiving water body. The turbidity, measured in Nephelometric Turbidity Units (NTU), of the discharge shall not be greater than a 10 percent increase of the background turbidity. The point of effluent discharge shall not cause bottom sediments, aquatic vegetation, or surface soils to become dislodged or disturbed.

The Contractor shall graphically depict the dewatering process within the Storm Water Pollution Prevention Plan (SWPPP), as specified in “Water Pollution Control” of these special provisions. The graphic shall show both a sectional and plan view that details the removal techniques for suspended solids. The graphic shall define the flow path and placement of pipes, hoses, pumps, and other equipment used to convey the discharge. In addition, the contractor shall provide a sketch that depicts the general position of the apparatus relative to the pile(s) or cofferdam(s) undergoing dewatering and the point of effluent discharge.

The Contractor shall describe the dewatering apparatus within the appropriate sections of the SWPPP. The description shall include, but not be limited to, an estimate of the discharge volume, flow rate, and frequency; location of discharge; and the inspection and monitoring procedures related to the discharge.

The Contractor shall conduct a daily inspection of the dewatering equipment, when in use, to ensure that all components are functional and routinely maintained to prevent leakage prior to removal of suspended solids. Any component of the apparatus that is found to be damaged or to affect the performance of the apparatus shall be either immediately repaired or replaced.

The Contractor shall monitor both the discharge and the receiving water body. The observations made during monitoring shall include the color, size of affected area, presence of suspended material, presence of water fowl or aquatic

wildlife, wind direction and velocity, tidal condition, atmospheric condition, time, and date. In addition, the Contractor shall supplement the observations with photographs. During monitoring events, the Contractor shall obtain NTU measurements for the discharge turbidity and the receiving water (background) turbidity. The Contractor shall conduct monitoring, at a minimum, one hour prior to discharge, during the first ten minutes of initiating discharge, every four hours during discharge, and upon cessation of discharge. The observations and turbidity measurements shall be recorded daily in a tabular format known as the monitoring report, Attachment C in "Field Guide to Construction Site Dewatering" includes a Dewatering Operations Monitoring Form. The monitoring report, including photographs, shall be provided weekly to the Engineer, or as directed by the Engineer.

Observations or measurements which indicate that the discharge is of a purity such that turbidity and apparent color are beyond the present natural background levels shall be immediately reported to the Engineer. The discharge activity shall immediately cease, so that corrective actions are undertaken to repair, modify, or replace the equipment. The commencement of discharge activities shall be allowed upon approval by the Engineer.

Stockpile Dewater

The Contractor shall prevent the flow of water, including ground water, surface runoff and tidal flow from entering any temporary stockpiles on land.

The Contractor shall depict and describe within an amendment to the Storm Water Pollution Prevention Plan (SWPPP), as specified in "Water Pollution Control" of these special provisions, the methods and measures that will be used to dewater the temporary stockpiles, to seal the sides and bottom of the temporary stockpiles, and to prevent the flow of water into the stockpiles. The time to be provided for the Engineer's review and approval of the amendment shall be 10 working days prior to beginning temporary stockpile operations. Operations producing water will not be permitted until the plan has been approved by the Engineer.

The Contractor is responsible for all work, records, reports, and costs involved in handling the water in accordance with the permits described elsewhere in this special provision. The Contractor shall supply all analytical data, dewatering volume records, and written requests for discharge to the Engineer for approval prior to discharging any water. The Engineer shall have up to 7 calendar days for review and approval of discharge. Water that does not meet discharge permit requirements shall not be discharged on the site or to the storm drainage or to the sanitary sewer systems. The Contractor is responsible for either treating such water to meet the permit requirements for discharge or hauling such water off site to an appropriately licensed liquid disposal facility. Penalties assessed against the State for permit non-compliance by the Contractor will be borne by the Contractor. Such penalties will be deducted from the monthly progress payment.

However, nothing in this section, "Non-Storm Water Discharge," will be construed as relieving the Contractor of full responsibility of complying with Section 7-1.16, "Contractor's Responsibility for the Work and Materials," of the Standard Specifications.

Permits

Non-storm water discharges from the construction operations, addressed within this special provision shall be handled in accordance with the requirements of the General Construction Activity Storm Water Permit No. CAS000002, Order No. 99-08-DWQ, and Caltrans Statewide Storm Water Permit No. CAS000003, Order No. 99-06-DWQ, issued by the State Water Resources Control Board. Coverage under General National Pollutant Discharge Elimination System (NPDES) permits for treated groundwater discharges (NPDES No. CAG912002 and CAG912003) to storm sewer system will be required from the San Francisco Bay Regional Water Quality Control Board. The Contractor may choose to discharge the treated groundwater to the Publicly Owned Treatment Works (POTW), or haul it to an appropriately licensed liquid disposal facility. These permits or approvals needed hereafter referred to as the "Permits" in this special provision regulate the storm water and the non-storm water discharges associated with construction activities. The Contractor shall be responsible for obtaining all the permits needed, and pay for all associated fees for the discharges.

Excavation Dewater

The Contractor shall provide a sealed excavation and prevent the flow of ground water, surface runoff, and tidal flow from entering any excavation including, but not limited to, footing excavations, and excavations for retaining walls, storm drainage systems, sanitary sewer systems and their appurtenances. Well points and continuous pumping of excavations for dewatering purposes are not allowed. The Contractor may dewater an initial volume of water equivalent to the structure excavation pay limits for a particular excavation. The maximum seepage rate of the sealed excavation, after initial dewatering is complete, shall not exceed twenty-two liters per square meter of the excavation area per eight-hour period. The excavation area shall be measured at the top of the excavation as seen in plan view. A meter that has been approved by the Engineer shall be used to measure all excavation discharges. Attention is directed to Section 10-1.42 of these special provisions for the structure excavation.

The Contractor shall submit to the Engineer, as provided in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications, a plan which details the methods and measures that will be used to seal the sides and bottom of

excavations, prevent the flow of water into excavations, control seepage within the specified maximum seepage rate, and remove suspended solids known ground water contaminants. The plan shall, at a minimum, contain a graphic for the dewatering operation showing both a sectional and plan view that details the removal techniques for suspended solids and known ground water contaminants. The graphic shall define the flow path and placement of pipes, hoses, pumps, and other equipment used to convey the discharge. In addition, the Contractor shall provide a drawing that depicts the general position of the dewatering measures relative to the excavations undergoing dewatering and the point of effluent discharge. The written descriptions of the dewatering operation shall include, but are not limited to, an estimate of the discharge volume, flow rate, and frequency; location of discharge; performance capabilities of treatment measures; and the inspection and monitoring procedures related to the discharge.

The plan shall be submitted, at least, 3 weeks prior to beginning excavation operations. The Contractor shall allow 10 days for the Engineer to review and approve the plan. If revisions are required, as determined by the Engineer, the Contractor shall revise and resubmit the plan within 5 days of receipt of the Engineer's comments and shall allow 5 days for the Engineer to review the revisions. Excavation operations shall not be allowed until the Engineer has approved the plan. The plan shall be incorporated into the Storm Water Pollution Prevention Plan as described in "Water Pollution Control" of these special provisions.

If the initial dewatering volume exceeds the volume of the structure excavation pay limits or the seepage rate exceeds the specified maximum rate, then the Contractor shall immediately stop all work within the excavation not related to the control of water and submit a plan of corrective measures. The Contractor may not resume operations in that excavation until the plan is approved by the Engineer.

Suspended solids shall be removed during the dewatering operation of any excavation, as specified in these special provisions.

Suspended solids shall be removed to the extent that visible, floating products are not apparent within the discharge. Also, the discharge shall be of a purity such that turbidity and color beyond present natural background levels are not apparent within the receiving water body. The turbidity, measured in Nephelometric Turbidity Units (NTU), of the discharge shall not be greater than a 10 percent increase of the background turbidity of the receiving water body. The point of effluent discharge shall not cause bottom sediments, aquatic vegetation, or surface soils to become dislodged or disturbed.

Petroleum hydrocarbons, volatile organic compounds (VOCs), and semi-volatile organic compounds (SVOCs) shall be removed during the dewatering operation in conformance with these special provisions.

The discharge into the receiving water body shall not contain total petroleum hydrocarbons beyond a maximum allowable concentration of 50 ug/L. The discharge into the receiving water body shall not contain VOCs or SVOCs beyond a maximum allowable concentration of 5 ug/L. Samples obtained from the discharge shall be analyzed in accordance with EPA methods 8015M, 8260, and 8270. The detection limits for the analyses shall be equal to or less than the allowable discharge concentration.

The Contractor shall conduct a daily inspection of the dewatering equipment, when in use, to ensure that all components are functional and routinely maintained to prevent leakage prior to removal of suspended solids, petroleum hydrocarbons, VOCs, or SVOCs. Should any component of the dewatering equipment be damaged or affect the performance of the equipment, the dewatering operation shall be discontinued and the component shall be repaired or replaced with substitute equipment.

Observations which indicate that the discharge is of a visible purity such that turbidity and apparent color are beyond the present natural background shall be immediately reported to the Engineer. The discharge activity shall cease so that corrective actions are undertaken to repair, modify or replace the equipment and improve removal of suspended solids. The commencement of discharge activities shall be upon approval by the Engineer.

All water removed from excavations and dewatering operations shall be handled as provided in 'Effluent Treatment System' elsewhere in this specification and in accordance with the permits described elsewhere in this section. Penalties assessed against the State for permit non-compliance by the Contractor shall be borne by the Contractor. Department will deduct those penalty amounts from any moneys due, or that may become due, the Contractor under the contract.

Effluent Treatment System

An effluent treatment system shall be provided to treat all groundwater discharged from excavations or dewatering operations as shown on the plans and in accordance with these special provisions. Effluent shall be considered as the water and any other material discharged from the pumping operations.

The Contractor shall use the effluent treatment system to treat all groundwater prior to discharging into the approved dedicated discharge site. Protection shall be provided at the outlet of treated effluent into the receiving water body to ensure that bottom sediments, aquatic vegetation, or surface soils do not become dislodged or disturbed.

Materials

Materials shall conform to the provisions in Section 6, "Control of Materials," Section 7-1.16, "Contractor's Responsibility for the Work and Materials," and Section 74-2, "Drainage Pump Equipment," of the Standard Specifications and these special provisions.

The Contractor shall provide a minimum of four (4) holding tanks to temporarily store ground water encountered during excavation. Holding tanks shall be transportable, totally enclosed, with a minimum holding capacity of 37,850 L per individual tank and capable of connecting multiple tanks in series. Holding tanks shall have an inlet and outlet capable of receiving and discharging minimum flows, at a rate of 318 L/min.

All tanks shall be of the same make and manufacturer and shall remain on the jobsite until dewatering operations are no longer necessary as determined by the Engineer. Upon completion of the discharge, the Contractor shall dispose of dried sediment from the holding tanks within the project, at a location designated by the Engineer. The disposed sediment shall be compacted to generally conform to the existing grade and terrain.

A granulated activated carbon (GAC) system shall be used to treat groundwater contaminated with petroleum hydrocarbons, especially petroleum hydrocarbons of the motor oil range. The GAC treatment system shall consist of at least two vessels having an inlet and outlet capable of receiving and discharging water at a flow rate of 318 L/min. The GAC treatment system shall be capable of treating total petroleum hydrocarbons at an inflow concentration of 10 mg/L, such that the outflow concentration is less than or equal to an allowable concentration of 50 µg/L. GAC treatment vessels shall be readily capable of removal and replacement or interchange when required. The GAC treatment system shall have appropriate fittings for pipe connections designed to accommodate the flow rate. The Contractor shall throughout the operation have one additional GAC vessel available for transport and use at the site within one hour after being directed by the Engineer.

Sampling ports shall be spigots attached to the piping system and capable of obtaining a representative sample of water at each location of the GAC treatment system, as shown on the plans. The GAC treatment system shall be capable of sustaining temporary fluctuations in water pressure due to monitoring activities.

Pumps shall be capable of being submerged in water and discharging water and other materials including, but not limited to small rocks, gravel, sand and sediments. Two submersible pumps will be required for this project and shall be capable, at all times, of discharging at a flow rate of 318 L/min. In addition, a third submersible pump shall be provided by the Contractor that is capable of discharging treated effluent from the temporary holding container to the dedicated discharge location.

Plastic piping may be approved for use as determined by the Engineer in writing. If plastic piping is used, it shall conform to the provisions in section 20-5.03E, "Pipe," of the Standard Specifications. The Contractor shall be responsible for providing all piping required to circulate the effluent through the treatment system and all piping required to convey the treated effluent from the temporary holding container to the point of release at the dedicated discharge location.

A temporary holding container shall be provided with a minimum holding capacity of 37,850 L. The holding container shall have an inlet and outlet capable of receiving and discharging minimum flows of 318 L/min. The holding container shall be open to the air and sealed on all sides and the bottom to prevent any leakage.

The Contractor shall be responsible for maintaining all of the equipment and materials outlined in this special provision to operational levels necessary to comply with provisions outlined in these special provisions and permits issued for this project. If the Contractor or the Engineer identifies a deficiency in the functioning of any equipment or material, the deficiency shall be immediately corrected by the Contractor.

Monitoring

Monitoring shall occur daily for the first 7 days of operating GAC treatment system, and then be reduced to a frequency of once every 7 days thereafter. Upon relocation replacement, interchange, or maintenance of the GAC vessels the Contractor shall conduct daily monitoring for the first 7 days of resuming treatment operation, and then reduce the monitoring frequency to once every 7 days thereafter. The Contractor shall collect water samples from each sampling port of the GAC treatment system as depicted in the plans. A total of three samples shall be obtained from each sampling port during each monitoring event The first of the three samples shall be analyzed for total suspended solids (TSS) in accordance with EPA method 160.1. The detection limit for the TSS analysis shall be at a maximum of 1 mg/L. The second sample shall be analyzed for total metals in accordance with EPA method 6010, and the third sample shall be analyzed for total petroleum hydrocarbons in accordance with EPA method 8015. The detection limits for total metals and total petroleum hydrocarbons shall be consistent with those used for the site investigation described in "Aerially Deposited Lead, General" elsewhere in these special provisions. Furthermore, the quality assurance and quality control measures employed by the laboratory and personnel conducting sampling shall be consistent with those used for the site investigation described in "Aerially Deposited Lead, General" elsewhere in these special provisions. Analytical results for all samples shall be available to the Engineer within 24 hours of delivering the samples to the laboratory. The Contractor shall ensure that the laboratory responsible for the analysis of the samples has been properly certified by the California Department of Health Services for conducting the analyses described under these special provisions.

Spill Contingency

The Contractor shall prepare and submit to the Engineer a contingency plan for the management of spills or leaks of any materials or wastes that may impact the water quality of Easton Creek, Sanchez Creek, Burlingame Recreation Lagoon, El Portal Channel, and Mills Creek.

The spill contingency plan shall be incorporated within the Storm Water Pollution Prevention Plan, as specified in "Water Pollution Control" of these special provisions.

The contingency plan shall include instructions and procedures for reporting spills, and a list of spill containment and collection materials and equipment to be maintained onsite. The contingency plan shall be reviewed and updated at least every 90 calendar days.

Liquids, Residues and Debris

Attention is directed to "Remove Pavement Markers," "Temporary Pavement Delineation," "Remove Traffic Stripes and Pavement Markings," "Remove Drainage Facilities," "Cold Plane Asphalt Concrete Pavement," "Cast in Drilled-Hole Concrete Piles," "Slurry," "Clean and Paint Structural Steel," "Falsework," "Expansion Joint Assemblies," "Bridge Deck Membrane Waterproofing," "Concrete Barrier," "Masonry Structures," "Piling," and of these special provisions.

The control and disposal of liquids, residues, and debris associated with "Remove Pavement Markers," "Temporary Pavement Delineation," "Remove Traffic Stripes and Pavement Markings," "Remove Drainage Facilities," "Cold Plane Asphalt Concrete Pavement," "Cast in Drilled-Hole Concrete Piles," "Slurry," "Clean and Paint Structural Steel," "Falsework," "Expansion Joint Assemblies," "Bridge Deck Membrane Waterproofing," "Concrete Barrier," "Masonry Structures," "Piling" shall be described within the SWPPP, as specified in "Water Pollution Control" of these special provisions. The SWPPP shall, at a minimum, depict and describe the procedural and structural methods of detaining, collecting, and disposing of all slurries, liquids, residues, and debris associated with the operations. Sufficient redundancy shall be incorporated into the procedural and structural methods such that the liquids, residues, and debris are not conveyed into or become present in drainage systems, San Francisco Bay, or other water bodies.

Measurement and Payment

The contract lump sum price paid for non-storm water discharges shall include full compensation for furnishing all labor, materials, tools, equipment, obtaining permits and incidentals, and for doing all the work involved in dewatering pile and structural excavations and stockpiles complete in place, including providing power to operate pumping equipment, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.04 TEMPORARY EROSION CONTROL BLANKET

Temporary erosion control blanket shall be furnished, installed, maintained, and later removed in ditches or swales, on embankment slopes, and excavation slopes at the locations shown on the approved Storm Water Pollution Prevention Plan in conformance with "Water Pollution Control" of these special provisions, and in conformance with details shown on the plans and these special provisions.

Temporary erosion control blanket shall be one of the water pollution control practices for soil stabilization. The Storm Water Pollution Prevention Plan shall include the use of temporary erosion control blanket.

MATERIALS

Materials for the temporary erosion control blanket shall conform to the provisions in Section 20-2, "Materials," of the Standard Specifications and these special provisions. Temporary erosion control blanket shall be a rolled erosion control product (RECP) and shall be classified either as temporary and degradable or long-term and nondegradable.

Temporary and Degradable

Temporary and degradable RECP shall be as follows:

A. Machine produced mats consisting of curled wood excelsior with 80 percent of the fiber 150 mm or longer. The excelsior blanket shall be of consistent thickness with wood fiber evenly distributed over the entire area of the blanket. The top surface of the blanket shall be covered with an extruded photodegradable plastic netting or lightweight nonsynthetic netting. The blanket shall be smolder resistant without the use of chemical additives, nontoxic, and noninjurious to plant and animal life. Excelsior blanket shall be furnished in rolled strips with a minimum mass per unit area of 0.40-kg/m^2.
B. Machine produced mats consisting of 70 percent straw and 30 percent coconut fiber with an extruded photodegradable plastic netting or lightweight nonsynthetic netting on the top and bottom surfaces of the blanket. The straw and coconut shall adhere to the netting using thread or glue strip. The straw and coconut blanket shall be

of consistent thickness, with straw and coconut fiber evenly distributed over the entire area of the blanket. Straw and coconut fiber blanket shall be furnished in rolled strips with a minimum mass per unit area of 0.27-kg/m^2.

C. Machine produced mats consisting of 100 percent coir consisting of coconut fiber with an extruded photodegradable plastic netting or lightweight nonsynthetic netting on the top and bottom surfaces of the blanket. The coconut fiber shall adhere to the netting using thread or glue strip. The coconut blanket shall be of consistent thickness, with coconut fiber evenly distributed over the entire area of the blanket. Coconut fiber blanket shall be furnished in rolled strips with a minimum mass per unit area of 0.27-kg/m^2.

D. Machine woven netting consisting of 100 percent spun coir consisting of coconut fiber with an average open area of 63 percent to 70 percent. Coconut coir netting shall be furnished in rolled strips with a minimum mass per unit area of 0.40-kg/m^2.

Long-Term and Nondegradable Erosion Control Blanket

The long-term and nondegradable erosion control blanket shall be a geotextile blanket conforming to the provisions in Section 88-1.04, "Rock Slope Protection Fabric," of the Standard Specifications for rock slope protection fabric (Type A).

Staples

An alternative attachment device such as geotextile pins or plastic pegs may be used instead of staples. The Contractor shall submit a sample of the alternative attachment device for the Engineer's approval prior to installation.

INSTALLATION

Temporary erosion control blanket shall be installed as follows:

A. Temporary erosion control blanket strips shall be placed loosely along the ditch or swale with the longitudinal edges and joints parallel to the centerline of the ditch or swale. Longitudinal joints of blankets shall be overlapped and stapled. The blanket on the upper portion of the slope shall overlap the blanket on the lower portion of the slope. Transverse joints of blankets shall be secured in intermediate joint trenches. Ends of the blankets shall be secured in place in key trenches.

B. Temporary erosion control blanket strips shall be placed loosely on the embankment or excavation slope with the longitudinal joints perpendicular to the slope contour lines. Longitudinal and transverse joints of blankets shall be overlapped and stapled. For transverse joints, the blanket on the upper portion of the slope shall overlap the blanket on the lower portion of the slope. For longitudinal joints, the blanket on the side of the prevailing wind shall overlap the blanket on the downwind side of the slope. Ends of the blankets shall be secured in place in key trenches.

C. Temporary erosion control blanket strips shall be secured in place with wire staples. Staples shall be driven perpendicular to the slopes.

When no longer required, as determined by the Engineer, temporary erosion control blanket fabric shall become the property of the Contractor and be removed and disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Ground disturbances, including holes and depressions caused by the installation and removal of the temporary erosion control blanket shall be backfilled and repaired in conformance with the provisions in Section 15-1.02, "Preservation of Property," of the Standard Specifications.

MAINTENANCE

Sediment in excess of 50 mm above the surface of the blanket, or when directed by the Engineer, shall be removed. Removed sediment shall be deposited within the project limits and shall not be subject to erosion by wind or water.

Temporary erosion control blanket shall be repaired or replaced on the same day the damage occurs. When washouts occur between joints or beneath the temporary erosion control blanket, the blanket shall be repaired. Temporary erosion control blanket shall be repaired or replaced when the area treated with temporary erosion control blanket becomes exposed or exhibits visible erosion. Temporary erosion control blanket damaged during the progress of work or resulting from the Contractor's vehicles, equipment, or operations shall be repaired or replaced at the expense of the Contractor.

MEASUREMENT AND PAYMENT

The quantity of temporary erosion control blanket to be paid for will be measured by the square meter of the actual area covered excluding overlaps.

The contract price paid per square meter for temporary erosion control blanket shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in installing temporary erosion control blanket, complete in place, including trench excavation and backfill, maintenance, and removal of temporary

erosion control blanket, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.05 TEMPORARY COVER

Temporary cover shall be furnished, installed, maintained, and later removed at the locations shown on the approved Storm Water Pollution Prevention Plan in conformance with "Water Pollution Control" of these special provisions, and in conformance with details shown on the plans and these special provisions.

Temporary cover shall be one of the water pollution control practices for soil stabilization. The Storm Water Pollution Prevention Plan shall include the use of temporary cover.

MATERIALS

Temporary Cover Fabric

Temporary cover fabric shall be either a geotextile (engineering fabric) or a geomembrane (plastic sheeting) conforming to the following requirements:

A. Geotextile shall be a woven, slit film fabric which is also known as woven tape. The fabric shall be nonbiodegradable, resistant to deterioration by sunlight, and inert to most soil chemicals. Edges of the film fabric shall be selvage or serge to prevent unraveling. The film fabric shall also conform to the following requirements:

Specification	Requirements
Grab tensile strength (25-mm grip), kilonewtons, min. ASTM Designation: D4632*	0.89
Elongation at break, percent min. ASTM Designation: D4632*	15
Toughness, kilonewtons, min. (percent elongation x grab tensile strength)	13.3
Permittivity, 1/sec, max. (liters per minute per square meter) ASTM Designation: D 4491	0.08 (244)
Ultraviolet light stability, percent tensile strength retained after 500 hours, min. ASTM Designation: D 4355 (xenon arc lamp method)	70

* or appropriate test method for specific polymer

B. The geomembrane shall consist of 0.25-mm thick, single-ply material in conformance with the requirements in ASTM Designation: D 5199.

Temporary cover fabric shall be manufactured from polyethylene, polypropylene, or comparable polymers. The polymer materials may be virgin, recycled, or a combination of virgin and recycled materials. The polymer materials shall not contain biodegradable filler materials that can degrade the physical or chemical characteristics of the finished fabric. The Engineer may order tests to confirm the absence of biodegradable filler materials in conformance with the requirements in ASTM Designation: E 204 (Fourier Transformed Infrared Spectroscopy-FTIR).

Restrainers

Restrainers for securing the temporary cover fabric on slopes and stockpiles shall consist of one or a combination of the following:

A. Gravel-filled bags used as restrainers shall be knotted, roped, and placed at a maximum of 2 m apart on the temporary cover fabric as shown on the plans. Gravel-filled bags shall be between 13 kg and 22 kg in mass, between 600 mm and 800 mm in length, and between 400 mm and 500 mm in width. Gravel bag fabric shall be nonwoven polypropylene geotextile with a minimum unit weight of 270 g/m^2. The fabric shall have a minimum grab tensile strength (25-mm grip) of 0.89-kN in conformance with the requirements in ASTM Designation: D 4632, and an ultraviolet (UV) stability of 70 percent tensile strength retained after 500 hours in conformance with the requirements in ASTM Designation: D 4355, xenon arc lamp method. Gravel shall consist of noncohesive material between 10 mm and 20 mm in diameter, free of clay balls, organic matter, and other deleterious material. The openings of gravel-filled bags shall be secured to prevent escape of gravel.
B. Restrainers consisting of a steel anchor with a wooden lath shall be fabricated and placed as shown on the plans. Wooden lath shall conform to the provisions in Section 20-2.12, "Lumber," of the Standard Specifications and shall

be fir or pine, 38 mm x 89 mm in size, and 2.4 m in length. The wooden lath shall be secured to the temporary cover with steel anchors placed 1.2 m apart along the lath.

The Contractor may use an alternative restrainer if approved by the Engineer in writing. The Contractor shall submit details for an alternative restrainer to the Engineer prior to installation. The alternative restrainer shall be installed and maintained in conformance with these special provisions.

INSTALLATION

Temporary cover shall be installed as follows:

A. Temporary cover fabric shall be placed and anchored as shown on the plans.
B. Abutting edges of the temporary cover fabric shall overlap a minimum of 600 mm. Nonabutting edges shall be embedded in the soil a minimum of 150 mm.
C. Restrainers shall be placed at the overlap area and along the toe of the slope. Restrainers outside the overlap areas shall be placed at a maximum spacing of 2.4 m.
D. Steel anchors shall be installed to allow the leg of the steel anchor to pierce through the temporary cover fabric into the slope with the crown section securing the wooden lath firmly against the slope.
E. Earthen berm, a linear sediment barrier, shall be constructed adjacent to the toe of the slope with a minimum height of 200 mm and a minimum width of 940 mm. The earthen berm shall be hand or mechanically compacted. Alternative linear sediment barrier may be used at the Contractor's expense if approved by the Engineer in writing.

If the Contractor removes the temporary cover in order to facilitate other work, the temporary cover shall be replaced and secured at the Contractor's expense.

When no longer required as determined by the Engineer, temporary cover shall become the property of the Contractor and be removed and disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Ground disturbances, including holes and depressions, caused by the installation and removal of the temporary cover shall be backfilled and repaired in conformance with the provisions in Section 15-1.02, "Preservation of Property," of the Standard Specifications.

MAINTENANCE

The Contractor shall maintain the temporary cover throughout the contract to prevent displacement or migration of the material on the slope or stockpiled.

Temporary cover shall be maintained to minimize exposure of the protected area. Restrainers shall be relocated and secured as needed to restrain the temporary cover fabric in place. Temporary cover that breaks free shall be immediately secured. Holes, tears, and voids in the temporary cover fabric shall be patched, repaired, or replaced. When patches or repairs are unacceptable as determined by the Engineer, the temporary cover shall be replaced.

Temporary cover shall be repaired or replaced on the same day when the damage occurs. Damage to the temporary cover resulting from the Contractor's vehicles, equipment, or operations shall be repaired at the Contractor’s expense.

MEASUREMENT AND PAYMENT

The quantity of temporary cover to be paid for will be measured by the square meter for the actual area covered.

The contract price paid per square meter for temporary cover shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in installing temporary cover, complete in place, including trench excavation and backfill, maintenance, and removal of temporary cover, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.06 TEMPORARY CONCRETE WASHOUT FACILITY

Temporary concrete washout facilities shall be constructed, maintained, and later removed at the locations shown on the approved Storm Water Pollution Prevention Plan in conformance with "Water Pollution Control" of these special provisions, and in conformance with details shown on the plans and these special provisions.

Temporary concrete washout facilities shall be one of the water pollution control practices for waste management and materials pollution control. The Storm Water Pollution Prevention Plan shall include the use of temporary concrete washout facilities.

MATERIALS

Plastic Liner

Plastic liners shall be single ply, new polyethylene sheeting, a minimum of 0.25-mm thick and shall be free of holes, punctures, tears or other defects that compromise the impermeability of the material. Plastic liners shall not have seams or overlapping joints.

Gravel-filled Bags

Gravel bag fabric shall be nonwoven polypropylene geotextile (or comparable polymer) and shall conform to the following requirements:

Specification	Requirements
Mass per unit area, grams per square meter, min. ASTM Designation: D 5261	270
Grab tensile strength (25-mm grip), kilonewtons, min. ASTM Designation: D4632*	0.89
Ultraviolet stability, percent tensile strength retained after 500 hours, ASTM Designation: D4355, xenon arc lamp method	70

* or appropriate test method for specific polymer

Gravel bags shall be between 600 mm and 800 mm in length, and between 400 mm and 500 mm in width.

Yarn used for binding gravel bags shall be as recommended by the manufacturer or bag supplier and shall be of a contrasting color.

Gravel shall be between 10 mm and 20 mm in diameter, and shall be clean and free from clay balls, organic matter, and other deleterious materials.

The opening of gravel-filled bags shall be secured to prevent gravel from escaping. Gravel-filled bags shall be between 13 kg and 22 kg in mass.

Straw Bales

Straw for straw bales shall conform to the provisions in Section 20-2.06, "Straw," of the Standard Specifications.

Straw bales shall be a minimum of 360 mm in width, 450 mm in height, 900 mm in length and shall have a minimum mass of 23 kg. The straw bale shall be composed entirely of vegetative matter, except for binding material.

Straw bales shall be bound by either wire, nylon or polypropylene string. Jute or cotton binding shall not be used. Baling wire shall be a minimum 1.57 mm in diameter. Nylon or polypropylene string shall be approximately 2 mm in diameter with 360 N of breaking strength.

Stakes

Stakes shall be wood or metal. Wood stakes shall be untreated fir, redwood, cedar, or pine and cut from sound timber. They shall be straight and free of loose or unsound knots or other defects which would render them unfit for the purpose intended. Wood stakes shall be a minimum 50 mm x 50 mm in size. Metal stakes may be used as an alternative, and shall be a minimum 13 mm in diameter. Stakes shall be a minimum 1.2 m in length. The tops of the metal stakes shall be bent at a 90-degree angle or capped with an orange or red plastic safety cap that fits snugly to the metal stake. The Contractor shall submit a sample of the metal stake and plastic cap, if used, for the Engineer's approval prior to installation.

Staples

Staples shall be as shown on the plans. An alternative attachment device such as geotextile pins or plastic pegs may be used instead of staples. The Contractor shall submit a sample of the alternative attachment device for the Engineer's approval prior to installation.

Signs

Wood posts for signs shall conform to the provisions in Section 56-2.02B, "Wood Posts," of the Standard Specifications. Lag screws shall conform to the provisions in Section 56-2.02D, "Sign Panel Fastening Hardware," of the Standard Specifications.

Plywood shall be freshly painted for each installation with not less than 2 applications of flat white paint. Sign letters shown on the plans shall be stenciled with commercial quality exterior black paint. Testing of paint will not be required.

INSTALLATION

Temporary concrete washout facilities shall be as follows:

A. Temporary concrete washout facilities shall be installed prior to beginning placement of concrete and located a minimum of 15 m from storm drain inlets, open drainage facilities, and water courses unless determined infeasible by the Engineer. Temporary concrete washout facilities shall be located away from construction traffic or access areas at a location determined by the Contractor and approved by the Engineer.
B. A sign shall be installed adjacent to each washout facility at a location determined by the Contractor and approved by the Engineer. Signs shall be installed in conformance with the provisions in Section 56-2.03, "Construction," and Section 56-2.04, "Sign Panel Installation," of the Standard Specifications.
C. The length and width of a temporary concrete washout facility may be increased from the minimum dimensions shown on the plans, at the Contractor's expense and upon approval of the Engineer.
D. Temporary concrete washout facilities shall be constructed in sufficient quantity and size to contain liquid and concrete waste generated by washout operations for concrete wastes. These facilities shall be constructed to contain liquid and concrete waste without seepage, spills, or overflow.
E. Berms for below grade temporary concrete washout facilities shall be constructed from compacted native material. Gravel may be used in conjunction with compacted native material.
F. A plastic liner shall be installed in below grade temporary concrete washout facilities.

Details for an alternative temporary concrete washout facility shall be submitted to the Engineer for approval at least 7 days prior to installation.

When temporary concrete washout facilities are no longer required for the work, as determined by the Engineer, the hardened concrete and liquid residue shall be removed and disposed of in conformance with the provisions in Section 15-3.02, "Removal Methods," of the Standard Specifications. Temporary concrete washout facilities shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Ground disturbance, including holes and depressions, caused by the installation and removal of the temporary concrete washout facilities shall be backfilled and repaired in conformance with the provisions in Section 15-1.02, "Preservation of Property," of the Standard Specifications.

MAINTENANCE

Temporary concrete washout facilities shall be maintained to provide adequate holding capacity with a minimum freeboard of 300 mm. Maintaining temporary concrete washout facilities shall include removing and disposing of hardened concrete and returning the facilities to a functional condition. Hardened concrete materials shall be removed and disposed of in conformance with the provisions in Section 15-3.02, "Removal Methods," of the Standard Specifications. Holes, rips, and voids in the plastic liner shall be patched and repaired by taping or the plastic liner shall be replaced. The plastic liner shall be replaced when patches or repairs compromise the impermeability of the material as determined by the Engineer.

Gravel bags shall be replaced when the bag material is ruptured or when the yarn has failed, allowing the bag contents to spill out.

Temporary concrete washout facilities shall be repaired or replaced on the same day the damage occurs. Damage to temporary concrete washout facilities resulting from the Contractor's vehicles, equipment, or operations shall be repaired at the Contractor’s expense.

MEASUREMENT AND PAYMENT

Quantities of temporary concrete washout facilities will be measured as units determined from actual count in place.

The contract unit price paid for temporary concrete washout facility shall include full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in constructing a temporary concrete washout facility, complete in place, including excavation and backfill, maintenance, and removal, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.07 TEMPORARY CHECK DAM

Temporary check dams shall be constructed and maintained at the locations shown on the approved Storm Water Pollution Prevention Plan in conformance with "Water Pollution Control" of these special provisions, and in conformance with details shown on the plans and these special provisions.

Temporary check dams shall be one of the water pollution control practices for sediment control. The Storm Water Pollution Prevention Plan shall include the use of temporary check dams.

At the option of the Contractor, temporary check dams shall be Type 1 (fiber roll) or Type 2 (gravel bag).

MATERIALS

Fiber Roll

Fiber rolls shall be one of the following:

A. Constructed with a premanufactured blanket consisting of one material or a combination of materials consisting of wood excelsior, rice or wheat straw, or coconut fibers. The blanket shall be between 2.0 m and 2.4 m in width and between 20 m and 29 m in length. Wood excelsior shall be individual fibers, of which 80 percent shall be 150 mm or longer in length. The blanket shall have a photodegradable plastic netting or biodegradable jute, sisal, or coir fiber netting on at least one side. The blanket shall be rolled along the width and secured with jute twine spaced 2 m apart along the full length of the roll and placed 150 mm from the ends of each roll. The finished roll shall be between 200 mm and 250 mm in diameter, between 3 m and 6 m in length and shall weigh at least 0.81-kg/m. More than one blanket may be required to achieve the finished roll diameter. When more than one blanket is required, blankets shall be jointed longitudinally with an overlap of 150 mm along the length of the blanket.

B. A premanufactured roll of rice or wheat straw, wood excelsior, or coconut fiber encapsulated within a photodegradable plastic or biodegradable jute, sisal, or coir fiber netting. Rolls shall be between 200 mm and 250 mm in diameter, between 3 m and 6 m in length and shall weigh at least 1.6 kg/m. The netting shall have a minimum durability of one year after installation. The netting shall be secured tightly at each end of the rolls.

Stakes

Wood stakes shall be a minimum of 19 mm x 38 mm x 450 mm. Wood stakes shall be untreated fir, redwood, cedar, or pine and cut from sound timber. They shall be straight and free of loose or unsound knots or other defects which would render them unfit for the purpose intended. Metal stakes may be used as an alternative. The Contractor shall submit a sample of the metal stake for the Engineer's approval prior to installation. The tops of the metal stakes shall be bent at a 90-degree angle.

Rope

Rope shall be biodegradable, such as sisal or manila, with a minimum diameter of 6.35 mm.

Gravel-filled Bag

Gravel bag fabric shall be nonwoven polypropylene geotextile (or comparable polymer) and shall conform to the following requirements:

Specification	Requirements
Mass per unit area, grams per square meter, min. ASTM Designation: D 5261	270
Grab tensile strength (25-mm grip), kilonewtons, min. ASTM Designation: D4632*	0.89
Ultraviolet stability, percent tensile strength retained after 500 hours, ASTM Designation: D4355, xenon arc lamp method	70

* or appropriate test method for specific polymer

Gravel bags shall be between 600 mm and 800 mm in length, and between 400 mm and 500 mm in width.

Yarn used in construction of the gravel bags shall be as recommended by the manufacturer or bag supplier and shall be of a contrasting color.

Gravel shall be between 10 mm and 20 mm in diameter, and shall be clean and free from clay balls, organic matter, and other deleterious materials. The opening of gravel-filled bags shall be secured to prevent gravel from escaping. Gravel-filled bags shall be between 13 kg and 22 kg in mass.

INSTALLATION

Temporary check dams shall be installed as follows:

A. Temporary check dam (Type 1): Rope and notched stakes shall be used to restrain the fiber rolls against the surface of the unlined ditch or swale. Stakes shall be driven into the slope until the notch is even with the top of the fiber roll. Rope shall be knotted at each stake and laced between stakes. After installation of the rope, stakes shall be driven into the slope so that the rope will hold the fiber roll tightly to the slope. Furrows will not be required. If metal stakes are used, the rope may be laced and knotted on the bend at the top of the metal stakes.

B. Temporary check dam (Type 2): A single layer of gravel bags shall be placed in lined or unlined ditches with ends abutted tightly and not overlapped.
C. The bedding area for the temporary check dam shall be cleared of obstructions including, rocks, clods, and debris greater than 25 mm in diameter prior to installation.
D. The temporary check dam shall be installed across and approximately perpendicular to the centerline of a ditch or drainage line.
E. The temporary check dam shall be installed with sufficient spillway depth to prevent flanking of concentrated flow around the ends of the check dam.
F. The temporary check dam shall be installed in an unlined ditch or swale prior to the application of other temporary erosion control or soil stabilization material in the same unlined ditch or swale.
G. The temporary check dam shall be installed upon completion of temporary erosion control blanket in earthen ditches or swales.

Details for an alternative temporary check dam shall be submitted to the Engineer for approval at least 7 days prior to installation.

Unless the temporary check dam is determined by the Engineer to no longer be required, it shall remain in place. If the temporary check dam is no longer required, as determined by the Engineer, it shall become the property of the Contractor and be removed and disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Ground disturbances including holes and depressions caused by the installation and removal of the temporary check dam shall be backfilled and repaired in conformance with the provisions in Section 15-1.02, "Preservation of Property," of the Standard Specifications.

MAINTENANCE

Temporary check dams shall be maintained to provide sediment holding capacity and to reduce runoff velocities. Split, torn, or unraveling rolls shall be repaired or replaced. Broken or split stakes shall be replaced. Sagging or slumping fiber rolls shall be repaired with additional stakes or replaced. Gravel bags shall be replaced when the bag material is ruptured or when the yarn has failed, allowing the bag contents to spill out. Locations where rills and other evidence of concentrated runoff have occurred beneath the check dams shall be corrected.

When sediment exceeds 1/3 of the height of the check dam above ground, or when directed by the Engineer, sediment shall be removed. The removed sediment shall be deposited within the project limits so that the sediment is not subject to erosion by wind or by water.

Temporary check dams shall be repaired or replaced the same day damage occurs. Washouts or scour beneath the temporary check dam shall be repaired. Temporary check dams damaged during the progress of work or resulting from the Contractor's vehicles, equipment, or operations shall be repaired or replaced at the Contractor's expense.

MEASUREMENT AND PAYMENT

Quantities of temporary check dams to be paid for will be determined by the meter measured along the centerline of the installed check dam.

The contract price paid per meter for temporary check dam shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in installing temporary check dams, complete in place, including maintenance, and removal if required, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.08 TEMPORARY FIBER ROLL

Temporary fiber roll shall be furnished, installed, maintained, and later removed at the locations shown on the approved Storm Water Pollution Prevention Plan in conformance with "Water Pollution Control" of these special provisions, and in conformance with details shown on the plans and these special provisions.

Temporary fiber roll shall be installed on excavation and embankment slopes and other disturbed soil areas, active or nonactive.

Temporary fiber roll shall be one of the water pollution control practices for sediment control. The Storm Water Pollution Prevention Plan shall include the use of temporary fiber roll.

Temporary fiber roll shall be Type 1.

MATERIALS

Fiber Roll

Fiber roll shall be either:

A. Constructed with a premanufactured blanket consisting of either wood excelsior, rice or wheat straw, or coconut fibers or a combination of these materials. The blanket shall be between 2.0 m and 2.4 m in width and between 20 m and 29 m in length. Wood excelsior shall be individual fibers, of which 80 percent shall be 150 mm or longer in length. The blanket shall have a photodegradable plastic netting or biodegradable jute, sisal, or coir fiber netting on at least one side. The blanket shall be rolled along the width and secured with jute twine spaced 2 m apart along the full length of the roll and placed 150 mm from the ends of each roll. The finished roll shall be between 200 mm and 250 mm in diameter, a minimum of 6 m in length, and shall weigh a minimum 0.81-kg/m. More than one blanket may be required to achieve the finished roll diameter. When more than one blanket is required, blankets shall be jointed longitudinally with an overlap of 150 mm along the length of the blanket.
B. A premanufactured roll of rice or wheat straw, wood excelsior, or coconut fiber encapsulated within a photodegradable plastic or biodegradable jute, sisal, or coir fiber netting. The netting shall have a minimum durability of one year after installation. The netting shall be secured tightly at each end of the roll. Rolls shall be between 200 mm and 300 mm in diameter. Rolls between 200 mm and 250 mm in diameter shall have a minimum weight of 1.6 kg/m and a minimum length of 6 m. Rolls between 250 mm and 300 mm in diameter shall have a minimum weight of 4.5 kg/m and a minimum length of 3 m.

Stakes

Wood stakes shall be a minimum of 19 mm x 19 mm x 450 mm in size for Type 1 installation, or a minimum of 19 mm x 38 mm x 450 mm in size for Type 2 installation. Wood stakes shall be untreated fir, redwood, cedar, or pine and cut from sound timber. They shall be straight and free of loose or unsound knots and other defects which would render them unfit for the purpose intended. Metal stakes shall not be used.

Rope

Rope shall be biodegradable, such as sisal or manila, with a minimum diameter of 6.35 mm.

INSTALLATION

Temporary fiber roll shall be installed as follows:

A. Temporary fiber roll (Type 1): Furrows shall be constructed to a depth between 50 mm and 100 mm, and to a sufficient width to hold the fiber roll. Stakes shall be installed 600 mm apart along the length of the fiber rolls and stopped at 300 mm from each end of the rolls. Stakes shall be driven to a maximum of 50 mm above, or flush with the top of the roll.
B. Temporary fiber rolls shall be placed 3 m apart along the slope for slope inclination (vertical:horizontal) of 1:2 and steeper, 4.5 m apart along the slope for slope inclination between 1:2 and 1:4, 6.0 m apart along the slope for slope inclination between 1:4 and 1:10, and a maximum of 15 m apart along the slope for slope inclination of 1:10 and flatter.
C. The bedding area for the fiber roll shall be cleared of obstructions including rocks, clods, and debris greater than 25 mm in diameter before installation.
D. Temporary fiber rolls shall be installed approximately parallel to the slope contour.
E. Temporary fiber rolls shall be installed before the application of other temporary erosion control or soil stabilization materials in the same area.

When no longer required, as determined by the Engineer, temporary fiber rolls shall be removed and disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications. Temporary fiber rolls may be abandoned in place when approved in writing by the Engineer.

Ground disturbances including holes and depressions caused by the installation and removal of the temporary fiber roll shall be backfilled and repaired in conformance with the provisions in Section 15-1.02, "Preservation of Property," of the Standard Specifications.

MAINTENANCE

Temporary fiber rolls shall be maintained to disperse concentrated water runoff and to reduce runoff velocities. Split, torn, or unraveling rolls shall be repaired or replaced. Broken or split stakes shall be replaced. Sagging or slumping fiber

rolls shall be repaired with additional stakes or replaced. Locations where rills and other evidence of concentrated runoff have occurred beneath the rolls shall be corrected. Temporary fiber rolls shall be repaired or replaced within 24 hours of identifying the deficiency.

MEASUREMENT AND PAYMENT

Quantities of temporary fiber rolls to be paid for will be determined by the meter measured along the centerline of the installed roll. Where temporary fiber rolls are joined and overlapped, the overlap will be measured as a single installed roll.

The contract price paid per meter for temporary fiber roll shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in installing temporary fiber rolls, complete in place, including furrow excavation and backfill, maintenance, and removal, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Damage to temporary fiber rolls resulting from the Contractor's vehicles, equipment, or operations shall be repaired at the Contractor's expense.

The cost of maintaining temporary fiber rolls will be borne equally by the State and the Contractor. The division of cost will be made by determining the cost of maintaining temporary fiber rolls in conformance with the provisions in Section 9-1.03, "Force Account Payment," of the Standard Specifications and paying half of that cost to the Contractor.

Cleanup, repair, removal, disposal, or replacement due to improper installation or the Contractor's negligence will not be considered as included in the cost for performing maintenance.

10-1.09 TEMPORARY SILT FENCE

Temporary silt fence shall be furnished, installed, maintained, and later removed at the locations shown on the approved Storm Water Pollution Prevention Plan in conformance with "Water Pollution Control" of these special provisions, and in conformance with details shown on the plans and these special provisions.

Temporary silt fence shall be one of the water pollution control practices for sediment control. The Storm Water Pollution Prevention Plan shall include the use of temporary silt fence.

MATERIALS

At the Contractor's option, temporary silt fence shall be prefabricated or constructed with silt fence fabric, posts, and fasteners.

Silt Fence Fabric

Silt fence fabric shall be geotextile manufactured from woven polypropylene or polymer material. Silt fence fabric may be virgin, recycled, or a combination of virgin and recycled polymer materials. No virgin or recycled polymer materials shall contain biodegradable filler materials that can degrade the physical or chemical characteristics of the finished fabric. The Engineer may order tests to confirm the absence of biodegradable filler materials in conformance to the requirements in ASTM Designation: E 204 (Fourier Transformed Infrared Spectroscopy-FTIR).

Silt fence fabric shall conform to the following requirements:

Specification	Requirements
Width, mm, min.	900
Grab tensile strength (25-mm grip), kilonewtons, min. in each direction ASTM Designation: D 4632*	0.55
Elongation, percent minimum in each direction ASTM Designation: D 4632*	15
Permittivity, 1/sec., min. ASTM Designation: D 4491	0.05
Flow rate, liters per minute per square meter, min. ASTM Designation: D 4491	400
Ultraviolet stability, percent tensile strength retained after 500 hours, min. ASTM Designation: D 4355 (xenon-arc lamp and water spray weathering method)	70

* or appropriate test method for specific polymer

Posts

Posts for temporary silt fence shall be one of the following:

A. Untreated fir or pine, a minimum of 34 mm x 40 mm in size, and 1.2 m in length. One end of the post shall be pointed.

B. Steel and have a "U," "T," "L," or other cross sectional shape that can resist failure from lateral loads. The steel posts shall have a minimum mass per length of 1.1 kg/m and a minimum length of 1.2 m. One end of the steel posts shall be pointed and the other end shall be capped with an orange or red plastic safety cap which fits snugly to the steel post. The Contractor shall submit to the Engineer for approval a sample of the capped steel post prior to installation.

Fasteners

Fasteners for attaching silt fence fabric to posts shall be as follows:

A. When prefabricated silt fence is used, posts shall be inserted into sewn pockets.
B. Silt fence fabric shall be attached to wooden posts with nails or staples as shown on the plans or as recommended by the manufacturer or supplier. Tie wire or locking plastic fasteners shall be used to fasten the silt fence fabric to steel posts. Maximum spacing of fasteners shall be 200 mm along the length of the steel post.

INSTALLATION

Temporary silt fence shall be installed parallel with the slope contour in reaches not to exceed 150 m. A reach is considered a continuous run of temporary silt fence from end to end or from an end to an opening, including joined panels. Each reach shall be constructed so that the elevation at the base of the fence does not deviate from the contour more than 1/3 of the fence height.

The silt fence fabric shall be installed on the side of the posts facing the slope. The silt fence fabric shall be anchored in a trench as shown on the plans. The trench shall be backfilled and mechanically or hand tamped to secure the silt fence fabric in the bottom of the trench.

Mechanically pushing 300 mm of the silt fence fabric vertically through the soil may be allowed if the Contractor can demonstrate to the Engineer that the silt fence fabric will not be damaged and will not slip out of the soil resulting in sediment passing under the silt fence fabric.

At the option of the Contractor, the maximum post spacing may increase to 3 m if the fence is reinforced by a wire or plastic material by prefabrication or by field installation. The field-assembled reinforced temporary silt fence shall be able to retain saturated sediment without collapsing.

Temporary silt fence shall be joined as shown on the plans. The tops of the posts shall be tied together by minimum of 2 wraps of tie wire of a minimum 1.5 mm diameter. The silt fence fabric shall be attached to the posts at the joint as specified in these special provisions.

When no longer required as determined by the Engineer, temporary silt fence shall be removed and disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications. Trimming the silt fence fabric and leaving it in place will not be allowed.

Ground disturbance, including holes and depressions, caused by the installation and removal of the temporary silt fence shall be backfilled and repaired in conformance with the provisions in Section 15-1.02, "Preservation of Property," of the Standard Specifications.

MAINTENANCE

Temporary silt fence shall be maintained to provide a sediment holding capacity of approximately 1/3 the height of the silt fence fabric above ground. When sediment exceeds this height or when directed by the Engineer, sediment shall be removed. The removed sediment shall be deposited within the project limits so that the sediment is not subject to erosion by wind or by water.

Temporary silt fence shall be repaired or replaced the same day the damage occurs. Damage to the temporary silt fence resulting from the Contractor's vehicles, equipment, or operations shall be repaired at the Contractor’s expense.

MEASUREMENT AND PAYMENT

Quantities of temporary silt fence to be paid for will be determined by the meter, measured parallel with the ground slope along the line of the installed temporary silt fence, deducting the widths of openings.

The contract price paid per meter for temporary silt fence shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in installing temporary silt fence, complete in place, including trench excavation and backfill, maintenance, and removal, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.10 TEMPORARY FENCE (TYPE CL-1.8)

Temporary fence (Type CL-1.8) shall be furnished, constructed, maintained, and later removed as shown on the plans, as specified in these special provisions and as directed by the Engineer.

Except as otherwise specified in this section, temporary fence (Type CL-1.8) shall conform to the plan details and the specifications for permanent fence of similar character as provided in Section 80, "Fences," of the Standard Specifications.

Used materials may be installed provided the used materials are good, sound and are suitable for the purpose intended, as determined by the Engineer.

Materials may be commercial quality provided the dimensions and sizes of the materials are equal to, or greater than, the dimensions and sizes shown on the plans or specified herein.

Posts shall be either metal or wood at the Contractor's option.

Galvanizing and painting of steel items will not be required.

Treating wood with a wood preservative will not be required.

Concrete footings for metal posts will not be required.

Temporary fence (Type CL-1.8) that is damaged during the progress of the work shall be repaired or replaced by the Contractor at the Contractor's expense.

When no longer required for the work, as determined by the Engineer, temporary fence (Type CL-1.8) shall be removed. Removed facilities shall become the property of the Contractor and shall be removed from the site of the work, except as otherwise provided in this section.

Removed temporary fence (Type CL-1.8) materials that are not damaged may be constructed in the permanent work provided the materials conform to the requirements specified for the permanent work and such materials are new when used for the temporary fence(Type CL-1.8).

Holes caused by the removal of temporary fence (Type CL-1.8) shall be backfilled in conformance with the provisions in the second paragraph of Section 15-1.02, "Preservation of Property," of the Standard Specifications.

The various types and kinds of temporary fence will be measured and paid for in the same manner specified for permanent fence of similar character as provided in Section 80, "Fences," of the Standard Specifications.

Full compensation for maintaining, removing, and disposing of temporary fence (Type CL-1.8) shall be considered as included in the contract prices paid per meter for the various types of temporary fence and no additional compensation will be allowed therefor.

10-1.11 TEMPORARY FENCE (TYPE ESA)

Temporary fence (Type ESA) shall be furnished, installed, maintained, and later removed in conformance with the details shown on the plans, as specified in these special provisions and as directed by the Engineer.

MATERIALS

Used materials may be installed provided the used materials conform to these special provisions. Materials for temporary fence (Type ESA) shall conform to the following:

High Visibility Fabric

High visibility fabric shall be machine produced, orange colored mesh manufactured from polypropylene or polyethylene. High visibility fabric may be made of recycled materials. Materials shall not contain biodegradable filler materials that can degrade the physical or chemical characteristics of the finished fabric. High visibility fabric shall be fully stabilized ultraviolet resistant, shall be a minimum of 1.22 m in width with a maximum mesh opening of 50 mm x 50 mm. High visibility fabric shall be furnished in one continuous width and shall not be spliced to conform to the specified width dimension.

Posts

Posts for temporary fence (Type ESA) shall be of one of the following:

A. Wood posts shall be fir or pine, shall have a minimum cross section of 50 mm x 50 mm, and a minimum length of 1.6 m. The end of the post to be embedded in the soil shall be pointed. Wood posts shall not be treated with wood preservative.
B. Steel posts shall have a "U", "T", "L" or other cross sectional shape that resists failure by lateral loads. Steel posts shall have a minimum mass per length of 1.1 kg/m and a minimum length of 1.6 m. One end of the steel post shall be pointed and the other end shall have a high visibility colored top.

Fasteners

Fasteners for attaching high visibility fabric to the posts shall be as follows:

A. The high visibility fabric shall be attached to wooden posts with commercial quality nails or staples, or as recommended by the manufacturer or supplier.

B. Tie wire or locking plastic fasteners shall be used for attaching the high visibility fabric to steel posts. Maximum spacing of tie wire or fasteners shall be 600 mm along the length of the steel post.

INSTALLATION

Temporary fence (Type ESA) shall be installed as follows:

A. All fence construction activities shall be conducted from outside the ESA as shown on the plans or as staked.
B. Posts shall be embedded in the soil a minimum of 380 mm. Post spacing shall be 2.5 m maximum from center to center and shall at all times support the fence in a vertical position.
C. Temporary fence (Type ESA) shall be constructed prior to clearing and grubbing work, shall enclose the foliage canopy (drip line) of protected plants and trees to be saved and protected as shown on the plans, and shall not encroach upon visible roots of the plants.
D. Temporary fence (Type ESA) shall be installed adjacent to ESA areas between the ESA areas and construction activities.
E. Temporary fence (Type ESA) shall be located so that it is visible, as determined by the Engineer.

When Type ESA temporary fence is no longer required, as determined by the Engineer, the temporary fence shall become the property of the Contractor and shall be removed and disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications, except when reused as provided in this section.

Holes caused by the removal of temporary fence (Type ESA) shall be backfilled in conformance with the provisions in Section 15-1.02, "Preservation of Property," of the Standard Specifications.

MAINTENANCE

Temporary fence (Type ESA) that is damaged during the progress of the work shall be repaired or replaced by the Contractor the same day the damage occurs.

MEASUREMENT AND PAYMENT

Temporary fence (Type ESA) shall be measured and paid for in the same manner specified for permanent fence as provided in Section 80, "Fences," of the Standard Specifications.

Full compensation for maintaining, removing, and disposing of temporary fence (Type ESA) shall be considered as included in the contract price paid per meter for temporary fence (Type ESA) and no additional compensation will be allowed therefor.

10-1.12 TEMPORARY CONSTRUCTION ENTRANCE

Temporary construction entrances shall be constructed, maintained, and later removed at the locations shown on the approved Storm Water Pollution Prevention Plan in conformance with "Water Pollution Control" of these special provisions, and in conformance with details shown on the plans and these special provisions.

Temporary construction entrances shall be one of the water pollution control practices for tracking control. The Storm Water Pollution Prevention Plan shall include the use of temporary construction entrances.

At the option of the Contractor, temporary construction entrances shall be Type 1 or Type 2.

MATERIALS

Temporary Entrance Fabric

Temporary entrance fabric shall be manufactured from polyester, nylon, or polypropylene material, or any combination thereof. Temporary entrance fabric shall be a nonwoven, needle-punched fabric, free of needles which may have broken off during the manufacturing process. Temporary entrance fabric shall be permeable and shall not act as a wicking agent.

Temporary entrance fabric shall be manufactured from virgin, recycled, or a combination of virgin and recycled polymer materials. No virgin or recycled materials shall contain biodegradable filler materials that can degrade the physical or chemical characteristics of the finished fabric. The Engineer may order tests to confirm the absence of biodegradable filler materials in conformance to the requirements in ASTM Designation: E 204 (Fourier Transformed Infrared Spectroscopy-FTIR).

Temporary entrance fabric shall conform to the following requirements:

Specification	Requirements
Mass per unit area, grams per square meter, min. ASTM Designation: D 5261	235
Grab tensile strength (25-mm grip), kilonewtons, min. ASTM Designation: D4632*	0.89
Elongation at break, percent min. ASTM Designation: D4632*	50
Toughness, kilonewtons, min. (percent elongation x grab tensile strength)	53

* or appropriate test method for specific polymer

Rocks

Rocks shall conform to the material quality requirements in Section 72-2.02, "Materials," of the Standard Specifications for shape and for apparent specific gravity, absorption, and durability index. Rocks used for the temporary entrance shall conform to the following sizes:

Square Screen Size (inch)	Percentage Passing	Percentage Retained
150	100	0
75	0	100

Corrugated Steel Panels

Corrugated steel panels shall be prefabricated and shall be pressed or shop welded, with a slot or hooked section to facilitate coupling at the ends of the panels.

INSTALLATION

Temporary construction entrances shall be installed as follows:

A. Prior to placing the temporary entrance fabric, the areas shall be cleared of all trash and debris. Vegetation shall be removed to the ground level. Trash, debris, and removed vegetation shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.
B. A sump shall be constructed within 6 m of each temporary construction entrance as shown on the plans.
C. Before placing the temporary entrance fabric, the ground shall be graded to a uniform plane. The relative compaction of the top 0.5-m shall be not less than 90 percent. The ground surface shall be free of sharp objects that may damage the temporary entrance fabric, and shall be graded to drain to the sump as shown on the plans.
D. Temporary entrance fabric shall be positioned longitudinally along the alignment of the entrance, as directed by the Engineer.
E. The adjacent ends of the fabric shall be overlapped a minimum length of 300 mm.
F. Rocks to be placed directly over the fabric shall be spread in the direction of traffic, longitudinally and along the alignment of the temporary construction entrance.
G. During spreading of the rocks, vehicles or equipment shall not be driven directly on the fabric. A layer of rocks a minimum 150 mm thick shall be placed between the fabric and the spreading equipment to prevent damage to the fabric.
H. For Type 2 temporary construction entrances, a minimum of 6 coupled panel sections shall be installed for each temporary construction entrance. Prior to installing the panels, the ground surface shall be cleared of all debris to ensure uniform contact with the ground surface.

Fabric damaged during rock placement shall be repaired by placing a new piece of fabric over the damaged area. The piece of fabric shall be large enough to cover the damaged area and provide a minimum 450-mm overlap on all edges.

Details for a proposed alternative temporary construction entrance or alternative sump shall be submitted to the Engineer for approval at least 7 days prior to installation. The Contractor may eliminate the sump if approved in writing by the Engineer.

If buildup of soil and sediment deter the function of the temporary construction entrance, the Contractor shall immediately remove and dispose of the soil and sediment, and install additional corrugated steel panels and spread additional rocks to increase the capacity of the temporary construction entrance at the Contractor's expense.

When no longer required as determined by the Engineer, temporary construction entrances shall be removed and disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Ground disturbance, including holes and depressions, caused by the installation and removal of the temporary construction entrance, including the sumps, shall be backfilled and repaired in conformance with the provisions in Section 15-1.02, "Preservation of Property," of the Standard Specifications.

While the temporary construction entrance is in use, pavement shall be cleaned and sediment removed at least once a day, and as often as necessary when directed by the Engineer. Soil and sediment or other extraneous material tracked onto existing pavement shall not be allowed to enter drainage facilities.

MAINTENANCE

The Contractor shall maintain temporary construction entrances throughout the contract or until removed. The Contractor shall prevent displacement or migration of the rock surfacing or corrugated steel panels. Significant depressions resulting from settlement or heavy equipment shall be repaired by the Contractor, as directed by the Engineer.

Temporary construction entrances shall be maintained to minimize tracking of soil and sediment onto existing public roads.

Temporary construction entrances shall be repaired or replaced on the same day the damage occurs. Damage to the temporary construction entrance resulting from the Contractor's vehicles, equipment, or operations shall be repaired at the Contractor's expense.

MEASUREMENT AND PAYMENT

Quantities of temporary construction entrances will be determined from actual count in place.

The contract unit price paid for temporary construction entrance shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing temporary construction entrance, complete in place, including excavation and backfill, maintenance, and removal, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

The cost of maintaining the temporary construction entrance will be borne equally by the State and the Contractor. The division of cost will be made be determining the cost of maintaining temporary construction entrance in conformance with the provisions in Section 9-1.03, "Force Account Payment," of the Standard Specifications and paying to the Contractor one-half of that cost.

Cleanup, repair, removal, disposal, or replacement due to improper installation or the Contractor's negligence will not be considered as included in the cost for performing maintenance.

10-1.13 TEMPORARY DRAINAGE INLET PROTECTION

Temporary drainage inlet protection shall be constructed, maintained, and removed at the locations shown on the approved Storm Water Pollution Prevention Plan in accordance with "Water Pollution Control" of these special provisions, and in accordance with the details shown on the plans and these special provisions.

Temporary drainage inlet protection shall be one of the water pollution control practices for sediment control. The Storm Water Pollution Prevention Plan shall include the use of temporary drainage inlet protection.

The Contractor shall select the appropriate drainage inlet protection in accordance with the details to meet the conditions around the drainage inlet. Throughout the duration of the contract, the Contractor shall provide protection to meet the changing conditions around the drainage inlet.

Temporary drainage inlet protection shall be Type 1, 2, 3A, 3B, 4A, 4B or 5.

MATERIALS

Erosion Control Blanket

The erosion control blanket shall be a rolled erosion control product (RECP) and shall be classified either as temporary and degradable or long-term and nondegradable, and shall conform to one of the following:

A. Temporary and degradable:

1. Machine produced mats consisting of curled wood excelsior with 80 percent of the fiber 150 mm or longer. The excelsior blanket shall be of consistent thickness with wood fiber evenly distributed over the entire area of the blanket. The top surface of the blanket shall be covered with an extruded photodegradable plastic netting or lightweight nonsynthetic netting. The blanket shall be smolder resistant without the use of chemical additives and shall be nontoxic and noninjurious to plant and animal life. The excelsior blanket shall be furnished in rolled strips with a minimum mass per unit area of 0.40-kg/m^2.

2. Machine produced mats consisting of 70 percent straw and 30 percent coconut fiber with an extruded photodegradable plastic netting or lightweight nonsynthetic netting on the top and bottom surfaces of the blanket. The straw and coconut shall adhere to the netting using thread or glue strip. The straw and coconut blanket shall be of consistent thickness, and straw and coconut fiber shall be evenly distributed over the entire area of the blanket. The straw and coconut fiber blanket shall be furnished in rolled strips with a minimum mass per unit area of 0.27-kg/m^2.
3. Machine produced mats that are 100 percent coir consisting of coconut fiber with an extruded photodegradable plastic netting or lightweight nonsynthetic netting on the top and bottom surfaces of the blanket. The coconut fiber shall adhere to the netting using thread or glue strip. The coconut blanket shall be of consistent thickness, with coconut fiber evenly distributed over the entire area of the blanket. The coconut fiber blanket shall be furnished in rolled strips with a minimum mass per unit area of 0.27-kg/m^2.
4. Machine woven netting that is 100 percent spun coir consisting of coconut fiber with an average open area of 63 percent to 70 percent. Coconut coir netting shall be furnished in rolled strips with a minimum mass per unit area of 0.40-kg/m^2.

B. Long-term and nondegradable:

1. Geotextile blanket shall conform to the provisions for rock slope protection fabric (Type A) in Section 88-1.04, "Rock Slope Protection Fabric," of the Standard Specifications.

Staples

Staples shall be as shown on the plans. An alternative attachment device such as geotextile pins or plastic pegs may be used instead of staples. The Contractor shall submit a sample of the alternative attachment device for the Engineer's approval prior to installation.

Rocks

Rocks shall conform to the requirements in Section 72-2.02, "Materials," of the Standard Specifications except that grading shall conform to the following sizes:

Square Screen Size (mm)	Percentage Passing	Percentage Retained
150	100	0
75	0	100

Fiber Roll

A fiber roll shall be one of the following:

A. Constructed with a premanufactured blanket made of one material or a combination of materials consisting of wood excelsior, rice or wheat straw, or coconut fibers. The blanket shall be between 2.0 m and 2.4 m in width and between 20 m and 29 m in length. Wood excelsior shall be individual fibers, of which 80 percent shall be 150 mm or longer in length. The blanket shall have a photodegradable plastic netting or biodegradable jute, sisal, or coir fiber netting on at least one side. The blanket shall be rolled along the width and secured with jute twine spaced 2 m apart along the full length of the roll and placed 150 mm from the ends of each roll. The finished roll shall be between 200 mm and 250 mm in diameter, between 3 m and 6 m in length, and shall weigh at least 0.81-kg/m. More than one blanket may be required to achieve the finished roll diameter. When more than one blanket is required, blankets shall be jointed longitudinally with an overlap of 150 mm along the length of the blanket.
B. A premanufactured roll of rice or wheat straw, wood excelsior, or coconut fiber encapsulated within a photodegradable plastic or biodegradable jute, sisal, or coir fiber netting. The rolls shall be between 200 mm and 250 mm in diameter, between 3 m and 6 m in length, and shall weigh at least 1.6 kg/m. The netting shall have a minimum durability of one year after installation. The netting shall be secured tightly at each end of the roll.

Wood Stakes

Wood stakes shall be a minimum of 19 mm x 19 mm x 450 mm in size for Type 1 installation, or shall be a minimum of 19 mm x 38 mm x 450 mm in size for Type 2 installation. Wood stakes shall be untreated fir, redwood, cedar, or pine and cut from sound timber. They shall be straight and free of loose or unsound knots and other defects which would render them unfit for the purpose intended.

Rope

Rope shall be biodegradable, such as sisal or manila, with a minimum diameter of 6.35 mm.

Gravel-filled Bags

Gravel-filled bag fabric shall be nonwoven polypropylene geotextile or polymer material and shall conform to the following requirements:

Specification	Requirements
Mass per unit area, grams per square meter, minimum. ASTM Designation: D 5261	270
Grab tensile strength (25-mm grip), kilonewtons, minimum. ASTM Designation: D4632*	0.89
Ultraviolet stability, percent tensile strength retained after 500 hours, ASTM Designation: D4355, xenon arc lamp method	70

* or appropriate test method for specific polymer

Gravel-filled bags shall be between 600 mm and 800 mm in length, and between 400 mm and 500 mm in width.

Yarn used for binding gravel bags shall be as recommended by the manufacturer or bag supplier and shall be of a contrasting color.

Gravel shall be between 10 mm and 20 mm in diameter, and shall be clean and free from clay balls, organic matter, and other deleterious materials. The opening of gravel-filled bags shall be secured to prevent gravel from escaping. Gravel-filled bags shall be between 13 kg and 22 kg in mass.

Silt Fence

At the Contractor's option, temporary silt fence shall be prefabricated or constructed with silt fence fabric, posts, and fasteners.

Silt fence fabric shall conform to the following requirements:

Specification	Requirements
Width, mm, min.	900
Grab tensile strength (25-mm grip), kilonewtons, minimum. in each direction ASTM Designation: D 4632 or appropriate test method for specific polymer	0.55
Elongation, percent minimum in each direction ASTM Designation: D 4632 or appropriate test method for specific polymer	15
Permittivity, 1/sec., minimum. ASTM Designation: D 4491	1.5
Flow rate, liters per minute per square meter, minimum. ASTM Designation: D 4491	400
Ultraviolet stability, percent tensile strength retained after 500 hours, minimum. ASTM Designation: D 4355 (xenon-arc lamp and water spray weathering method)	70

Silt fence fabric shall be geotextile manufactured from woven polypropylene or polymer material. Silt fence fabric may be made of recycled materials. No materials shall contain biodegradable filler materials that can degrade the physical or chemical characteristics of the finished fabric. The Engineer may order tests to confirm the absence of biodegradable filler materials in conformance to the requirements in ASTM Designation: E 204.

Posts for temporary silt fences shall be one of the following:

A. Posts shall be untreated fir, redwood, cedar, or pine, shall be cut from sound timber, and shall be straight and free of loose or unsound knots and other defects which would render them unfit for the purpose intended. Wood post shall be a minimum of 34 mm x 40 mm in size, and 4 feet in length. The end of the post to be embedded in the soil shall be pointed.
B. Posts shall be steel and have a "U," "T," "L," or other cross sectional shape that can resist failure from lateral loads. The steel posts shall have a minimum mass per length of 1.1 kg/m and a minimum length of 1.2 m. One end of the steel posts shall be pointed and the other end shall be capped with an orange or red plastic safety cap which fits snugly to the steel post. The Contractor shall submit to the Engineer for approval a sample of the capped steel post prior to installation.

Fasteners for attaching silt fence fabric to posts shall be as follows:

A. When prefabricated silt fence is used, posts shall be inserted into sewn pockets.
B. Silt fence fabric shall be attached to wooden posts with nails or staples as shown on the plans or as recommended by the manufacturer or supplier. Tie wire or locking plastic fasteners shall be used to fasten the silt fence fabric to steel posts. Maximum spacing of fasteners shall be 200 mm along the length of the steel post.

Foam Barriers

The foam barrier fabric cover and skirt shall be a woven polypropylene fabric with a minimum tensile strength of 0.44-kN, conforming to ASTM Designation: D 4632. The prefabricated fabric shall be high visibility orange in color that is integral to the fabric; painting shall not be allowed. The fabric shall have an ultraviolet stability exceeding 70 percent.

The foam core shall be urethane foam and shall be shaped and dimensioned as shown on the plans.

Adhesive for foam barriers shall be a solvent-free rubber modified asphalt emulsion. The color of the emulsion shall be brown when wet and shall have a drying period of not more than 3 hours.

Anchoring nails or spikes for foam barriers shall be a minimum of 25 mm in length and capable of penetrating concrete or asphalt surfaces.

Sediment Filter Bag

Sediment filter bag fabric shall be geotextile manufactured from woven polypropylene or polymer material. Sediment filter bag fabric may be made from recycled polymer materials. Polymer materials shall not contain biodegradable filler materials and shall conform to the requirements in ASTM Designation: E 204.

Sediment filter bag fabric shall conform to the following requirements:

Specification	Requirements
Grab tensile strength (25-mm grip), kilonewtons, minimum. in each direction ASTM Designation: D 4632 or appropriate test method for specific polymer	1.35
Elongation, percent minimum in each direction ASTM Designation: D 4632 or appropriate test method for specific polymer	15
Permittivity, 1/sec., minimum. ASTM Designation: D 4491	1.5
Flow rate, liters per minute per square meter, minimum. ASTM Designation: D 4491	8140
Ultraviolet stability, percent tensile strength retained after 500 hours, minimum. ASTM Designation: D 4355 (xenon-arc lamp and water spray weathering method)	80

The sediment filter bag shall be sized to fit the catch basin or drainage inlet and shall be complete with lifting loops and dump straps attached at the bottom to facilitate emptying of the sediment filter bag. The sediment filter bags shall have a restraint cord approximately halfway up the bag to keep the sides away from the catch basin walls.

INSTALLATION

Temporary drainage inlet protection shall be installed at drainage inlets in paved and unpaved areas as follows:

A. Temporary drainage inlet protection shall be installed such that ponded runoff does not encroach on the traveled way or overtop the curb or dike. Gravel-filled bags shall be placed to control ponding and prevent runoff from overtopping the curb or dike.
B. The bedding area for the temporary drainage inlet protection shall be cleared of obstructions including rocks, clods, and debris greater than 25 mm in diameter prior to installation.
C. A temporary linear sediment barrier shall be installed up-slope of the existing drainage inlet and parallel with the curb, dike, or flow line to prevent sediment from entering the drainage inlet.

Erosion Control Blanket and Geotextile Fabric

The erosion control blanket and geotextile fabric shall be secured to the surface of the excavated sediment trap with staples and embedded in a trench adjacent to the drainage inlet. The perimeter edge of the erosion control blanket and geotextile fabric shall be anchored in a trench.

Silt Fence

Silt fence shall be installed along the perimeter of the erosion control blanket or geotextile fabric, with the posts facing the drainage inlet. The trench shall be backfilled and tamped to secure the silt fence fabric in the bottom of the trench.

Gravel-filled Bags

Gravel-filled bags shall be stacked to form a gravel bag barrier. The gravel-filled bags shall be placed so that the bags are tightly abutted and overlap the joints in adjacent rows. A spillway shall be created by removing one or more gravel-filled bags from the upper layer of the gravel bag barrier.

Gravel-filled bags shall only be use within shoulder areas when placed behind temporary railing (Type K).

Fiber Rolls

Fiber rolls shall be placed over the erosion control blanket or geotextile fabric with the ends of the fiber roll abutted tightly together. Fiber rolls shall be secured with stakes installed along the length of the fiber rolls. Stakes shall not be installed within 300 mm of the end of the rolls.

Foam Barriers

Foam barriers shall be installed in individual sections adjacent to existing drainage inlets. Foam barriers shall be securely attached to the pavement according to the angle and spacing shown on the plans. Foam barriers shall be installed flush against the sides of concrete or asphalt concrete curbs, dikes, and pavement with the inner material and fabric cover cut smoothly and evenly to provide a tight flush joint.

Sediment Filter Bags

Sediment filter bags shall be installed by removing the drainage inlet grate, placing the sediment bag in the opening, and replacing the grate to secure the sediment filter bag in place.

REMOVAL

When the temporary drainage inlet protection is no longer required the protection materials shall be removed and disposed of in accordance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Holes, depressions, or other ground disturbance caused by the removal of the temporary drainage inlet protection shall be backfilled and repaired in accordance with the provisions in Section 15-1.02, "Preservation of Property," of the Standard Specifications.

MAINTENANCE

Temporary drainage inlet protection shall be maintained to provide sediment holding capacity and to reduce runoff velocities. Temporary drainage inlet protection shall be repaired or replaced immediately after the damage occurs.

Sediment deposits, trash, and debris shall be removed from temporary drainage inlet protection as needed or when directed by the Engineer. Removed sediment shall be deposited within the project limits so that the sediment is not subject to erosion by wind or by water. Trash and debris shall be removed and disposed of in accordance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

At locations where rills and other evidence of concentrated runoff have occurred beneath the drainage inlet protection, the protection shall be adjusted to prevent another occurrence.

Temporary silt fence shall be repaired or replaced when silt fence fabric becomes split, torn, or unraveled. Sagging or slumping silt fence shall be repaired with additional stakes or replaced. Broken or split stakes shall be replaced. Temporary silt fence shall be maintained to provide a sediment holding capacity of approximately 1/3 the height of the silt fence fabric above ground.

Sediment in excess of 50 mm above the surface of the erosion control blanket or geotextile fabric shall be removed.

Sediment shall be removed from the sediment trap when the volume has been reduced by approximately one-half.

Sediment deposits shall be removed when the deposit is 1/3 the height of the gravel bag barrier or one half the height of the spillway; whichever is less.

Gravel-filled bags shall be replaced when the bag material ruptures or when the binding fails.

Split, torn, unraveling, sagging, or slumping fiber rolls shall be replaced or repaired.

Foam barriers shall be repaired or replaced when the geotextile fabric cover becomes split, torn, or unraveled. Foam barriers that become detached or dislodged shall be reattached to the pavement. Sediment deposits shall be removed when the deposit reaches 1/3 of the foam barrier height.

Sediment filter bags shall be emptied when the restraint cords are no longer visible. Sediment filter bags shall be emptied by placing 25 mm steel reinforcing bars through the lifting loops. The bag shall be emptied of its contents and rinsed before replacement in the drainage inlet.

MEASUREMENT

Quantities of temporary drainage inlet protection will be determined from actual count in place. The protection will be measured one time only and no additional measurement will be recognized.

PAYMENT

The contract unit price paid for temporary drainage inlet protection shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the temporary drainage inlet protection, complete in place, including removal of materials, including cleanup and disposal of retained sediment and debris, and backfilling and repairing holes, depressions and other ground disturbance, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

No additional compensation will be made if the temporary drainage inlet protection changes during the course of construction.

The cost of maintaining, repairing, removing, and disposing of the temporary drainage inlet protection will be borne equally by the State and the Contractor. The division of cost will be made by determining the cost of maintaining temporary drainage inlet protection in accordance with the provisions in Section 9-1.03, "Force Account Payment," of the Standard Specifications and paying to the Contractor one-half of that cost.

Cleanup, repair, removal, disposal, or replacement due to improper installation, or as a result of the Contractor's negligence will not be considered as included in the cost for performing maintenance.

10-1.14 MIGRATORY BIRD PROTECTION

The Contractor shall protect migratory birds, their occupied nests, and their eggs as specified in these special provisions.

Nesting or attempted nesting by migratory birds is anticipated to occur between, but not limited to, February 15 and September 1.

The Federal Migratory Bird Treaty Act (16 U.S.C. 703 et seq.), Title 50 Code of Federal Regulations part 10, and California Department of Fish and Game Code Sections 3503, 3513, and 3800, protect migratory birds, their occupied nests, and their eggs.

The Federal and California Endangered Species Acts protect occupied and unoccupied nests of some threatened and endangered bird species. The Bald Eagle Protection Act (16 U.S.C. 668) prohibits the destruction of bald and golden eagles occupied and unoccupied nests.

When evidence of migratory bird nesting that may be adversely affected by construction activities is discovered, or when birds are injured or killed as a result of construction activities, the Contractor shall immediately stop work within 92 m (300 ft) of the nests and notify the Engineer. Work shall not resume until the Engineer provides written notification that work may begin in this location.

When ordered by the Engineer the Contractor shall use exclusion devices or remove and dispose of partially constructed and unoccupied nests of migratory birds on a regular basis to prevent their occupation.

Nest removal activities shall not deposit in, permit to pass into, or place nest materials where they can pass into the waters of this state.

Penalties as used in this section, "General Migratory Bird Protection," shall include fines, penalties, and damages; whether proposed, assessed, or levied against the Department or the Contractor. Penalties shall also include payments made or costs incurred in settlement for alleged violations of applicable laws, regulations, or requirements. Costs incurred could include sums spent instead of penalties, in mitigation or to remediate or correct violations.

Notwithstanding any other remedies authorized by law, the Department may retain or withhold monies due the Contractor under the contract, in an amount determined by the Department, up to and including the entire amount of penalties proposed, assessed, or levied as a result of the Contractor's violation of Federal or State law, regulations or requirements. The Department may retain funds until final disposition has been made as to the penalties. The Contractor shall remain liable for the full amount of penalties until such time as they are finally resolved with the entity seeking the penalties. Upon final disposition, the Department shall inform the Contractor of the withheld amount.

Full compensation for migratory bird protection shall be considered as included in the various items of contract work and no separate payment will be allowed therefore.

Nesting prevention measures performed by the Contractor will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

A delay to the controlling item due to migratory birds or their nests will be considered a temporary suspension of work in accordance with the provisions in Section 8-1.05, "Temporary Suspension of Work," of the Standard Specifications.

Adjustments will be made for delays that the Engineer determines are not due to the Contractor's failure to perform the provision of the contract in the same manner as for suspensions due to unsuitable weather in Section 8-1.05.

10-1.15 BIOLOGICAL MONITOR

Biological Monitor will be required on this project to monitor for the presence of the California Red Legged Frog (CRLF) and the San Francisco Garter Snake (SFGS).

Attention is directed to "Order of Work" and "Temporary Exclusion Fence" of these special provisions.

The Contractor shall furnish sufficient, qualified personnel for Biological Monitor. Biological Monitor shall be permitted by the U.S. Fish and Wildlife Service to handle listed species specifically the San Francisco garter snake and California red-legged frog. The Contractor shall provide the Engineer with the names and telephone numbers of the Biological Monitor(s), including all certifications and documentation to substantiate their qualifications to perform biological monitoring as specified in these Special Provisions, five working days prior to the start of monitoring work.

BIOLOGICAL TRAINING CLASS

The Engineer, Contractor and subcontractors involved in construction operations shall attend a mandatory pre-construction biological training class prior to the start of construction. All personnel, working within the ESA area, shall attend the class. The Biological Monitor shall instruct the Biological Training Class.

The informal, on-site Biological Training Class shall include descriptions and photographs of San Francisco garter snake and the California red-legged frog. Training will include the importance of the two species and their habitat, the general measures that are being implemented to protect the species, and the boundaries within which the project may be accomplished. Additional information provided at the Biological Training Class will include the duties and contact information for the Biological Monitor. The training shall direct all Contractor employees to immediately notify the Biological Monitor should any employee encounter a San Francisco garter snake or California red-legged frog or species with a similarity of appearance during the progress of the work.

The Engineer will prohibit any construction personnel who do not attend the Biological Training Class from working within the ESA area until they have received biological training from the Biological Monitor.

PRE-CONSTRUCTION BIOLOGICAL SURVEY

A pre-construction biological survey shall be performed after the installation of the temporary exclusion fence.

The Biological Monitor shall be present to visually survey the area of the temporary exclusion fence, inspecting under rocks, wood or other debris; and shaking vegetation to flush wildlife in those areas where the temporary exclusion fence shall be installed or removed immediately prior to any installation or removal activity.

The Biological Monitor shall conduct pre-construction biological surveys for the California red-legged frog and San Francisco garter snake prior to the initiation of any construction activities. For both species, the monitor(s) shall conduct pre-construction biological survey for five (5) consecutive days prior to the initiation of any construction activities, except for the installation of the temporary exclusion fence. If the California red-legged frog and/or the San Francisco garter snake are encountered in the area, they shall be captured and transferred as specified in this special provision. If these species are captured and transferred, the Engineer shall be contacted immediately and no construction may begin without the written approval of the Engineer.

MONITORING

The Biological Monitor shall conduct monitoring prior to the start of the workday. The monitoring shall consist of a survey of the all construction areas within the Right of Way, including at minimum the following activities: visual surveys of the entire area; inspecting under rocks, wood, or other debris; inspecting under and in any construction equipment and material stored within the Right of Way; and "shaking" of any vegetation within the Right of Way to flush wildlife. Equipment such as, but not limited to a spotlight and a wooden stick may be used during the monitoring process.

The Biological Monitor shall inspect the temporary exclusion fence for barrier integrity prior to the start of the daily monitoring. If the temporary exclusion fence is found not to be in condition to exclude California red-legged frog or San Francisco garter snake, the Biological Monitor shall immediately inform the Engineer and Contractor, and the Contractor shall take corrective action immediately.

If the Biological Monitor or the Contractor encounters a California red-legged frog or San Francisco garter snake, construction activities within the area designated by biological monitor shall be immediately halted. The Engineer shall be immediately notified. As approved by the U.S. Fish and Wildlife Service, the biological monitor shall move the individual San Francisco garter snake(s) or California red-legged frog(s) out of all construction zones to areas previously approved by the Service. The Contractor shall not resume work within the designated area without the written approval of the Engineer.

BIOLOGICAL RECORDS

The Biological Monitor shall maintain records of monitoring efforts that include the beginning and ending time of monitoring work and a statement clearly stating whether specified species were present or absent, the time when such species were found, condition of the temporary exclusion fence, and describing any actions taken. The Biological Monitor shall be responsible for providing and maintaining copies of a sign up sheet to those that have attended Biological Training Class. This sheet will be the record of completed training for all Contractor and construction personnel working within the ESA area. The Biological Monitor shall maintain complete records in their possession while conducting monitoring activities and shall immediately surrender records to the Engineer upon request. All training and monitoring records shall be provided to the Engineer upon request and completion of the monitoring work.

PAYMENT

The contract lump sum price paid for Biological Monitor shall include full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in Biological Monitoring, including but not limited to pre-construction surveys, training, record keeping, site visits, temporary exclusion fence inspection and repair, and related monitoring activities.

A delay to the controlling item due to presence of the California Red Legged Frog (CRLF) and the San Francisco Garter Snake (SFGS) will be considered a temporary suspension of work in accordance with the provisions in Section 8-1.05, "Temporary Suspension of Work," of the Standard Specifications. Adjustments will be made for delays that the Engineer determines are not due to the Contractor's failure to perform the provision of the contract in the same manner as for suspensions due to unsuitable weather in Section 8-1.05.

Nothing in this section shall relieve the Contractor from providing for public safety in conformance with the provisions in Section 7-1.09, "Public Safety," of the Standard Specifications.

10-1.16 TEMPORARY EXCLUSION FENCE

Temporary Exclusion Fence shall be furnished, constructed, maintained, and later removed as shown on the plans, as specified in these special provisions and as directed by the Engineer.

Attention is directed to "Order of Work" and "Biological Monitor" of these special provisions.

Preparation shall conform to the requirements in Section 20-3.02, "Preparation," of the Standard Specifications.

MATERIALS

Used materials may be installed provided the used materials are good, sound and are suitable for the purpose intended, as determined by the Engineer.

Materials may be commercial quality provided the dimensions and sizes of the materials are equal to, or greater than, the dimensions and sizes shown on the plans or specified herein.

Materials shall conform to Section 20-2, "Materials," of the Standard Specifications and the following:

A. Plywood shall be 12.6 mm thick (min.), with a nominal dimension of 1.2m x 2.43m. Plywood shall be pressure treated to resist decay.
B. Wood bracing shall be as shown on the plans, and shall be pressure treated to resist decay.
C. Posts shall be steel and have a "U," "T," "L" or other cross sectional shape that resists failure by lateral loads. Steel posts shall have a minimum mass per length of 1.1 kg/m and a minimum length of 1.6m. One end of the steel posts shall be pointed and the other end shall be capped with an orange or red plastic safety cap which fits snugly to the steel post. The Contractor shall submit to the Engineer for approval a sample of the capped steel post prior to installation.
D. High Visibility Fabric shall be machine produced mesh manufactured from polypropylene or polyethylene and shall be orange in color. High visibility fabric may be virgin or recycled polymer materials, or a combination of virgin and recycled polymer materials. No virgin or recycled polymer materials shall contain biodegradable filler materials that degrade the physical or chemical characteristics of the finished fabric. High visibility fabric shall be fully stabilized ultraviolet (UV) resistant. High visibility fabric shall be a minimum of 1.22 m in width with a maximum mesh opening of 50 mm x 50 mm. High visibility fabric shall be furnished in one continuous width and shall not be spliced to conform to the specified width dimension.

INSTALLATION

Temporary Exclusion Fence shall be installed shall be constructed prior to any clearing and grubbing work and as shown on the plans and as follows:

Temporary Exclusion Fence shall consist of new plywood sheets anchored to steel posts with tie wire as shown on the plans. Holes shall be made through the plywood to adequately anchor the plywood to the steel posts and ensure snug overlap of plywood. Plywood shall be installed below grade as shown on the plans.

Temporary Exclusion Fence that is damaged during the progress of the work shall be repaired or replaced by the Contractor at the Contractor's expense.

When no longer required for the work, as determined by the Engineer, Temporary Exclusion Fence shall be removed. Removed facilities shall become the property of the Contractor and shall be removed from the site of the work, except as otherwise provided in this section.

Holes caused by the removal of Temporary Exclusion Fence shall be backfilled in conformance with the provisions in the second paragraph of Section 15-1.02, "Preservation of Property," of the Standard Specifications.

MEASUREMENT AND PAYMENT

The quantity of Temporary Exclusion Fence will be measured by the meter as determined from actual measurement in place, the measurements to be made parallel with the ground slope along the line of the completed Temporary Exclusion Fence.

The contract price paid per meter for Temporary Exclusion Fence shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in installing Temporary Exclusion Fence, complete in place, including maintenance and removal of Temporary Exclusion Fence, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.17 TEMPORARY SUPPORTS

Temporary supports for existing structures during bridge removal, reconstruction, and retrofit work shall be designed, furnished, constructed, monitored, maintained, and removed in conformance with the provisions in these special provisions.

Construction sequence and application of temporary support jacking loads shall be as shown on the plans. Proposed changes to the construction sequence and application of temporary support jacking loads shall be subject to the Engineer's approval.

Temporary supports shall include jacking assemblies and appurtenant items necessary to jack and support the structures.

Attention is directed to the sections "Order of Work" and "Maintaining Traffic" of these special provisions regarding the construction sequences and the required openings in temporary supports for the use of public traffic.

Approval by the Engineer of the temporary support working drawings or temporary support inspection performed by the Engineer will in no way relieve the Contractor of full responsibility for the temporary supports.

TEMPORARY SUPPORT DESIGN AND DRAWINGS

The Contractor shall submit to the Engineer working drawings and design calculations for the temporary supports. Such drawings and design calculations shall be signed by an engineer who is registered as a Civil Engineer in the State of California. The temporary support working drawings and design calculations shall conform to the requirements in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. The number of sets of drawings and design calculations and times for review for temporary supports shall be the same as specified for falsework working drawings in Section 51-1.06A, "Falsework Design and Drawings," of the Standard Specifications.

In addition to the requirements in Section 51-1.06A, "Falsework Design and Drawings," of the Standard Specifications, the following requirements shall apply:

A. The time to be provided for the Engineer's review of the working drawings for specific structures, or portions thereof, shall be as follows:

Structure or Portion of Structure	Review Time - Weeks
Peninsula Ave OC (Replace) BR. No. 35-0088	3

Working drawings for any part of the temporary supports shall include stress sheets, anchor bolt layouts, shop details, and erection and removal plans.

The temporary support working drawings shall include descriptions and values of all loads, including construction equipment loads, descriptions of equipment to be used, complete details and calculations for jacking and supporting the existing structure, and descriptions of the displacement monitoring system. The displacement monitoring system shall

include equipment to be used, location of control points, method and schedule of taking measurements, and shall also include provisions to jack the structure should settlement occur in the temporary supports.

A redundant system of supports shall be provided during the entire jacking operation for backup should any of the jacks fail. The redundant system shall include stacks of steel plates added as necessary to maintain the redundant supports at each jack location within 6 mm of the jacking sill or corbels.

When footing type foundations are to be used, the Contractor shall determine the bearing value of the soil and shall show the values assumed in the design of the temporary supports on the temporary support drawings. Anticipated temporary support foundation settlement shall be shown on the temporary support drawings.

When pile type foundations are to be used, the temporary support drawings shall show the maximum horizontal distance that the top of a temporary support pile may be pulled in order to position it under its cap. The temporary support plans shall also show the maximum allowed deviation of the top of the pile, in its final position, from a vertical line through the point of fixity of the pile.

The Contractor may use the permanent piles as part of the temporary support foundation. Permanent piles shall not be moved or adjusted from the locations shown on the plans. Any use of the permanent piles and the loads imposed on them shall be shown on the temporary support drawings. Should the Contractor propose to provide piles longer than required for the work in order to support the temporary supports above the elevation of the top of the footing and later cut off the piles at their final elevation, shear devices adequate to transfer all pile reactions into the footing will be required.

Temporary support footings shall be designed to carry the load imposed upon them without exceeding the estimated soil bearing values and anticipated settlements.

Bracing shall be provided, as necessary, to withstand all imposed loads during erection and removal of any temporary supports. The temporary support drawings shall show provisions for such temporary bracing or methods to be used to conform to these requirements during each phase of erection and removal. Wind loads shall be included in the design of such bracing or methods. Wind loads shall conform to the applicable provisions in Section 51-1.06A(1), "Design Loads," of the Standard Specifications.

The temporary support design calculations shall show a summary of computed stresses in the (1) temporary supports, (2) connections between temporary supports and the existing structure and (3) existing load supporting members. The computed stresses shall include the effect of the jacking sequence. The temporary support design calculations shall also include a lateral stiffness assessment of the temporary support system and conform to the design values shown on the plans.

The design of temporary supports will not be approved unless it is based on the use of loads and conditions which are no less severe than those described in "Temporary Support Design Criteria," of these special provisions and on the use of allowable stresses which are no greater than those described in Section 51-1.06A(2), "Design Stresses, Loadings, and Deflections," of the Standard Specifications.

If falsework loads are imposed on temporary supports, the temporary supports shall also satisfy the deflection criteria described in Section 51-1.06A(2), "Design Stresses, Loadings, and Deflections," of the Standard Specifications.

TEMPORARY SUPPORT DESIGN CRITERIA

The temporary supports shall support the initial jacking loads and the minimum temporary support design loads and the minimum lateral design forces shown on the plans. The vertical design loads shall be adjusted for the weight of temporary supports and jacks, construction equipment loads and additional loads imposed by the Contractor's operations. The construction equipment loads shall be the actual weight of the construction equipment but in no case shall be less than 960 N/m^2 of deck surface area of the frame involved. A frame is defined as the portion of the bridge between expansion joints.

The temporary supports shall resist the specified lateral design forces applied at the point where the column to be removed meets the superstructure. The lateral design forces to be resisted shall be increased to be compatible with the temporary support lateral stiffness if the stiffness exceeds the specified minimum. The temporary supports resisting transverse lateral loads shall be placed within a distance of not more than 2 meters from the centerline bent. The temporary supports resisting longitudinal lateral loads shall be placed within the frame having columns removed.

The existing structure shall be mechanically connected to the temporary supports. The temporary supports shall be mechanically connected to their foundations. The mechanical connections shall be capable of resisting the lateral temporary support design forces. Friction forces developed between the existing structure and temporary supports shall not be used to reduce the lateral forces and shall not be considered as an effective mechanical connection. The mechanical connections shall be designed to tolerate adjustments to the temporary support frame throughout the use of the temporary supports.

If the concrete is to be prestressed, the temporary supports shall be designed to support any increased or readjusted loads caused by the prestressing forces.

Manufactured Assemblies

Manufactured assemblies shall conform to the provisions in Section 51-1.06A(2), "Design Stresses, Loadings, and Deflections," of the Standard Specifications and these special provisions.

Each jack shall be equipped with either a pressure gage or a load cell for determining the jacking force. Pressure gages shall have an accurately reading dial at least 150 mm in diameter. Each jack shall be calibrated by a private laboratory approved by the Transportation Laboratory within 6 months prior to use and after each repair. Each jack and its gage shall be calibrated as a unit with the cylinder extension in the approximate position that it will be at final jacking force and shall be accompanied by a certified calibration chart. Load cells shall be calibrated and provided with an indicator by which the jacking force is determined.

SPECIAL LOCATIONS

Attention is directed to Section 51-1.06A(3), "Special Locations," of the Standard Specifications. All reference to falsework in this section shall also apply to temporary supports.

TEMPORARY SUPPORT CONSTRUCTION

Attention is directed to paragraphs 1 through 7 of Section 51-1.06B, "Falsework Construction," of the Standard Specifications. All reference to falsework in these paragraphs shall also apply to temporary supports.

Welding, welder qualification, and inspection of welding for all steel members shall conform to the requirements of ANSI/AASHTO/AWS D1.1.

Prior to proceeding with bridge removal, an engineer for the Contractor who is registered as a Civil Engineer in the State of California shall inspect the temporary supports, including jacking and displacement monitoring systems, for conformity with the working drawings. The Contractor's registered engineer shall certify in writing that the temporary supports, including jacking and displacement monitoring systems, conform to the working drawings, and that the material and workmanship are satisfactory for the purpose intended. A copy of this certification shall be available at the site of the work at all times.

The Contractor's registered engineer shall be present at the bridge site at all times when adjustments are in progress and shall be on 24-hour call during Stage 3. The Contractor's registered engineer shall inspect the temporary support and report in writing on a weekly basis the status of the adequacy of the support system and any observed settlement and displacement and when requested by the Engineer. A copy of the daily report shall be available at the site of the work at all times. Should an unplanned event occur, the Contractor's registered engineer shall submit immediately to the Engineer for approval, the procedure or proposed operation to correct or remedy the occurrence.

The Contractor shall perform an initial survey as part of the displacement monitoring system to record the location of the existing structure prior to the commencement of any work. Two copies of the survey shall be signed by an engineer, who is registered as a Civil Engineer in the State of California, and submitted to the Engineer.

Vandal-resistant displacement monitoring equipment shall be provided and maintained. Vertical and horizontal displacements of the temporary supports and the supported portion structure shall be accurately measured and recorded weekly. The recorded measurement shall be included in the weekly report. Elevations shall be taken prior to the opening of Stage 3 and after the temporary supports have been removed. As a minimum, the existing structure shall be monitored at the bent and at mid span of both adjoining spans. Control points at each location shall be located near the center and at both edges of the superstructure for Stage 1 and 2. The records of vertical and horizontal displacement shall be signed by an engineer who is registered as a Civil Engineer in the State of California and available to the Engineer at the jobsite during normal working hours, and a copy of the record shall be delivered to the Engineer at the completion .

A force equal to the initial jacking load or the dead load shown on the plans shall be applied to the structure by the temporary support system and held until all initial compression and settlement of the system is completed before bridge removal work at the location being supported is begun.

Jacking operations shall be carefully controlled and monitored to ensure that the jacking loads are applied simultaneously to prevent distortion and excessive stresses that would damage the structure. The superstructure shall be jacked as necessary to maintain the total vertical displacements at control points to less than 6 mm from the elevations recorded prior to jacking or as modified by the Engineer.

Should unanticipated displacements, cracking or other damage occur, the construction shall be discontinued until corrective measures satisfactory to the Engineer are performed. Damage to the structure as a result of the Contractor's operations shall be repaired by the Contractor in conformance with the provisions in Section 7-1.11, "Preservation of Property," of the Standard Specifications.

Following completion of the reconstruction, the monitored control points shall not deviate from the vertical position by more than 6 mm from the initial survey elevations or the elevations as modified by the Engineer.

REMOVING TEMPORARY SUPPORTS

Attention is directed to Section 51-1.06C, "Removing Falsework," of the Standard Specifications. All references to falsework in this section shall also apply to temporary supports, except that when public traffic is carried on the structure on temporary supports no temporary supports shall be released until the concrete for both Stage 1, 2 and 3 has attained 100 percent of the specified strength.

Attachments shall be removed from the existing structure and concrete surfaces restored to original conditions, except where permanent alterations are shown on the plans.

PAYMENT

The contract lump sum price paid for temporary supports shall include full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in designing, constructing, maintaining, and removing the temporary supports, including jacking the existing structure and monitoring displacements, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.18 COOPERATION

Attention is directed to Section 7-1.14, "Cooperation," and Section 8-1.10, "Utility and Non-Highway Facilities," of the Standard Specifications and these special provisions.

It is anticipated that work by another contractors.

It is anticipated that work by another contractor (Contract No. 04-270824) to replace the median barriers in San Mateo County on Route 280 from PM R18.5 to PM M27.4 (KP 29.8 to KP 44.1), and in San Francisco County on Route 280 from PM R3.8 to PM 4.0 (KP 6.1 to KP 6.4) may be in progress adjacent to or within the limits of this project during progress of the work on this contract.

It is anticipated that work by another contractor (Contract No. 04-270834) to replace the median barriers in San Mateo County on Route 280 from PM R0.0 to PM R18.5 (KP 0.0 to KP 29.8) may be in progress adjacent to or within the limits of this project during progress of the work on this contract.

It is anticipated that work by another contractor (Contract No. 04-0C9604) to replace PCC slab in San Mateo County on Route 280 from PM 10.8 to PM 26.7 (KP 17.4 to KP 43.0) may be in progress adjacent to or within the limits of this project during progress of the work on this contract.

10-1.19 PROGRESS SCHEDULE (CRITICAL PATH METHOD)

The Contractor shall submit to the Engineer practicable critical path method (CPM) progress schedules in conformance with these special provisions. Whenever the term "schedule" is used in this section it shall mean CPM progress schedule.

Attention is directed to "Payments" of Section 5 of these special provisions.

The provisions in Section 8-1.04, "Progress Schedule," of the Standard Specifications shall not apply.

DEFINITIONS

The following definitions shall apply to this section:

A. ACTIVITY.—A task, event or other project element on a schedule that contributes to completing the project. Activities have a description, start date, finish date, duration and one or more logic ties.
B. BASELINE SCHEDULE.—The initial schedule representing the Contractor's work plan on the first working day of the project.
C. CONTRACT COMPLETION DATE.—The current extended date for completion of the contract shown on the weekly statement of working days furnished by the Engineer in conformance with the provisions in Section 8-1.06, "Time of Completion," of the Standard Specifications.
D. CRITICAL PATH.—The longest continuous chain of activities for the project that has the least amount of total float of all chains. In general, a delay on the critical path will extend the scheduled completion date.
E. CRITICAL PATH METHOD (CPM).—A network based planning technique using activity durations and the relationships between activities to mathematically calculate a schedule for the entire project.
F. DATA DATE.—The day after the date through which a schedule is current. Everything occurring earlier than the data date is "as-built" and everything on or after the data date is "planned."
G. EARLY COMPLETION TIME.—The difference in time between an early scheduled completion date and the contract completion date.
H. FLOAT.—The difference between the earliest and latest allowable start or finish times for an activity.
I. MILESTONE.—An event activity that has zero duration and is typically used to represent the beginning or end of a certain stage of the project.
J. NARRATIVE REPORT.—A document submitted with each schedule that discusses topics related to project progress and scheduling.
K. NEAR CRITICAL PATH.—A chain of activities with total float exceeding that of the critical path but having no more than 10 working days of total float.
L. SCHEDULED COMPLETION DATE.—The planned project finish date shown on the current accepted schedule.
M. STATE OWNED FLOAT ACTIVITY.—The activity documenting time saved on the critical path by actions of the State. It is the last activity prior to the scheduled completion date.

N. TIME IMPACT ANALYSIS.—A schedule and narrative report developed specifically to demonstrate what effect a proposed change or delay has on the current scheduled completion date.
O. TOTAL FLOAT.—The amount of time that an activity or chain of activities can be delayed before extending the scheduled completion date.
P. UPDATE SCHEDULE.—A current schedule developed from the baseline or subsequent schedule through regular monthly review to incorporate as-built progress and any planned changes.

GENERAL REQUIREMENTS

The Contractor shall submit to the Engineer baseline, monthly update and final update schedules, each consistent in all respects with the time and order of work requirements of the contract. The project work shall be executed in the sequence indicated on the current accepted schedule.

Schedules shall show the order in which the Contractor proposes to carry out the work with logical links between time-scaled work activities, and calculations made using the critical path method to determine the controlling operation or operations. The Contractor is responsible for assuring that all activity sequences are logical and that each schedule shows a coordinated plan for complete performance of the work.

The Contractor shall produce schedules using computer software and shall furnish compatible software for the Engineer's exclusive possession and use. The Contractor shall furnish network diagrams, narrative reports, tabular reports and schedule data as parts of each schedule submittal.

Schedules shall include, but not be limited to, activities that show the following that are applicable to the project:

A. Project characteristics, salient features, or interfaces, including those with outside entities, that could affect time of completion.
B. Project start date, scheduled completion date and other milestones.
C. Work performed by the Contractor, subcontractors and suppliers.
D. Submittal development, delivery, review and approval, including those from the Contractor, subcontractors and suppliers.
E. Procurement, delivery, installation and testing of materials, plants and equipment.
F. Testing and settlement periods.
G. Utility notification and relocation.
H. Erection and removal of falsework and shoring.
I. Major traffic stage switches.
J. Finishing roadway and final cleanup.
K. State-owned float as the predecessor activity to the scheduled completion date.

Schedules shall have not less than 50 and not more than 500 activities, unless otherwise authorized by the Engineer. The number of activities shall be sufficient to assure adequate planning of the project, to permit monitoring and evaluation of progress, and to do an analysis of time impacts.

Schedule activities shall include the following:

A. A clear and legible description.
B. Start and finish dates.
C. A duration of not less than one working day, except for event activities, and not more than 20 working days, unless otherwise authorized by the Engineer.
D. At least one predecessor and one successor activity, except for project start and finish milestones.
E. Required constraints.
F. Codes for responsibility, stage, work shifts, location and contract pay item numbers.

The Contractor may show early completion time on any schedule provided that the requirements of the contract are met. Early completion time shall be considered a resource for the exclusive use of the Contractor. The Contractor may increase early completion time by improving production, reallocating resources to be more efficient, performing sequential activities concurrently or by completing activities earlier than planned. The Contractor may also submit for approval a cost reduction incentive proposal in conformance with the provisions in Section 5-1.14, "Cost Reduction Incentive," of the Standard Specifications that will reduce time of construction.

The Contractor may show a scheduled completion date that is later than the contract completion date on an update schedule, after the baseline schedule is accepted. The Contractor shall provide an explanation for a late scheduled completion date in the narrative report that is included with the schedule.

State-owned float shall be considered a resource for the exclusive use of the State. The Engineer may accrue State-owned float by the early completion of review of any type of required submittal when it saves time on the critical path. The

Contractor shall prepare a time impact analysis, when requested by the Engineer, to determine the effect of the action in conformance with the provisions in "Time Impact Analysis" specified herein. The Engineer will document State-owned float by directing the Contractor to update the State-owned float activity on the next update schedule. The Contractor shall include a log of the action on the State-owned float activity and include a discussion of the action in the narrative report. The Engineer may use State-owned float to mitigate past, present or future State delays by offsetting potential time extensions for contract change orders.

The Engineer may adjust contract working days for ordered changes that affect the scheduled completion date, in conformance with the provisions in Section 4-1.03, "Changes," of the Standard Specifications. The Contractor shall prepare a time impact analysis to determine the effect of the change in conformance with the provisions in "Time Impact Analysis" specified herein, and shall include the impacts acceptable to the Engineer in the next update schedule. Changes that do not affect the controlling operation on the critical path will not be considered as the basis for a time adjustment. Changes that do affect the controlling operation on the critical path will be considered by the Engineer in decreasing time or granting an extension of time for completion of the contract. Time extensions will only be granted if the total float is absorbed and the scheduled completion date is delayed one or more working days because of the ordered change.

The Engineer's review and acceptance of schedules shall not waive any contract requirements and shall not relieve the Contractor of any obligation thereunder or responsibility for submitting complete and accurate information. Schedules that are rejected shall be corrected by the Contractor and resubmitted to the Engineer within 5 working days of notification by the Engineer, at which time a new review period of one week will begin.

Errors or omissions on schedules shall not relieve the Contractor from finishing all work within the time limit specified for completion of the contract. If, after a schedule has been accepted by the Engineer, either the Contractor or the Engineer discover that any aspect of the schedule has an error or omission, it shall be corrected by the Contractor on the next update schedule.

COMPUTER SOFTWARE

The Contractor shall submit to the Engineer for approval a description of proposed software before delivery. The software shall be the current version of Primavera SureTrak Project Manager for Windows, or equal, and shall be compatible with Windows NT (version 4.0) operating system. If software other than SureTrak is proposed, it shall be capable of generating files that can be imported into SureTrak.

The Contractor shall furnish schedule software and all original software instruction manuals to the Engineer with submittal of the baseline schedule. The furnished schedule software shall become the property of the State and will not be returned to the Contractor. The State will compensate the Contractor in conformance with the provisions in Section 4-1.03, "Extra Work," of the Standard Specifications for replacement of software which is damaged, lost or stolen after delivery to the Engineer.

The Contractor shall instruct the Engineer in the use of the software and provide software support until the contract is accepted. Within 20 working days of contract approval, the Contractor shall provide a commercial 8-hour training session for 2 Department employees in the use of the software at a location acceptable to the Engineer. It is recommended that the Contractor also send at least 2 employees to the same training session to facilitate development of similar knowledge and skills in the use of the software. If software other than SureTrak is furnished, then the training session shall be a total of 16-hours for each Department employee.

NETWORK DIAGRAMS, REPORTS AND DATA

The Contractor shall include the following for each schedule submittal:

A. Two sets of originally plotted, time-scaled network diagrams.
B. Two copies of a narrative report.
C. Two copies of each of 3 sorts of the CPM software-generated tabular reports.
D. One 1.44-megabyte 90 mm (3.5 inch) floppy diskette containing the schedule data.

The time-scaled network diagrams shall conform to the following:

A. Show a continuous flow of information from left to right.
B. Be based on early start and early finish dates of activities.
C. Clearly show the primary paths of criticality using graphical presentation.
D. Be prepared on E-size sheets, 860 mm x 1120 mm (34 inch x 44 inch).
E. Include a title block and a timeline on each page.

The narrative report shall be organized in the following sequence with all applicable documents included:

A. Contractor's transmittal letter.
B. Work completed during the period.
C. Identification of unusual conditions or restrictions regarding labor, equipment or material; including multiple shifts, 6-day work weeks, specified overtime or work at times other than regular days or hours.
D. Description of the current critical path.
E. Changes to the critical path and scheduled completion date since the last schedule submittal.
F. Description of problem areas.
G. Current and anticipated delays:

    1. Cause of delay.
    2. Impact of delay on other activities, milestones and completion dates.
    3. Corrective action and schedule adjustments to correct the delay.

H. Pending items and status thereof:

    1. Permits
    2. Change orders
    3. Time adjustments
    4. Non-compliance notices

I. Reasons for an early or late scheduled completion date in comparison to the contract completion date.

Tabular reports shall be software-generated and provide information for each activity included in the project schedule. Three different reports shall be sorted by (1) activity number, (2) early start and (3) total float. Tabular reports shall be 215 mm x 280 mm (8 1/2 inch x 11 inch) in size and shall include, as a minimum, the following applicable information:

A. Data date
B. Activity number and description
C. Predecessor and successor activity numbers and descriptions
D. Activity codes
E. Scheduled, or actual and remaining durations (work days) for each activity
F. Earliest start (calendar) date
G. Earliest finish (calendar) date
H. Actual start (calendar) date
I. Actual finish (calendar) date
J. Latest start (calendar) date
K. Latest finish (calendar) date
L. Free float (work days)
M. Total float (work days)
N. Percentage of activity complete and remaining duration for incomplete activities.
O. Lags
P. Required constraints

Schedule submittals will only be considered complete when all documents and data have been provided as described above.

PRE-CONSTRUCTION SCHEDULING CONFERENCE

The Contractor shall schedule and the Engineer will conduct a pre-construction scheduling conference with the Contractor's project manager and construction scheduler within 10 working days of the approval of the contract. At this meeting the Engineer will review the requirements of this section of the special provisions with the Contractor.

The Contractor shall submit a general time-scaled logic diagram displaying the major activities and sequence of planned operations and shall be prepared to discuss the proposed work plan and schedule methodology that comply with the requirements of these special provisions. If the Contractor proposes deviations to the construction staging of the project, then the general time-scaled logic diagram shall also display the deviations and resulting time impacts. The Contractor shall be prepared to discuss the proposal.

At this meeting, the Contractor shall additionally submit the alphanumeric coding structure and the activity identification system for labeling the work activities. To easily identify relationships, each activity description shall indicate its associated scope or location of work by including such terms as quantity of material, type of work, bridge number, station to station location, side of highway (such as left, right, northbound, southbound), lane number, shoulder, ramp name, ramp line descriptor or mainline.

The Engineer will review the logic diagram, coding structure, and activity identification system, and provide any required baseline schedule changes to the Contractor for implementation.

BASELINE SCHEDULE

Beginning the week following the pre-construction scheduling conference, the Contractor shall meet with the Engineer weekly until the baseline schedule is accepted by the Engineer to discuss schedule development and resolve schedule issues.

The Contractor shall submit to the Engineer a baseline schedule within 20 working days of approval of the contract. The Contractor shall allow 3 weeks for the Engineer's review after the baseline schedule and all support data are submitted. In addition, the baseline schedule submittal will not be considered complete until the computer software is delivered and installed for use in review of the schedule.

The baseline schedule shall include the entire scope of work and how the Contractor plans to complete all work contemplated. The baseline schedule shall show the activities that define the critical path. Multiple critical paths and near-critical paths shall be kept to a minimum. A total of not more than 50 percent of the baseline schedule activities shall be critical or near critical, unless otherwise authorized by the Engineer.

The baseline schedule shall not extend beyond the number of working days specified in these special provisions. The baseline schedule shall have a data date of the first working day of the contract and not include any completed work to date. The baseline schedule shall not attribute negative float or negative lag to any activity.

If the Contractor submits an early completion baseline schedule that shows contract completion in less than 85 percent of the working days specified in these special provisions, the baseline schedule shall be supplemented with resource allocations for every task activity and include time-scaled resource histograms. The resource allocations shall be shown to a level of detail that facilitates report generation based on labor crafts and equipment classes for the Contractor and subcontractors. The Contractor shall use average composite crews to display the labor loading of on-site construction activities. The Contractor shall optimize and level labor to reflect a reasonable plan for accomplishing the work of the contract and to assure that resources are not duplicated in concurrent activities. The time-scaled resource histograms shall show labor crafts and equipment classes to be utilized on the contract. The Engineer may review the baseline schedule activity resource allocations using Means Productivity Standards or equivalent to determine if the schedule is practicable.

UPDATE SCHEDULE

The Contractor shall submit an update schedule and meet with the Engineer to review contract progress, on or before the first day of each month, beginning one month after the baseline schedule is accepted. The Contractor shall allow 2 weeks for the Engineer's review after the update schedule and all support data are submitted, except that the review period shall not start until the previous month's required schedule is accepted. Update schedules that are not accepted or rejected within the review period will be considered accepted by the Engineer.

The update schedule shall have a data date of the twenty-first day of the month or other date established by the Engineer. The update schedule shall show the status of work actually completed to date and the work yet to be performed as planned. Actual activity start dates, percent complete and finish dates shall be shown as applicable. Durations for work that has been completed shall be shown on the update schedule as the work actually occurred, including Engineer submittal review and Contractor resubmittal times.

The Contractor may include modifications such as adding or deleting activities or changing activity constraints, durations or logic that do not (1) alter the critical path(s) or near critical path(s) or (2) extend the scheduled completion date compared to that shown on the current accepted schedule. The Contractor shall state in writing the reasons for any changes to planned work. If any proposed changes in planned work will result in (1) or (2) above, then the Contractor shall submit a time impact analysis as described herein.

TIME IMPACT ANALYSIS

The Contractor shall submit a written time impact analysis (TIA) to the Engineer with each request for adjustment of contract time, or when the Contractor or Engineer consider that an approved or anticipated change may impact the critical path or contract progress.

The TIA shall illustrate the impacts of each change or delay on the current scheduled completion date or internal milestone, as appropriate. The analysis shall use the accepted schedule that has a data date closest to and prior to the event. If the Engineer determines that the accepted schedule used does not appropriately represent the conditions prior to the event, the accepted schedule shall be updated to the day before the event being analyzed. The TIA shall include an impact schedule developed from incorporating the event into the accepted schedule by adding or deleting activities, or by changing durations

or logic of existing activities. If the impact schedule shows that incorporating the event modifies the critical path and scheduled completion date of the accepted schedule, the difference between scheduled completion dates of the two schedules shall be equal to the adjustment of contract time. The Engineer may construct and utilize an appropriate project schedule or other recognized method to determine adjustments in contract time until the Contractor provides the TIA.

The Contractor shall submit a TIA in duplicate within 15 working days of receiving a written request for a TIA from the Engineer. The Contractor shall allow the Engineer 2 weeks after receipt to approve or reject the submitted TIA. All approved TIA schedule changes shall be shown on the next update schedule.

If a TIA submitted by the Contractor is rejected by the Engineer, the Contractor shall meet with the Engineer to discuss and resolve issues related to the TIA. If agreement is not reached, the Contractor will be allowed 15 days from the meeting with the Engineer to give notice in conformance with the provisions in Section 9-1.04, "Notice of Potential Claim," of the Standard Specifications. The Contractor shall only show actual as-built work, not unapproved changes related to the TIA, in subsequent update schedules. If agreement is reached at a later date, approved TIA schedule changes shall be shown on the next update schedule. The Engineer will withhold remaining payment on the schedule contract item if a TIA is requested by the Engineer and not submitted by the Contractor within 15 working days. The schedule item payment will resume on the next estimate after the requested TIA is submitted. No other contract payment will be retained regarding TIA submittals.

FINAL UPDATE SCHEDULE

The Contractor shall submit a final update, as-built schedule with actual start and finish dates for the activities, within 30 days after completion of contract work. The Contractor shall provide a written certificate with this submittal signed by the Contractor's project manager and an officer of the company stating, "To my knowledge and belief, the enclosed final update schedule reflects the actual start and finish dates of the actual activities for the project contained herein." An officer of the company may delegate in writing the authority to sign the certificate to a responsible manager.

RETENTION

The Department will retain an amount equal to 25 percent of the estimated value of the work performed during each estimate period in which the Contractor fails to submit an acceptable schedule conforming to the requirements of these special provisions as determined by the Engineer. Schedule retentions will be released for payment on the next monthly estimate for partial payment following the date that acceptable schedules are submitted to the Engineer or as otherwise specified herein. Upon completion of all contract work and submittal of the final update schedule and certification, any remaining retained funds associated with this section, "Progress Schedule (Critical Path Method)", will be released for payment. Retentions held in conformance with this section shall be in addition to other retentions provided for in the contract. No interest will be due the Contractor on retention amounts.

PAYMENT

Progress schedule (critical path method) will be paid for at a lump sum price. The contract lump sum price paid for progress schedule (critical path method) shall include full compensation for furnishing all labor, material, tools, equipment, and incidentals, including computer software, and for doing all the work involved in preparing, furnishing, and updating schedules, and instructing and assisting the Engineer in the use of computer software, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Payments for the progress schedule (critical path method) contract item will be made progressively as follows:

A. A total of 25 percent of the item amount or a total of 25 percent of the amount listed for progress schedule (critical path method) in "Payments" of Section 5 of these special provisions, whichever is less, will be paid upon achieving all of the following:

    1. Completion of 5 percent of all contract item work.
    2. Acceptance of all schedules and TIAs required to the time when 5 percent of all contract item work is complete.
    3. Delivery of schedule software to the Engineer.
    4. Completion of required schedule software training.

B. A total of 50 percent of the item amount or a total of 50 percent of the amount listed for progress schedule (critical path method) in "Payments" of Section 5 of these special provisions, whichever is less, will be paid upon completion of 25 percent of all contract item work and acceptance of all schedules and TIAs required to the time when 25 percent of all contract item work is complete.

C. A total of 75 percent of the item amount or a total of 75 percent of the amount listed for progress schedule (critical path method) in "Payments" of Section 5 of these special provisions, whichever is less, will be paid upon completion of 50 percent of all contract item work and acceptance of all schedules and TIAs required to the time when 50 percent of all contract item work is complete.

D. A total of 100 percent of the item amount or a total of 100 percent of the amount listed for progress schedule (critical path method) in "Payments" of Section 5 of these special provisions, whichever is less, will be paid upon completion of all contract item work, acceptance of all schedules and TIAs required to the time when all contract item work is complete, and submittal of the certified final update schedule.

If the Contractor fails to complete any of the work or provide any of the schedules required by this section, the Engineer shall make an adjustment in compensation in conformance with the provisions in Section 4-1.03C, "Changes in Character of Work," of the Standard Specifications for the work not performed. Adjustments in compensation for schedules will not be made for any increased or decreased work ordered by the Engineer in furnishing schedules.

10-1.20 TIME-RELATED OVERHEAD

The Contractor will be compensated for time-related overhead as described below and in conformance with "Force Account Payment" of these special provisions. The Contractor will not be compensated for time-related overhead for delays to the controlling operations caused by the Engineer that occur prior to the first working day, but will be compensated for actual overhead costs incurred, as determined by an independent Certified Public Accountant audit examination and report.

Attention is directed to "Beginning of Work, Time of Completion and Liquidated Damages," "Force Account Payment," and "Progress Schedule (Critical Path Method)" of these special provisions.

The provisions in Section 9-1.08, "Adjustment of Overhead Costs," of the Standard Specifications shall not apply.

Time-related overhead shall consist of those overhead costs, including field and home office overhead, that are in proportion to the time required to complete the work. Time-related overhead shall not include costs that are not related to time, including but not limited to, mobilization, licenses, permits, and other charges incurred only once during the contract. Time-related overhead shall not apply to subcontractors of any tier, suppliers, fabricators, manufacturers, or other parties associated with the Contractor.

Field office overhead expenses include time-related costs associated with the normal and recurring operations of the construction project, and shall not include costs directly attributable to the work of the contract. Time-related costs of field office overhead include, but are not limited to, salaries, benefits, and equipment costs of project managers, general superintendents, field office managers and other field office staff assigned to the project, and rent, utilities, maintenance, security, supplies, and equipment costs of the project field office.

Home office overhead or general and administrative expenses refer to the fixed costs of operating the Contractor's business. These costs include, but are not limited to, general administration, insurance, personnel and subcontract administration, purchasing, accounting, and project engineering and estimating. Home office overhead costs shall exclude expenses specifically related to other contracts or other businesses of the Contractor, equipment coordination, material deliveries, and consultant and legal fees.

The amount of time-related overhead associated with a reduction in contract time for cost reduction incentive proposals accepted and executed in conformance with the provisions in Section 5-1.14, "Cost Reduction Incentive," of the Standard Specifications shall be considered a construction cost attributable to the resultant estimated net savings due to the cost reduction incentive.

If the final increased amount of time-related overhead exceeds 149 percent of the contract lump sum price bid, the Contractor shall, within 60 days of the Engineer's written request, submit to the Engineer an audit examination and report performed by an independent Certified Public Accountant of the Contractor's actual overhead costs. The audit examination and report shall depict the Contractor's project and company-wide financial records and shall specify the actual overall average daily rates for both field and home office overhead for the entire duration of the project, and whether the costs have been properly allocated. The rates of field and home office overhead shall exclude unallowable costs as determined in the Federal Acquisition Regulations, 48 CFR, Chapter 1, Part 31.

Independent Certified Public Accountant's audit examinations shall be performed in conformance with the requirements of the American Institute of Certified Public Accountants Attestation Standards. Audit examinations and reports shall determine if the rates of field office overhead and home office overhead are:

A. Allowable in conformance with the requirements of the Federal Acquisition Regulations, 48 CFR, Chapter 1, Part 31.
B. Adequately supported by reliable documentation.
C. Related solely to the project under examination.

Within 20 days of receipt of the Engineer's written request, the Contractor shall make its financial records available for audit by the State for the purpose of verifying the actual rate of time-related overhead specified in the audit submitted by the Contractor. The actual rate of time-related overhead specified in the audit, submitted by the Contractor, will be subject to approval by the Engineer.

If the Engineer requests the independent Certified Public Accountant audit, or if it is requested in writing by the Contractor, the contract lump sum payment for time-related overhead, in excess of 149 percent of the lump sum price bid, will be adjusted to reflect the actual rate.

The cost of performing an independent Certified Public Accountant audit examination and submitting the report, requested by the Engineer, will be borne equally by the State and the Contractor. The division of the cost will be made by determining the cost of providing an audit examination and report in conformance with the provisions of Section 9-1.03B, "Work Performed by Special Forces or Other Special Services" of the Standard Specifications, and paying to the Contractor one-half of that cost. The cost of performing an audit examination and submitting the independent Certified Public Accountant audit report for overhead claims other than for the purpose of verifying the actual rate of time-related overhead shall be entirely borne by the Contractor. The cost of performing an audit examination and submitting the independent Certified Public Accountant audit report to verify actual overhead costs incurred prior to the first working day shall be entirely borne by the Contractor.

Time-related overhead will be paid for at a lump sum price. The contract lump sum price bid for time-related overhead will be increased or decreased only as a result of suspensions or adjustments of contract time which revise the current contract completion date and which satisfy any of the following criteria:

A. Suspensions of work ordered in conformance with the provisions in Section 8-1.05, "Temporary Suspension of Work," of the Standard Specifications, except:

    1. Suspensions ordered due to weather conditions being unfavorable for the suitable prosecution of the controlling operation or operations.
    2. Suspensions ordered due to the failure on the part of the Contractor to carry out orders given, or to perform the provisions of the contract.
    3. Suspensions ordered due to factors beyond the control of and not caused by the State or the Contractor, for which the Contractor is granted extensions of time in conformance with the provisions of the third paragraph of Section 8-1.07, "Liquidated Damages," of the Standard Specifications.
    4. Other suspensions that mutually benefit the State and the Contractor.

B. Extensions of contract time granted by the State in conformance with the provisions in the fifth paragraph in Section 8-1.07, "Liquidated Damages," of the Standard Specifications and set forth in approved contract change orders, in conformance with the provisions in Section 4-1.03, "Changes," of the Standard Specifications.
C. Reductions in contract time set forth in approved contract change orders, in conformance with the provisions in Section 4-1.03, "Changes," of the Standard Specifications.

For each day the number of working days bid to complete the contract, in conformance with the provisions in "Beginning Of Work, Time Of Completion And Liquidated Damages," of these special provisions, is increased or decreased due to suspensions or adjustments of contract time as specified above, the lump sum price for time-related overhead will be increased or decreased by an amount equal to the contract lump sum price bid for time-related overhead divided by the number of working days bid to complete the contract.

In the event an early completion progress schedule, as defined in "Progress Schedule (Critical Path Method)" of these special provisions, is submitted by the Contractor and approved by the Engineer, the amount of time-related overhead eligible for payment will be based on the total number of working days for the project, in conformance with the provisions in "Beginning of Work, Time of Completion and Liquidated Damages" of these special provisions, rather than the Contractor's early completion progress schedule.

The contract lump sum price paid for time-related overhead shall include full compensation for time-related overhead, including the Contractor's share of costs of an independent Certified Public Accountant audit of overhead costs requested by the Engineer, as specified in these special provisions, and as directed by the Engineer.

The provisions in Sections 4-1.03B, "Increased or Decreased Quantities," and 4-1.03C, "Changes in Character of the Work," of the Standard Specifications shall not apply to the contract item of time-related overhead.

Full compensation for additional overhead costs involved in incentive and disincentive provisions to satisfy internal milestone or multiple calendar requirements shall be considered as included in the contract items of work involved and no additional compensation will be allowed therefor.

Full compensation for additional overhead costs incurred during days of inclement weather when the contract work is extended into additional construction seasons due to delays caused by the State shall be considered as included in the time-related overhead paid during the contract working days, and no additional compensation will be allowed therefor.

Full compensation for additional overhead costs involved in performing additional contract item work that is not a controlling operation shall be considered as included in the contract items of work involved, and no additional compensation will be allowed therefor.

Full compensation for overhead, other than time-related overhead measured and paid for as specified above, and other than overhead costs included in the markups specified in "Force Account Payment" of these special provisions, shall be considered as included in the various items of work and no additional compensation will be allowed therefor.

Overhead costs incurred by subcontractors of any tier, suppliers, fabricators, manufacturers, and other parties associated with the Contractor shall be considered as included in the various items of work and as specified in Section 9-1.03, "Force Account Payment," of the Standard Specifications.

For the purpose of making partial payments pursuant to the provisions in Section 9-1.06, "Partial Payments," of the Standard Specifications, the amount of time-related overhead in each monthly partial payment will be based on the number of working days that occurred during that monthly estimate period, including compensable suspensions and right of way delays. Working days granted by contract change order due to extra work or changes in character of work, will be compensated upon completion of the contract. The amount earned per working day for time-related overhead shall be the lesser of the following amounts:

A. The contract lump sum price for time-related overhead, divided by the number of working days bid to complete the contract, in conformance with the provisions in "Beginning Of Work, Time Of Completion And Liquidated Damages," of these special provisions.
B. Twenty percent of the original total contract amount, divided by the number of working days bid to complete the contract, in conformance with the provisions in "Beginning Of Work, Time Of Completion And Liquidated Damages," of these special provisions.

After the work has been completed, except plant establishment work, as provided in Section 20-4.08, "Plant Establishment Work," of the Standard Specifications, the amount of the total contract lump sum price for time-related overhead not yet paid will be included for payment in the first estimate made after completion of roadway construction work, in conformance with the provisions in Section 9-1.06, "Partial Payments," of the Standard Specifications.

10-1.21 OBSTRUCTIONS

Attention is directed to Section 8-1.10, "Utility and Non-Highway Facilities," and Section 15, "Existing Highway Facilities," of the Standard Specifications and these special provisions.

Attention is directed to the existence of certain underground facilities that may require special precautions be taken by the Contractor to protect the health, safety and welfare of workers and of the public. Facilities requiring special precautions include, but are not limited to: conductors of petroleum products, oxygen, chlorine, and toxic or flammable gases; natural gas in pipelines greater than 150 mm in diameter or pipelines operating at pressures greater than 415 kPa (gage); underground electric supply system conductors or cables, with potential to ground of more than 300 V, either directly buried or in a duct or conduit which do not have concentric grounded or other effectively grounded metal shields or sheaths.

The Contractor shall notify the Engineer and the appropriate regional notification center for operators of subsurface installations at least 2 working days, but not more than 14 calendar days, prior to performing any excavation or other work close to any underground pipeline, conduit, duct, wire or other structure. Regional notification centers include, but are not limited to, the following:

Notification Center	Telephone Number
Underground Service Alert-Northern California (USA)	1-800-642-2444 1-800-227-2600
MTC SAFE Contact Call Box Project Manager Metropolitan Transportation Commission SAFE 1999 Harrison Street, Suite 1700 Oakland, CA 94612-4700	

The following utility facilities will be relocated during the progress of the contract. The Contractor shall notify the Engineer, in writing, prior to doing work in the vicinity of the facility. The utility facility will be relocated within the listed working days, as defined in Section 8-1.06, "Time of Completion," of the Standard Specifications, after the notification is received by the Engineer:

Utility	Location	Working Days
MTC SAFE *	Call Boxes ## SM-101-138	21
MTC SAFE *	Call Boxes ## SM-101-139	21
MTC SAFE *	Call Boxes ## SM-101-144	21
MTC SAFE *	Call Boxes ## SM-101-145	21
MTC SAFE *	Call Boxes ## SM-101-146	21
MTC SAFE *	Call Boxes ## SM-101-147	21
MTC SAFE *	Call Boxes ## SM-101-152	21
MTC SAFE *	Call Boxes ## SM-101-156	21
MTC SAFE *	Call Boxes ## SM-101-162	21
MTC SAFE *	Call Boxes ## SM-101-163	21
MTC SAFE *	Call Boxes ## SM-101-164	21

*The Metropolitan Transportation Commission Service Authority for Freeways and Expressways (MTC SAFE) administers the call box program.

Call Boxes ## SM-101-138, -139, -144, -145, -146, -147, -152, -156, -162, -163, -164 have to be relocated, as shown on the sign plans. Neither Caltrans nor the Contractor shall remove, relocate or reinstall any call boxes. MTC SAFE or one of its contractors shall perform this work.

During Construction

Resident engineer (by request of Contractor) makes request to MTC SAFE in writing 30 calendar days prior to the date that boxes need to be removed. Fax, email, or mail request form 4CD 1310.

Notify MTC SAFE of any changes to the construction schedules that were made after the requested date.

After Construction

Notify MTC SAFE using Form 4CD 1310 when construction is complete. MTC SAFE will relocate the call boxes. Prior to the permanent relocation of call boxes, MTC SAFE will obtain a new encroachment permit from the Caltrans senior permit engineer (510-286-4425).

In the event that the utility facilities mentioned above are not removed or relocated by the date specified and, if in the opinion of the Engineer, the Contractor's operations are delayed or interfered with by reason of the utility facilities not being removed or relocated by the date specified, the State will compensate the Contractor for the delays to the extent provided in Section 8-1.09, "Right of Way Delays," of the Standard Specifications, and not otherwise, except as provided in Section 8-1.10, "Utility and Non-Highway Facilities," of the Standard Specifications.

10-1.22 DUST CONTROL

Dust control shall conform to the provisions in Section 10, "Dust Control," of the Standard Specifications and these special provisions.

Attention is directed to "Material Containing Aerially Deposited Lead" of these special provisions.

10-1.23 MOBILIZATION

Mobilization shall conform to the provisions in Section 11, "Mobilization," of the Standard Specifications.

10-1.24 CONSTRUCTION AREA TRAFFIC CONTROL DEVICES

Flagging, signs, and temporary traffic control devices furnished, installed, maintained, and removed when no longer required shall conform to the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Category 1 temporary traffic control devices are defined as small and lightweight (less than 45 kg) devices. These devices shall be certified as crashworthy by crash testing, crash testing of similar devices, or years of demonstrable safe performance. Category 1 temporary traffic control devices include traffic cones, plastic drums, portable delineators, and channelizers.

If requested by the Engineer, the Contractor shall provide written self-certification for crashworthiness of Category 1 temporary traffic control devices at least 5 days before beginning any work using the devices or within 2 days after the request if the devices are already in use. Self-certification shall be provided by the manufacturer or Contractor and shall include the following:

A. Date,
B. Federal Aid number (if applicable),
C. Contract number, district, county, route and kilometer post of project limits,
D. Company name of certifying vendor, street address, city, state and zip code,
E. Printed name, signature and title of certifying person; and
F. Category 1 temporary traffic control devices that will be used on the project.

The Contractor may obtain a standard form for self-certification from the Engineer.

Category 2 temporary traffic control devices are defined as small and lightweight (less than 45 kg) devices that are not expected to produce significant vehicular velocity change, but may cause potential harm to impacting vehicles. Category 2 temporary traffic control devices include barricades and portable sign supports.

Category 2 temporary traffic control devices shall be on the Federal Highway Administration's (FHWA) list of Acceptable Crashworthy Category 2 Hardware for Work Zones. This list is maintained by FHWA and can be located at:

http://safety.fhwa.dot.gov/roadway_dept/road_hardware/listing.cfm?code=workzone

The Department also maintains this list at:

http://www.dot.ca.gov/hq/traffops/signtech/signdel/pdf/Category2.pdf

Category 2 temporary traffic control devices that have not received FHWA acceptance shall not be used. Category 2 temporary traffic control devices in use that have received FHWA acceptance shall be labeled with the FHWA acceptance letter number and the name of the manufacturer. The label shall be readable and permanently affixed by the manufacturer. Category 2 temporary traffic control devices without a label shall not be used.

If requested by the Engineer, the Contractor shall provide a written list of Category 2 temporary traffic control devices to be used on the project at least 5 days before beginning any work using the devices or within 2 days after the request if the devices are already in use.

Category 3 temporary traffic control devices consist of temporary traffic-handling equipment and devices that weigh 45 kg or more and are expected to produce significant vehicular velocity change to impacting vehicles. Temporary traffic-handling equipment and devices include crash cushions, truck-mounted attenuators, temporary railing, temporary barrier, and end treatments for temporary railing and barrier.

Type III barricades may be used as sign supports if the barricades have been successfully crash tested, meeting the NCHRP Report 350 criteria, as one unit with a construction area sign attached.

Category 3 temporary traffic control devices shall be shown on the plans or on the Department's Highway Safety Features list. This list is maintained by the Division of Engineering Services and can be found at:

http://www.dot.ca.gov/hq/esc/approved_products_list/HighwaySafe.htm

Category 3 temporary traffic control devices that are not shown on the plans or not listed on the Department's Highway Safety Features list shall not be used.

Full compensation for providing self-certification for crashworthiness of Category 1 temporary traffic control devices and for providing a list of Category 2 temporary traffic control devices used on the project shall be considered as included in the prices paid for the various items of work requiring the use of the Category 1 or Category 2 temporary traffic control devices and no additional compensation will be allowed therefor.

10-1.25 CONSTRUCTION AREA SIGNS

Construction area signs for temporary traffic control shall be furnished, installed, maintained, and removed when no longer required in conformance with the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Attention is directed to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions. Type II retroreflective sheeting shall not be used on construction area sign panels. Type III, IV, VII, VIII, or IX retroreflective sheeting shall be used for stationary mounted construction area sign panels.

Attention is directed to "Construction Project Information Signs" of these special provisions regarding the number and type of construction project information signs to be furnished, erected, maintained, and removed and disposed of.

Unless otherwise shown on the plans or specified in these special provisions, the color of construction area warning and guide signs shall have black legend and border on orange background, except W10-1 or W47(CA) (Highway-Rail Grade Crossing Advance Warning) sign shall have black legend and border on yellow background.

Orange background on construction area signs shall be fluorescent orange.

Repair to construction area sign panels will not be allowed, except when approved by the Engineer. At nighttime under vehicular headlight illumination, sign panels that exhibit irregular luminance, shadowing or dark blotches shall be immediately replaced at the Contractor's expense.

The Contractor shall notify the appropriate regional notification center for operators of subsurface installations at least 2 working days, but not more than 14 calendar days, prior to commencing excavation for construction area sign posts. The regional notification centers include, but are not limited to, the following:

Notification Center	Telephone Number
Underground Service Alert-Northern California (USA)	(800) 642-2444 (800) 227-2600
PG&E Peninsula Division	(650) 598-7361

Excavations required to install construction area signs shall be performed by hand methods without the use of power equipment, except that power equipment may be used if it is determined there are no utility facilities in the area of the proposed post holes. The post hole diameter, if backfilled with portland cement concrete, shall be at least 100 mm greater than the longer dimension of the post cross-section.

Construction area signs placed within 4.6 m from the edge of the travel way shall be mounted on stationary mounted sign supports as specified in "Construction Area Traffic Control Devices" of these special provisions.

The Contractor shall maintain accurate information on construction area signs. Signs that are no longer required shall be immediately covered or removed. Signs that convey inaccurate information shall be immediately replaced or the information shall be corrected. Covers shall be replaced when they no longer cover the signs properly. The Contractor shall immediately restore to the original position and location any sign that is displaced or overturned, from any cause, during the progress of work.

The term "construction area signs" shall include temporary object markers required for the direction of public traffic through or around the work during construction. Object markers listed or designated on the plans as construction area signs shall be considered to be signs and shall be furnished, erected, maintained, and removed by the Contractor in the same manner specified for construction area signs.

Object markers shall be stationary mounted on wood or metal posts in conformance with the details shown on the plans and the provisions in Section 82, "Markers and Delineators," of the Standard Specifications.

Marker panels for Type N, Type P and Type R object markers shall conform to the provisions for sign panels for stationary mounted signs.

Target plates for Type K and Type L object markers and posts, reflectors and hardware shall conform to the provisions in Section 82, but need not be new.

10-1.26 MAINTAINING TRAFFIC

Attention is directed to Sections 7-1.08, "Public Convenience," 7-1.09, "Public Safety," and 12, "Construction Area Traffic Control Devices," of the Standard Specifications and to the provisions in "Public Safety" of these special provisions and these special provisions. Nothing in these special provisions shall be construed as relieving the Contractor from the responsibilities specified in Section 7-1.09.

Lane closures shall conform to the provisions in section "Traffic Control System for Lane Closure" of these special provisions.

At locations where falsework pavement lighting or pedestrian openings through falsework are designated, falsework lighting shall be installed in conformance with the provisions in Section 86-6.11, "Falsework Lighting," of the Standard Specifications.

Openings shall be provided through bridge falsework for the use of public traffic at each location where falsework is constructed over the streets or routes listed in the following table. The type, minimum width, height, and number of openings at each location, and the location and maximum spacing of falsework lighting, if required for each opening, shall conform to the requirements in the table. The width of vehicular openings shall be the clear width between temporary railings or other protective work. The spacing shown for falsework pavement lighting is the maximum distance center to center in meters between fixtures.

Peninsula OC (Replace); Bridge No. 35-0088

	Number	Width	Height
Vehicle Openings	2	18.3_	4.6
Pedestrian Openings	N/A	N/A	N/A
	Location	Spacing	
Falsework Pavement Lighting	R and L	12 m	
Falsework Pavement Lighting	C	12 m staggered ½ space	

(Width and Height in meters)
(R = Right side of traffic. L = Left side of traffic)
(C = Centered overhead)

Peninsula OC (Replace); Bridge No. 35-0088

	Number	Width	Height
Vehicle Openings	2	11.1_	4.6
Pedestrian Openings	N/A	N/A	N/A
	Location	Spacing	
Falsework Pavement Lighting	R and L	12 m staggered ½ space	

(Width and Height in meters)
(R = Right side of traffic. L = Left side of traffic)
(C = Centered overhead)

Broadway POC; Bridge No. 35-0342

	Number	Width	Height
Vehicle Openings	2	18.3_	4.6
Pedestrian Openings	N/A	N/A	N/A
	Location	Spacing	
Falsework Pavement Lighting	R and L	12 m	
Falsework Pavement Lighting	C	12 m staggered ½ space	

(Width and Height in meters)
(R = Right side of traffic. L = Left side of traffic)
(C = Centered overhead)

The exact location of openings will be determined by the Engineer.

The Contractor shall notify local authorities of the Contractor's intent to begin work at least 5 days before work is begun. The Contractor shall cooperate with local authorities relative to handling traffic through the area and shall make arrangements relative to keeping the working area clear of parked vehicles.

Whenever work vehicles or equipment are parked on the shoulder within 1.8 m of a traffic lane, the shoulder area shall be closed as shown on the plans.

Lanes shall be closed only during the hours shown on the charts included in this section "Maintaining Traffic." Except work required under Sections 7-1.08 and 7-1.09, work that interferes with public traffic shall be performed only during the hours shown for lane closures.

The full width of the traveled way shall be open for use by public traffic on Saturdays, Sundays and designated legal holidays; after 3:00 p.m. on Fridays and the day preceding designated legal holidays; and when construction operations are not actively in progress.

Designated legal holidays are: January 1st, the third Monday in February, the last Monday in May, July 4th, the first Monday in September, November 11th, Thanksgiving Day, and December 25th. When a designated legal holiday falls on a Sunday, the following Monday shall be a designated legal holiday. When November 11th falls on a Saturday, the preceding Friday shall be a designated legal holiday.

Designated legal holidays are: January 1st, the third Monday in February, the last Monday in May, July 4th, the first Monday in September, November 11th, Thanksgiving Day, and December 25th. When a designated legal holiday falls on a

Sunday, the following Monday shall be a designated legal holiday. When November 11th falls on a Saturday, the preceding Friday shall be a designated legal holiday.

Special days are: the third Monday in January, February 12th, the third Monday in February, March 31st, the second Monday in October, any day on which a major event, as determined by the Engineer.

Minor deviations from the requirements of this section concerning hours of work which do not significantly change the cost of the work may be permitted upon the written request of the Contractor, if in the opinion of the Engineer, public traffic will be better served and the work expedited. These deviations shall not be adopted by the Contractor until the Engineer has approved the deviations in writing. All other modifications will be made by contract change order.

Chart No. 1
Multilane Lane Requirements

Location: **SB US 101 Full closure at Broadway Ave. See sheet TH-1 for detour #1**
SB US 101 Full closure between Poplar Ave. and 3rd Ave. See sheet TH-3 for detour #3
SB US 101 Full closure between Broadway Ave. and Poplar Ave. See sheet TH-5 for detour #5

	a.m.												p.m.												
FROM HOUR TO HOUR	12	1	2	3	4	5	6	7	8	9	10	11	12	1	2	3	4	5	6	7	8	9	10	11	12
Mondays through Thursdays		X	X	X	X																				
Fridays		X	X	X	X																				
Saturdays				X	X																				
Sundays				X	X																				

Legend:

X	**Full closure permitted in direction of travel**
	No lane closure allowed

REMARKS: Refer to Table Z for lane closure restrictions for designated legal holidays and special days. Table Z lane closure restriction shall take precedence over the lane closure requirements in this chart.

Chart No. 2
Multilane Lane Requirements

Location: **NB US 101 Full closure at Broadway Ave. See sheet TH-2 for detour #2**

	a.m.												p.m.												
FROM HOUR TO HOUR	12	1	2	3	4	5	6	7	8	9	10	11	12	1	2	3	4	5	6	7	8	9	10	11	12
Mondays through Thursdays	X	X	X	X																					
Fridays	X	X	X	X																					
Saturdays		X	X	X	X																				
Sundays		X	X	X	X																				

Legend:

X	**Full closure permitted in direction of travel**
	No lane closure allowed

REMARKS: Refer to Table Z for lane closure restrictions for designated legal holidays and special days. Table Z lane closure restriction shall take precedence over the lane closure requirements in this chart.

Chart No. 3
Multilane Lane Requirements

Location**: NB US 101 Full closure between Poplar Ave. and 3rd Ave. See sheet TH-4 for detour #4**
NB US 101 Full closure between Broadway Ave. and Poplar Ave. See sheet TH-6 for detour #6

	a.m.												p.m.												
FROM HOUR TO HOUR	12	1	2	3	4	5	6	7	8	9	10	11	12	1	2	3	4	5	6	7	8	9	10	11	12
Mondays through Thursdays	**X**	**X**	**X**	**X**																					
Fridays	**X**	**X**	**X**	**X**																					
Saturdays			**X**	**X**	**X**																				
Sundays			**X**	**X**	**X**																				

Legend:

X **Full closure permitted in direction of travel**

No lane closure allowed

REMARKS: Refer to Table Z for lane closure restrictions for designated legal holidays and special days. Table Z lane closure restriction shall take precedence over the lane closure requirements in this chart.

Chart No. 4
Multilane Lane Requirements

Location**: SB US 101 Partial closure between Millbrae Ave. and Broadway Ave.**
SB US 101 Partial closure between Broadway Ave. and Peninsula Ave.
SB US 101 Partial closure between Peninsula Ave. and 3rd Ave.

	a.m.												p.m.												
FROM HOUR TO HOUR	12	1	2	3	4	5	6	7	8	9	10	11	12	1	2	3	4	5	6	7	8	9	10	11	12
Mondays through Thursdays	**2**	**1**	**1**	**1**	**1**	**3**																			
Fridays	**2**	**2**	**1**	**1**	**1**	**3**																			
Saturdays		**3**	**2**	**1**	**1**	**3**																			
Sundays		**3**	**2**	**1**	**1**	**2**																			

Legend:

1 One lane open in direction of travel

2 Two adjacent lanes open in direction of travel

3 Three adjacent lanes open in direction of travel

No lane closure allowed

REMARKS: Refer to Table Z for lane closure restrictions for designated legal holidays and special days. Table Z lane closure restriction shall take precedence over the lane closure requirements in this chart.

Chart No. 5
Multilane Lane Requirements

Location: **NB US 101 Partly closure Between Millbrae Ave. and Broadway Ave.**
NB US 101 Partly closure between Broadway Ave. and Peninsula Ave.
NB US 101 Partly closure between Peninsula Ave. and 3rd Ave.

	a.m.												p.m.												
FROM HOUR TO HOUR	12	1	2	3	4	5	6	7	8	9	10	11	12	1	2	3	4	5	6	7	8	9	10	11	12
Mondays through Thursdays	**2**	**1**	**1**	**1**	**2**																				
Fridays	**2**	**1**	**1**	**1**	**2**																				
Saturdays	**2**	**2**	**1**	**1**	**2**																				
Sundays	**3**	**2**	**2**	**1**	**1**	**2**																			

Legend:

1 One lane open in direction of travel

2 Two adjacent lanes open in direction of travel

3 Three adjacent lanes open in direction of travel

No lane closure allowed

REMARKS: Refer to Table Z for lane closure restrictions for designated legal holidays and special days.
Table Z lane closure restriction shall take precedence over the lane closure requirements in this chart.

Chart No. 6
Ramp Lane Requirements

Location: **NB US-101 ON Ramp at 3rd Avenue. See sheet TH-7 for detour # 7**
NB US-101 OFF Ramp at Dore Avenue.
NB US-101 OFF Ramp at Peninsula Avenue.
NB US-101 ON Ramp at Peninsula Avenue. See sheet TH-8 for detour # 8
NB US-101 OFF Ramp at Anza Avenue.
NB US-101 ON Ramp at Anza Avenue. See sheet TH-9 for detour # 9
NB US-101 OFF Ramp at Broadway Avenue
NB US-101 ON Ramp at Broadway Avenue. See sheet TH-10 for detour # 10

	a.m.												p.m.												
FROM HOUR TO HOUR	12	1	2	3	4	5	6	7	8	9	10	11	12	1	2	3	4	5	6	7	8	9	10	11	12
Mondays through Thursdays	X	X	X	X	X	X																		X	
Fridays	X	X	X	X	X	X																		X	
Saturdays	X	X	X	X	X	X																		X	
Sundays	X	X	X	X	X	X																		X	

Legend:

X	**Ramp may be closed and traffic detoured.**
	No ramp closure allowed

REMARKS: Refer to Table Z for lane closure restrictions for designated legal holidays and special days. Table Z lane closure restriction shall take precedence over the lane closure requirements in this chart.

Chart No. 7
Ramp Lane Requirements

Location: **SB US-101 OFF Ramp at Millbrae Avenue.**
SB US-101 ON Ramp at Millbrae Avenue. See sheet TH-11 for detour # 11
SB US-101 OFF Ramp at Broadway Avenue.
SB US-101 Loop ON Ramp at Broadway Avenue. See sheet TH-12 for detour # 12
SB US-101 ON Ramp at Broadway Avenue. See sheet TH-12 for detour # 12
SB US-101 OFF Ramp at Cadillac Way
SB US-101 OFF Ramp at Poplar Avenue.
SB US-101 ON Ramp at Poplar Avenue. See sheet TH-13 for detour # 13
SB US-101 OFF Ramp at 3rd Avenue.

	a.m.												p.m.												
FROM HOUR TO HOUR	12	1	2	3	4	5	6	7	8	9	10	11	12	1	2	3	4	5	6	7	8	9	10	11	12
Mondays through Thursdays	X	X	X	X	X																			X	
Fridays	X	X	X	X	X																			X	
Saturdays	X	X	X	X	X																			X	
Sundays	X	X	X	X	X																			X	

Legend:

X	**Ramp may be closed and traffic detoured.**
	No ramp closure allowed

REMARKS: Refer to Table Z for lane closure restrictions for designated legal holidays and special days. Table Z lane closure restriction shall take precedence over the lane closure requirements in this chart.

Table Z

Lane Closure Restrictions for Designated Legal Holidays and Special Days											
Each row represents an individual legal holiday or special day situation	Thu	Fri	Sat	Sun	Mon	Tues	Wed	Thu	Fri	Sat	Sun
	x	**H** xx	xx	xx							
		SD xx									
	x	xx	**H** xx	xx							
			SD xx								
		x	xx	**H** xx	xx						
				SD xx							
		x	xx	xx	**H** xx						
		x	xx	xx	**SD** xx						
					x	**H** xx					
						SD xx					
						x	**H** xx				
							SD xx				
							x	**H** xx	xx		xx
								SD xx			

H = Designated Legal Holiday
SD = Special Day

	Refer to lane closure charts
x	The full width of the traveled way shall be open for use by public traffic after 5:00 a.m.
xx	The full width of the traveled way shall be open for use by public traffic.

Pedestrian access facilities shall be provided through construction areas within the right of way as shown on the plans and as specified herein. Pedestrian walkways shall be surfaced with asphalt concrete, portland cement concrete or timber. The surface shall be skid resistant and free of irregularities. Hand railings shall be provided on each side of pedestrian walkways as necessary to protect pedestrian traffic from hazards due to construction operations or adjacent vehicular traffic. Protective overhead covering shall be provided as necessary to insure protection from falling objects and drip from overhead structures.

In addition to the required openings through falsework, pedestrian facilities shall be provided during pile driving, footing, wall, and other bridge construction operations. At least one walkway shall be available at all times. If the Contractor's operations require the closure of one walkway, then another walkway shall be provided nearby, off the traveled roadway.

Railings shall be constructed of wood, S4S, and shall be painted white. Railings and walkways shall be maintained in good condition. Walkways shall be kept clear of obstructions.

The Contractor shall provide shuttle service to ferry pedestrians at locations shown on the plans. The shuttle service shall be made available during the Contractor's operation hours of the construction phase/stage that requires it. If a safe walkway cannot be provided outside the Contractor's operation hours, then the shuttle service should be provided for a 24-hour period.

Full compensation for providing pedestrian facilities, including shuttle service, shall be considered as included in the prices paid for the various contract items of work involved and no additional compensation will be allowed therefor.

Precast concrete members shall not be cast within the right of way of Route 101.

Erection of girders over Route 101 shall be undertaken one span at a time. During girder erection, public traffic in the lanes over which girders are being placed shall be detoured or stopped as specified in this section, "Maintaining Traffic."

Erection and removal of falsework at locations where falsework openings are required shall be undertaken one location at a time. During falsework erection and removal, public traffic in the lanes over which falsework is being erected or removed shall be detoured or stopped as specified in this section, "Maintaining Traffic." Falsework erection shall include adjustments or removal of components that contribute to the horizontal stability of the falsework system**.** Falsework removal shall include lowering falsework, blowing sand from sand jacks, turning screws on screw jacks, and removing wedges.

The Contractor shall have necessary materials and equipment on the site to erect or remove the girders or falsework in any one span or over any one opening before detouring or stopping public traffic.

10-1.27 CLOSURE REQUIREMENTS AND CONDITIONS

Lane closures shall conform to the provisions in "Maintaining Traffic" of these special provisions and these special provisions.

The term closure, as used herein, is defined as the closure of a traffic lane or lanes, including ramp or connector lanes, within a single traffic control system.

CLOSURE SCHEDULE

By noon Monday, the Contractor shall submit a written schedule of planned closures for the following week period, defined as Friday noon through the following Friday noon. Closures involving work (temporary barrier placement and paving operations) that will reduce horizontal clearances, traveled way inclusive of shoulders, to 2 lanes or less shall be submitted not less than 18 working days and no more than 90 working days before the anticipated start of operation. Closures involving work (pavement overlay, overhead sign installation, falsework and girder erection) that will reduce the vertical clearances available to the public, shall be submitted not less than 18 working days and no more than 90 working days before the anticipated start of operation.

Full freeway closures will be allowed during permitted hours only for false work erection/removal, erecting girders, and bridge removal. NB US101 closures shall not occur in conjunction with SB US101 closures for works that involve falsework erection or removal, erecting girders, and bridge removal.

No conflicting traffic can be allowed on any detours during ramp and freeway closures, i.e. any particular detour routes shall not be used in both directions simultaneously. The Contractor shall not close more than one location at any one time.

The Closure Schedule shall show the locations and times when the proposed closures are to be in effect. The Contractor shall use the Closure Schedule request forms furnished by the Engineer. Closure Schedules submitted to the Engineer with incomplete, unintelligible or inaccurate information will be returned for correction and resubmittal. The Contractor will be notified of disapproved closures or closures that require coordination with other parties as a condition of approval.

Amendments to the Closure Schedule, including adding additional closures, shall be submitted to the Engineer, in writing, at least 3 working days in advance of a planned closure. Approval of amendments to the Closure Schedule will be at the discretion of the Engineer.

The Contractor shall confirm, in writing, scheduled closures by no later than 8:00 a.m. 3 working days prior to the date on which the closure is to be made. Approval or denial of scheduled closures will be made no later than 4:00 p.m. 2 working days prior to the date on which the closure is to be made. Closures not confirmed or approved will not be allowed.

Confirmed closures that are cancelled due to unsuitable weather may be rescheduled at the discretion of the Engineer for the following working day.

CONTINGENCY PLAN

The Contractor shall prepare a contingency plan for reopening closures to public traffic. The Contractor shall submit the contingency plan for a given operation to the Engineer within one working day of the Engineer's request.

LATE REOPENING OF CLOSURES

If a closure is not reopened to public traffic by the specified time, work shall be suspended in conformance with the provisions in Section 8-1.05, "Temporary Suspension of Work," of the Standard Specifications. The Contractor shall not make further closures until the Engineer has accepted a work plan, submitted by the Contractor, that will insure that future closures will be reopened to public traffic at the specified time. The Engineer will have 2 working days to accept or reject the Contractor's proposed work plan. The Contractor will not be entitled to compensation for the suspension of work resulting from the late reopening of closures.

For each 10-minute interval, or fraction thereof past the time specified to reopen the closure, the Department will deduct $7200 per interval from moneys due or that may become due the Contractor under the contract.

COMPENSATION

The Contractor shall notify the Engineer of delay in the Contractor's operations due to the following conditions, and if, in the opinion of the Engineer, the Contractor's controlling operation is delayed or interfered with by reason of those conditions, and the Contractor's loss due to that delay could not have been avoided by rescheduling the affected closure or by judicious handling of forces, equipment and plant, the delay will be considered a right of way delay within the meaning of Section 8-1.09, "Right of Way Delays," and compensation for the delay will be determined in conformance with the provisions in Section 8-1.09:

A. The Contractor's proposed Closure Schedule is denied and his planned closures are within the time frame allowed for closures in "Maintaining Traffic" of these special provisions, except that the Contractor will not be entitled to compensation for amendments to the Closure Schedule that are not approved.
B. The Contractor is denied a confirmed closure.

Should the Engineer direct the Contractor to remove a closure prior to the time designated in the approved Closure Schedule, delay to the Contractor's schedule due to removal of the closure will be considered a right of way delay within the meaning of Section 8-1.09, "Right of Way Delays," and compensation for the delay will be determined in conformance with the provisions in Section 8-1.09.

10-1.28 TRAFFIC CONTROL SYSTEM FOR LANE CLOSURE

A traffic control system shall consist of closing traffic lanes and ramps in conformance with the details shown on the plans, the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications, the provisions under "Maintaining Traffic" and "Construction Area Signs" of these special provisions, and these special provisions.

The provisions in this section will not relieve the Contractor from the responsibility to provide additional devices or take measures as may be necessary to comply with the provisions in Section 7-1.09, "Public Safety," of the Standard Specifications.

Each vehicle used to place, maintain and remove components of a traffic control system on multilane highways shall be equipped with a Type II flashing arrow sign which shall be in operation when the vehicle is being used for placing, maintaining or removing components. Vehicles equipped with Type II flashing arrow sign not involved in placing, maintaining or removing components when operated within a stationary lane closure shall only display the caution display mode. The sign shall be controllable by the operator of the vehicle while the vehicle is in motion. The flashing arrow sign shown on the plans shall not be used on vehicles which are being used to place, maintain and remove components of a traffic control system and shall be in place before a lane closure requiring its use is completed.

The 500 m section of lane closure, shown along lane lines between the 300 m lane closure tapers on the plans entitled "Traffic Control System for Lane Closures on Freeways and Expressways" and "Traffic Control System for Lane and Complete Closures on Freeways and Expressways" shall not be used.

The traffic cones shown to be placed transversely across closed traffic lanes and shoulders on the plans entitled "Traffic Control System for Lane Closures on Freeways and Expressways" and "Traffic Control System for Lane and Complete Closures on Freeways and Expressways" shall not be placed.

If components in the traffic control system are displaced or cease to operate or function as specified, from any cause, during the progress of the work, the Contractor shall immediately repair the components to the original condition or replace the components and shall restore the components to the original location.

When lane and ramp closures are made for work periods only, at the end of each work period, components of the traffic control system, except portable delineators placed along open trenches or excavation adjacent to the traveled way, shall be removed from the traveled way and shoulder. If the Contractor so elects, the components may be stored at selected central locations designated by the Engineer within the limits of the highway right of way.

The contract lump sum price paid for traffic control system shall include full compensation for furnishing all labor, materials (including signs), tools, equipment, and incidentals, and for doing all the work involved in placing, removing, storing, maintaining, moving to new locations, replacing, and disposing of the components of the traffic control system shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

The adjustment provisions in Section 4-1.03, "Changes," of the Standard Specifications shall not apply to the item of traffic control system. Adjustments in compensation for traffic control system will be made only for increased or decreased traffic control system required by changes ordered by the Engineer and will be made on the basis of the cost of the increased or decreased traffic control necessary. The adjustment will be made on a force account basis as provided in Section 9-1.03, "Force Account Payment," of the Standard Specifications for increased work and estimated on the same basis in the case of decreased work.

Traffic control system required by work which is classed as extra work, as provided in Section 4-1.03D of the Standard Specifications, will be paid for as a part of the extra work.

10-1.29 TEMPORARY PAVEMENT DELINEATION

Temporary pavement delineation shall be furnished, placed, maintained, and removed in conformance with the provisions in Section 12-3.01, "General," of the Standard Specifications and these special provisions. Nothing in these special provisions shall be construed as reducing the minimum standards specified in the MUTCD, the MUTCD California Supplement, or as relieving the Contractor from the responsibilities specified in Section 7-1.09, "Public Safety," of the Standard Specifications.

GENERAL

Whenever the work causes obliteration of pavement delineation, temporary or permanent pavement delineation shall be in place prior to opening the traveled way to public traffic. Laneline or centerline pavement delineation shall be provided at all times for traveled ways open to public traffic. On multilane roadways (freeways and expressways) edgeline delineation shall be provided at all times for traveled ways open to public traffic.

The Contractor shall perform the work necessary to establish the alignment of temporary pavement delineation, including required lines or marks. Surfaces to receive temporary pavement delineation shall be dry and free of dirt and loose material. Temporary pavement delineation shall not be applied over existing pavement delineation or other temporary pavement delineation. Temporary pavement delineation shall be maintained until superseded or replaced with a new pattern of temporary pavement delineation or permanent pavement delineation.

Temporary pavement markers, including underlying adhesive, and removable traffic tape which are applied to the final layer of surfacing or existing pavement to remain in place or which conflicts with a subsequent or new traffic pattern for the area shall be removed when no longer required for the direction of public traffic, as determined by the Engineer.

TEMPORARY LANELINE AND CENTERLINE DELINEATION

Whenever lanelines or centerlines are obliterated and temporary pavement delineation to replace the lines is not shown on the plans, the minimum laneline and centerline delineation to be provided for that area shall be temporary pavement markers placed at longitudinal intervals of not more than 7.3 m. The temporary pavement markers shall be the same color as the laneline or centerline the pavement markers replace. Temporary pavement markers shall be, at the option of the Contractor, one of the temporary pavement markers listed for short term day/night use (14 days or less) or long term day/night use (6 months or less) in "Prequalified and Tested Signing and Delineation Materials" of these special provisions. The temporary pavement markers shall be placed in conformance with the manufacturer's instructions. Temporary pavement markers for long term day/night use (6 months or less) shall be cemented to the surfacing with the adhesive recommended by the manufacturer, except epoxy adhesive shall not be used to place the temporary pavement markers in areas where removal of the temporary pavement markers will be required.

Temporary laneline or centerline delineation consisting entirely of temporary pavement markers listed for short term day/night use (14 days or less), shall be placed on longitudinal intervals of not more than 7.3 m and shall be used for a maximum of 14 days on lanes opened to public traffic. Prior to the end of the 14 days the permanent pavement delineation shall be placed. If the permanent pavement delineation is not placed within the 14 days, the Contractor shall replace the temporary pavement markers and provide additional temporary pavement delineation and shall bear the cost thereof. The additional temporary pavement delineation to be provided shall be equivalent to the pattern specified for the permanent pavement delineation for the area, as determined by the Engineer.

Full compensation for furnishing, placing, maintaining, and removing the temporary pavement markers (including underlying adhesive, layout (dribble) lines to establish alignment of temporary pavement markers or used for temporary laneline and centerline delineation) for those areas where temporary laneline and centerline delineation is not shown on the plans and for providing equivalent patterns of permanent traffic lines for those areas when required, shall be considered as included in the contract prices paid for the items of work that obliterated the laneline and centerline pavement delineation and no separate payment will be made therefor.

TEMPORARY EDGELINE DELINEATION

On multilane roadways (freeways and expressways), whenever edgelines are obliterated and temporary pavement delineation to replace those edgelines is not shown on the plans, the edgeline delineation to be provided for those areas adjacent to lanes open to public traffic shall be as follows:

A. Temporary pavement delineation for right edgelines shall, at the option of the Contractor, consist of either a solid 100-mm wide traffic stripe of the same color as the stripe the temporary edgeline delineation replaces, or traffic cones, portable delineators or channelizers placed at longitudinal intervals not to exceed 30 m.

B. Temporary pavement delineation for left edgelines shall, at the option of the Contractor, consist of either solid 100-mm wide traffic stripe of the same color as the stripe the temporary edgeline delineation replaces, traffic cones, portable delineators or channelizers placed at longitudinal intervals not to exceed 30 m or temporary pavement markers placed at longitudinal intervals of not more than 1.8 m. Temporary pavement markers used for temporary left edgeline delineation shall be one of the types of temporary pavement markers listed for short term day/night use (14 days or less) or long term day/night use (6 months or less) in "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

Traffic stripe (100-mm wide) placed as temporary edgeline delineation that will require removal shall conform to the provisions of "Temporary Traffic Stripe (Tape)" of these special provisions. Where removal of the 100-mm wide traffic stripe will not be required, painted traffic stripe conforming to the provisions of "Temporary Traffic Stripe (Paint)" of these special provisions may be used. The quantity of temporary traffic stripe (tape) or temporary traffic stripe (paint) used for this temporary edgeline delineation will not be included in the quantities of tape or paint to be paid for.

The lateral offset for traffic cones, portable delineators or channelizers used for temporary edgeline delineation shall be as determined by the Engineer. If traffic cones or portable delineators are used as temporary pavement delineation for edgelines, the Contractor shall provide personnel to remain at the project site to maintain the cones or delineators during the hours of the day that the portable delineators are in use.

Channelizers used for temporary edgeline delineation shall be the surface mounted type and shall be orange in color. Channelizer bases shall be cemented to the pavement in the same manner provided for cementing pavement markers to pavement in "Pavement Markers" of these special provisions, except epoxy adhesive shall not be used to place channelizers on the top layer of pavement. Channelizers shall be, at the Contractor's option, one of the surface mount types (900 mm) listed in "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

Temporary edgeline delineation shall be removed when no longer required for the direction of public traffic as determined by the Engineer.

The quantity of channelizers used as temporary edgeline delineation will not be included in the quantity of channelizers to be paid for. Full compensation for furnishing, placing, maintaining and removing temporary edgeline delineation for those areas where temporary edgeline delineation is not shown on the plans shall be considered as included in the contract prices paid for the items of work that obliterated the edgeline pavement delineation and no separate payment will be made therefor.

TEMPORARY TRAFFIC STRIPE (PAINT)

Temporary traffic stripe consisting of painted traffic stripe shall be applied and maintained at the locations shown on the plans. The painted temporary traffic stripe shall be complete in place at the location shown prior to opening the traveled way to public traffic. Temporary painted traffic stripe shall conform to the provisions in "Paint Traffic Stripes and Pavement Markings" of these special provisions, except for payment. At the option of the Contractor, either one or 2 coats shall be applied regardless of whether on new or existing pavement.

When painted traffic stripe is specified for temporary left edgeline delineation, temporary pavement markers placed at longitudinal intervals of not more than 1.8 m may be used in place of the temporary painted traffic stripe. Temporary pavement markers shall be one of the types of temporary pavement markers listed for long term day/night use (6 months or less) in "Prequalified and Tested Signing and Delineation Materials" of these special provisions. When temporary reflective pavement markers are used in place of temporary painted traffic stripe, payment for those temporary pavement markers will be made on the basis of the theoretical quantity of temporary traffic stripe (paint) required for the left edgeline the temporary pavement markers replace.

TEMPORARY PAVEMENT MARKING (PAINT)

Temporary pavement marking consisting of painted pavement marking shall be applied and maintained at the locations shown on the plans. The painted temporary pavement marking shall be complete in place at the location shown prior to opening the traveled way to public traffic. Removal of painted temporary pavement marking will not be required.

Temporary painted pavement marking shall conform to the provisions in "Paint Traffic Stripes and Pavement Markings" of these special provisions, except for payment. At the option of the Contractor, either one or 2 coats shall be applied regardless whether on new or existing pavement.

At the Contractor's option, temporary removable pavement marking tape or permanent pavement marking tape listed in "Prequalified and Tested Signing and Delineation Materials" of these special provisions may be used instead of painted temporary pavement markings. When pavement marking tape is used, regardless of which type of tape is placed, the tape will be measured and paid for by the square meter as temporary pavement marking (paint).

TEMPORARY PAVEMENT MARKERS

Temporary pavement markers shall be applied at the locations shown on the plans. The pavement markers shall be applied complete in place at the locations shown prior to opening the traveled way to public traffic.

Temporary pavement markers shown on the plans shall be, at the option of the Contractor, one of the temporary pavement markers for long term day/night use (6 months or less) listed in "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

Temporary pavement markers shall be placed in conformance with the manufacturer's instructions and shall be cemented to the surfacing with the adhesive recommended by the manufacturer, except epoxy adhesive shall not be used in areas where removal of the pavement markers will be required.

Where the temporary pavement delineation shown on the plans for lanelines or centerlines consists entirely of a pattern of broken traffic stripe and pavement markers, the Contractor may use groups of the temporary pavement markers for long term day/night use (6 months or less) in place of the temporary traffic stripe tape or painted temporary traffic stripe. The groups of pavement markers shall be spaced as shown on the plans for a similar pattern of permanent traffic line, except pavement markers shown to be placed in the gap between the broken traffic stripe shall be placed as part of the group to delineate the pattern of broken temporary traffic stripe. The kind of laneline and centerline delineation selected by the Contractor shall be continuous within a given location. Payment for those temporary pavement markers used in place of temporary traffic stripe will be made on the basis of the theoretical length of the patterns of temporary traffic stripe (tape) or temporary traffic stripe (paint).

Retroreflective pavement markers conforming to the provisions in "Pavement Markers" of these special provisions may be used in place of temporary pavement markers for long term day/night use (6 months or less) except to simulate patterns of broken traffic stripe. Placement of the retroreflective pavement markers used for temporary pavement markers shall conform to the provisions in "Pavement Markers" of these special provisions except the waiting period provisions before placing the pavement markers on new asphalt concrete surfacing as specified in Section 85-1.06, "Placement," of the Standard Specifications shall not apply and epoxy adhesive shall not be used to place pavement markers in areas where removal of the pavement markers will be required.

MEASUREMENT AND PAYMENT

Temporary traffic stripe (paint) and temporary pavement marking (paint) will be measured and paid for in the same manner specified for paint traffic stripe (1-coat) and paint pavement marking (1-coat) in Section 84-3.06, "Measurement," and Section 84-3.07, "Payment," of the Standard Specifications.

Temporary pavement markers, shown on the plans, will be measured and paid for by the unit in the same manner specified for retroreflective pavement markers in Section 85-1.08, "Measurement," and Section 85-1.09, "Payment," of the Standard Specifications. Temporary pavement markers used for temporary laneline and centerline delineation for areas which are not shown on the plans will not be included in the quantities of temporary pavement markers to be paid for. Full compensation for removing temporary pavement markers, when no longer required, shall be considered as included in the contract unit price paid for temporary pavement marker and no separate payment will be made therefor.

10-1.30 PORTABLE CHANGEABLE MESSAGE SIGN

Portable changeable message signs shall be furnished, placed, operated, and maintained at those locations shown on the plans or where designated by the Engineer in conformance with the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Additional and advance portable changeable message sign for each freeway lane closure shall be used. The exact locations of signs will be designated by the Engineer

Attention is directed to "Maintaining Traffic" of these special provisions regarding the use of the portable changeable message signs.

10-1.31 TEMPORARY RAILING

Temporary railing (Type K) shall be placed as shown on the plans, as specified in the Standard Specifications or these special provisions or where ordered by the Engineer and shall conform to the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Reflectors on temporary railing (Type K) shall conform to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

Temporary railing (Type K), conforming to the details shown on Standard Plan T3 may be used. Temporary railing (Type K) fabricated prior to January 1, 1993, and conforming to 1988 Standard Plan B11-30 may be used, provided the fabrication date is printed on the required Certificate of Compliance and vertical holes are not drilled in the top of the temporary railing to secure temporary traffic screen to the temporary railing.

Attention is directed to "Public Safety" and "Order of Work" of these special provisions.

Temporary railing (Type K) placed in conformance with the provisions in "Public Safety" of these special provisions will be neither measured nor paid for.

10-1.32 CHANNELIZER

Channelizers shall conform to the provisions in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Channelizers shall conform to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

When no longer required for the work as determined by the Engineer, channelizers and underlying adhesive used to cement the channelizer bases to the pavement shall be removed. Removed channelizers and adhesive shall become the property of the Contractor and shall be removed from the site of work.

10-1.33 TEMPORARY TRAFFIC SCREEN

Temporary traffic screen shall be furnished, installed, and maintained on top of temporary railing (Type K) at the locations designated on the plans, specified in the special provisions or directed by the Engineer and shall conform to the provisions specified for traffic handling equipment and devices in Section 12, "Construction Area Traffic Control Devices," of the Standard Specifications and these special provisions.

Temporary traffic screen panels shall be new or used CDX Grade, or better, plywood or weather resistant strandboard mounted and anchored on temporary railing (Type K). Wale boards shall be new or used Douglas fir, rough sawn, Construction Grade, or better. Pipe screen supports shall be new or used galvanized steel pipe, Schedule 40. Nuts, bolts, and washers shall be cadmium plated. Screws shall be black or cadmium plated flat head, cross slotted screws with full thread length.

When no longer required, as determined by the Engineer, temporary traffic screen shall be removed from the site of the work and shall become the property of the Contractor.

Temporary traffic screen will be measured by the meter from actual measurements along the line of the completed temporary traffic screen, at each location designated on the plans, specified or directed by the Engineer. If the Engineer orders a lateral move of temporary railing, with temporary traffic screen attached, and the repositioning is not shown on the plans, moving the temporary traffic screen will be paid for as part of the extra work for moving the temporary railing as specified in Section 12-4.01, "Measurement and Payment," of the Standard Specifications. Temporary traffic screen placed in excess of the length shown, specified or directed by the Engineer will not be paid for.

The contract price paid per meter for temporary traffic screen shall include full compensation for furnishing all labor, materials (including anchoring systems), tools, equipment, and incidentals, and for doing all the work involved in installing, maintaining, and removing the temporary traffic screen, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.34 TEMPORARY CRASH CUSHION MODULE

This work shall consist of furnishing, installing, and maintaining sand filled temporary crash cushion modules in groupings or arrays at each location shown on the plans, as specified in these special provisions or where designated by the Engineer. The grouping or array of sand filled modules shall form a complete sand filled temporary crash cushion in conformance with the details shown on the plans and these special provisions.

Attention is directed to "Public Safety", "Order of Work", and "Temporary Railing" of these special provisions.

Whenever the work or the Contractor's operations establishes a fixed obstacle, the exposed fixed obstacle shall be protected with a sand filled temporary crash cushion. The sand filled temporary crash cushion shall be in place prior to opening the lanes adjacent to the fixed obstacle to public traffic.

Sand filled temporary crash cushions shall be maintained in place at each location, including times when work is not actively in progress. Sand filled temporary crash cushions may be removed during a work period for access to the work provided that the exposed fixed obstacle is 4.6 m or more from a lane carrying public traffic and the temporary crash cushion is reset to protect the obstacle prior to the end of the work period in which the fixed obstacle was exposed. When no longer required, as determined by the Engineer, sand filled temporary crash cushions shall be removed from the site of the work.

At the Contractor's option, the modules for use in sand filled temporary crash cushions shall be either Energite III Inertial Modules, Fitch Inertial Modules or TrafFix Sand Barrels manufactured after March 31, 1997, or equal:

A. Energite III and Fitch Inertial Modules, manufactured by Energy Absorption Systems, Inc., One East Wacker Drive, Chicago, IL 60601-2076. Telephone 1-312-467-6750, FAX 1-800-770-6755

   1. Distributor (North): Traffic Control Service, Inc., 8585 Thys Court, Sacramento, CA 95828. Telephone 1-800-884-8274, FAX 1-916-387-9734
   2. Distributor (South): Traffic Control Service, Inc., 1881 Betmor Lane, Anaheim, CA 92805. Telephone 1-800-222-8274, FAX 1-714-937-1070

B. TrafFix Sand Barrels, manufactured by TrafFix Devices, Inc., 220 Calle Pintoresco, San Clemente, CA 92672. Telephone 1-949 361-5663, FAX 1-949 361-9205

1. Distributor (North): United Rentals, Inc., 1533 Berger Drive, San Jose, CA 95112. Telephone 1-408 287-4303, FAX 1-408 287-1929
2. Distributor (South): Statewide Safety & Sign, Inc., P.O. Box 1440, Pismo Beach, CA 93448. Telephone 1-800-559-7080, FAX 1-805 929-5786

Modules contained in each temporary crash cushion shall be of the same type at each location. The color of the modules shall be the standard yellow color, as furnished by the vendor, with black lids. The modules shall exhibit good workmanship free from structural flaws and objectionable surface defects. The modules need not be new. Good used undamaged modules conforming to color and quality of the types specified herein may be utilized. If used Fitch modules requiring a seal are furnished, the top edge of the seal shall be securely fastened to the wall of the module by a continuous strip of heavy duty tape.

Modules shall be filled with sand in conformance with the manufacturer's directions, and to the sand capacity in kilograms for each module shown on the plans. Sand for filling the modules shall be clean washed concrete sand of commercial quality. At the time of placing in the modules, the sand shall contain not more than 7 percent water as determined by California Test 226.

Modules damaged due to the Contractor's operations shall be repaired immediately by the Contractor at the Contractor's expense. Modules damaged beyond repair, as determined by the Engineer, due to the Contractor's operations shall be removed and replaced by the Contractor at the Contractor's expense.

Temporary crash cushion modules shall be placed on movable pallets or frames conforming to the dimensions shown on the plans. The pallets or frames shall provide a full bearing base beneath the modules. The modules and supporting pallets or frames shall not be moved by sliding or skidding along the pavement or bridge deck.

A Type R or P marker panel shall be attached to the front of the crash cushion as shown on the plans, when the closest point of the crash cushion array is within 3.6 m of the traveled way. The marker panel, when required, shall be firmly fastened to the crash cushion with commercial quality hardware or by other methods determined by the Engineer.

At the completion of the project, temporary crash cushion modules, sand filling, pallets or frames, and marker panels shall become the property of the Contractor and shall be removed from the site of the work. Temporary crash cushion modules shall not be installed in the permanent work.

Temporary crash cushion modules will be measured by the unit as determined from the actual count of modules used in the work or ordered by the Engineer at each location. Temporary crash cushion modules placed in conformance with the provisions in "Public Safety" of these special provisions and modules placed in excess of the number specified or shown will not be measured nor paid for.

Repairing modules damaged by public traffic will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications. Modules damaged beyond repair by public traffic, when ordered by the Engineer, shall be removed and replaced immediately by the Contractor. Modules replaced due to damage by public traffic will be measured and paid for as temporary crash cushion module.

If the Engineer orders a lateral move of the sand filled temporary crash cushions and the repositioning is not shown on the plans, moving the sand filled temporary crash cushion will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications and these temporary crash cushion modules will not be counted for payment in the new position.

The contract unit price paid for temporary crash cushion module shall include full compensation for furnishing all labor, materials (including sand, pallets or frames and marker panels), tools, equipment, and incidentals, and for doing all the work involved in furnishing, installing, maintaining, moving, and resetting during a work period for access to the work, and removing from the site of the work when no longer required (including those damaged by public traffic) sand filled temporary crash cushion modules, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.35 EXISTING HIGHWAY FACILITIES

The work performed in connection with various existing highway facilities shall conform to the provisions in Section 15, "Existing Highway Facilities," of the Standard Specifications and these special provisions.

Except as otherwise provided for damaged materials in Section 15-2.04, "Salvage," of the Standard Specifications, the materials to be salvaged shall remain the property of the State, and shall be cleaned, packaged, bundled, tagged, and hauled to the District Regional Recycle Center at the San Francisco – Oakland Bay Bridge Toll Plaza Warehouse and stockpiled.

Salvaged irrigation facilities shall remain the property of the State and shall be delivered to Caltrans South Bay Maintenance Station, 500 Queens Lane, San Jose, CA 95035, (408) 452-7129.

The Contractor shall notify the Engineer and the District Regional Recycle Coordinator, telephone (510)-286-6111 a minimum of 48 hours prior to hauling salvaged material to the Recycle Center.

Attention is directed to Section 7-1.06, "Safety and Health Provisions," of the Standard Specifications. Work practices and worker health and safety shall conform to the California Division of Occupational Safety and Health Construction Safety Orders Title 8, of the California Code of Regulations including Section 5158, "Other Confined Space Operations."

ABANDON MANHOLE

Existing storm drain manholes and sanitary sewer manholes, where shown on the plans to be abandoned, shall be abandoned.

Frames and covers shall be salvaged. Full compensation for salvaging existing frames and covers shall be considered as included in the contract unit price paid for abandon manhole and no separate payment will be made therefor.

ABANDON CULVERT AND SEWER PIPE LINE

Existing culverts and sewer pipelines, where shown on the plans to be abandoned, shall be abandoned in place or, at the option of the Contractor, the culverts and pipelines shall be removed and disposed of. Resulting openings into existing structures that are to remain in place shall be plugged with commercial quality concrete containing not less than 300 kg of cement per cubic meter.

Abandoning culverts and sewer pipelines in place shall conform to the following:

A. Culverts and sewer pipelines that intersect the side slopes shall be removed to a depth of not less than one meter measured normal to the plane of the finished side slope, before being abandoned.
B. Culverts and sewer pipelines 300 mm in diameter and larger, shall, at the Contractor's option, be backfilled with either sand, controlled low strength material or slurry cement backfill conforming to the provisions in Section 19-3.062, "Slurry Cement Backfill," of the Standard Specifications by any method acceptable to the Engineer that completely fills the pipe. Sand backfill material shall be clean, free draining, and free from roots and other deleterious substances.
C. The ends of culverts and sewer pipelines shall be securely closed by a 150 mm thick tight fitting plug or wall of commercial quality concrete.

Culverts and sewer pipelines shall not be abandoned until their use is no longer required. The Contractor shall notify the Engineer in advance of any intended culvert or pipeline abandonment.

If the Contractor elects to remove and dispose of a culvert or sewer pipeline which is specified to be abandoned, as provided herein, backfill specified for the pipe will be measured and paid for in the same manner as if the culvert or pipeline has been abandoned in place.

Backfill will be measured by the cubic meter determined from the dimensions of the culverts and sewer pipelines to be abandoned.

The contract price paid per cubic meter for Sand Backfill and Sand Backfill (Abandon Sewer) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in backfilling culverts and sewer pipelines with sand, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Controlled low strength material and slurry cement backfill, if used at the Contractor's option, will be measured and paid for by the cubic meter as sand backfill.

Full compensation for concrete plugs, pipe removal, structure excavation, and backfill shall be considered as included in the contract price paid per meter for abandon culvert and abandon sewer and no additional compensation will be allowed therefor.

ABANDON INLET

Existing concrete drainage inlets, where shown on the plans to be abandoned, shall be abandoned.

The top portion of the inlets shall be removed to a depth of 1 m below finished grade.

Removed frames and grates shall be disposed of.

SALVAGE METAL BEAM GUARD RAILING

Existing metal beam guard railing, where shown on the plans to be salvaged, shall be removed and salvaged.

Existing concrete anchors or steel foundation tubes shall be completely removed and disposed of. Full compensation for removing and disposing of concrete anchors or steel foundation tubes shall be considered as included in the contract price paid per meter for salvage metal beam guard railing and no separate payment will be made therefor.

SALVAGE METAL FENCE

Existing metal fence, where shown on the plans to be salvaged, shall be removed and salvaged.

Salvaged metal fence materials shall be hauled to Poplar Creek Golf Course and stockpiled. The Contractor shall contact Tim Heck of the Poplar Creek Golf Course at (650) 522-7512.

Existing fence posts shall be completely removed and disposed of. Full compensation for removing and disposing of fence posts shall be considered as included in the contract price paid per meter for salvage metal fence and no separate payment will be made therefor.

The contract price paid per meter for Salvage metal fence shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all work involved in salvage metal fence, complete in place, as shown on the plans, as specified in the Standard Specification and these special provisions, and as directed by the Engineer.

Full compensation for backfilling and compacting post holes shall be considered as included in the contract price paid per meter for salvage metal fence and no additional compensation will be allowed therefore.

RELOCATE METAL FENCE

Existing metal fence shall be removed and relocated to the new location as shown on the plans or as directed by the Engineer.

The contract price paid per meter for Relocate Existing Metal Fence shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all work involved in relocate existing metal fence, complete in place, as shown on the plans, as specified in the Standard Specification and these special provisions, and as directed by the Engineer.

Full compensation for backfilling and compacting post holes shall be considered as included in the contract price paid per meter for relocate existing metal fence and no additional compensation will be allowed therefore.

REMOVE WOOD BEAM GUARD RAILING

Existing wood beam guard railing, where shown on the plans to be removed, shall be removed and disposed of.

Existing concrete anchors or steel foundation tubes shall be completely removed and disposed of. Full compensation for removing concrete anchors shall be considered as included in the contract price paid per meter for remove wood beam guard railing and no separate payment will be made therefor.

Full compensation for removing cable anchor assemblies, terminal anchor assemblies or steel foundation tubes shall be considered as included in the contract price paid per meter for remove wood beam guard railing and no separate payment will be made therefor.

REMOVE SIGN STRUCTURE

Existing sign structures, where shown on the plans to be removed, shall be removed and disposed of.

Overhead sign structure removal shall consist of removing posts, frames, portions of foundations, sign panels, walkways with safety railings, and sign lighting electrical equipment.

Bridge mounted sign structure removal shall consist of removing sign panels and frames, sign lighting electrical equipment, walkways with safety railings, structural braces and supports, and hardware.

A sign structure shall not be removed until the structure is no longer required for the direction of public traffic.

Concrete foundations may be abandoned in place, except that the top portion, including anchor bolts, reinforcing steel, and conduits shall be removed to a depth of not less than 1 m below the adjacent finished grade. The resulting holes shall be backfilled and compacted with material equivalent to the surrounding material.

Electrical wiring shall be removed to the nearest pull box. Fuses within spliced connections in the pull box shall be removed and disposed of.

Electrical equipment, where shown on the plans, shall be salvaged.

REMOVE PAVEMENT MARKER

Existing pavement markers, including underlying adhesive, when no longer required for traffic lane delineation as determined by the Engineer, shall be removed and disposed of.

REMOVE TRAFFIC STRIPE AND PAVEMENT MARKING

Traffic stripe, temporary traffic stripe (paint) and pavement marking shall be removed at the locations shown on the plans and as directed by the Engineer.

Attention is directed to "Water Pollution Control" of these special provisions.

Waste from removal of yellow thermoplastic and yellow painted traffic stripe and pavement marking contains lead chromate in average concentrations greater than or equal to 350 mg/kg and less than 1000 mg/kg Total Lead. Yellow thermoplastic and yellow paint traffic stripe and pavement marking exist from Station 139 to Station 205. Residue produced when yellow thermoplastic and yellow paint are removed may contain heavy metals in concentrations that exceed thresholds established by the California Health and Safety Code and may produce toxic fumes when heated.

The removed yellow thermoplastic and yellow paint shall be disposed of at a Class 1 disposal facility permitted by the Regional Water Quality Control Board in conformance with the requirements of the disposal facility operator within 7 days after accumulating 100 kg of residue and dust. The Contractor shall make necessary arrangements with the operator of the disposal facility to test the yellow thermoplastic and yellow paint residue as required by the facility and these special provisions. Testing shall include, at a minimum, (1) Total Lead and Chromium by EPA Method 7000 series and (2) Soluble Lead and Chromium by California Waste Extraction Test. From the first 3360 L of waste or portion thereof, if less than 3360 L of waste are produced, a minimum of four randomly selected samples shall be taken and analyzed. From each additional 840 L of waste or portion thereof, if less than 840 L are produced, a minimum of one additional random sample shall be taken and analyzed. The Contractor shall submit the name and location of the disposal facility and analytical laboratory along with the testing requirements to the Engineer not less than 7 days prior to the start of removal of yellow thermoplastic and yellow painted traffic stripe and pavement marking. The analytical laboratory shall be certified by the Department of Health Services Environmental Laboratory Accreditation Program. Test results shall be provided to the Engineer for review prior to signing a waste profile as requested by the disposal facility, prior to issuing an EPA identification number, and prior to allowing removal of the waste from the site.

The Contractor shall prepare a project specific Lead Compliance Plan to prevent or minimize worker exposure to lead while handling removed yellow thermoplastic and yellow paint residue. Attention is directed to Title 8, California Code of Regulations, Section 1532.1, "Lead," for specific Cal-OSHA requirements when working with lead.

The Lead Compliance Plan shall contain the elements listed in Title 8, California Code of Regulations, Section 1532.1(e)(2)(B). Before submission to the Engineer, the Lead Compliance Plan shall be approved by an Industrial Hygienist certified in Comprehensive Practice by the American Board of Industrial Hygiene. The Plan shall be submitted to the Engineer at least 7 days prior to beginning removal of yellow thermoplastic and yellow paint.

Prior to removing yellow thermoplastic and yellow painted traffic stripe and pavement marking, personnel who have no prior training, including State personnel, shall complete a safety training program provided by the Contractor that meets the requirements of Title 8, California Code of Regulations, Section 1532.1, "Lead," and the Contractor's Lead Compliance Program.

Personal protective equipment, training, and washing facilities required by the Contractor's Lead Compliance Plan shall be supplied to State personnel by the Contractor. The number of State personnel will be 3.

Where grinding or other methods approved by the Engineer are used to remove yellow thermoplastic and yellow painted traffic stripe and pavement marking, the removed residue, including dust, shall be contained and collected immediately. Sweeping equipment shall not be used. Collection shall be by a high efficiency particulate air (HEPA) filter equipped vacuum attachment operated concurrently with the removal operations or other equally effective methods approved by the Engineer. The Contractor shall submit a written work plan for the removal, storage, and disposal of yellow thermoplastic and yellow painted traffic stripe and pavement marking to the Engineer for approval not less than 7 days prior to the start of the removal operations. Removal operations shall not be started until the Engineer has approved the work plan.

The removed yellow thermoplastic and yellow painted traffic stripe and pavement marking residue shall be stored and labeled in covered containers. Labels shall conform to the provisions of Title 22, California Code of Regulations, Sections 66262.31 and 66262.32. Labels shall be marked with date when the waste is generated, the words "Hazardous Waste", composition and physical state of the waste (for example, asphalt grindings with thermoplastic or paint), the word "Toxic", the name and address of the Engineer, the Engineer's telephone number, contract number, and Contractor or subcontractor. The containers shall be a type approved by the United States Department of Transportation for the transportation and temporary storage of the removed residue. The containers shall be handled so that no spillage will occur. The containers shall be stored in a secured enclosure at a location within the project limits until disposal, as approved by the Engineer.

If the yellow thermoplastic and yellow painted traffic stripe and pavement marking residue is transported to a Class 1 disposal facility, a manifest shall be used, and the transporter shall be registered with the California Department of Toxic Substance Control. The Engineer will obtain the United States Environmental Protection Agency Identification Number and sign all manifests as the generator within 2 working days of receiving sample test results and approving the test methods.

The Contractor shall assume that the yellow paint removed is not regulated under the Federal Resource Conservation and Recovery Act (RCRA). Additional disposal costs for removal residue regulated under RCRA, as determined by test results required by the disposal facility, will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

Nothing in these special provisions shall relieve the Contractor of the Contractor's responsibilities as specified in Section 7-1.09, "Public Safety," of the Standard Specifications.

Attention is directed to "Material Containing Aerially Deposited Lead" of these special provisions regarding payment for the Lead Compliance Plan.

Full compensation for providing a written work plan for the removal, storage, and disposal of yellow thermoplastic and yellow painted traffic stripe shall be considered as included in the contract items paid per meter for remove yellow thermoplastic traffic stripe and remove yellow painted traffic stripe and no separate payment will be made therefor.

REMOVE DRAINAGE FACILITY

Existing box culverts, inlets, and headwalls, where any portion of these structures is within one meter of the grading plane in excavation areas, or within 0.3-m of original ground in embankment areas, or where shown on the plans to be removed, shall be completely removed and disposed of.

REMOVE SEWER MANHOLE AND SEWER PIPE

Existing sewer manhole and sewer pipe, where shown on the plans to be removed, shall be completely removed and disposed of.

Remove sewer manhole will be measured and paid for per unit in the same manner specified for remove manhole in Section 15, "Existing Highway Facilities" of the Standard Specifications

Remove sewer pipe will be measured and paid for by the meter in the same manner specified for remove culvert in Section 15, "Existing Highway Facilities" of the Standard Specifications.

REMOVE SLOTTED DRAIN

Existing slotted drain, where shown on the plans to be removed, shall be completely removed and disposed of.

Remove slotted drain will be measured and paid for by the meter in the same manner specified for remove culvert in Section 15, "Existing Highway Facilities," of the Standard Specifications.

REMOVE ROADSIDE SIGN

Existing roadside signs, at those locations shown on the plans to be removed, shall be removed and disposed of.

Sign panels shown on the plans shall be salvaged.

Existing roadside signs shall not be removed until replacement signs have been installed or until the existing signs are no longer required for the direction of public traffic, unless otherwise directed by the Engineer.

Full compensation for salvaging sign panels shall be considered as included in the contract unit price paid for remove roadside sign and no separate payment will be made therefor.

RECONSTRUCT METAL BEAM GUARD RAILING

Existing metal beam guard railing, where shown on the plans to be reconstructed, shall be reconstructed.

Attention is directed to "Order of Work" of these special provisions regarding the reconstruction of metal beam guard railing at those locations exposed to public traffic.

Cable anchor assemblies or terminal anchor assemblies, including concrete anchors and steel foundation tubes, shall be completely removed and disposed of.

New posts, blocks, and hardware shall be furnished and used to reconstruct metal beam guard railing. New posts and blocks shall conform to the provisions in Section 83-1.02B, "Metal Beam Guard Railing," of the Standard Specifications.

Posts, blocks, and other components of the removed metal beam guard railing, including terminal sections, that are not used in the reconstruction work shall be disposed of.

Full compensation for furnishing and installing new posts, blocks, and hardware; for connecting reconstructed metal beam guard railing to existing structures, other flat concrete surfaces or terminal systems; and for removing and disposing of anchor assemblies shall be considered as included in the contract price paid per meter for reconstruct metal beam guard railing and no separate payment will be made therefor.

Terminal anchor assemblies (Type SFT) for reconstructed metal beam guard railing will be measured and paid for separately and shall conform to the provisions in "Metal Beam Guard Railing" of these special provisions.

Terminal System (Type SRT for connection to reconstructed metal beam guard railing will be measured and paid for separately in conformance with the provisions in "Terminal System (Type SRT)" of these special provisions.

ADJUST INLET

Existing concrete drainage inlets, manholes, and sewer manholes shall be adjusted as shown on the plans.

Portland cement concrete shall be minor concrete or may be produced from commercial quality concrete containing not less than 350 kilograms of cement per cubic meter.

Adjustment of inlets and manholes shall be performed prior to paving and shall be limited to the area to be paved or surfaced during the working day in which the adjustment is performed. The top of the inlet grate or manhole cover shall be protected from the asphalt concrete during paving operations by means of heavy plywood covers, steel plate covers or by other methods approved by the Engineer. Excess paving material shall be removed prior to rolling.

REMOVE BASE AND SURFACING

Existing base and bituminous surfacing shown on the plans to be removed, shall be removed to a depth of at least 150 mm below the grade of the existing surfacing. Resulting holes and depressions shall be backfilled with earthy material selected from excavation to the lines and grade established by the Engineer.

Removing base and surfacing will be measured by the cubic meter in the same manner specified for roadway excavation in conformance with the provisions in Section 19, "Earthwork," of the Standard Specifications and will be paid for at the contract price per cubic meter for remove base and surfacing.

COLD PLANE ASPHALT CONCRETE PAVEMENT

Existing asphalt concrete pavement shall be cold planed at the locations and to the dimensions shown on the plans.

Planing asphalt concrete pavement shall be performed by the cold planing method. Planing of the asphalt concrete pavement shall not be done by the heater planing method.

Cold planing machines shall be equipped with a cutter head not less than 750 mm in width and shall be operated so that no fumes or smoke will be produced. The cold planing machine shall plane the pavement without requiring the use of a heating device to soften the pavement during or prior to the planing operation.

The depth, width, and shape of the cut shall be as shown on the typical cross sections or as designated by the Engineer. The final cut shall result in a uniform surface conforming to the typical cross sections. The outside lines of the planed area shall be neat and uniform. Planing asphalt concrete pavement operations shall be performed without damage to the surfacing to remain in place.

Planed widths of pavement shall be continuous except for intersections at cross streets where the planing shall be carried around the corners and through the conform lines. Following planing operations, a drop-off of more than 45 mm will not be allowed between adjacent lanes open to public traffic.

Where transverse joints are planed in the pavement at conform lines no drop-off shall remain between the existing pavement and the planed area when the pavement is opened to public traffic. If asphalt concrete has not been placed to the level of existing pavement before the pavement is to be opened to public traffic a temporary asphalt concrete taper shall be constructed. Asphalt concrete for temporary tapers shall be placed to the level of the existing pavement and tapered on a slope of 1:30 (Vertical: Horizontal) or flatter to the level of the planed area.

Asphalt concrete for temporary tapers shall be commercial quality and may be spread and compacted by any method that will produce a smooth riding surface. Temporary asphalt concrete tapers shall be completely removed, including the removal of loose material from the underlying surface, before placing the permanent surfacing. The removed material shall be disposed of outside the highway right of way in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Asphalt concrete for temporary tapers shall be commercial quality and shall conform to the provisions in Section 39, "Asphalt Concrete," of the Standard Specifications and these special provisions and may be spread and compacted by any method that will produce a smooth riding surface. Temporary asphalt concrete tapers shall be completely removed, including the removal of loose material from the underlying surface, before placing the permanent surfacing. The removed material shall be disposed of outside the highway right of way in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

The material planed from the roadway surface, including material deposited in existing gutters or on the adjacent traveled way, shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications. Removal operations of cold planed material shall be concurrent with planing operations and follow within 15 m of the planer, unless otherwise directed by the Engineer.

Cold plane asphalt concrete pavement will be measured by the square meter. The quantity to be paid for will be the actual area of surface cold planed irrespective of the number of passes required to obtain the depth shown on the plans.

The contract price paid per square meter for cold plane asphalt concrete pavement shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in cold planing asphalt concrete surfacing and disposing of planed material, including furnishing the asphalt concrete for and constructing, maintaining, removing, and disposing of temporary asphalt concrete tapers, as specified in the Standard Specifications and these special provisions and as directed by the Engineer.

CAP INLET

Existing concrete drainage inlets, where shown on the plans to be capped, shall be capped and the bottoms of the inlets shall be rounded with portland cement concrete as shown on the plans.

Portland cement concrete shall be minor concrete or may be produced from commercial quality aggregates and cement containing not less than 350 kg of cement per cubic meter.

Inlets shall be removed to a depth of at least 0.3-m below the grading plane.

Concrete removal shall be performed without damage to portions of the inlet that are to remain in place. Damage to existing concrete, which is to remain in place, shall be repaired by the Contractor to a condition equal to that existing prior to

the beginning of removal operations. The repair of existing concrete damaged by the Contractor's operations shall be at the Contractor's expense.

Existing reinforcement that is to be incorporated in the new work shall be protected from damage and shall be thoroughly cleaned of adhering material before being embedded in the new concrete.

The quantity of capping inlets will be determined as units from actual count.

The contract unit price paid for cap inlet shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in capping inlets, including removing portions of inlets, rounding bottoms of inlets, bar reinforcing steel, and structure excavation and structure backfill, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

EXISTING HIGHWAY IRRIGATION FACILITIES

Existing irrigation facilities within the limits of work shall remain in place. Irrigation facilities that are damaged by the Contractor's operation shall be reported immediately to the Engineer.

Water shall be maintained in conformance with the provisions in Section 20-5.025, "Maintain Existing Water Supply," of the Standard Specifications.

BRIDGE REMOVAL

Removing bridges or portions of bridges shall conform to the provisions in Section 15-4, "Bridge Removal," of the Standard Specifications and these special provisions.

Bridge Removal shall consist of removing the following bridges as shown on plans and as required to complete the work:

Location A: Peninsula Avenue Overcrossing (Bridge No. 35-0088)
Location B: Monte Diablo Avenue Pedestrian Overcrossing (Bridge No. 35-0134)

Removed materials that are not to be salvaged or used in the reconstruction shall become the property of the Contractor and shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

The Contractor shall submit a complete bridge removal plan to the Engineer for each bridge listed above, detailing procedures, sequences, and all features required to perform the removal in a safe and controlled manner.

The bridge removal plan shall include, but not be limited to the following:

A. The removal sequence, including staging of removal operations.
B. Equipment locations on the structure during removal operations.
C. Temporary support shoring or temporary bracing.
D. Locations where work is to be performed over traffic or utilities.
E. Details, locations, and types of protective covers to be used.
F. Measures to assure that people, property, utilities, and improvements will not be endangered.
G. Details and measures for preventing material, equipment, and debris from falling onto public traffic.

When protective covers are required for removal of portions of a bridge, or when superstructure removal works on bridges are involved, the Contractor shall submit working drawings, with design calculations, to the Engineer for the proposed bridge removal plan, and the bridge removal plan shall be prepared and signed by an engineer who is registered as a Civil Engineer in the State of California. The design calculations shall be adequate to demonstrate the stability of the structure during all stages of the removal operations. Calculations shall be provided for each stage of bridge removal and shall include dead and live load values assumed in the design of protective covers. At a minimum, a stage will be considered to be removal of the deck, the soffit, or the girders, in any span; or walls, bent caps, or columns at support locations.

Temporary support shoring, temporary bracing, and protective covers, as required, shall be designed and constructed in conformance with the provisions in Section 51-1.06, "Falsework," of the Standard Specifications and these special provisions.

The assumed horizontal load to be resisted by the temporary support shoring and temporary bracing, for removal operations only, shall be the sum of the actual horizontal loads due to equipment, construction sequence or other causes, and an allowance for wind, but in no case shall the assumed horizontal load to be resisted in any direction be less than 5 percent of the total dead load of the structure to be removed.

The bridge removal plan shall conform to the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. The number of sets of drawings, design calculations, the time for reviewing bridge removal plans shall be the same as specified for falsework working drawings in Section 51-1.06A, "Falsework Design and Drawings," of the Standard Specifications.

The following additional requirements apply to the removal of bridges or portions of bridges that are over or adjacent to roadways that may be closed to public traffic for only brief periods of time:

A. The closure of roadways to public traffic shall conform to the provisions in "Order of Work" and "Maintaining Traffic" of these special provisions.
B. Prior to closing a roadway to traffic to accommodate bridge removal operations, the Contractor shall have all necessary workers, materials, and equipment at the site as needed to proceed with the removal work in an expeditious manner. While the roadway is closed to public traffic, work shall be pursued promptly and without interruption until the roadway is reopened to public traffic.
C. Bridge removal operations shall be performed during periods of time that the roadway is closed to public traffic except as specified herein for preliminary work.
D. Preliminary work shall be limited to operations that will not reduce the structural strength or stability of the bridge, or any element thereof, to a level that in the judgment of the Engineer would constitute a hazard to the public. This preliminary work shall also be limited to operations that cannot cause debris or any other material to fall onto the roadway. Protective covers may be used to perform preliminary work such as chipping or cutting the superstructure into segments, provided the covers are of sufficient strength to support all loads and are sufficiently tight to prevent dust and fine material from sifting down onto the traveled way. Protective covers shall extend at least 1.2 m beyond the limit of the work underway. Bottom slabs of box girders may be considered to be protective covers for preliminary work performed on the top slab inside the limits of the exterior girders.
E. Temporary support shoring and temporary bracing shall be used in conjunction with preliminary work when necessary to insure the stability of the bridge.
F. Temporary support shoring, temporary bracing, and protective covers shall not encroach closer than 2.4 m horizontally from the edge or 4.6 m vertically above any traffic lane or shoulder that is open to public traffic.
G. During periods when the roadway is closed to public traffic, debris from bridge removal operations may be allowed to fall directly onto the lower roadway provided adequate protection is furnished for all highway facilities. The minimum protection for paved areas shall be a 0.6-m thick earthen pad or a 25-mm thick steel plate placed over the area where debris can fall. Prior to reopening the roadway to public traffic, all debris, protective pads, and devices shall be removed and the roadway swept clean with wet power sweepers or equivalent methods.
H. The removal operations shall be conducted in such a manner that the portion of the structure not yet removed remains in a stable condition at all times. For girder bridges, each girder shall be completely removed within a span before the removal of the adjacent girder is begun. For slab type bridges, removal operations within a span shall be performed along a front that roughly parallels the primary reinforcing steel.

The following additional requirements apply to the removal of bridges or portions of bridges whenever the removal work is to be performed over public traffic or railroad property:

A. A protective cover shall be constructed before beginning bridge removal work. The protective cover shall be supported by shoring, falsework, or members of the existing structure. The Contractor shall be responsible for designing and constructing safe and adequate protective covers, shoring, and falsework with sufficient strength and rigidity to support the entire load to be imposed.
B. The construction and removal of the protective cover, and the installation and removal of temporary railings shall conform to the provisions in "Order of Work," "Maintaining Traffic," and "Temporary Railings" of these special provisions.
C. Bridge removal methods shall be described in the working drawings, supported by calculations with sufficient details to substantiate live loads used in the protective cover design. Dead and live load values assumed for designing the protective cover shall be shown on the working drawings.
D. The protective cover shall prevent any materials, equipment, or debris from falling onto public traffic. The protective cover shall have a minimum strength equivalent to that provided by good, sound Douglas fir planking having a nominal thickness of 50 mm. Additional layers of material shall be furnished as necessary to prevent fine materials or debris from sifting down upon the traveled way and shoulders.
E. During the removal of bridge segments, and when portions of the bridge, such as deck slabs or box girder slabs, comply with the requirements for the protective cover, a separate protective cover need not be constructed.
F. At locations where entire girders are to be removed, the protective cover shall extend at least 3 m beyond the outside face of the bridge railing.
G. The protective cover shall provide the openings specified under "Maintaining Traffic" of these special provisions, except that when no openings are specified for bridge removal, a vertical opening of 4.6 m and a horizontal opening of 9.8 m shall be provided for the passage of public traffic.
H. Falsework or supports for protective covers shall not extend below the vertical clearance level nor to the ground line at any location within the roadbed.

I. The construction of the protective cover as specified herein shall not relieve the Contractor of responsibilities specified in Section 7-1.12A, "Indemnification," and Section 7-1.12B, "Insurance," of the Standard Specifications.
J. Before removal of the protective cover, the Contractor shall clean the protective cover of all debris and fine material.

For bridge removal that requires the Contractor's registered engineer to prepare and sign the bridge removal plan, the Contractor's registered engineer shall be present at all times when bridge removal operations are in progress. The Contractor's registered engineer shall inspect the bridge removal operation and report in writing on a daily basis the progress of the operation and the status of the remaining structure. A copy of the daily report shall be available at the site of the work at all times. Should an unplanned event occur or the bridge operation deviate from the approved bridge removal plan, the Contractor's registered engineer shall submit immediately to the Engineer for approval, the procedure of operation proposed to correct or remedy the occurrence.

REMOVE CONCRETE

Concrete, (curb and gutter, sidewalk, barrier, island and sound wall) where shown on the plans to be removed, shall be removed.

The pay quantities of concrete to be removed for curb and gutter, island, sidewalk and sound wall will be measured by the cubic meter, measured before and during removal operations.

Removing concrete barrier will be measured by the meter, measured along the-barrier before removal operations.

Concrete removed shall be disposed of outside the highway right of way in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

10-1.36 CLEARING AND GRUBBING

Clearing and grubbing shall conform to the provisions in Section 16, "Clearing and Grubbing," of the Standard Specifications and these special provisions.

Clearing and grubbing shall include removal of trees as shown on the plans.

Attention is directed to "Order of Work," "Environmentally Sensitive Areas" and "Material Containing Aerially Deposited Lead," elsewhere in these special provisions.

Vegetation shall be cleared and grubbed 1.5 m beyond the toe of slope lines.

Full compensation for additional grading stakes and control shall be considered as included in contract lump sum price paid for clearing and grubbing, and no separate payment will be made therefore.

At locations where there is no grading adjacent to a bridge or other structure, clearing and grubbing of vegetation shall be limited to 1.5 m outside the physical limits of the bridge or structure.

Existing vegetation outside the areas to be cleared and grubbed shall be protected from injury or damage resulting from the Contractor's operations.

Activities controlled by the Contractor, except cleanup or other required work, shall be confined within the graded areas of the roadway.

Nothing herein shall be construed as relieving the Contractor of the Contractor's responsibility for final cleanup of the highway as provided in Section 4-1.02, "Final Cleaning Up," of the Standard Specifications.

10-1.37 WATERING

Developing a water supply and applying watering shall conform to the provisions in Section 17, "Watering," of the Standard Specifications and these special provisions.

Attention is directed to "Beginning of Work, Time of Completion and Liquidated Damages" of these special provisions regarding availability of water.

10-1.38 EARTHWORK

Earthwork shall conform to the provisions in Section 19, "Earthwork," of the Standard Specifications and these special provisions.

Structure backfill or roadway embankment with the limits of the bridge abutments as shown on the plans shall have an Expansion Index (EI) less than 50 and Sand Equivalent (SE) greater than 20. The Expansion Index shall be determined in accordance with ASTM D4829. The Sand Equivalent shall be determined in accordance with California Test Method 217.

At locations and to the limits shown on the plans, Structure backfill (bridge) shall also meet expansion index requirements as shown on the plans.

Full compensation for conforming to the above expansion index requirements shall be considered as included in the contract prices paid for the various contract items of the work and no additional compensation will be allowed therefor.

Attention is directed to "Material Containing Aerially Deposited Lead" of these special provisions.

When portland cement concrete pavement is to be placed on the grading plane, the grading plane shall not extend above the grade established by the Engineer.

The grading plane of embankments beneath structure approach slabs and beneath the thickened portion of sleeper slabs shall not project above the grade established by the Engineer.

Surplus excavated material not designated or determined to contain aerially deposited lead shall become the property of the Contractor and shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Where a portion of the existing surfacing is to be removed, the outline of the area to be removed shall be cut on a neat line with a power-driven saw to a minimum depth of 50 mm before removing the surfacing. Full compensation for cutting the existing surfacing shall be considered as included in the contract price paid per cubic meter for roadway excavation and no additional compensation will be allowed therefor.

Reinforcement or metal attached to reinforced concrete rubble placed in embankments shall not protrude above the grading plane. Prior to placement within 0.6-m below the grading plane of embankments, reinforcement or metal shall be trimmed to no greater than 20 mm from the face of reinforced concrete rubble. Full compensation for trimming reinforcement or metal shall be considered as included in the contract prices paid per cubic meter for the types of excavation shown in the Engineer's estimate, or the contract prices paid for furnishing and placing imported borrow or embankment material, as the case may be, and no additional compensation will be allowed therefor.

Settlement periods are required for the bridge approach embankments at the bridges listed in the following table.

Surcharge embankments shall be constructed at the grading plane where listed in the following table:

Bridge Name or Number	Abutment Number	Bent Number	Surcharge Height (meters)*	Settlement Period (days)
Peninsula Avenue Overcrossing (Replace) Br. No. 35-0088	1		0.0	30

* At this location, the surcharge embankment shall be constructed by extending the grading plane (GP) in the "Elevation" view of the "Bridge Embankment Surcharge" detail of Standard Plan A62B horizontally to the centerline of abutment.

Settlement periods are required for the roadway embankments at the earth retaining structures listed in the following table.

Surcharge embankments shall be constructed at or above the grading plane where listed in the following table.

Earth Retaining Structure Number	Surcharge Height (meters)	Settlement Period (days)
Retaining Wall No. 2 (Br. No. 35-0343M)	0	30
Retaining Wall No. 3 (MSE) (Br.No. 35-0344M)	0	30

The duration of the required settlement period at each location will be determined by the Engineer. The estimated duration of the settlement periods are listed in the tables of settlement data. The Engineer may order an increase or decrease in any settlement period. An ordered increase or decrease in any settlement period will result in an increase or decrease in the number of contract working days if the settlement period involved is considered to be the current controlling operation in conformance with the provisions in Section 8-1.06, "Time of Completion," of the Standard Specifications. Adjustments of contract time due to increases or decreases in settlement periods will be made by contract change order.

LAGGING WALL EARTHWORK

General

Cross sections of the site in the vicinity of the soldier pile wall are included in the "Information Handout" available to the Contractor in conformance with the provisions in Section 2-1.03, "Examination of Plans, Specifications, Contract, and Site of Work," of the Standard Specifications.

The Contractor shall submit to the Engineer working drawings, including design calculations, and a construction sequence for the proposed method of lagging wall construction for the site in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. The drawings and calculations shall be signed by an engineer who is registered as a Civil Engineer in the State of California. One set of the drawings and construction sequence, and one copy of the design calculations, shall be furnished to the Engineer. The working drawings and construction sequence shall include, but not be limited to, defining order of work, traffic control, method of installation of soldier piles, method of placing lagging, limits of structure excavation lifts, and type of drilling and excavation equipment

to be used. The Contractor shall allow one week after complete drawings and support data are submitted for the review and approval of the proposed method of lagging wall construction.

In the event the Engineer fails to complete the review and approval within the time allowed, and if, in the opinion of the Engineer, completion of the work is delayed or interfered with by reason of the Engineer's delay in completing the review, the Contractor will be compensated for any resulting loss, and an extension of time will be granted, in the same manner as provided in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

Structure Excavation (Lagging Wall)

Excavation and construction of the lagging wall shall proceed in lifts from the bottom up.

Care shall be taken in performing structure excavation (lagging wall) for placement of lagging such that a minimal void behind the lagging is required to be backfilled.

Excavation in front of the lagging wall shall not extend more than 900 mm below any level of tiebacks that has not been stressed and grouted.

At the end of the work shift, lagging shall be in place the full height of the exposed excavation face.

Structure Backfill (Lagging Wall)

Material for structure backfill behind lagging shall conform to the provisions in Section 19-3, "Structure Excavation and Backfill," of the Standard Specifications. Structure backfill behind lagging shall be compacted by hand tamping, mechanical compaction, or other means approved by the Engineer.

Structure backfill in fill areas behind the lagging shall be keyed into the existing or excavated back slope.

Backfill behind the lagging shall be in place and compacted to at least 1.5 m above the level of the tiebacks prior to drilling for the tiebacks. The remainder of the backfill behind the lagging shall be placed and compacted after tiebacks are drilled, stressed, and grouted.

Concrete Backfill

Concrete backfill of the types listed in the engineer's estimate encasing the steel soldier piles below the lagging shall be Class 3 concrete conforming to the provisions in Section 90, "Portland Cement Concrete," of the Standard Specifications and these special provisions.

Pervious backfill material placed within the limits of payment for bridges will be measured and paid for as structure backfill (bridge).

If structure excavation or structure backfill for bridges is not otherwise designated by type and payment for the structure excavation or structure backfill has not otherwise been provided for in the Standard Specifications or these special provisions, the structure excavation or structure backfill will be measured and paid for as structure excavation (bridge) or structure backfill (bridge), respectively.

Structure excavation designated as (Type D), for footings at the locations shown on the plans, will be measured and paid for as structure excavation (Type D). Ground water or surface water is expected to be encountered at these locations, but seal course concrete is not shown or specified. Structure excavation for footings at locations not designated on the plans as structure excavation (Type D), and where ground or surface water is encountered, will be measured and paid for as structure excavation (bridge).

Concrete backfill encasing steel soldier piles below the lagging will be measured and paid for by the cubic meter as concrete backfill of the types listed in the Engineer's Estimate in the same manner specified for structure backfill in Section 19-3.07, "Measurement," and Section 19-3.08, "Payment," of the Standard Specifications.

Full compensation for working drawings and construction sequence, and temporary supports and shoring, if required, for soldier pile wall construction shall be considered as included in the contract price paid per cubic meter for structure excavation (lagging wall) and no additional compensation will be allowed therefor.

Full compensation for filter fabric shall be considered as included in the contract price paid per cubic meter for structure backfill (lagging wall) and no additional compensation will be allowed therefor.

10-1.39 LIGHTWEIGHT FILL

Lightweight fill shall consist of furnishing, placing and compacting lightweight fill material at abut 6 embankment, Peninsula Avenue OC, at the locations and to the lines and grades designated on the plans or specified in the special provisions. Lightweight fill shall conform to the requirements specified for embankment and structure backfill in Section 19, "Earthwork," of the Standard Specifications and these special provisions.

Lightweight fill material shall consist of a rotary kiln expanded shale aggregate of the extruded type or a processed naturally-occurring volcanic aggregate.

Lightweight fill material shall be fine-graded material as specified in these special provisions.

Fine-graded lightweight fill material, when deposited in place, shall conform to the following:

GRADATION REQUIREMENT

Sieve Size	Percent Passing
25 mm	95 – 100
19 mm	90 – 100
9.5 mm	45 – 95
4.75 mm	25 – 60
600 µm	8 – 30
75 µm	0 – 15

Gradation will be determined in conformance with the requirements of California Test202, except shaking in the sieves shall be limited to 5 minutes.

QUALITY REQUIREMENT

Resistance (R-Value)	50 minimum
Durability Index	35

At locations directed by the Engineer, the structure backfill place within 0.6 m of finished ground around abutments, abutment wingwalls, retaining walls, and other portions of structures shall be a compacted impervious material, conforming to Section 19-3.06, "Structure Backfill," of the Standard Specifications. If the minimum resistivity of the native soil is less than 1,000 ohm-cm, then the lightweight fill shall have a chloride content less than or equal to 500 PPM and a sulfate content less than or equal to 2000 PPM.

Lightweight fill shall have a maximum dry loose unit weight of 880 kg/m^3 when determined in conformance with the requirements of California test Method 212, using test procedure b Compaction Method (by jigging). Lightweight fill shall have a maximum calculated saturated surface dry unit weight of 960 kg/m^3. The saturated surface dry unit weight shall be calculated by adjusting the dry loose unit weight by the absorption of the coarse and fine fractions. The absorption shall be determined by California Test Methods 206 and 207, except that the samples shall be oven dry before soaking and shall be soaked for 24 hours plus or minus 30 minutes. To calculate the saturated surface dry unit weight: 1) multiply the percent coarse aggregate by the absorption of the coarse aggregate; 2) multiply the percent fines aggregate by the absorption of the fine aggregate; 3) add the two values from 1) and 2) and divide by 10000; 4) add one (1) to the result from 3) and multiply by the dry loose unit weight.

Lightweight fill shall be placed and compacted to the designated dimensions as specified in Sections 19-1.03, "Grade Tolerance," and the requirements specified for embankment construction in Section 19-6, "Embankment Construction," of the Standard Specifications, except Section 19-5, "Compaction," of the Standard Specifications shall not apply.

Initial layers of lightweight fill may be placed by end dumping from trucks, or by any other method approved by the Engineer.

Fine-graded lightweight fill shall be spread or placed in such manner that will prevent bulking of the material and minimize particle breakdown. Fine-graded lightweight fill shall be compacted in uniform layers of 0.2 m maximum thickness before compaction. Compaction shall be obtained by a minimum of 3 complete coverage passes using smooth drum steel roller compaction equipment imposing contact pressure of 5,360 kg per-meter-width of the roller face. Track type equipment which imposes the equivalent contact pressure as that specified for steel drum rollers, as determined by the Engineer, may be used provided the 3 complete coverages of the tracks of the track type equipment are achieved. Compaction using pneumatic-tired equipment of compaction within trenches or other limited-access areas, or compaction in areas of low confining pressure shall be of a method approved by the Engineer.

The contract price paid per cubic meter for lightweight fill (Bid Item # 198100) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing lightweight fill, complete in place (including construction and removing any test sites required), as shown on the plans, as specified in these special provisions, and as directed by the Engineer.

10-1.40 EARTH RETAINING STRUCTURES

Earth retaining structures, consisting of a mechanically stabilized embankment (MSE) shall conform to the details shown on the plans and these special provisions. Earth retaining structures shall be constructed at the following locations:

Location A: Retaining Wall No. 3 (Bridge No. 35E0004)
Location B: Retaining Wall No. 4 (Bridge No. 35E0005)

Attention is directed to "Precast Concrete Quality Control" of these special provisions.

At the Contractor's option, one of the following acceptable alternative earth retaining systems may be constructed for Retaining Walls No. 3 and No. 4:

Proprietary Earth Retaining System	Address and Phone Number
Reinforced Earth (1.52 m cruciform concrete face panels; 1.52 m square concrete face panels)	The Reinforced Earth Company 1 Orchard Road, Suite 220 Lake Forest, CA 92630 (949) 587-3060 www.reinforcedearth.com
Retained Earth (1.52 m square concrete face panels)	Foster Geotechnical 1660 Hotel Circle North, Suite 304 San Diego, CA 92108 (619) 688-2400 www.lbfoster.com
MSE Plus (1.52 m square concrete face panels; 1.52 m high by 1.83 m wide concrete face panels)	SSL 4740 Scotts Valley Drive, Suite 'E' Scotts Valley, CA 95066 (831) 430-9300

Only one type of earth retaining system shall be used at any one location.

The above list of acceptable alternative earth retaining systems has been selected from the Department's current list of prequalified earth retaining systems and is limited only to those systems determined to have characteristics suitable for this project. Among the alternatives shown, some systems may be proprietary.

The list of prequalified earth retaining systems has been developed from data previously furnished by suppliers or manufacturers of each system. Approval of additional earth retaining systems is contingent on the system meeting the full range of parameters for which prequalification is required. The prequalification requirements can be obtained from the Office of Structure Design, Mail Station 9-2/9I, 1801 30th Street, Sacramento, CA 95816.

WORKING DRAWINGS

If the Contractor elects to use a proprietary earth retaining system from the list of acceptable alternative systems, the Contractor shall submit complete working drawings for each installation of the system to the Office of Structure Design (OSD) in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. For initial review, 4 sets of drawings shall be submitted. After review between 6 and 12 sets, as requested by the Engineer, shall be submitted to OSD for final approval and use during construction.

Working drawings shall be 279 mm x 432 mm in size, and each drawing and calculation sheet shall include the State assigned designations for the contract number, bridge number, full name of the structure as shown on the contract plans, and District-County-Route-Kilometer Post. The design firm's name, address, and phone number shall be shown on the working drawings. Each sheet shall be numbered in the lower right hand corner and shall contain a blank space in the upper right hand corner for future contract sheet numbers. Working drawings and the calculations shall include the design of the attachments, dowels or inserts for the installation of sign attached to the barrier slab at the locations shown on the plans. No vertical adjustment for the attachments, dowels or inserts shall be made without prior written approval from the Engineer.

The Contractor shall verify the existing ground elevations at the site before preparing the working drawings. The working drawings shall contain all information required for the proper construction of the system at each location including existing ground line at face of wall as verified at the site and any required revisions or additions to drainage systems or other facilities. The working drawings shall include "General Notes" which contain design parameters, material notes, and wall construction procedures and shall be accompanied with calculations. The working drawings and calculations shall be stamped and signed by an engineer who is registered as a Civil Engineer in the State of California. The Contractor shall allow the Engineer 4 weeks to review the drawings after a complete set has been received.

Unless otherwise specified, at the completion of each structure for which working drawings were submitted, and if the work detailed in these working drawings is permanent, the Contractor shall submit to the Engineer one set of corrected as-built prints 279 mm x 432 mm in size and on 75-g/m^2 (minimum) bond paper, showing as built conditions. As-built drawings that are common to more than one structure shall be submitted for each structure.

MATERIALS

Earthwork

Excavation and backfill shall conform to the details shown on the plans, the provisions in Section 19, "Earthwork," of the Standard Specifications, and these special provisions.

Structure backfill for earth retaining structures with soil reinforcement shall be free of organic material and substantially free of shale or other soft materials of poor durability. Structure backfill shall not contain slag aggregate or recycled materials such as glass, shredded tires, portland cement concrete rubble, asphaltic concrete rubble, or other unsuitable material as determined by the Engineer.

Structure backfill for earth retaining structures with soil reinforcement shall conform to the following requirements:

Gradation Requirements		
Sieve Size	Percentage Passing	California Test
159-mm	100	202
75-mm	78 - 100	202
4.75-mm	----	202
600-µm	0 - 60	202
75-µm	0 - 15	202

Property Requirements		
Test	Requirement	California Test
Sand Equivalent	12 minimum	217
Plasticity Index	6 maximum	204
Minimum Resistivity	2000 ohm-cm	643
Chlorides	< 250 ppm	422
Sulfates	< 500 ppm	417
pH	5.5 to 10.0	643

If 12 percent or less passes the No. 75-µm sieve and 50 percent or less passes the No. 4.75-mm sieve, the Sand Equivalent and Plasticity Index requirements shall not apply.

Structure backfill for earth retaining structures with geosynthetic soil reinforcement shall conform to the following requirements:

Gradation Requirements		
Sieve Size	Percentage Passing	California Test
50-mm	100	202
4.75 mm	50 - 80	202
425-µm	0 - 30	202
75-µm	0 - 15	202

Property Requirements		
Test	Requirement	California Test
Sand Equivalent	30 minimum	217
Plasticity Index	6 maximum	204
Durability Index	35 minimum	229
pH	4.5 to 9.0	643

Permeable material shall be used for the portion of the structure backfill for earth retaining structures with soil reinforcement within the limits shown on the plans. Permeable material shall be Class 1, Type B, conforming to the provisions in Section 68-1.025, "Permeable Material," of the Standard Specifications.

Permeable material for earth retaining structures with metallic soil reinforcement shall conform to the following requirements:

Property Requirements		
Test	Requirement	California Test
Minimum Resistivity	2000 ohm-cm	643
Chlorides	< 250 ppm	422
Sulfates	< 500 ppm	417
pH	5.5 to 10.0	643

Permeable material for earth retaining structures with geosynthetic soil reinforcement shall conform to the following requirements:

Property Requirements		
Test	Requirement	California Test
pH	4.5 to 9.0	643

Water used for earthwork or dust control within 150 meters of earth retaining structures with metallic soil reinforcement shall conform to the provisions for water in Section 90-2.03, "Water," of the Standard Specifications.

Concrete

Concrete used in precast and cast-in-place reinforced concrete members of earth retaining structures shall conform to the details shown on the plans, the provisions in Section 51, "Concrete Structures," of the Standard Specifications, and these special provisions.

The concrete leveling pads and the sidewalk, as shown on the plans for the Mechanically Stabilized Embankment (MSE) system shall conform to the provisions in Section 90-10, "Minor Concrete," of the Standard Specifications.

Concrete shall conform to the provisions in "Freezing Condition Requirements" of these special provisions and shall contain not less than 400 kg of cementitious material per cubic meter.

Reinforcement

Reinforcement shall conform to the provisions in Section 52, "Reinforcement," of the Standard Specifications and these special provisions.

Galvanizing

Soil reinforcement, connecting elements, and other steel components that are in contact with the earth shall be galvanized in conformance with the provisions in Section 75-1.05, "Galvanizing," of the Standard Specifications.

Inspection Elements

If a proprietary alternative system is selected, inspection elements representative of the particular soil reinforcement shall be furnished in the same number and approximate location as shown on the plans for the MSE system.

When metallic soil reinforcement is used, the threaded end of the inspection wire may be formed before or after galvanizing. The end 100 mm of the wire shall be coated with two applications of an approved unthinned commercial quality zinc-rich primer (organic vehicle type). The threaded end of the wire shall be encapsulated with corrosion inhibiting, mastic filled, round vinyl enclosure secured with a nylon tie as shown on the plans. If the threaded end is galvanized after threading, the threads shall be cleaned before painting. There shall be no damage to the unthreaded portion of the galvanized inspection wire.

Drainage System

The drainage system shall conform to the details shown on the plans and these special provisions.

The class of rock used for rock slope protection at drain pipe outlets shall be No. 3 Backing and shall conform to the provisions in Section 72-2, "Rock Slope Protection," of the Standard Specifications.

Filter fabric shall be ultraviolet (UV) ray protected, and shall conform to the provisions for fabric for underdrains in Section 88-1.03, "Filter Fabric," of the Standard Specifications and these special provisions.

Adhesive for bonding filter fabric to concrete panels shall be commercial grade.

Soil Reinforcement

Soil reinforcement shall conform to the details shown on the contract plans, the approved working drawings, the pre-approved proprietary system details, and these special provisions.

MW70 and MW130 steel wire shall conform to the requirements in ASTM Designation: A 82/A 82M. The welded wire mat shall conform to the requirements in ASTM Designation: A 185/A 185M. MD70 and MD130 deformed steel wire may be substituted for MW70 and MW130 steel wire, respectively. The welded wire mat utilizing deformed steel wire shall conform to the requirements in ASTM Designation: A 496/A 496M and ASTM Designation: A 497/A 497M.

The button on button-head wires shall conform to the provisions in Section 50-1.05, "Prestressing Steel," of the Standard Specifications.

The coupler at the wire mat connection shall be a seamless steel sleeve. The coupler shall be applied over the button-head wires and swaged by means of a hydraulic press. The coupler shall develop the minimum tensile strength of the wire without exceeding a total slip of the wires of 5.0 mm.

Sample button-head wire and coupler connectors shall develop the minimum tensile requirements for MW70 and MW130 steel wire in ASTM Designation: A 82/A 82M without exceeding a total slip of the wires of 5.0 mm when tested in conformance with the provisions for tension testing of round wire samples in ASTM Designation: A 370. When MD70 and MD130 deformed steel wire are substituted, samples shall develop the minimum tensile requirements contained in ASTM Designation: A 496/A 496M. An independent testing laboratory shall perform button-head wire and coupler connection testing. Samples shall consist of 2 button-head wires each 600 mm long connected by a swaged coupler.

Prior to the start of wall construction, the Contractor shall furnish test results to the Engineer from tension and slip tests conducted on 6 proposed button-head wire and coupler connections. Failure of any of the proposed button-head wire and coupler connector samples to meet the slip and tensile strength requirements herein shall require the connection be redesigned by the Contractor.

No installation of face panels shall be allowed until the Contractor has successfully completed tension and slip testing for proposed button-head wire and coupler connectors.

During wall construction, the Contractor shall furnish test results to the Engineer from tension and slip testing of 4 samples of production button-head wire and coupler connections for each lot of 500 individual mat wire connections incorporated into the work. Production testing shall consist of testing each of the 4 sample connections for both slip and tensile requirements herein. If 2 or more of the production samples fail to meet slip or tensile test requirements, the entire lot represented by these samples shall be rejected. If one of the production samples fails to meet slip or tensile test requirements, an additional 4 samples shall be tested. Should any of the additional samples fail to meet the slip or tensile requirements, the entire lot represented by these samples shall be rejected.

Splicing of the welded wire mat along its length shall be by mechanical coupler, which shall develop the minimum tensile strength of the wire. The mechanical coupler shall be approved by the Engineer.

Geogrid soil reinforcement roll identification, storage, and handling shall be in accordance with ASTM Designation: D 4873, and as specified in the pre-approved proprietary details. The geogrid shall be shipped and stored such that the material is not placed directly on the ground. The geogrid shall be covered and protected at all times during shipment and storage such that it is fully protected from UV radiation including sunlight, site construction damage, precipitation, chemicals, flames including welding sparks, temperatures less than -29°C or greater than 60°C, or other conditions that may damage the physical property values of the geogrid. The Contractor shall prevent foreign materials from coming into contact with or affixing to the geogrid.

Miscellaneous

Resin bonded cork for horizontal joints shall conform to the requirements in ASTM Designation: D 1752, Type II, with a compressive load of not less than 690 kPa.

Pipe for the pipe pin shall conform to the requirements in ASTM Designation: A 53/A 53M, Standard weight, except the amount of the zinc coating per square meter of actual surface shall average not less than 610 g and no individual specimen shall be less than 550 g. Dowels or inserts for sign installation shall conform to the provisions in Section 75, "Miscellaneous Metal," of the Standard Specifications.

CONSTRUCTION

Earth retaining structures shall be constructed to the lines, grades, and details shown on the plans, and shall conform to these special provisions.

Earthwork

The foundation for the structure shall be graded level for a width equal to the length of soil reinforcement elements plus 300 mm or as shown on the contract plans. The foundation material shall be compacted to a relative compaction of not less than 95 percent. The Engineer shall approve the compacted foundation area prior to commencement of wall construction.

The contractor shall remove unsuitable material as determined and directed by the Engineer. This work shall be paid for as extra work as provided in Section 4-l.03D, "Extra Work," of the Standard Specifications.

Structure backfill material shall be placed and compacted simultaneously with the erection of the facing panels. Placement and compaction shall be accomplished without distortion of the soil reinforcement or displacement of facing panels. Structure backfill at the front of the wall shall be completed prior to backfilling more than 4 m above the bottom of the lowermost face element.

Vertical and horizontal alignment tolerances of panels shall not exceed 20 mm when measured along a 3 m straight edge. The maximum allowable offset in any panel joint shall not exceed 20 mm.

Structure backfill for earth retaining structures with soil reinforcement shall be compacted to a relative compaction of not less than 95 percent.

Soil reinforcement shall be tensioned in the direction perpendicular to the wall face with enough force to remove any slack in the connection or in the soil reinforcement itself. Soil reinforcement shall be secured in place to prevent movement during placement of additional soil reinforcement and structure backfill until the initial lift of structure backfill is compacted.

Geogrid soil reinforcement shall be placed in full-length sections.

Soil reinforcement shall be covered with structure backfill during the same work shift that it is placed.

Placement and compaction of structure backfill shall begin 300 mm from the back face of wall panels and progress towards the free end of the soil reinforcement. Compaction equipment shall be operated parallel to the wall facing. The remaining width of backfill behind the wall panels shall be placed and compacted after soil reinforcement has been covered to a depth of 150 mm.

Sheepsfoot or grid-type rollers shall not be used for compacting material within the limits of the soil reinforcement. Hand-held or hand-guided compacting equipment shall be used to compact structure backfill material within one meter of the facing panels.

Construction equipment shall not be operated directly on the soil reinforcement. A layer of structure backfill material not less than 150 mm in thickness shall be maintained between the soil reinforcement and construction equipment of any type.

Structure backfill material for earth retaining structures with geogrid soil reinforcement shall be placed in lifts not to exceed 150 mm where hand-operated compacting equipment is used and 200 mm where heavy compaction equipment is used.

At each level of the soil reinforcement the structure backfill shall be constructed to a plane 50 mm above the elevation of the soil reinforcement connection and shall start one meter from the back of the face panel and extend for at least the remaining length of soil reinforcement. This grading shall be complete before placing the next layer of soil reinforcement.

Permeable material and filter fabric shall be placed along with structure backfill as shown on the plans. Permeable material shall be placed in layers not exceeding 0.6-m in thickness. Compaction of the permeable material for the drainage system outside the limits of the soil reinforcement is not required, and equipment shall not be operated directly on the permeable material or filter fabric. If a sloped layer of permeable material is placed to facilitate the work or to satisfy safety considerations, the vertical limits of permeable material shall remain unchanged and the thickness of the layer of permeable material shall be measured normal to the slope.

The Contractor shall grade the reinforced backfill to rapidly drain away from the wall face at the end of each work shift. Berms or ditches shall be provided to direct runoff away from the wall site. The Contractor shall not allow surface runoff from adjacent areas to enter the wall construction site.

Filter Fabric

Filter fabric shall be placed at the locations and in conformance with the details shown on the plans and these special provisions.

Immediately prior to placing filter fabric, the subgrade to receive the filter fabric shall conform to the compaction and elevation tolerance specified for the material involved and shall be free of loose or extraneous material and sharp objects that may damage the filter fabric during installation.

Concrete panel surfaces to receive filter fabric shall be dry and thoroughly cleaned of dust and deleterious materials.

Filter fabric shall be handled and placed in conformance with the manufacturer's recommendations.

Filter fabric shall be stretched, aligned, and placed in a wrinkle-free manner.

Adjacent borders of filter fabric shall be stitched or overlapped from 300 mm to 450 mm. The preceding roll shall overlap the following roll in the direction the material is being spread or shall be stitched. When filter fabric is joined by stitching it shall be stitched with yarn of a contrasting color. The size and composition of the yarn shall be as recommended by the filter fabric manufacturer. The stitches shall number 2 to 3 per centimeter of seam.

If the filter fabric is damaged during installation, it shall be repaired by placing a piece of filter fabric that is large enough to cover the damaged area and which meets the overlap requirement.

During spreading of the permeable material, a minimum of 150 mm of the material shall be maintained between the filter fabric and the Contractor's equipment. Where structure backfill material is to be placed on filter fabric, a minimum of 450 mm of structure backfill material shall be maintained between the filter fabric and the Contractor's equipment. Equipment or vehicles shall not be operated or driven directly on filter fabric.

Concrete

Concrete for the leveling pads shall be placed at least 24 hours prior to erecting face panels.

Exposed surfaces of precast and cast-in-place concrete members shall receive a surface finish as shown and detailed on plans and as indicated in"Architectural Surface (Textured Concrete)," of these special provisions.

After placement of an inspection element and placement of backfill to a level at least 0.6-m above the inspection element, the void in the face panel shall be dry packed with portland cement mortar as shown on the plans. Dry pack shall conform to the provisions in Section 51-1.135, "Mortar," of the Standard Specifications, except that the proportion of cement to sand shall be that required to achieve a 28-day mortar compressive strength of 7 MPa to 10 MPa.

Proprietary Earth Retaining Systems

If the Contractor elects to construct one of the acceptable proprietary alternative earth retaining systems, the structure shall be constructed to the lines and grades shown on the plans. Vertical and horizontal alignment shall be checked at every course throughout the erection process. The construction shall include a drainage system where shown on the plans, and shall conform to the details shown on the approved working drawings, approved proprietary system details, and these special provisions.

The Contractor shall supply a Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications stating the supplied material meets the respective index criteria set forth when the proprietary alternative earth retaining system was prequalified by the Department, as measured in accordance with all test methods and standards specified in the Standard Specifications, these special provisions, and the approved working drawings.

A qualified representative of the proprietary earth retaining system manufacturer shall be present during erection and backfill of the first 3 meters of height of the entire length of the wall and shall be available during any remaining installations. The manufacturer's representative shall not be an employee of the Contractor.

The top of wall profile of alternative earth retaining systems shall conform to the profile shown on the plans. The bottom office panels shall be at or below the elevations shown on the plans. The height and length to be used for any system shall be the minimums for that system that will effectively retain the earth behind the structure for the loading conditions and the contours, profile, or slope lines shown on the plans. The length of soil reinforcement for any system shall be not less than that shown on the plans. In addition, if the plans or special provisions indicate limiting parameters for alternative systems, the system shall conform to those parameters.

The top of face panels, assuming no leveling pad settlement, shall be covered by the coping lip or concrete barrier slab lip at a minimum of 170 mm.

The top level of soil reinforcement shall be placed parallel to the top of the concrete panel at a distance below the top of the wall as shown on the plans. The top level of soil reinforcement shall also be 1) placed a minimum of 75 mm below the bottom of the barrier slab lip or the bottom of the concrete gutter behind coping and 2) placed a minimum of 125 mm below the top edge of the concrete panel.

MEASUREMENT AND PAYMENT

Earth retaining structures will be measured and paid for by the square meter. Regardless of the type of earth retaining structure actually constructed, the square meter area for payment will be based on the length and vertical height of each section of Mechanically Stabilized Embankment (MSE) system shown on the plans that was or would have been constructed. The vertical height of each section will be taken as the difference in elevation on the outer face from the bottom of the lowermost face element top of footing to the top of wall profile.

The contract price paid per square meter for earth retaining structure at each location shown on the plans shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the earth retaining structure and inspection elements, including earthwork, leveling pad, coping, bearing pads, and drainage systems, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

The contract price paid per cubic meter for structural concrete, barrier slab shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the barrier slab, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Full compensation for furnishing and testing sample mechanical connectors shall be considered as included in the contract price paid per square meter for earth retaining structure, and no separate payment will be made therefor.

Full compensation for revisions to the barrier support, drainage system, or other facilities made necessary by the use of an alternative earth retaining system shall be considered as included in the contract price paid per square meter for earth retaining structure, and no separate payment will be made therefor.

Full compensation for concrete surface texture shall be considered as included in the contract price paid per square meter for earth retaining structure, and no separate payment will be made therefor.

10-1.41 TIEBACK WALL EARTHWORK

Tieback wall earthwork shall conform to the provisions in Section 19, "Earthwork," of the Standard Specifications and these special provisions.

Attention is directed to "Tieback Anchors" of these special provisions.

The Contractor shall submit to the Engineer working drawings and construction sequence for their proposed method of tieback wall construction for the site. Attention is directed to Section 5-1.02, "Plans and Working Drawings." The drawings shall be signed by an engineer who is registered as a Civil Engineer in the State of California. One set of the drawings and one copy of the design calculations shall be furnished to the Engineer. The Contractor shall allow three weeks after complete drawings and all support data are submitted for the review of their proposed method of tieback wall construction.

Working drawings for tieback wall earthwork shall contain all information required for the construction and quality control of the earthwork, including the following:

1. The proposed schedule and detailed construction sequence. Construction sequence shall include measures to ensure wall and slope stability during various stages of wall construction including provisions for discontinuous rows of nails or anchors.
2. Methods of excavation to the staged lifts indicated and excavation equipment types.
3. Temporary shoring plans.

Should the Engineer fail to complete the review within the time allowance and if, in the opinion of the Engineer, the Contractor's controlling operation is delayed or interfered with by reason of the delay in working drawings and construction sequence plan review for the retaining wall, the delay will be considered a right of way delay as specified in Section 8-1.09, "Right of Way Delays."

Excavation for walls shall be limited to that area which can be anchored and covered with shotcrete during the same work shift in which the excavation is done. Subsequent excavation shall not be made within 3 meters of previously anchored and covered portions of the wall until those anchored and covered portions are structurally complete. A portion of the wall will be considered structurally complete when the tieback anchors have been installed, the shotcrete cover has set, anchor bearing assemblies installed, and specified anchorage testing has been completed for that portion of the wall, and the test results have been furnished to the Engineer.

Excavation to the final wall alignment for the full wall height shall incorporate a working berm which shall be constructed from the top down in a staged lift sequence as shown on the approved wall earthwork working drawings. The ground level in front of the wall face shall not be excavated more than 1 meter below the level of the row of tieback anchors to be installed in that same lift.

The Contractor shall protect installed tieback anchors during excavation and subsequent operations. Any tieback anchors damaged during construction shall be replaced by the Contractor, at the Contractor's expense.

The Contractor shall remove all cobbles, boulders, rubble, or debris which are encountered at the final wall alignment during wall face excavation and which protrude from the excavated face more than 5mm into the design shotcrete thickness as shown on the plans. Such over excavation shall be backfilled with shotcrete.

MEASUREMENT AND PAYMENT

Measurement and payment for structure excavation (tieback wall) shall conform to the provisions in Sections 19-3.07, "Measurement," and 19-3.08, "Payment," of the Standard Specifications and these special provisions.

Full compensation for working drawings and supplements, and shoring, if required, for tieback wall construction shall be considered as included in the contract price paid per cubic meter for structure excavation (tieback wall) and no additional compensation will be allowed therefor.

Full compensation for shotcrete used to fill voids created by the removal of cobbles and boulders or other obstructions shall be considered as included in the contract price paid per cubic meter for shotcrete and no additional compensation will be allowed therefor.

10-1.42 TEMPORARY RETAINING WALL

Temporary retaining wall shall be designed, constructed and maintained in accordance with Caltrans practices, the provisions in Standard Specifications, as shown on the plans, as specified in these special provisions and as directed by the Engineer.

Temporary retaining wall shall be designed to remain in place and be an integral part of the permanent embankment.

The temporary retaining wall may be of conventional construction or of alternative earth retaining system construction. No architectural fascia is required.

The report entitled "Geotechnical Design and Materials Report" is available for inspection at the Department of Transportation. This is Contractor's Engineer responsibility to interpretive data from this report for Temporary retaining wall design.

Within 30 days after the approval of the contract, the Contractor shall submit complete working drawings and calculations for the temporary retaining wall to the Engineer for review in accordance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. The retaining wall design shall include a vertical debris protection barrier adjacent to the face of the wall for the length of the wall. It shall extend from the lowest adjacent grade to a minimum of 1.2 m above the wall construction at all times. The protection barrier shall be designed to prevent debris and construction materials from dropping or falling onto the traffic below the wall. Working drawings and calculations for the wall and the protection barrier shall be stamped and signed by a civil engineer currently registered in the State of California. Sufficient details for construction sequence, bracing and supports for the protection barrier shall be shown on the working drawings. Four sets of drawings and 2 copies of the design calculations including criteria as basis of the temporary retaining

wall designs shall be submitted to the Engineer. The Contractor shall allow the Engineer 30 working days to review the drawings and design calculations after a complete submittal has been received. If revisions are required, as determined by the Engineer, the Contractor shall revise and resubmit the drawings and design calculations within 15 working days of receipt of the Engineer's comments and shall allow 30 working days for the Engineer to review the revisions. Upon the Engineer's approval of the drawings and design calculations, 4 additional sets of drawings and 2 copies of the design calculations, incorporating the required changes shall be submitted to the Engineer.

Working drawings shall be either 280 mm x 432 mm, or 560 mm x 864 mm in size.

All exposed synthetic or geo-synthetic material used in the wall construction including the protection barrier shall be treated with ultraviolet (UV) ray protection. The UV ray protection treatment shall be required to protect the construction materials and the overall retaining wall system to retain minimum 90% design strength throughout the required service life span of the wall.

When no longer required as determined by the Engineer, temporary retaining wall (Temporary shoring) shall be removed to a depth of not less than 0.9 m below final grade. Any timber for temporary retaining wall (Temporary shoring) which is left in place shall be treated with creosote and shall conform to the provisions in Section 58, "Preservative Treatment of Lumber, Timber and Piling," of the Standard Specifications. Removed Temporary shoring shall be disposed of outside the highway right of way as provided in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Approval by the Engineer of the Temporary retaining wall drawings or the inspection performed by the Engineer will in no way relieve the Contractor of full responsibility for the temporary retaining wall.

EARTHWORK

Structure excavation and structure backfill shall conform to the provisions in Section 19, "Earthwork," of the Standard Specifications, and these special provisions.

The Contractor shall substantiate all values used in the design of the temporary retaining wall shown on the working drawings.

MATERIAL

All material shall comply with the provisions of the applicable sections of the Standard Specifications and these special provisions.

MEASUREMENT AND PAYMENT

Temporary retaining wall will be measured and paid for by the square meter. Regardless of the type of temporary retaining wall actually constructed, the square meter area for payment will be based on the vertical height and length of each section, which was constructed. The vertical height of each section will be taken as the difference in elevation on the outer face, from the existing ground elevation to the top of wall profile complete in place.

The contract price paid per square meter for temporary retaining wall shall include full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all work involved in temporary retaining wall, complete in place, including designing, preparing working drawings, constructing (including structure excavation and structure backfill), maintaining, and leaving in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.43 CONTROLLED LOW STRENGTH MATERIAL

Controlled low strength material shall consist of a workable mixture of aggregate, cementitious materials, and water and shall conform to the provisions for slurry cement backfill in Section 19-3.062, "Slurry Cement Backfill," of the Standard Specifications and these special provisions.

At the option of the Contractor, controlled low strength material may be used as structure backfill for pipe culverts, except that controlled low strength material shall not be used as structure backfill for culverts having a diameter or span greater than 6.1 m.

When controlled low strength material is used for structure backfill, the width of the excavation shown on the plans may be reduced so that the clear distance between the outside of the pipe and the side of the excavation, on each side of the pipe, is a minimum of 300 mm. This minimum may be reduced to 150 mm when the height of cover is less than or equal to 6.1 m or the pipe diameter or span is less than 1050 mm.

Controlled low strength material in new construction shall not be permanently placed higher than the basement soil. For trenches in existing pavements, permanent placement shall be no higher than the bottom of the existing pavement permeable drainage layer. If a drainage layer does not exist, permanent placement in existing pavements shall be no higher than 25 mm below the bottom of the existing asphalt concrete surfacing or no higher than the top of base below the existing portland cement concrete pavement. The minimum height that controlled low strength material shall be placed, relative to the culvert invert, is 0.5 diameter or 0.5 height for rigid culverts and 0.7 diameter or 0.7 height for flexible culverts.

When controlled low strength material is proposed for use, the Contractor shall submit a mix design and test data to the Engineer for approval prior to excavating the trench for which controlled low strength material is proposed for use. The test data and mix design shall provide for the following:

A. A 28-day compressive strength between 345 kPa and 690 kPa for pipe culverts having a height of cover of 6.1 m or less and a minimum 28-day compressive strength of 690 kPa for pipe culverts having a height of cover greater than 6.1 m. Compressive strength shall be determined in conformance with the requirements in ASTM Designation: D 4832.
B. Cement shall be any type of portland cement conforming to the requirements in ASTM Designation: C 150; or any type of blended hydraulic cement conforming to the requirements in ASTM Designation: C 595M or the physical requirements in ASTM Designation: C 1157M. Testing of cement will not be required.
C. Admixtures may be used in conformance with the provisions in Section 90-4, "Admixtures," of the Standard Specifications. Chemical admixtures containing chlorides as Cl in excess of one percent by mass of admixture, as determined in conformance with the requirements of California Test 415, shall not be used. If an air-entraining admixture is used, the maximum air content shall be limited to 20 percent. Mineral admixtures shall be used at the Contractor's option.

Materials for controlled low strength material shall be thoroughly machine-mixed in a pugmill, rotary drum or other approved mixer. Mixing shall continue until the cementitious material and water are thoroughly dispersed throughout the material. Controlled low strength material shall be placed in the work within 3 hours after introduction of the cement to the aggregates.

When controlled low strength material is to be placed within the traveled way or otherwise to be covered by paving or embankment materials, the material shall achieve a maximum indentation diameter of 76 mm prior to covering and opening to public traffic. Penetration resistance shall be measured in conformance with the requirements in ASTM Designation: D 6024.

Controlled low strength material used as structure backfill for pipe culverts will be considered structure backfill for compensation purposes.

10-1.44 MATERIAL CONTAINING AERIALLY DEPOSITED LEAD

Earthwork involving material containing aerially deposited lead shall conform to the provisions in Section 19, "Earthwork" of the Standard Specifications and these special provisions.

Attention is directed to "Aerially Deposited Lead" of these special provisions.

Type Y-1 material contains aerially deposited lead in average concentrations of 0.5 mg/L or less extractable lead (based on a modified waste extraction test using deionized water as the extractant) and 1411 mg/kg or less total lead. Type Y-1 material exists as shown on the plans. This material shall be placed as shown on the plans, unless otherwise directed by the Engineer, and covered with a minimum 0.6-m layer of non-hazardous soil or pavement. This material is hazardous waste regulated by the State of California that may be reused as permitted under the Variance of the California Department of Toxic Substances Control (DTSC) provided that the lead contaminated soil is placed a minimum of 1.5 m above the maximum water table elevation and covered with at least 0.3 m of non-hazardous soil. Temporary surplus material may be generated on this project due to the requirements of stage construction. Temporary surplus material shall not be transported outside the State right of way. In order to conform to the requirements of these provisions it may be necessary to stockpile material for subsequent stages, to construct some embankments out of stage, or to handle temporary surplus material more than once.

Type Y-2 material contains aerially deposited lead in average concentrations that exceed either 0.5 mg/L extractable lead (based on a modified waste extraction test using deionized water as the extractant) or 1411 mg/kg total lead but are less than 50 mg/L extractable lead (based on a modified waste extraction test using deionized water as the extractant) and less than 3397 mg/kg of total lead. Type Y-2 material exists as shown on the plans. This material shall be placed as shown on the plans, unless otherwise directed by the Engineer, and covered with a layer of pavement. This material is hazardous waste regulated by the State of California that may be reused as permitted under the Variance of DTSC provided that the lead contaminated soil is placed a minimum of 1.5 m above the maximum water table elevation and protected from infiltration by a pavement structure which will be maintained by the Department. Temporary surplus material may be generated on this project due to the requirements of stage construction. Temporary surplus material shall not be transported outside the State right of way. In order to conform to the requirements of these provisions, it may be necessary to stockpile material for subsequent stages, to construct some embankments out of stage, or to handle temporary surplus material more than once.

Type Z-2 material contains aerially deposited lead in average concentrations (using the 95 percent Upper Confidence Limit) greater than or equal to 1000 mg/kg total lead; greater than or equal to 5.0 mg/L soluble lead (as tested using the California Waste Extraction Test) and the material is surplus; or greater than 3397 mg/kg total lead. Surplus Type Y-1 and Y-2 material shall be treated as Type Z-2 material. Type Z-2 material exists as shown on the plans (see Sheet Q-1). This material is hazardous waste regulated by the State of California and shall be transported to and disposed of at a Class I

Disposal Site. Material excavated from these areas shall be transported by a hazardous waste transporter registered with the DTSC using the required procedures for creating a manifest for the material. The vehicles used to transport the hazardous material shall conform to the current certifications of compliance of the DTSC.

LEAD COMPLIANCE PLAN

The Contractor shall prepare a project specific Lead Compliance Plan to prevent or minimize worker exposure to lead while handling material containing aerially deposited lead. Attention is directed to Title 8, California Code of Regulations, Section 1532.1, "Lead," for specific California Department of Industrial Relations, Division of Occupational Safety and Health (Cal-OSHA) requirements when working with lead.

The Lead Compliance Plan shall contain the elements listed in Title 8, California Code of Regulations, Section 1532.1(e)(2)(B). Before submission to the Engineer, the Lead Compliance Plan shall be approved by an Industrial Hygienist certified in Comprehensive Practice by the American Board of Industrial Hygiene. The plan shall be submitted to the Engineer for review and acceptance at least 15 days prior to beginning work in areas containing aerially deposited lead.

The Lead Compliance Plan shall include perimeter air monitoring incorporating upwind and downwind locations as shown on the plans or as approved by the Engineer. Monitoring shall be by personal air samplers using National Institute of Safety and Health Method 7082. Sampling shall achieve a detection limit of 0.05 $\mu g/m^3$ of air per day. Daily monitoring shall take place while the Contractor clears and grubs and performs earthwork operations. A single representative daily sample shall be analyzed for lead. Results shall be analyzed and provided to the Engineer within 24 hours. Average lead concentrations shall not exceed 1.5 $\mu g/m^3$ of air per day. If concentrations exceed this level the Contractor shall stop work and modify the work to prevent release of lead. Monitoring shall be done under the direction of, and the data shall be reviewed by and signed by a Certified Industrial Hygienist.

The Contractor shall not work in areas containing aerially deposited lead within the project limits, unless authorized in writing by the Engineer, until the Engineer has accepted the Lead Compliance Plan.

Prior to performing work in areas containing aerially deposited lead, personnel who have no prior training or are not current in their training status, including Department personnel, shall complete a safety training program provided by the Contractor. The safety training program shall meet the requirements of Title 8, California Code of Regulations, Section 1532.1, "Lead."

Personal protective equipment, training, and washing facilities required by the Contractor's Lead Compliance Plan shall be supplied to Department personnel by the Contractor. The number of Department personnel will be one.

The Engineer will notify the Contractor of acceptance or rejection of the submitted or revised Lead Compliance Plan not more than 10 days after submittal of the plan.

The contract lump sum price paid for Lead Compliance Plan shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in preparing the Lead Compliance Plan, including paying the Certified Industrial Hygienist, and for providing personal protective equipment, training and medical surveillance, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

EXCAVATION AND TRANSPORTATION PLAN

Within 15 days after approval of the contract, the Contractor shall submit 3 copies of an Excavation and Transportation Plan to the Engineer. The Engineer will have 3 days to review the plan. If revisions are required, as determined by the Engineer, the Contractor shall revise and resubmit the plan within 7 days of receipt of the Engineer's comments. The Engineer will have 3 days to review the revisions. Upon the Engineer's approval of the plan, 3 additional copies incorporating the required changes shall be submitted to the Engineer. Minor changes to or clarifications of the initial submittal may be made and attached as amendments to the Excavation and Transportation Plan. In order to allow construction to proceed, the Engineer may conditionally approve the plan while minor revisions or amendments are being completed.

The Contractor shall prepare the written, project specific Excavation and Transportation Plan establishing the procedures the Contractor will use to comply with requirements for excavating, stockpiling, transporting, and placing (or disposing) of material containing aerially deposited lead. The plan shall conform to the regulations of the DTSC and Cal-OSHA. The sampling and analysis portions of the Excavation and Transportation Plan shall meet the requirements for the design and development of the sampling plan, statistical analysis, and reporting of test results contained in USEPA, SW 846, "Test Methods for Evaluating Solid Waste," Volume II: Field Manual Physical/Chemical, Chapter Nine, Section 9.1. The plan shall contain, but not be limited to the following elements:

A. Excavation schedule (by location and date),
B. Temporary locations of stockpiled material,
C. Sampling and analysis plans for areas after removal of a stockpile,

1. Location and number of samples,
2. Analytical laboratory,

D. Sampling and analysis plan for soil cover,
E. Sampling and analysis plan for post excavation as shown on the plans,
F. Dust control measures,
G. Air monitoring,

1. Location and type of equipment,
2. Sampling frequency,
3. Analytical laboratory,

H. Transportation equipment and routes,
I. Method for preventing spills and tracking material onto public roads,
J. Truck waiting and staging areas,
K. Site for disposal of hazardous waste,
L. Spill Contingency Plan for material containing aerially deposited lead.

DUST CONTROL

Excavation, transportation, placement, and handling of material containing aerially deposited lead shall result in no visible dust migration. The Contractor shall have a water truck or tank on the job site at all times while clearing and grubbing and performing earthwork operations in work areas containing aerially deposited lead.

STOCKPILING

Stockpiles of material containing aerially deposited lead shall not be placed where affected by surface run-on or run-off. Stockpiles shall be covered with plastic sheeting 0.33 mm minimum thickness or 0.3 m of non-hazardous material. Stockpiles shall not be placed in environmentally sensitive areas. Stockpiled material shall not enter storm drains, inlets, or waters of the State.

MATERIAL TRANSPORTATION

Prior to traveling on public roads, loose and extraneous material shall be removed from surfaces outside the cargo areas of the transporting vehicles and the cargo shall be covered with tarpaulins or other cover, as outlined in the approved Excavation and Transportation Plan. The Contractor shall be responsible for costs due to spillage of material containing lead during transport.

The Department will not consider the Contractor a generator of the hazardous material, and the Contractor will not be obligated for further cleanup, removal, or remedial action for such material handled or disposed of in conformance with the requirements specified in these special provisions and the appropriate State and Federal laws and regulations and county and municipal ordinances and regulations regarding hazardous waste.

DISPOSAL

Surplus material for which the lead content is not known shall be analyzed for aerially deposited lead by the Contractor prior to removing the material from within the project limits. The Contractor shall submit a sampling and analysis plan and the name of the analytical laboratory to the Engineer at least 15 days prior to beginning sampling or analysis. The Contractor shall use a laboratory certified by the California Department of Health Services. Sampling shall be at a minimum rate of one sample for each 150 m^3 of surplus material and tested for lead using EPA Method 6010 or 7000 series.

Materials containing aerially deposited lead shall be disposed of within California. The disposal site shall be operating under a permit issued by the appropriate California Environmental Protection Agency board or department.

The Engineer will obtain the Environmental Protection Agency Generator Identification Number for hazardous waste disposal. The Engineer will sign all hazardous waste manifests. The Contractor shall notify the Engineer 5 days before the manifests are to be signed.

The Engineer will obtain the State of California Board of Equalization Identification Number for hazardous waste disposal. The Engineer will sign all hazardous waste manifests. The Contractor shall notify the Engineer 5 days before the manifests are to be signed.

Sampling, analyzing, transporting, and disposing of material containing aerially deposited lead excavated outside the pay limits of excavation will be at the Contractor's expense.

MEASUREMENT AND PAYMENT

Quantities of roadway excavation (aerially deposited lead) and structure excavation (aerially deposited lead), of the types shown in the Engineer's Estimate, will be measured and paid for in the same manner specified for roadway excavation and structure excavation, respectively, in Section 19, "Earthwork," of the Standard Specifications.

Full compensation for preparing an approved Excavation and Transportation Plan, transporting material containing aerially deposited lead reused in the work from location to location, and transporting and disposing of material containing aerially deposited lead shall be considered as included in the contract prices paid per cubic meter for the items of roadway excavation (aerially deposited lead) and structure excavation (aerially deposited lead) of the types involved, and no additional compensation will be allowed therefor.

No payment for stockpiling of material containing aerially deposited lead will be made, unless the stockpiling is ordered by the Engineer.

Sampling, analyses, and reporting of results for surplus material not previously sampled will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

10-1.45 EROSION CONTROL (NETTING)

Erosion control (netting) shall conform with the details as shown on the plans, as specified in these special provisions, and as directed by the Engineer.

Erosion control (netting) work shall consist of furnishing, installing, and maintaining control netting in ditches or swales, on embankment slopes, excavation slopes and other locations as shown on the plans.

Following the installation of erosion control (netting), erosion control materials shall be applied onto the netting face as specified in these special provisions.

MATERIALS

Materials for the erosion control (netting) shall conform to the provisions in Section 20-2, "Materials," of the Standard Specifications and these special provisions.

Erosion Control Netting

Erosion control netting shall consist of 100 percent spun coir fiber and shall conform to the following:

Specification	Requirement
Weight, grams per square meter ASTM Designation: D 3776	400
Minimum Tensile Strength, kilonewtons, ASTM Designation: D 4595-86	9.0 to 11.3 kN/m in longitudinal direction (dry) 5.0 to 10.7 kN/m in cross-direction (dry) 6.0 to 9.8 kN/m in longitudinal direction (wet) 4.0 to 9.4 kN/m in cross- direction (wet)
Roll Width, meters, min.	4
Area/Roll, square meters, min.	200
Open Area, percent	63-70

Staples

Staples shall be as shown on the plans.

Seed

Seed shall conform to the provisions in Section 20-2.10, "Seed," of the Standard Specifications. Individual seed species shall be measured and mixed in the presence of the Engineer.

Seed not required to be labeled under the California Food and Agricultural Code shall be tested for purity and germination by a seed laboratory certified by the Association of Official Seed Analysts or by a seed technologist certified by the Society of Commercial Seed Technologists.

Seed shall have been tested for purity and germination not more than one year prior to application of seed.

Results from testing seed for purity and germination shall be furnished to the Engineer prior to applying seed.

Seed shall be delivered to the job site in unopened separate containers with the seed tag attached. Containers without a seed tag will not be accepted.

A sample of approximately 30 g of seed will be taken from each seed container by the Engineer.

Non-Legume Seed

Non-legume seed shall consist of the following:

NON-LEGUME SEED

Botanical Name (Common Name)	Percent Germination (Minimum)	Kilograms Pure Live Seed Per Hectare (Slope Measurement)
Cyperus eragrostis (Tall nutsedge)	35	4
Eleocharis macrostachya (Spikerush)	30	3
Hordeum brachyantherum (Meadow barley)	60	12
Juncus effusus (Pacific rush)	40	1.5
Polygonum punctatum (Water smartweed)	40	2.5

Compost

Compost shall be derived from green material consisting of chipped, shredded or ground vegetation or clean processed recycled wood products or a Class A, exceptional quality biosolids composts, as required by the United States Environmental Protection Agency (EPA), 40 CFR, Part 503c regulations or a combination of green material and biosolids compost. The compost shall be processed or completed to reduce weed seeds, pathogens and deleterious material, and shall not contain paint, petroleum products, herbicides, fungicides or other chemical residues that would be harmful to plant or animal life. Other deleterious material, plastic, glass, metal or rocks shall not exceed 0.1 percent by weight or volume. A minimum internal temperature of 57°C shall be maintained for at least 15 continuous days during the composting process. The compost shall be thoroughly turned a minimum of 5 times during the composting process and shall go through a minimum 90-day curing period after the 15-day thermophilic compost process has been completed. Compost shall be screened through a maximum 9.5-mm screen. The moisture content of the compost shall not exceed 35 percent. Compost products with a higher moisture content may be used provided the weight of the compost is increased to equal the compost with a moisture content of 35 percent. Moist samples of compost on an as received basis shall be dried in an oven at a temperature between 105°C and 115°C until a constant dry weight of the sample is achieved. The percentage of moisture will be determined by dividing the dry weight of the sample by the moist weight of the sample and then multiplying by 100. Compost will be tested for maturity and stability with a Solvita test kit. The compost shall measure a minimum of 6 on the maturity and stability scale.

APPLICATION

Erosion control (netting) materials shall be placed in separate applications as follows:

The first application shall consist of applying seed, fiber, and compost at the following rates:

If hydro-seeding equipment is used to apply seed, fiber, and compost, the mixture shall be applied within 60 minutes after the seed has been added to the mixture.

Material	Kilograms Per Hectare (Slope Measurement)
Non-Legume Seed	23
Fiber	320

Material	Cubic Meter Per Hectare (Slope Measurement)
Compost	4

The second application shall consist of installing the erosion control (netting) over the seed application.

INSTALLATION

Erosion control (netting) shall be installed in ditches or swales, on embankment slopes, or excavation slopes as follows:

A. Erosion control (netting) strips shall be placed loosely along the ditch or swale with the longitudinal edges and joints parallel to the centerline of the ditch or swale. Longitudinal joints of netting shall be overlapped and stapled. Transverse joints of netting shall be secured in intermediate joint trenches. Staples shall be driven perpendicular to the slopes. Ends of the netting shall be secured in place in key trenches.
B. Erosion control (netting) strips shall be placed loosely on the embankment or excavation slope with the longitudinal joints perpendicular to the slope contour lines. Longitudinal and transverse joints of netting shall be overlapped and stapled. Staples shall be driven perpendicular to the slopes. Ends of the netting shall be secured in place in key trenches.

MAINTENANCE

Erosion control (netting) shall be repaired or replaced on the same day the damage occurs. Damaged netting shall be replaced. Washouts between joints or beneath the erosion control (netting) shall be repaired.

Erosion control (netting) damaged during the progress of work or resulting from the Contractor's vehicles, equipment, or operations shall be repaired or replaced at the expense of the Contractor.

MEASUREMENT AND PAYMENT

The quantity of erosion control (netting) will be measured by the square meter as determined from actual slope measurements of the areas covered by the erosion control (netting) excluding overlaps.

The contract price paid per square meter for erosion control (netting) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in installing erosion control (netting), complete in place, including trench excavation and backfill, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.46 MOVE-IN/MOVE-OUT (EROSION CONTROL)

Move-in/move-out (erosion control) shall include moving onto the project when an area is ready to receive erosion control as determined by the Engineer, setting up all required personnel and equipment for the application of erosion control materials and moving out all personnel and equipment when erosion control in that area is completed.

When areas are ready to receive applications of erosion control (Type D), as determined by the Engineer, the Contractor shall begin erosion control work in that area within 5 working days of the Engineer's notification to perform the erosion control work.

Attention is directed to the requirements of erosion control (Type D) elsewhere in these special provisions.

Quantities of move-in/move-out (erosion control) will be determined as units from actual count as determined by the Engineer. For measurement purposes, a move-in followed by a move-out will be considered as one unit.

The contract unit price paid for move-in/move-out (erosion control) shall include full compensation for furnishing all labor, materials (excluding erosion control materials), tools, equipment, and incidentals and for doing all the work involved in moving in and removing from the project all personnel and equipment necessary for application of erosion control (Type D), as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

No adjustment of compensation will be made for any increase or decrease in the quantities of move-in/move-out (erosion control) required, regardless of the reason for the increase or decrease. The provisions in Section 4-1.03B, "Increased or Decreased Quantities," of the Standard Specifications shall not apply to the item of move-in/move-out (erosion control).

10-1.47 EROSION CONTROL (NETTING)

Erosion control (netting) shall conform with the details as shown on the plans, as specified in these special provisions, and as directed by the Engineer.

Erosion control (netting) work shall consist of furnishing, installing, and maintaining control netting in ditches or swales, on embankment slopes, excavation slopes and other locations as shown on the plans.

Following the installation of erosion control (netting), erosion control materials shall be applied onto the netting face as specified in these special provisions.

MATERIALS

Materials for the erosion control (netting) shall conform to the provisions in Section 20-2, "Materials," of the Standard Specifications and these special provisions.

Erosion Control Netting

Erosion control netting shall consist of 100 percent spun coir fiber and shall conform to the following:

Specification	Requirement
Weight, grams per square meter ASTM Designation: D 3776	400
Minimum Tensile Strength, kilonewtons, ASTM Designation: D 4595-86	9.0 to 11.3 kN/m in longitudinal direction (dry) 5.0 to 10.7 kN/m in cross-direction (dry) 6.0 to 9.8 kN/m in longitudinal direction (wet) 4.0 to 9.4 kN/m in cross- direction (wet)
Roll Width, meters, min.	4
Area/Roll, square meters, min.	200
Open Area, percent	63-70

Staples

Staples shall be as shown on the plans.

Seed

Seed shall conform to the provisions in Section 20-2.10, "Seed," of the Standard Specifications. Individual seed species shall be measured and mixed in the presence of the Engineer.

Seed not required to be labeled under the California Food and Agricultural Code shall be tested for purity and germination by a seed laboratory certified by the Association of Official Seed Analysts or by a seed technologist certified by the Society of Commercial Seed Technologists.

Seed shall have been tested for purity and germination not more than one year prior to application of seed.

Results from testing seed for purity and germination shall be furnished to the Engineer prior to applying seed.

Seed shall be delivered to the job site in unopened separate containers with the seed tag attached. Containers without a seed tag will not be accepted.

A sample of approximately 30 g of seed will be taken from each seed container by the Engineer.

Non-Legume Seed

Non-legume seed shall consist of the following:

NON-LEGUME SEED

Botanical Name (Common Name)	Percent Germination (Minimum)	Kilograms Pure Live Seed Per Hectare (Slope Measurement)
Cyperus eragrostis (Tall nutsedge)	35	4
Eleocharis macrostachya (Spikerush)	30	3
Hordeum brachyantherum (Meadow barley)	60	12
Juncus effusus (Pacific rush)	40	1.5
Polygonum punctatum (Water smartweed)	40	2.5

Compost

Compost shall be derived from green material consisting of chipped, shredded or ground vegetation or clean processed recycled wood products or a Class A, exceptional quality biosolids composts, as required by the United States Environmental Protection Agency (EPA), 40 CFR, Part 503c regulations or a combination of green material and biosolids compost. The compost shall be processed or completed to reduce weed seeds, pathogens and deleterious material, and shall not contain paint, petroleum products, herbicides, fungicides or other chemical residues that would be harmful to plant or animal life.

Other deleterious material, plastic, glass, metal or rocks shall not exceed 0.1 percent by weight or volume. A minimum internal temperature of 57°C shall be maintained for at least 15 continuous days during the composting process. The compost shall be thoroughly turned a minimum of 5 times during the composting process and shall go through a minimum 90-day curing period after the 15-day thermophilic compost process has been completed. Compost shall be screened through a maximum 9.5-mm screen. The moisture content of the compost shall not exceed 35 percent. Compost products with a higher moisture content may be used provided the weight of the compost is increased to equal the compost with a moisture content of 35 percent. Moist samples of compost on an as received basis shall be dried in an oven at a temperature between 105°C and 115°C until a constant dry weight of the sample is achieved. The percentage of moisture will be determined by dividing the dry weight of the sample by the moist weight of the sample and then multiplying by 100. Compost will be tested for maturity and stability with a Solvita test kit. The compost shall measure a minimum of 6 on the maturity and stability scale.

APPLICATION

Erosion control (netting) materials shall be placed in separate applications as follows:

The first application shall consist of applying seed, fiber, and compost at the following rates:

If hydro-seeding equipment is used to apply seed, fiber, and compost, the mixture shall be applied within 60 minutes after the seed has been added to the mixture.

Material	Kilograms Per Hectare (Slope Measurement)
Non-Legume Seed	23
Fiber	320

Material	Cubic Meter Per Hectare (Slope Measurement)
Compost	4

The second application shall consist of installing the erosion control (netting) over the seed application.

INSTALLATION

Erosion control (netting) shall be installed in ditches or swales, on embankment slopes, or excavation slopes as follows:

A. Erosion control (netting) strips shall be placed loosely along the ditch or swale with the longitudinal edges and joints parallel to the centerline of the ditch or swale. Longitudinal joints of netting shall be overlapped and stapled. Transverse joints of netting shall be secured in intermediate joint trenches. Staples shall be driven perpendicular to the slopes. Ends of the netting shall be secured in place in key trenches.
B. Erosion control (netting) strips shall be placed loosely on the embankment or excavation slope with the longitudinal joints perpendicular to the slope contour lines. Longitudinal and transverse joints of netting shall be overlapped and stapled. Staples shall be driven perpendicular to the slopes. Ends of the netting shall be secured in place in key trenches.

MAINTENANCE

Erosion control (netting) shall be repaired or replaced on the same day the damage occurs. Damaged netting shall be replaced. Washouts between joints or beneath the erosion control (netting) shall be repaired.

Erosion control (netting) damaged during the progress of work or resulting from the Contractor's vehicles, equipment, or operations shall be repaired or replaced at the expense of the Contractor.

MEASUREMENT AND PAYMENT

The quantity of erosion control (netting) will be measured by the square meter as determined from actual slope measurements of the areas covered by the erosion control (netting) excluding overlaps.

The contract price paid per square meter for erosion control (netting) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in installing erosion control (netting), complete in place, including trench excavation and backfill, seed, fiber, compost and application of seed and compost, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.48 EROSION CONTROL (TYPE D)

Erosion control (Type D) shall conform to the provisions in Section 20-3, "Erosion Control," of the Standard Specifications and these special provisions and shall consist of applying erosion control materials to embankment and excavation slopes and other areas disturbed by construction activities as shown on the plans.

Erosion control (Type D) shall be applied when an area is ready to receive erosion control as determined by the Engineer and in conformance with the provisions in "Move-in/Move-out (Erosion Control)" of these special provisions.

Prior to installing erosion control materials, soil surface preparation shall conform to the provisions in Section 19-2.05, "Slopes," of the Standard Specifications, except that rills and gullies exceeding 50 mm in depth or width shall be leveled. Vegetative growth, temporary erosion control materials, and other debris shall be removed from areas to receive erosion control.

MATERIALS

Materials shall conform to the provisions in Section 20-2, "Materials," of the Standard Specifications and these special provisions.

Seed

Seed shall conform to the provisions in Section 20-2.10, "Seed," of the Standard Specifications. Individual seed species shall be measured and mixed in the presence of the Engineer.

Seed shall be delivered to the project site in unopened separate containers with the seed tag attached. Containers without a seed tag attached will not be accepted.

A sample of approximately 30 g of seed will be taken from each seed container by the Engineer.

Legume Seed

Legume seed and non legume seed (Type 2) shall be pellet-inoculated or industrial-inoculated and shall conform to the following:

A. Inoculated seed (TYPE 1) and Industrial pellet-inoculated seed (TYPE 2) shall be inoculated in conformance with the provisions in Section 20-2.10, "Seed," of the Standard Specifications.
B. Inoculated seed (TYPE 1) shall have a calcium carbonate coating.
C. Industrial pellet inoculated seed (TYPE 2) shall have artificial soil medium and soil making inoculants, a calcium carbonate coating, enzymes, algae inoculums, polymer, organic carbon chains, mycorrhiza , rhizobia and beneficial bacillus Weight Ratios:1-3 ratio of seed to total weight, 1-12 ratio of mycorrhizal innoculant, 1-4 ratio of coating (artificial soil medium and soil making inoculants)-calcium sulfate, calcium carbonate, enzymes, algae inoculums, polymer, organic carbon chains, benefical bacillus. Relationship of Ingredients: 50 parts seed, 25 parts mycorrizal, 125 parts of coating (artificial soil medium) self sustaining native ecosystem.
D. Industrial-inoculated seed (TYPE 1) shall be inoculated with Rhizobia and coated using an industrial process by a manufacturer whose principal business is seed coating and seed inoculation.
E. Industrial pellet-inoculated seed (TYPE 2) shall be inoculated and coated using an industrial process by a manufacturer whose principal business is seed coating and seed inoculation and shall be inoculated in the pellatazation process.
F. Industrial-inoculated seed (TYPE 1) shall be sown within 180 calendar days after inoculation.
G Industrial pellet-inoculated seed (TYPE 2) shall be sown within 90 calendar days after inoculation
H. Legume seed shall consist of the following:

LEGUME SEED (TYPE 1)

Botanical Name (Common Name)	Percent Germination (Minimum)	Kilograms Pure Live Seed Per Hectare (Slope Measurement)
Lotus purshianus (Spanish Clover)	45	1.0
Trifolium willdonevii (TomCat Clover)	60	1.0
Lupinus bicolor (Pygmy-leaved Lupine)	45	1.0
Lupinus nanus (Sky Lupine)	45	1.0

LEGUME SEED (TYPE 2)

Botanical Name (Common Name)	Percent Germination (Minimum)	Kilograms Pure Live Seed Per Hectare (Slope Measurement)
Lotus purshianus (Purshings Lotus)	45	4
Lupinus bicolor (Pygmy-leaved Lupine)	45	4
Lupinus nanus (Sky Lupine)	45	4
Trifolium Obtusiflora ssp Diversifolium (Clammy Clover)	45	4

Non-Legume Seed

Non-legume seed shall consist of the following:

NON-LEGUME SEED (TYPE 1)

Botanical Name (Common Name)	Percent Germination (Minimum)	Kilograms Pure Live Seed Per Hectare (Slope Measurement)
Eschscholzia californica* (California Poppy)	40	1.0
Hordeum brachyantherum "salt"* (California Barley)	40	10.0
Hordeum californicum prostrate* (California Barley Prostrate)	45	15.0
Elymus glaucus "Berkeley"* (Blue Wild Rye)	40	10.0
Festuca idahoensis* (Idaho Fescue)		8.0
Deschampsia elongatum* (Slender hairgrass)	40	1.5
Vulpia microstachys* (Six Weeks Fescue)	45	8.0

- California native seed source

NON-LEGUME SEED (TYPE 2)

Botanical Name (Common Name)	Percent Germination (Minimum)	Kilograms Pure Live Seed Per Hectare (Slope Measurement)
Carex tumulicola (Foothill Sedge)	45	40
Clarkia rubcundum Ruby Clarkia	45	3
Festuca Idahoensis sbb Ovina ssp ingrata – Mokelumne 2 Blue fescue	45	16
Festuca Idahoensis sbb romerii Siskiyou Ice Blue fescue	45	16
Festuca Rubra -Molate Blue fescue	45	16
Eschscholzia californica (California Poppy)	45	2

Straw

Straw shall conform to the provisions in Section 20-2.06, "Straw," of the Standard Specifications and these special provisions.

Wheat and barley straw shall be derived from irrigated crops.

Prior to delivery of wheat or barley straw to the project site, the Contractor shall provide the name, address and telephone number of the grower.

Straw shall be derived from wheat or barley.

Straw for applications of Seed (TYPE 2) shall be derived from native grasses of the same species as used in Erosion Control (Type D) (Seed Type 2) and shall be weed free and applied at the rate of 4 tonnes per hectare.

Straw shall be free of plastic, glass, metal, rocks, and refuse or other deleterious material.

Compost

At the option of the Contractor, compost may be either A, B, or any combination of both:

A. Green material consisting of chipped, shredded, or ground vegetation; or clean processed recycled wood products.
B. Class A, exceptional quality biosolids composts, conforming to the requirements in United States Environmental Protection Agency (EPA) regulation 40 CFR, Part 503c.

Compost shall not contain paint, petroleum products, herbicides, fungicides or other chemical residues harmful to plant or animal life. Other deleterious material, plastic, glass, metal or rock shall not exceed 0.1-percent by weight or volume.

Compost shall be thermophilically processed for 15 days. During this process, the compost shall be maintained at minimum internal temperature of 55˚C and be thoroughly turned at least 5 times. A 90-day curing period shall follow the thermophilic process.

Compost shall be screened through a screen no larger than 12 mm.

Compost shall measure at least 6 on the maturity and stability scale with a Solvita test kit.

A Certificate of Compliance for compost shall be furnished to the Engineer in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. The Certificate of Compliance shall state the Solvita maturity and stability scale test result of the compost.

Stabilizing Emulsion

Stabilizing emulsion shall conform to the provisions in Section 20-2.11, "Stabilizing Emulsion," of the Standard Specifications and these special provisions.

Stabilizing emulsion shall be in a dry powder form, may be reemulsifiable, and shall be a processed organic adhesive derivative Platago ovato used as a soil tackifier.

APPLICATION

Erosion control materials shall be applied in separate applications in the following sequence:

A. The following mixture in the rates indicated shall be applied with hydro-seeding equipment within 60 minutes after the seed has been added to the mixture:

Seed (TYPE 1)

Material	Kilograms Per Hectare (Slope Measurement)
Legume Seed	4
Non-Legume Seed	53.5
Fiber	320

Material	Cubic Meter Per Hectare (Slope Measurement)
Compost	4

Seed (TYPE 2)

Material	Kilograms Per Hectare (Slope Measurement)
Legume Seed	16
Non-Legume Seed	93
Fiber	1810

Material	Cubic Meter Per Hectare (Slope Measurement)
Compost	4

B. The Contractor may dry apply compost at the total of the rates specified in the preceding table and the following table instead of including it as part of the hydro-seeding operations. In areas where the compost is dry applied, all compost for that area shall be applied before the next operation.

C. Straw shall be applied at the rate of 4 tonnes per hectare based on slope measurements. Incorporation of straw will not be required. Straw shall be distributed evenly without clumping or piling.

D. The following mixture in the rates indicated shall be applied with hydro-seeding equipment:

Seed (TYPE 1)

Material	Kilograms Per Hectare (Slope Measurement)
Fiber	320
Stabilizing Emulsion (Solids)	140

Material	Cubic Meter Per Hectare (Slope Measurement)
Compost	4

Seed (TYPE 2)

Material	Kilograms Per Hectare (Slope Measurement)
Fiber	1810
Stabilizing Emulsion (Solids)	140

Material	Cubic Meter Per Hectare (Slope Measurement)
Compost	4

The ratio of total water to total stabilizing emulsion in the mixture shall be as recommended by the manufacturer.

Once straw work is started in an area, stabilizing emulsion applications shall be completed in that area on the same working day.

The rates of erosion control in areas using Seed (Type 2) materials may be changed by the Engineer to meet field conditions.

MEASUREMENT AND PAYMENT

Compost (erosion control) will be measured by the cubic meter in the vehicle at the point of delivery in conformance with the provisions in Section 9-1.01, "Measurement of Quantities," of the Standard Specifications.

The contract price paid per cubic meter for compost (erosion control) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in applying compost for erosion control, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

The contract price paid per tonne for Straw (Erosion Control) (Type D) (Seed Type 1) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in Straw (Erosion Control) (Type D) (Seed Type 1), complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

The contract price paid per tonne for Straw (Erosion Control) (Type D) (Seed Type 2) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in Straw (Erosion Control) (Type D) (Seed Type 2), complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

The contract price paid per kilogram for Pure Live Seed (Erosion Control) (Type D) (Seed Type 1) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in Pure Live Seed (Erosion Control) (Type D) (Seed Type 1), complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

The contract price paid per kilogram for Pure Live Seed (Erosion Control) (Type D) (Seed Type 2) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in Pure Live Seed (Erosion Control) (Type D) (Seed Type 2), complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Watering of Erosion Control "D" applications using seed (Type 2) seeding areas will not be required unless directed by the Engineer. When directed by the Engineer, watering will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications.

10-1.49 FIBER ROLLS

Fiber rolls shall conform to the details shown on the plans and these special provisions.

MATERIALS

Fiber rolls shall consist of one of the following:

A. Fiber rolls shall be constructed on the project site with manufactured blankets consisting of one or a combination of wood excelsior, rice, wheat or coconut fibers. The blanket shall measure approximately 3.5 m wide by 26 m to 29 m in length. Wood excelsior material shall have individual fibers, 80 percent of which shall be 150 mm or longer in fiber length. The blanket shall have a photodegradable plastic netting. The blanket shall be rolled on the blanket's width and secured with jute twine spaced 2 m apart along the roll for the full length and 150 mm from each end of the individual rolls. The blanket shall be rolled so that the netting is on the outside of the finished roll. The finished roll diameter shall be a minimum of 175 mm and a maximum of 225 mm and shall weigh not less than 1.3 kg/m.
B. Fiber rolls shall be pre-manufactured rice or wheat straw, wood excelsior or coconut fiber rolls encapsulated within a photodegradable plastic netting. Each roll shall be a minimum of 175 mm and a maximum of 225 mm in diameter and 7 m to 9 m in length and shall weigh not less than 1.3 kg/m. The netting shall be ultraviolet (UV) degradable plastic. The netting shall have a minimum durability of one year after installation. The netting shall be secured tightly at each end of the individual rolls.
C. Stakes shall be fir or pine and shall be a minimum of 25 mm x 25 mm x 600 mm in length. Metal stakes may be used as an alternative. The Contractor shall submit a sample of the metal stake to the Engineer prior to installation. The tops of the metal stakes shall be bent over at a 90-degree angle. No additional compensation will be allowed for the use of a metal stake.

INSTALLATION

Fiber rolls shall be joined tightly together to form a single linear roll that is installed approximately parallel to the slope contour. Fiber rolls shall be installed prior to the application of other erosion control materials.

Furrows shall be constructed at a slight angle to the slope contour as shown on the plans, to a depth of 50 mm to 100 mm, and at a sufficient width to hold the fiber rolls.

Rolls shall be installed at contour intervals of 6 m of elevation in the furrows with the first row installed 1.5 m above the toe of slope. Individual rolls shall be placed with adjacent ends butted firmly to each other to create a continuous linear roll.

Stakes shall be installed 1.2 m apart along the total length of the rolls and 125 mm from the end of each individual roll. Stakes shall be driven flush or a maximum of 50 mm above the roll.

MEASUREMENT AND PAYMENT

Fiber rolls will be measured by the meter from end to end along the centerline of the installed rolls.

The contract price paid per meter for fiber rolls shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in installing fiber rolls, complete in place, including stakes, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.50 DRAINAGE INLET PROTECTION

Drainage inlet protection shall be constructed and maintained as shown on the plans, as specified in these special provisions, and as directed by the Engineer.

MATERIALS

Materials shall conform to the provisions in Section 20-2, "Materials," of the Standard Specifications and these special provisions.

Erosion Control Blanket

Erosion control blanket shall consist of straw and coconut or wood excelsior blanket secured in place with wire staples and shall conform to one of the following:

A. Excelsior blanket material shall consist of machine produced mats of curled wood excelsior with 80 percent of the fiber 150 mm or longer. The erosion control blanket shall be of consistent thickness and the wood fiber shall be evenly distributed over the entire area of the blanket. The top surface of the blanket shall be covered with a photodegradable extruded plastic mesh. The blanket shall be smolder resistant without the use of chemical additives and shall be non-toxic and non-injurious to plant and animal life. Erosion control blanket shall be furnished in rolled

strips, 1220 mm ±25 mm in width, and shall have an average mass of 0.5-kg/m^2± 10 percent at the time of manufacture.

B. Erosion control blanket shall consist of 100 percent spun coir fiber and shall conform to the following:

Properties

ASTM 3776C Weight	400 g/m2
Roll Width (minimum)	2rn
Area/roll (minimum)	200 m2
Open Area (maximum)	63-70%
D4595-86 Minimum tensile Strength	0.23/0.14 KN (dry) 0.17/0.11KN (wet)

C. Straw and coconut blanket shall be machine produced mats of straw and coconut with a light weight photodegradable netting on top. The straw and coconut shall adhere to the netting with biodegradable thread or glue strip. The straw and coconut erosion control blanket shall be of consistent thickness with the straw and coconut evenly distributed over the entire area of the blanket. Straw and coconut erosion control blanket shall be furnished in rolled strips with a minimum width of 1.8 meters, minimum length of 20 meters (± 1 meter) and a minimum weight of0.27-kg/m2.

D. Staples for erosion control blankets shall be made of 11-gage minimum steel wire and shall be U-shaped with 150-mm legs and 25-mm crown or 200-mm legs and 50-mm crown.

Fiber Rolls

A. Fiber rolls shall be constructed with manufactured blankets consisting of one material or a combination of materials consisting of wood excelsior, rice or wheat straw, or coconut fibers. Blankets shall measure approximately 2.0 to 2.4m wide by 20 m to 29 m in length. Wood excelsior material shall have individual fibers, 80 percent of which shall be 150 mm or longer in fiber length. Blankets shall have a photodegradable plastic netting or biodegradable jute, sisal or coir fiber netting on at least one side. The blanket shall be rolled on the blanket's width and secured with jute twine spaced 2 m apart along the roll for the full length and 150 mm from each end of the individual rolls. The finished roll diameter shall be a minimum of 200 mm and a maximum of 250 mm and shall weigh not less than 0.81 kg/m. Overlapping of more than one blanket may be required to achieve the finished roll diameter. When overlapping is required, blankets shall be longitudinally overlapped all 50 mm along the length of the fabric.

B. Fiber rolls shall be pre-manufactured rice or wheat straw, wood excelsior or coconut fiber rolls encapsulated within a photodegradable plastic or biodegradable jute, sisal or coir fiber netting. Each roll shall be a minimum of 200 mm and a maximum of 250 mm in diameter, 3 m to 6 m in length and shall weigh not less than 1.6 kg/m. The netting shall have a minimum durability of one year after installation. The netting shall be secured tightly at each end of the individual rolls.

C. Stakes shall be fir or pine and shall be a minimum of 19 mm x 38 mm x 600 mm in length.

INSTALLATION

The bedding area shall be excavated and cleared of obstructions including, but not limited to, rocks, clods, and mulch prior to installation of the erosion control blanket The edges of the erosion control blanket shall be keyed into trenches, stapled, backfilled, and tamped. Upon completion of the backfill and tamping, the resulting key trench shall have an indentation or furrow of 50 mm to 100 mm to accept the fiber roll. Fiber rolls shall be installed along the edges of the erosion control blanket, in the furrow, and secured as shown on plans. Excess soil from excavation of the key trenches shall be disposed of uphill of the installed fiber rolls.

Stakes shall be installed 600 mm apart along the total length of the rolls and 300 mm from the end of each individual roll. Stakes shall be driven flush or a maximum of 50 mm above the roll.

MAINTENANCE

Drainage inlet protection shall be maintained to provide sediment holding capacity and to reduce runoff velocities. Drainage inlet protection shall be repaired or replaced immediately when the damage occurs.

Sediment deposits, trash and debris shall be removed from drainage inlet protection as needed or when directed by the Engineer. Removed sediment shall be deposited within the project limits in such a way that the sediment is not subject to erosion by wind or by water. Trash and debris shall be removed and disposed of in accordance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

At locations where rills and other evidence of concentrated runoff have occurred beneath the drainage inlet protection, the protection shall be adjusted to prevent that occurrence.

Sediment in excess of 50 mm above the surface of the erosion control blanket or geotextile fabric shall be removed.

Split, torn, unraveling, sagging or slumping fiber rolls shall be replaced or repaired.

MEASUREMENT AND PAYMENT

The quantity of drainage inlet protection to be paid for will be determined from actual measurement of drainage inlet protected conforming to the details shown on the plans

The contract unit price paid per Drainage Inlet Protection shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing drainage inlet protection, complete in place, including furnishing and installing fiber rolls and erosion control blanket, and maintenance of drainage inlet protection, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.51 FLARED END SECTION PROTECTION

Flared end section protection shall be constructed and maintained as shown on the plans, as specified in these special provisions, and as directed by the Engineer.

MATERIALS

Materials shall conform to the provisions in Section 20-2, "Materials," of the Standard Specifications and these special provisions.

Erosion Control Blanket

Erosion control blanket shall consist of straw and coconut or wood excelsior blanket secured in place with wire staples and shall conform to one of the following:

A. Excelsior blanket material shall consist of machine produced mats of curled wood excelsior with 80 percent of the fiber 150mm or longer. The erosion control blanket shall be of consistent thickness and the wood fiber shall be evenly distributed over the entire area of the blanket. The top surface of the blanket shall be covered with a photo-degradable extruded plastic mesh. The blanket shall be smolder resistant without the use of chemical additives and shall be non-toxic and non-injurious to plant and animal life. Erosion control blanket shall be furnished in rolled strips, 1220 mm ± 25 mm in width, and shall have an average mass of 0.5-kg/m^2 ±10 percent at the time of manufacture.

B. Erosion control blanket shall consist of 100 percent spun coir fiber and shall conform to the following:

Properties

ASTM 3776C Weight	400 g/m2
Roll Width (minimum)	2rn
Area/roll (minimum)	200 m2
Open Area (maximum)	63-70%
D4595-86 Minimum tensile Strength	0.23/0.14 KN (dry) 0.17/0.11KN (wet)

C. Straw and coconut blanket shall be machine produced mats of straw and coconut with a light weight photo-degradable netting on top. The straw and coconut shall adhered to the netting with biodegradable thread or glue strip. The straw and coconut erosion control blanket shall be of consistent thickness with the straw and coconut evenly distributed over the entire area of the blanket. Straw and coconut erosion control blanket shall be furnished in rolled strips with a minimum width of 1.8 meters, minimum length of 20 meters (± 1 meter) and a minimum weight of 0.27-kg/m^2.

D. Staples for erosion control blankets shall be made of 11-gage minimum steel wire and shall be U-shaped with 150-mm legs and 25-mm crown or 200-mm legs and 50-mm crown.

Fiber Rolls

A. Fiber rolls shall be constructed with manufactured blankets consisting of one material or a combination of materials consisting of wood excelsior, rice or wheat straw, or coconut fibers. Blankets shall measure approximately 2.0 to 2.4 m wide by 20 m to 29 m in length. Wood excelsior material shall have individual fibers, 80 percent of which shall be 150 mm or longer in fiber length. Blankets shall have a photodegradable plastic netting or biodegradable jute, sisal or coir fiber netting on at least one side. The blanket shall be rolled on the blanket's width and secured with jute twine spaced 2 m apart along the roll for the full length and 150 mm from each end of the individual rolls. The finished roll diameter shall be a minimum of 200mm and a maximum of 250mm and shall weigh not less than 0.81 kg/m. Overlapping of more than one blanket may be required to achieve the finished roll diameter. When overlapping is required, blankets shall be longitudinally overlapped all 50 mm along the length of the fabric.

B. Fiber rolls shall be pre-manufactured rice or wheat straw, wood excelsior or coconut fiber rolls encapsulated within a photodegradable plastic or biodegradable jute, sisal or coir fiber netting. Each roll shall be a minimum of 200 mm and a maximum of 250 mm in diameter, 3 m to 6 m in length and shall weigh not less than 1.6 kg/m. The netting shall have a minimum durability of one year after installation. The netting shall be secured tightly at each end of the individual rolls.

C. Stakes shall be fir or pine and shall be a minimum of 19 mm x 38 mm x 600 mm in length.

INSTALLATION

The bedding area shall be excavated and cleared of obstructions including, but not limited to, rocks, clods, and mulch prior to installation of the erosion control blanket The edges of the erosion control blanket shall be keyed into trenches, stapled, backfilled, and tamped. Upon completion of the backfill and tamping, the resulting key trench shall have an indentation or furrow of 50 mm to 100 mm to accept the fiber roll. Fiber rolls shall be installed along the edges of the erosion control blanket, in the furrow, and secured as shown on plans. Excess soil from excavation of the key trenches shall be disposed of uphill of the installed fiber rolls.

Stakes shall be installed 600 mm apart along the total length of the rolls and 300 mm from the end of each individual roll. Stakes shall be driven flush or a maximum of 50 mm above the roll.

MAINTENANCE

Flared end section protection shall be maintained to reduce runoff velocities. Flared end section protection shall be repaired or replaced immediately when the damage occurs.

Sediment deposits, trash and debris shall be removed from flared end section protection as needed or when directed by the Engineer. Removed sediment shall be deposited within the project limits in such a way that the sediment is not subject to erosion by wind or by water. Trash and debris shall be removed and disposed of in accordance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

At locations where rills and other evidence of concentrated runoff have occurred beneath the flared end section protection, the protection shall be adjusted to prevent that occurrence.

Sediment in excess of 50 mm above the surface of the erosion control blanket or geotextile fabric shall be removed.

Split, torn, unraveling, sagging or slumping fiber rolls shall be replaced or repaired.

MEASUREMENT AND PAYMENT

The quantity of flared end section protection to be paid for will be determined from actual measurement of flared ends protected conforming to the details shown on the plans.

The contract unit price paid per Flared End Section Protection shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing flared end section protection, complete in place, including furnishing and installing fiber rolls and erosion control blanket, and maintenance of flared end section protection, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.52 IRRIGATION CROSSOVERS

Irrigation crossovers shall conform to the provisions in Section 20-5, "Irrigation Systems," of the Standard Specifications and these special provisions.

Conduits shall be placed in open trenches in conformance with the provisions in Section 20-5.03B, "Conduit for Irrigation Crossovers," of the Standard Specifications.

Conduits shall be corrugated high density polyethylene (CHDPE) pipe. Corrugated high density polyethylene pipe shall conform to the requirements in ASTM Designation: F 405 or F 667, or AASHTO Designation: M 252 or M 294 and shall be Type S. Couplings and fittings shall be as recommended by the pipe manufacturer.

Water line crossovers shall conform to the provisions in Section 20-5.03C, "Water Line Crossovers," of the Standard Specifications.

Sprinkler control crossovers shall conform to the provisions in Section 20-5.027D, "Sprinkler Control Crossovers," of the Standard Specifications.

Installation of pull boxes shall conform to the provisions in Section 20-5.027I, "Conductors, Electrical Conduit and Pull Boxes," of the Standard Specifications. When no conductors are installed in electrical conduits, pull boxes for irrigation crossovers shall be installed on a foundation of compacted soil.

10-1.53 FINISHING ROADWAY

Finishing roadway shall conform to the provisions in Section 22, "Finishing Roadway," of the Standard Specifications.

10-1.54 AGGREGATE SUBBASE

Aggregate subbase shall be Class 4 and shall conform to the provisions in Section 25, "Aggregate Subbases," of the Standard Specifications and these special provisions.

The restriction that the amount of reclaimed material included in Class 4 aggregate subbase not exceed 50 percent of the total volume of the aggregate used shall not apply. Aggregate for Class 4 aggregate subbase may include or consist of material processed from reclaimed asphalt concrete, lean concrete base, cement treated base, glass or combination of any of these materials reclaimed glass. Aggregate subbase incorporating reclaimed glass shall not be placed at locations where surfacing will not be placed over the aggregate subbase.

The percentage composition by mass of Class 4 aggregate subbase shall conform to the following grading requirements:

Grading Requirements (Percentage Passing)

Sieve Sizes	Operating Range	Contract Compliance
63 mm_	100_	100
4.75-mm	30-65_	25-70
75-µm	0-15	0-18

Class 4 aggregate subbase shall also conform to the following quality requirements:

Quality Requirements

Test	Operating Range	Contract Compliance
Sand Equivalent	21 Min.	18 Min.
Resistance (R-value)	----	50 Min.

The provisions of the last 4 paragraphs in Section 25-1.02A, "Class 1, Class 2, and Class 3 Aggregate Subbases," of the Standard Specifications shall apply to Class 4 aggregate subbase.

At the option of the Contractor, Class 1 aggregate subbase conforming to the grading and quality requirements in Section 25-1.02A, may be used in place of Class 4 aggregate subbase. The restriction that the amount of reclaimed material included in Class 1 aggregate subbase not exceed 50 percent of the total volume of the aggregate used shall not apply. Aggregate for Class 1 aggregate subbase may include reclaimed glass. Aggregate subbase incorporating reclaimed glass shall not be placed at locations where surfacing will not be placed over the aggregate subbase. Once a class of aggregate subbase is selected, the class shall not be changed without written approval of the Engineer.

Regardless of the class of aggregate subbase supplied under the provisions of this section, payment for all aggregate subbase will be made as Class 4 aggregate subbase.

10-1.55 AGGREGATE BASE

Aggregate base shall be Class 3 and shall conform to the provisions in Section 26, "Aggregate Bases," of the Standard Specifications and these special provisions.

The restriction that the amount of reclaimed material included in Class 3 aggregate base not exceed 50 percent of the total volume of the aggregate used shall not apply. Aggregate for Class 3 aggregate base may include or consist of material processed from reclaimed asphalt concrete, Portland cement concrete, lean concrete base, cement treated base, glass or combination of any of these materials. Aggregate base incorporating reclaimed glass shall not be placed at locations where surfacing will not be placed over the aggregate base.

Aggregate for Class 3 aggregate base shall conform to the following requirements:

Grading Requirements (Percentage Passing)

19 Maximum			37.5 Maximum	
Sieve Sizes	Operating Range	Contract Compliance	Operating Range	Contract Compliance
50-mm			100	87-100
37.5-mm			90-100	87-100
25-mm	100	100		
19-mm	90-100	87-100	50-85	45-90
4.75-mm	35-60	30-65	25-45	20-50
600-µm	10-30	5-35	10-25	6-29
75-µm	2-11	0-14	2-11	0-14

Quality Requirements

Tests	Operating Range	Contract Compliance
Sand Equivalent	25 min	22 min
Resistance (R-value)		78 min
Durability Index		35 min

The aggregate shall not be treated with lime, cement or other chemical material before the Durability Index test is performed. Untreated reclaimed asphalt concrete and portland cement concrete will not be considered to be treated with lime, cement or other chemical material for purposes of performing the Durability Index test.

10-1.56 SEAL RANDOM CRACKS IN EXISTING SURFACING

Cracks in existing asphalt concrete surfacing of traffic lanes and shoulders shall be prepared and filled with crack sealant and covered with sand as shown on the plans and in conformance with these special provisions.

Cracks 6 mm wide and wider in existing asphalt concrete surfacing and shoulders shall be prepared and sealed. Limits of lanes and shoulders to be prepared and sealed shall be as designated on the plans or directed by the Engineer.

The Contractor shall provide the Engineer with a Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificate of Compliance," of the Standard Specifications for each shipment of crack sealant. The certificate shall certify that the sealant conforms to the specifications, and shall be accompanied with storage and heating instructions and cautions for the material.

MATERIALS

Emulsified crack sealant shall conform to the provisions for asphaltic emulsion in Section 94, "Asphaltic Emulsions," of the Standard Specifications. The crack sealant shall be readily handled at ambient temperature, shall be capable of being stored for periods of up to 6 months, shall withstand freeze-thaw cycles and shall contain no volatile organic compounds which may contribute to air pollution. The base material shall remain ductile with aging and provide resiliency under extreme climatic conditions.

Emulsified crack sealant shall conform to the following requirements:

Property	Test Method	Requirements
Viscosity @ 25°C, SFS	ASTM Designation: D 244	25-150
Pumping stability	GB method, Note a	Pass
5-day settlement test, %	ASTM Designation: D 244	5.0 max.
Cement mixing test, %	ASTM Designation: D 244	2.0 max.
Sieve test, %	ASTM Designation: D 244	0.1 max.
Particle charge test	ASTM Designation: D 244, Note b	Positive
Residue, %	ASTM Designation: D 244, Notes b and c	64 min.
Test of Residue from ASTM Designation: D 244		
Viscosity @ 60°C cSt	ASTM Designation: D 2170	4,500-9,500

Notes:

a. Pumping stability is determined by charging 450 milliliters of emulsion into a one-L beaker and circulating emulsion through a gear pump (Roper 29 B22621) having a 6-mm inlet and outlet. The emulsion passes if there is not significant oil separation after circulating ten minutes.

b. Use test procedure ASTM Designation: D 244 except that distilled water shall be used in place of two percent sodium oleate solution.

c. ASTM Designation: D 244 Evaporation Test for percent of residue is modified by heating a 50-g sample to 149°C until foaming ceases, then cooling immediately and calculating results.

Unless otherwise directed by the Engineer, a 2-L sample of emulsified sealant to be used in the work shall be submitted to the Engineer at least 10 days prior to beginning of the crack seal work.

Immediately following the application of crack sealant material, sand shall be applied on the crack sealant material. Sand shall be free from clay or organic material, and 90 percent to 100 percent shall pass a 4.75-mm sieve and not more than 5 percent shall pass a 75-µm sieve. Sand shall be spread uniformly with the exact spread rate to be determined by the Engineer.

PREPARATION

Cracks to be filled and adjacent asphalt concrete surfacing shall be cleaned and shall be free of dirt, vegetation, debris and loose sealant. Cleaning shall be done by air blasting. Old sealant which protrudes above the asphalt concrete surfacing shall be completely removed. Routing will not be required.

When moisture is present, hot compressed air or other means, approved by the Engineer, shall be used to clean and dry the crack immediately prior to application of crack sealant.

APPLICATION

Crack sealant shall be applied only after the cracks and adjacent asphalt concrete surfacing have been cleaned and dried.

Crack sealant material shall be spread with a nozzle or device approved for use by the Engineer and be placed within the specified temperature range and to the dimensions shown on the plans.

Cracks shall be squeegeed as necessary after application of the crack sealant material.

Within 2 days after application of sealant, sealed cracks that reopen or in which the sealant material sags below the surrounding asphalt concrete surfacing and shoulders shall be resealed.

Light brooming shall be performed to remove loose excessive sand prior to opening a lane to public traffic that is not controlled by a pilot car.

MEASUREMENT AND PAYMENT

Seal random cracks will be measured by lane-kilometer, from actual measurement along the edge of each paved lane, parallel with the gradient of the pavement, or by lane length calculated using kilometer-post designations, as determined by the Engineer.

The contract price paid per lane-kilometer for seal random cracks shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in sealing random cracks, complete in place,

including furnishing and applying sand and for brooming excessive sand as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Full compensation for cleaning and sealing random cracks in adjacent paved shoulders shall be considered as included in the contract price paid per lane-kilometer for seal random cracks and no additional compensation will be allowed therefor.

10-1.57 ASPHALT CONCRETE

Asphalt concrete and asphalt concrete (leveling) shall be Type A and shall conform to the provisions in Section 11-1, "Quality Control / Quality Assurance" of these special provisions.

Open graded asphalt concrete shall conform to the provisions in "Open Graded Asphalt Concrete" of these special provisions.

Surfacing of miscellaneous areas with asphalt concrete shall conform to the provisions in "Asphalt Concrete (Miscellaneous Areas)" of these special provisions.

The grade of asphalt binder to be mixed with aggregate for Type A asphalt concrete shall be Grade PG 64-16 and shall conform to the provisions in Section 92, "Asphalts" of the Standard Specifications.

Paint binder (tack coat) shall be applied to existing surfaces to be surfaced and between layers of asphalt concrete, except when eliminated by the Engineer.

Paint binder (tack coat) shall be, at the option of the Contractor, either slow-setting asphaltic emulsion, rapid-setting asphaltic emulsion, or paving asphalt. Slow-setting asphaltic emulsion and rapid-setting asphaltic emulsion shall conform to the provisions in Section 39-8.02 of Section 11-1, "Quality Control / Quality Assurance," of these special provisions, and the provisions in Section 94, "Asphaltic Emulsions," of the Standard Specifications. When paving asphalt is used for paint binder; the grade will be determined by the Engineer. Paving asphalt shall be applied at a temperature of not less than 140°C or more than 175°C. Paving asphalt shall conform to the provisions in Section 39-8.02 of Section 11-1, "Quality Control / Quality Assurance," of these special provisions, and the provisions in Section 92, "Asphalts," of the Standard Specifications.

Paint binder (tack coat) shall be applied in the liter per square meter range limits specified for the surfaces to receive asphalt concrete in the tables below. The exact application rate within the range will be determined by the Engineer.

Application Rates for Asphaltic Emulsion Paint Binder (Tack Coat) on Asphalt Concrete (except Open Graded) and on Portland Cement Concrete Pavement (PCCP)		
Type of surface to receive Paint binder (tack coat)	Slow-Setting Asphaltic Emulsion L/m^2 (Note A)	Rapid-Setting Asphaltic Emulsion L/m^2 (Note B)
Dense, compact surfaces, between layers, and on PCCP	0.20 – 0.35	0.10 – 0.20
Open, textured or dry, Aged surfaces	0.35 – 0.90	0.20 – 0.40

Note A: Slow-setting asphaltic emulsion is asphaltic emulsion diluted with additional water. Water shall be added and mixed with the asphaltic emulsion (containing up to 43 percent water) so the resulting mixture contains one part asphaltic emulsion and not more than one part added water. The water shall be added by the emulsion producer or at a facility that has the capability to mix or agitate the combined blend.

Note B: Undiluted rapid-setting asphaltic emulsion

Application Rates for Paint Binder (Tack Coat) on Asphalt Concrete (except Open Graded) and on Portland Cement Concrete Pavement (PCCP)	
Type of surface to receive paint binder (tack coat)	Paving Asphalt L/m^2
Dense, compact surfaces, between layers, and on PCCP	0.05 – 0.10
Open, textured or dry, aged surfaces	0.10 – 0.25

The Contractor may obtain a copy of the Department's "Manual for Quality Control and Quality Assurance for Asphalt Concrete" at:

http://www.dot.ca.gov/hq/construc/qcqa.html

The aggregate for Type A asphalt concrete shall conform to the 19-mm Maximum Coarse grading specified in Section 39-2.02, "Aggregate," in Section 11-1, "Quality Control / Quality Assurance," of these special provisions.

In addition to the provisions in Section 39-9.01, "Spreading Equipment," in Section 11-1, "Quality Control / Quality Assurance," of these special provisions, asphalt paving equipment shall be equipped with automatic screed controls and a sensing device or devices.

When placing asphalt concrete to lines and grades established by the Engineer, the automatic controls shall control the longitudinal grade and transverse slope of the screed. Grade and slope references shall be furnished, installed, and maintained by the Contractor. Should the Contractor elect to use a ski device, the minimum length of the ski device shall be 9 m. The ski device shall be a rigid one piece unit and the entire length shall be utilized in activating the sensor.

When placing the initial mat of asphalt concrete on existing pavement, the end of the screed nearest the centerline shall be controlled by a sensor activated by a ski device not less than 9 m long. The end of the screed farthest from centerline shall be controlled manually.

When paving contiguously with previously placed mats, the end of the screed adjacent to the previously placed mat shall be controlled by a sensor that responds to the grade of the previously placed mat and will reproduce the grade in the new mat within a 3 mm tolerance. The end of the screed farthest from the previously placed mat shall be controlled in the same manner the screed was controlled when placing the initial mat.

If the methods and equipment furnished by the Contractor fail to produce a layer of asphalt concrete conforming to the provisions, including straightedge tolerance, in Section 39-10.04, "Compacting," in Section 11-1, "Quality Control / Quality Assurance," of these special provisions, the paving operations shall be discontinued and the Contractor shall modify the equipment or methods, or furnish substitute equipment.

If the automatic screed controls fail to operate properly during a day's work, the Contractor may use manual control of the spreading equipment for the remainder of that day. However, the equipment shall be corrected or replaced with alternative automatically controlled equipment conforming to the requirements in this section before starting another day's work.

If the finished surface of the asphalt concrete on Route 101 traffic lanes does not meet the specified surface tolerances, the finished surface shall be brought within tolerance by either (1) abrasive grinding (with fog seal coat applied on the areas which have been ground), (2) removal and replacement, or (3) placing an overlay of asphalt concrete. The method will be selected by the Engineer. The corrective work shall be at the Contractor's expense.

If abrasive grinding is used to bring the finished surface to specified surface tolerances, additional grinding shall be performed as necessary to extend the area ground in each lateral direction so that the lateral limits of grinding are at a constant offset from, and parallel to the nearest lane line or pavement edge, and in each longitudinal direction so that the grinding begins and ends at lines normal to the pavement centerline, within a ground area. Ground areas shall be neat rectangular areas of uniform surface appearance. Abrasive grinding shall conform to the provisions in the first paragraph and the last 4 paragraphs in Section 42-2.02, "Construction," of the Standard Specifications.

In addition to the straightedge requirements in Section 39-10.04, "Compacting," in Section 11-1, "Quality Control / Quality Assurance," of these special provisions, asphalt concrete pavement shall conform to the surface tolerances specified herein.

The top surface of the uppermost layer of Type A asphalt concrete surfacing shall be profiled by the Contractor, in the presence of the Engineer. Two profiles shall be obtained in each lane. The profiles shall be approximately one meter from and parallel with the edge of the lane.

Profiles shall be performed using a California Profilograph or equivalent in conformance with the requirements in California Test 526 and as specified in these special provisions. Prior to beginning profiles, the profilograph shall be calibrated in the presence of the Engineer.

Asphalt concrete pavement shall conform to the following Profile Index requirements:

A. Pavement on tangent alignment and pavement on horizontal curves having a centerline curve radius of 600 m or more shall have a Profile Index of 8 mm or less for each 0.1-km section profiled.
B. Pavement on horizontal curves having a centerline curve radius of 300 m or more but less than 600 m, including the pavement within the superelevation transition of these curves, shall have a Profile Index of 16 mm or less for each 0.1-km section profiled.
C. Pavement containing high point areas with deviations indicated by the profilograph in excess of 7.5 mm in a length of 7.5 m or less shall be corrected by the Contractor regardless of the Profile Index of the each 0.1-km section profiled.

Profile Index requirements will not apply to the following areas of asphalt concrete pavement, but these areas shall conform to the straightedge requirements in Section 39-10.04, "Compacting," in Section 11-1, "Quality Control / Quality Assurance," of these special provisions:

A. Pavement on horizontal curves with a centerline curve radius of less than 300 m and pavement within the superelevation transition on those curves.
B. Pavement with a total thickness of 75 mm or less.

C. Pavement placed in a single lift when required by the special provisions.
D. Pavement with extensive grade or cross slope correction which does not receive advance leveling operations in conformance with the provisions in Section 39-10.03, "Spreading," in Section 11-1, "Quality Control / Quality Assurance," of these special provisions.
E. Pavement for ramps and connectors with steep grades and high rates of superelevation, as determined by the Engineer.
F. Pavement on city or county streets and roads.
G. Pavement on turn lanes and collector lanes that are less than 500 meters in length.
H. Shoulders and miscellaneous areas.
I. Pavement placed one meter from and parallel with the joint between asphalt concrete pavement and existing curbs, gutters or existing pavement.
J. Pavement within 15 m of a transverse joint that separates the pavement from an existing pavement, approach slab or structure surface not constructed under the contract.

The Contractor shall complete initial runs of the profilograph prior to opening new pavement to public traffic. Profilograph operations shall be in conformance with the lane closure requirement in "Maintaining Traffic" of these special provisions. In the event that initial profiles can not be made prior to opening the pavement to public traffic, they shall be made the next day that lane closures are permitted for the area to be profiled.

Areas of the top surface of the uppermost layer of Type A asphalt concrete pavement that do not meet the specified surface tolerances shall be brought within tolerance by abrasive grinding. Abrasive grinding shall conform to the provisions in the first paragraph and the last 4 paragraphs in Section 42-2.02, "Construction," of the Standard Specifications, except that the grinding residue shall be disposed of outside the highway right of way.

Abrasive grinding shall be performed to reduce individual deviations in excess of 7.5 mm, and to reduce the Profile Index of the pavement to be within the specified tolerance. Deviations in excess of 7.5 mm which cannot be brought into specified tolerances by abrasive grinding shall be corrected by either (1) removal and replacement or (2) placing an overlay of asphalt concrete. The corrective method for each area shall be selected by the Contractor and shall be approved by the Engineer prior to beginning the corrective work. Replacement or overlay pavement not meeting the specified tolerances shall be corrected by the methods specified above. Corrective work shall be at the Contractor's expense except that flagging costs will be paid for in conformance to the provisions in Section 12-2, "Flagging," of the Standard Specifications. . The Contractor shall profile the areas that have received abrasive grinding or corrective work until the final Profile Index of the area is within the specified tolerance.

When abrasive grinding is used to bring the top surface of the uppermost layer of asphalt concrete surfacing within the specified surface tolerances, additional abrasive grinding shall be performed as necessary to extend the area ground in each lateral direction so that the lateral limits of grinding are at a constant offset from, and parallel with, the nearest lane line or pavement edge, and in each longitudinal direction so that the grinding begins and ends at lines normal to the pavement centerline, within a ground area. Ground areas shall be neat rectangular areas of uniform surface appearance.

The original of the final profilograms that indicate the pavement surface is within the Profile Index specified shall become the property of the State and shall be delivered to the Engineer prior to acceptance of the contract.

Full compensation for performing profiles corrective work shall be considered as included in the contract price paid per tonne for asphalt concrete (Type A) and no additional compensation will be allowed therefor.

The area to which paint binder has been applied shall be closed to public traffic. Care shall be taken to avoid tracking binder material onto existing pavement surfaces beyond the limits of construction.

A vertical longitudinal joint of more than 45 mm will not be allowed at any time between adjacent lanes open to public traffic.

At the Contractor's option, a 300-mm wide tapered notched wedge joint may be used as a longitudinal joint between adjacent lanes open to traffic if the lift thickness is greater than 45 mm. A vertical notch of 20 mm maximum shall be placed at the top and bottom of the tapered wedge.

The tapered portion of the tapered notched wedge shall be constructed with a strike-off device approved by the Engineer. The strike-off device will provide a uniform slope and will not restrict the main screed of the paver. The adjacent lane shall be paved within one day.

The tapered notched wedge shall retain its shape while exposed to traffic. The completed longitudinal joint shall have a relative compaction of 93 percent in conformance with the requirements in California Test 375 and these special provisions.

Where the existing pavement is to be widened by constructing a new structural section adjacent to the existing pavement, the new structural section, on both sides of the existing pavement, shall be completed to match the elevation of the edge of the existing pavement at each location prior to spreading and compacting asphalt concrete over the adjacent existing pavement.

Shoulders or median borders adjacent to a lane being paved shall be surfaced prior to opening the lane to public traffic.

Shoulder conform tapers, as shown on the plans, shall be placed concurrently with the paving of the adjacent lane.

Asphalt concrete surfacing shall be placed on existing surfacing, including curve widening, chain control lanes, turnouts, left turn pockets, and public and private road connections shown on the plans, unless otherwise directed by the Engineer.

Additional asphalt concrete surfacing material shall be placed along the edge of the surfacing at road connections and private drives, hand raked, if necessary, and compacted to form smooth tapered conforms. Full compensation for furnishing all labor and tools and doing all the work necessary to hand rake said conforms shall be considered as included in the contract prices paid per tonne for the various contract items of asphalt concrete surfacing involved and no additional compensation will be allowed therefor.

At drier-drum and continuous plants with cold feed control, Cleanness Value test samples will be obtained from the discharge of each coarse aggregate storage. An aggregate sampling device shall be provided to obtain a 25 kg sample of each coarse aggregate.

At the Contractor's option longitudinal joints may be constructed using a device attached to the screed that will form a tapered notched wedge in a single pass. Longitudinal joints constructed with a tapered notched wedge shall be compacted to a minimum relative compaction of 93 percent. If longitudinal joints are constructed in this manner, the Contractor shall conduct quality control testing in conformance with the provisions in Section 6-3.02, "Testing By Contractor," of the Standard Specifications.

In addition to the provisions for compaction in Section 11-1, "Quality Control / Quality Assurance," of these special provisions, the Contractor's quality control testing shall include the following:

A. Relative compaction values of the completed longitudinal joint tested using a nuclear gauge which has been calibrated and correlated with core densities in conformance with California Test 375 Parts 1 and 2.
B. Nuclear density values taken at the rate of one test for each 200-meter section along the completed longitudinal joint. The Contractor shall select random locations for testing within each 200-meter section.
C. Nuclear density values taken at the centerline of the completed longitudinal joint, 150 mm from the upper vertical notch, after the adjacent lane is placed and prior to opening the pavement to traffic.
D. Maximum density test results.
E. Relative compaction values of the longitudinal joint determined as the ratio of the average of the nuclear density values taken from each 200-meter section and the maximum density test results.
F. The additional quality control compaction results associated with the tapered notch wedge will not be included in the computation of any pay factor and process control for the lot composed of this asphalt concrete, specified in Section 11-1, "Quality Control / Quality Assurance," of these special provisions.

The Engineer will determine relative compaction values for the completed longitudinal joint at the completion of paving as follows:

A. The Engineer will determine relative compaction by using 150-mm diameter cores obtained within the 0.3-m section of pavement at the completed longitudinal joint.
B. The Contractor shall obtain two 150-mm diameter cores taken 150 mm from the upper vertical notch of the completed longitudinal joint for every 1000 m along the completed longitudinal joint at locations designated by the Engineer. Cores shall be obtained after the adjacent lane is placed and prior to opening the pavement to traffic. Cores shall be obtained in the presence of the Engineer and shall be marked to identify the test sites.
C. The Contractor shall deliver the cores to the Engineer. One core will be used for determination of the relative density and one core will be used for dispute resolution.
D. The Engineer will determine the bulk specific gravity of the cores in conformance with the requirements of California Test 308 Method A.
E. Relative compaction will be calculated as the ratio of the average of the core densities for each day's production to the maximum density test value determined at the test strip in conformance with California Test 375, Part 6.
F. Quality Assurance testing by the Engineer to determine relative compaction will not be included in the Engineer's verification testing as specified in Section 11-1, "Quality Control / Quality Assurance," of these special provisions.

Relative compaction values shall be determined each day the joint is completed and delivered to the Engineer within 24 hours of testing. If the relative compaction of one day's production is less than 90 percent, placement of the tapered notched wedge shall not continue until the Contractor has notified the Engineer of the adjustment that will be made in order to meet the specified relative compaction. If the relative compaction for 3 day's production is less than 90 percent, the Contractor shall notify the Engineer and suspend use of the tapered notched wedge device.

Quantities of asphalt concrete placed in the completed longitudinal joints that fail to meet relative compaction requirements of these special provisions will be subject to reduced compensation. The reduction in compensation shall be determined as follows:

A. Quantity = 0.3 m x 1000 m x (thickness of the layer placed) x (maximum density test value) x (relative compaction value).
B. Reduction in compensation = Quantity x (reduction factor) x (contract item price).
C. The reduction factor will be determined using the following table:

Relative Compaction (Percent)	Reduced Compensation Factor	Relative Compaction (Percent)	Reduced Compensation Factor
93.0	0.000	91.4	0.062
92.9	0.002	91.3	0.068
92.8	0.004	91.2	0.075
92.7	0.006	91.1	0.082
92.6	0.009	91.0	0.090
92.5	0.012	90.9	0.098
92.4	0.015	90.8	0.108
92.3	0.018	90.7	0.118
92.2	0.022	90.6	0.129
92.1	0.026	90.5	0.142
92.0	0.030	90.4	0.157
91.9	0.034	90.3	0.175
91.8	0.039	90.2	0.196
91.7	0.044	90.1	0.225
91.6	0.050	90.0	0.300
91.5	0.056		

Quantities of asphalt concrete placed in the completed longitudinal joint that meet the relative compaction requirements of these specifications will not be measured with the quantity of asphalt concrete placed in the paved lane and shall not be subject to incentive or disincentive compensation as determined by pay factor analysis as specified in Section 11-1, "Quality Control / Quality Assurance," of these special provisions

In addition to the cores taken every 1000 m along the completed longitudinal joint, the Contractor shall take 150-mm diameter cores every 3000 m approximately 0.9-m and 2.7 m perpendicular from the 1000 m core test sites. Cores may be taken on either side of the completed longitudinal joint. The Contractor shall mark core samples to identify the test sites. The Engineer will determine the bulk specific gravity of each core in conformance with California Test 308 Method A and relative compaction as specified in these special provisions. Results of this testing shall be for reporting only.

10-1.58 OPEN GRADED ASPHALT CONCRETE

Open graded asphalt concrete shall conform to the provisions in Section 39, "Asphalt Concrete," of the Standard Specifications and these special provisions. Section 11-1, "Quality Control / Quality Assurance," of these special provisions shall not apply to open graded asphalt concrete.

The grade of asphalt binder to be mixed with aggregate for open graded asphalt concrete shall be Grade PBA-6a conforming to the provisions in Section 92, "Asphalts" of the Standard Specifications.

Paint binder (tack coat) shall be, at the option of the Contractor, either rapid-setting asphaltic emulsion, or paving asphalt. Rapid-setting asphaltic emulsion shall conform to the provisions in Section 39-8.02 of Section 11-1, "Quality Control / Quality Assurance," of these special provisions, and the provisions in Section 94, "Asphaltic Emulsions," of the Standard Specifications. When paving asphalt is used for paint binder (tack coat) the grade will be determined by the Engineer. Paving asphalt shall conform to the provisions in Section 39-8.02 of Section 11-1, "Quality Control / Quality Assurance," of these special provisions, and the provisions in Section 92, "Asphalts," of the Standard Specifications.

Paint binder (tack coat) shall be applied to surfaces to be paved, except when eliminated by the Engineer. Paint binder (tack coat) shall be applied in the liter per square meter range limits specified for the surfaces to receive asphalt concrete in the tables below. The exact application rate within the range will be determined by the Engineer.

Application Rates for Asphaltic Emulsion Paint Binder (Tack Coat) on Open Graded Asphalt Concrete		
Type of surface to receive paint binder (tack coat)		Rapid-Setting Asphaltic Emulsion L/m^2(Note B)
Dense, compact surfaces, between layers		0.10 – 0.25
Open, textured or dry, aged surfaces		0.25 – 0.55

Note B: Undiluted rapid-setting asphaltic emulsion.

Application Rates for Paint Binder (Tack Coat) for Open Graded Asphalt Concrete	
Type of surface to receive paint binder (tack coat)	Paving Asphalt L/m^2
Dense, compact surfaces and between layers	0.05 – 0.15
Open, textured or dry, aged surfaces	0.28-0.41 L/m^2

Open graded asphalt concrete may be placed when the atmospheric temperature is below 20˚C, but above 10˚C, provided the following requirements are met:

A. The aggregate grading shall be 12.5 mm maximum.
B. Open graded asphalt concrete shall be not less than 30 mm in compacted thickness.
C. Immediately prior to adding the asphalt binder to the open graded asphalt concrete mixture, the temperature of the aggregate shall be not more than 165˚C. Open graded asphalt concrete shall be spread at a temperature of not less than 135˚C measured in the hopper in the asphalt paver.
D. The compaction operation shall be such that the maximum distance between the asphalt paver and the initial breakdown rolling shall be no greater than 15 m.
E. During the placement of open graded asphalt concrete, the speed of the asphalt paver shall not exceed 10 m per minute.
F. The contractor shall cover loads of open graded asphalt concrete with tarpaulins. The tarpaulins shall completely cover exposed open graded asphalt concrete in the hauling vehicle until the open graded asphalt concrete has been completely transferred into the asphalt paver hopper or in a windrow.

The area to which paint binder has been applied shall be closed to public traffic. Care shall be taken to avoid tracking binder material onto existing pavement surfaces beyond the limits of construction.

10-1.59 ASPHALT CONCRETE (MISCELLANEOUS AREAS)

Surfacing of miscellaneous areas with asphalt concrete shall conform to the provisions for miscellaneous areas in Section 39, "Asphalt Concrete," of the Standard Specifications and these special provisions.

Asphalt concrete placed in miscellaneous areas may be produced in conformance with the requirements for asphalt concrete placed on the traveled way in Section 11-1, "Quality Control / Quality Assurance," of these special provisions.

The grade of asphalt binder to be mixed with aggregate for asphalt concrete (miscellaneous areas) shall be Grade PG 64-14 conforming to the provisions in Section 92, "Asphalts," of the Standard Specifications.

The amount of asphalt binder used in asphalt concrete placed in dikes, gore extension shall be increased one percent by mass of the aggregate over the amount of asphalt binder determined for use in asphalt concrete placed on the traveled way.

The amount of asphalt binder used in asphalt concrete placed in asphalt concrete interlayer (layer between Concrete pavement and base) shall be 7%-10% percent by mass of aggregate.

Aggregate for asphalt concrete dikes shall conform to the 9.5-mm maximum grading specified in Section 39-2.02, "Aggregate," of the Standard Specifications.

The miscellaneous areas to be paid for at the contract price per square meter for place asphalt concrete (miscellaneous area) in addition to the prices paid for the materials involved shall be limited to the areas listed on the plans.

Asphalt concrete placed in miscellaneous areas will be paid for at the contract price per tonne for asphalt concrete in conformance with the provisions in Section 11-1, "Quality Control / Quality Assurance," of these special provisions. Section 39-11.02, "Statistical Evaluation and Determination of Pay Factor," in Section 11-1, "Quality Control / Quality Assurance," of these special provisions, shall not apply to asphalt concrete placed in miscellaneous areas. Payment for placing asphalt concrete in miscellaneous areas and dikes will be in conformance with the provisions in Section 39-8.02, "Payment," of the Standard Specifications.

10-1.60 RECYCLED ASPHALT CONCRETE (CONTRACTOR OPTION)

At the option of the Contractor, the asphalt concrete mixture in "Asphalt Concrete" of these special provisions may consist of recycled asphalt concrete.

Recycled asphalt concrete shall conform to the provisions for asphalt concrete in "Asphalt Concrete" of these special provisions except that reclaimed asphalt pavement may be substituted for virgin aggregate at a rate of up to 15 percent by dry mass of the aggregate in the asphalt concrete.

Asphalt binder used in recycled asphalt concrete shall be the same specified for asphalt concrete in "Asphalt Concrete" of these special provisions.

Virgin aggregate to be combined with reclaimed asphalt pavement shall conform to the provisions of "Quality Control/Quality Assurance" of these special provisions.

Reclaimed asphalt pavement shall be from stockpiles, from single or multiple sources, located on surfaces that are smooth and free of debris and organic material. Stockpiles shall consist of only reclaimed asphalt pavement. The material in each reclaimed asphalt pavement stockpile shall be uniformly blended and homogeneous. Stockpiling and processing of reclaimed asphalt pavement will be permitted throughout the life of the project. Stockpiling and processing of reclaimed asphalt pavement shall be performed in a manner that will prevent contamination and segregation of the material. The Engineer shall be given unrestricted access to stockpiles for inspection and testing.

The amount of asphalt binder to be mixed with the combined virgin aggregate and reclaimed asphalt pavement will be determined by the Contractor in conformance with California Test 367 and will be reviewed by the Engineer in conformance with "Quality Control/Quality Assurance" of these special provisions. The asphalt content of the recycled asphalt concrete mixture shall conform to the specification limits of Table 39-9, "Minimum Quality Control Requirements" of "Quality Control/Quality Assurance" of these special provisions.

The substitution rate of reclaimed asphalt pavement for virgin aggregate shall be designated at the time of the asphalt mix design proposal. Changes in the substitution rate of reclaimed asphalt pavement will be permitted to adjust the final grade of the asphalt binder when supported by blending chart results, and with the approval of the Engineer.

Changes in the target values for aggregate gradings and asphalt content shall be considered a change in mix design in conformance with "Quality Control/Quality Assurance" of these special provisions. Changes in cold feed or hot bin proportions of the virgin aggregate to conform to the aggregate gradation requirements shall not be considered a change in the mix design.

When submitting the mix design for review in conformance with the provisions in "Quality Control/Quality Assurance" of these special provisions, the Contractor shall provide the Engineer with the following additional information:

A. Locations of processed reclaimed asphalt pavement stockpiles.
B. A 30-kg sample of processed reclaimed asphalt pavement representing the processed reclaimed asphalt pavement to be used. The sample shall be from a split sample used by the Contractor to determine the mix design for the recycled asphalt concrete produced.
C. The asphalt content of the processed reclaimed asphalt pavement sample, in conformance with the requirements in California Test 380.
D. A grading chart representing the gradation of the recycled asphalt concrete mixture. This chart will be the mathematical combination of the aggregate in reclaimed asphalt pavement and the proposed gradation of the virgin aggregate.
E. The results of gradation tests on the aggregate recovered from the reclaimed asphalt pavement sample, in conformance with the requirements in California Test 202.
F. The results of gradation tests on the combined aggregate recovered from the recycled asphalt concrete mixture proposed, in conformance with the requirements in California Test 202.

Representative samples of reclaimed asphalt pavement to be used in the mix design review shall be obtained from the processed reclaimed asphalt pavement stockpiles. The Contractor shall sample and split the processed reclaimed asphalt pavement sample submitted for the mix design review from the stockpile in conformance with the provisions in California Test 125.

The provisions in "Quality Control/Quality Assurance" of these special provisions for storing and drying aggregate shall not apply to the reclaimed asphalt pavement. The virgin aggregate may be heated to a temperature of 175°C if, in the opinion of the Engineer, the higher temperature does not damage the new binder or the binder in the reclaimed asphalt pavement when the materials are combined.

The grading of the combined virgin aggregate and the processed reclaimed asphalt pavement in the recycled asphalt concrete shall conform to the specification limits of Table 39-9, "Minimum Quality Control Requirements" of "Quality Control/Quality Assurance" of these special provisions. The combined gradation shall be determined based on the mathematical combination of the virgin aggregate material gradation during production and the average reclaimed asphalt pavement gradation accepted for the mix analysis.

The Contractor's mixing equipment shall be equipped with a suitable, safe sampling device that will provide a sample, representative of actual production, of the virgin aggregate and processed reclaimed asphalt pavement being incorporated into the recycled asphalt concrete. Sampling shall conform to the provisions in "Quality Control/Quality Assurance" of these special provisions.

When recycled asphalt concrete is produced by batch mixing, the reclaimed asphalt pavement shall be kept separate from the virgin aggregate until both ingredients enter the weigh hopper or pugmill or other process as approved by the Engineer. The time of mixing after the reclaimed asphalt pavement has been added to the mix shall not be less than 35 seconds.

When recycled asphalt concrete is produced by continuous mixing, the reclaimed asphalt pavement shall be protected from direct contact with the burner flame by means of a shield, separator, second drum or other method approved by the Engineer. The binder shall be introduced into the mixer after the virgin aggregate and reclaimed asphalt pavement have been combined.

In addition to the Contractor process control requirements in "Quality Control/Quality Assurance" of these special provisions, the following tests shall be performed and test results shall be submitted to the Engineer. These tests are for information only.

Quality Characteristic	Test	Minimum Sampling and Testing Frequency	Point of Sampling	Reporting Time Allowance
Absolute viscosity of binder recovered from recycled asphalt concrete	AASHTO T202 or CT 380	10 000 tonnes 5 samples per project	Mat behind paver	5 days
Gradation of combined aggregate from recycled asphalt concrete	CT 202 (after extraction of binder)	5000 tonnes Not less than 1 sample per day	Mat behind paver	5 days

The Contractor shall take 30-kg samples of the recycled asphalt concrete for every 5000 tonnes placed and send them the Office of Materials Engineering and Testing Services (Attention: Asphalt Concrete Testing Lab) located at 5900 Folsom Boulevard, Sacramento, California 95819. Samples will be accompanied by a Form T101 designating the project stationing where the recycled asphalt concrete has been placed in addition to the information required to complete the form.

The provisions in Section 5-1.14, "Cost Reduction Incentive," of the Standard Specifications shall not apply to recycled asphalt concrete.

Full compensation for reclaimed asphalt concrete shall be considered as included in the contract price paid per tonne for Type A asphalt concrete and no separate payment will be made therefor.

10-1.61 REPLACE CONCRETE PAVEMENT (RAPID STRENGTH CONCRETE), (WEIGH-IN-MOTION)

Replace concrete pavement (Rapid Strength Concrete) shall consist of removing existing asphalt concrete pavement and constructing rapid strength concrete (RSC) pavement as shown on the plans and in conformance with Section 40, "Portland Cement Concrete Pavement," of the Standard Specifications and these special provisions.

DEFINITIONS

The following definitions shall apply to this section:

A. EARLY AGE. – A time less than 10 times the final set time of the concrete.
B. FINAL SET TIME. – The elapsed time after initial contact of cement and water, or accelerator, if used, at which a specific penetration resistance of 27.6 MPa is achieved in conformance with the requirements in ASTM Designation: C 403.
C. OPENING AGE. – The age at which the concrete will achieve the specified strength for opening to public or Contractor traffic.

PRE-OPERATION CONFERENCE

The Contractor and subcontractors involved in construction operations of RSC shall meet with the Engineer at a pre-operation conference, at a mutually agreed time, to discuss methods of accomplishing all phases of the construction operation, contingency planning, and standards of workmanship for the completed item of work

The Contractor shall provide the facility for the pre-operation conference. The Contractor's superintendent, foremen, subcontractors, field staff, plant personnel including plant supervisors, manager, and operator involved with RSC shall attend the pre-operation conference. The Contractor shall submit a list of participants to the Engineer for approval. The complete

listing shall identify each participant's name, employer, title and role in construction of RSC. The pre-operation conference shall be held for no less than 2 hours. Construction operations of RSC shall not begin until the specified personnel have completed the mandatory pre-operation conference.

JUST-IN-TIME TRAINING

Just-In-Time Training (JITT) shall be mandatory, and consist of a formal joint training class on rapid strength concrete. Construction operations for rapid strength concrete shall not begin until the Contractor's and the Engineer's personnel have completed the mandatory JITT. The Contractor's personnel included in the list of participants for the Pre-Operation Conference along with the Engineer's representatives shall attend JITT.

The JITT session will be conducted for not less than 4 hours on rapid strength concrete. The training class may be an extension of the Pre-Operation Conference and shall be conducted at the project field location convenient for both the Contractor's and the Engineer's project staffs. Scheduling and completion of the JITT session shall be completed at least 5 working days prior to the start of construction of rapid strength concrete. The class shall be held during normal working hours.

The JITT instructor shall be experienced in the construction methods, materials, and test methods associated with rapid strength concrete. The instructor shall not be an employee of the Contractor or a member of the Engineer's field staff. A copy of the syllabus, handouts, and presentation material shall be submitted to the Engineer at least 7 days before the day of the training. Selection of the course instructor, the course content and training site shall be as mutually agreed to by the Contractor and the Engineer. The instructor shall issue a certificate of completion to the participants upon the completion of the class. The certificate shall include the course title, date and location of the class, the name of the participant, instructor's name, location and phone number.

The Contractor's or Engineer's personnel involved with rapid strength concrete operations will not be required to attend JITT if they have completed similar training within the previous 12 months of the date of the JITT for this project. The Contractor shall provide a certificate of class completion as described above for each staff member to be excluded from the JITT session. The final determination for exclusion of any staff member's participation will be as determined by the Engineer. All attendees of the JITT shall complete, and submit to the Engineer, an evaluation of the training. The course evaluation form will be provided by the Engineer.

It is expressly understood that Just-In-Time Training shall not relieve the Contractor of any responsibility under the contract for the successful completion of the work in conformity with the requirements of the plans and specifications.

TRIAL SLAB

Prior to beginning work on replacement concrete pavement (RSC), the Contractor shall successfully complete one or more trial slabs for each RSC mix design to be used in constructing RSC pavement. Trial slabs shall be constructed, finished, cured and tested with the materials, tools, equipment, personnel and methods to be used in completing RSC pavement. Trial slabs shall demonstrate that the Contractor is capable of producing RSC pavement in conformance with the provisions in this section, within anticipated time periods including delivery, placement, finishing and curing times, and under similar atmospheric and temperature conditions expected during replacement operations. Multiple trial slabs for each RSC mix design may be required to envelop variable atmospheric and temperature conditions.

The minimum trial slab dimensions shall be 3 m by 6 m and shall be 225 mm thick where planned replacement pavement nominal thickness is less than 255 mm. The trial slab thickness shall be 260 mm where planned replacement pavement nominal thickness is 255 mm or greater. Where there are planned slab replacements with greater and less than 255 mm thickness then two trial slabs shall be required one at 225 mm thick and one at 260 mm thick. Trial slabs shall be placed near the project site at a location mutually acceptable to the Engineer and the Contractor except slabs shall not be placed on the roadway or within the project limits.

During trial slab construction and within 20 minutes of RSC delivery, beams shall be fabricated in conformance with the requirements in California Test 523. Beams shall be used to determine early age and 7-day modulus of rupture values. Beams fabricated for early age testing shall be cured so that the monitored temperature in the beams and the trial slab are within 3°C at all times. Internal temperatures of trial slab and early age beams shall be monitored and recorded at minimum time intervals of 5 minutes by installing thermocouples and or thermistors connected to strip-chart recorders or digital data loggers. Temperature recording devices shall be accurate to within ±1ºC. Internal temperature readings shall be measured at 25 mm from the top and 25 mm from the bottom, no closer than 75 mm from any edge of the concrete elements, until early age testing is completed. Beams fabricated for 7-day testing shall be cured in conformance with California Test 523 except they shall be placed into sand at between 5 and 10 times final set time or 24 hours, whichever is earlier. Trial slabs 225 mm thick shall have an early age modulus of rupture of not less than 2.8 MPa and a 7-day modulus of rupture of not less than 4.2 MPa. Trial slabs 260 mm thick shall have an early age modulus of rupture of not less than 2.3 MPa and a 7-day modulus of rupture of not less than 4.2 MPa. Beams failing early age or 7-day modulus of rupture requirements shall be cause for rejection of the trial slab.

The Contractor may request, in writing, the use of ASTM Designation: C 805 or C 900 to estimate the modulus of rupture of the pavement at early ages, subject to approval by the Engineer. The selected test method shall be used to determine modulus of rupture until 7 days after the Contractor notifies the Engineer of withdrawal of the proposal or 7 days after the Engineer notifies the Contractor of withdrawal of approval, in writing. During trial slab curing, correlation testing shall be performed to determine the relation between the modulus of rupture and ASTM Designation: C 805 or C 900 performed on the trial slab. The correlation shall be established by testing at 4 or more time intervals. At a minimum, tests shall be performed one hour before and one hour after the opening age and two others within 15 minutes of the opening age. Modulus of rupture estimates shall be calculated with either a linear, exponential or logarithmic, least squares best-fit equation, whichever provides the best correlation coefficient.

Materials resulting from construction of trial slabs and test specimens shall become the property of the Contractor and shall be removed and disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

REMOVING EXISTING PAVEMENT

Exact limits of asphalt concrete pavement to be replaced will be determined by the Engineer.

Existing asphalt concrete pavement shall be removed and replaced with RSC pavement within the same work period. In the event existing pavement are removed and the Contractor is unable to construct, finish, and cure RSC pavement prior to the specified traffic opening time, a temporary roadway structural section shall be constructed.

The outline of asphalt concrete pavement to be removed shall be sawed full depth with a power-driven saw except where the pavement is located adjacent to an asphalt concrete shoulder. Saw cuts within asphalt concrete pavement shall be cut no more than 2 days prior to asphalt concrete pavement removal. Saw cuts made in work shifts prior to the actual removal work shift shall not be made parallel or diagonal to the traveled way and shall be cut so that traffic will not dislodge any pieces or segments. RSC pavement placed adjacent to an asphalt concrete traveled way/shoulder shall be formed in conformance with the requirements of "Spreading, Compacting and Shaping," in these Special Provisions.

Tie bars are located at longitudinal joints and shall be sawn through prior to concrete pavement slab removal.

Concrete pavement shall be removed by non-impacting methods. Each pavement panel shall be removed in one or more pieces without disturbance or damage to the underlying base.

Equipment used to remove asphalt concrete pavement within the sawed outline, shall not impact the surface of the asphalt concrete pavement to be removed within 0.5-m of pavement to remain in place. Pavement removal shall be performed without damage to pavement or base to remain in place. Damage to pavement or base to remain in place, shall be repaired or removed and replaced. Repair, or removal and replacement of the damaged pavement and base shall be at the Contractor’s expense and will not be measured nor paid for.

Removed materials shall become the property of the Contractor and shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

TEMPORARY ROADWAY STRUCTURAL SECTION

Asphalt concrete and aggregate base, equal to the quantity of pavement removed during the work shift, shall be provided on site for construction of a temporary roadway structural section where existing pavement is to be replaced. The quantity and location of standby material shall be included in the Contractor's contingency plan in conformance with the requirements of these special provisions. Temporary roadway structural section shall be maintained and later removed as the first order of work when replace concrete pavement (Rapid Strength Concrete) operations resume. The temporary roadway structural section shall consist of 90-mm thick asphalt concrete over aggregate base. RSC not conforming to these special provisions for RSC may be used for temporary roadway structural section with the Engineer's approval.

Aggregate base for temporary roadway structural section shall be produced from commercial quality aggregates consisting of broken stone, crushed gravel, natural rough-surfaced gravel, reclaimed concrete and sand, or any combination thereof. Grading of aggregate base shall conform to the 19-mm maximum grading specified in Section 26-1.02A, "Class 2 Aggregate Base," of the Standard Specifications.

Asphalt concrete for temporary roadway structural section shall be produced from commercial quality aggregates and asphalt binder. Grading of aggregate shall conform to the 19-mm maximum, medium grading in Section 39-2.02, "Aggregate," of the Standard Specifications and asphalt binder shall conform to requirements for liquid asphalt SC-800 in Section 93, "Liquid Asphalts," of the Standard Specifications. Amount of asphalt binder to be mixed with the aggregate shall be approximately 0.3 percent less than the optimum bitumen content determined in conformance with the requirements in California Test 367.

Aggregate base and asphalt concrete for the temporary roadway structural section shall be spread and compacted by methods that will produce a well-compacted, uniform base, with a surface of uniform smoothness, texture and density. Surfaces shall be free from pockets of coarse or fine material. Aggregate base may be spread and compacted in one layer. Asphalt concrete may be spread and compacted in one layer. Finished surface of asphalt concrete shall not vary more than

15 mm from the lower edge of a 3.6-m ±0.06 m long straightedge placed parallel with the centerline and shall match the elevation of existing concrete pavement along the joints between the existing pavement and temporary surfacing.

Removed temporary roadway structural section materials shall become the property of the Contractor and shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications, except that removed aggregate base may be stockpiled at the project site and reused for construction of temporary roadway structural sections. Excess stockpiled material for temporary roadway structural section shall be removed and disposed in conformance with the provisions in Section 7-1.13. When no longer required, standby material or stockpiled material for construction of temporary roadway structural sections shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

RAPID STRENGTH CONCRETE

General

Rapid Strength Concrete (RSC) shall be a concrete made with hydraulic cement that develops opening age and 7-day specified modulus of rupture strengths.

Requirements of Sections 40-1.015, "Cement Content," 40-1.05, "Proportioning," and 90-1.01, "Description," of the Standard Specifications shall not apply.

Combined aggregate grading used in RSC shall be either the 37.5-mm, maximum grading, or 25-mm, maximum grading, at the option of the Contractor.

Cement for RSC shall be hydraulic cement as defined in ASTM Designation: C 219 and shall conform to the following requirements:

Test Description	Test Method	Requirement
Contraction in Air	California Test 527,W/C Ratio = 0.39 ± 0.010	0.053 %, max.
Mortar Expansion in Water	ASTM Designation: C 1038	0.04 %, max.
Soluble Chloride*	California Test 422	0.05 %, max.
Soluble Sulfates*	California Test 417	0.30 %, max.
Thermal Stability	California Test 553	60 %, min.
Compressive Strength @ 3 days	ASTM Designation: C 109	17 MPa

*Test is to be done on a cube specimen, fabricated in conformance with the requirements in ASTM Designation: C 109, cured at least 14 days and then pulverized to 100% passing the 300-µm sieve

At least 45 days prior to intended use, the Contractor shall furnish a sample of cement from each lot proposed for use and all admixtures proposed for use in the quantities ordered by the Engineer.

The Contractor shall submit uniformity reports for cement used in RSC to the Engineer and to the Transportation Laboratory, 5900 Folsom Boulevard, Sacramento, California. Uniformity reports shall conform to the requirements in ASTM Designation: C 917, except that testing age and water content may be modified to suit the particular material. Uniformity reports shall be submitted at least every 30 days during RSC pavement operations.

Type C accelerating chemical admixtures conforming to the provisions in Section 90-4, "Admixtures," of the Standard Specifications may be used. In addition to the admixtures listed on the Department's current list of approved admixtures, citric acid or borax may be used if requested in writing by the cement manufacturer and a sample is submitted to the Engineer. Chemical admixtures, if used, shall be included in the testing for requirements listed in the table above.

At least 10 days prior to use in the trial slab, the Contractor shall submit a mix design for RSC that shall include the following:

A. Opening age
B. Proposed aggregate gradings
C. Mix proportions of hydraulic cement and aggregate
D. Types and amounts of chemical admixtures
E. Maximum time allowed between batching RSC and placing roadway pavement
F. Range of ambient temperatures over which the mix design is effective (10˚C maximum range)
G. Final set time of the concrete
H. Any special instructions or conditions, including but not limited to, water temperature requirements when appropriate

The Contractor shall submit more than one mix design to plan for ambient temperature variations anticipated during placement of the roadway pavement. Each mix shall be designed for a maximum ambient temperature range of 10°C. The Contractor shall develop and furnish modulus of rupture development data for each proposed mix design. Modulus of

rupture development data for up to 7 days shall be provided to the Engineer prior to beginning paving operations. Modulus of rupture development data may be developed from laboratory prepared samples. The testing ages for modulus of rupture development data shall include one hour before opening age, opening age, one hour after opening age, 24 hours, 7 days and 28 days.

Concrete pavement penetration requirements in Section 90-6.06, "Amount of Water and Penetration," of the Standard Specifications shall not apply to RSC.

RSC pavement shall develop a minimum modulus of rupture of as specified in "Pay Factor Adjustment for Low Modulus of Rupture" of these special provisions before opening to public or Contractor traffic. In addition, RSC pavement shall develop a minimum modulus of rupture of 4.2 MPa in 7 days after placement. RSC pavement that attains a modulus of rupture of less than specified may be accepted in conformance with "Pay Factor Adjustment for Low Modulus of Rupture" specified herein. Modulus of rupture shall be determined by averaging results from 3 beam specimens tested in conformance with the requirements in California Test 524. Beam specimens may be fabricated using an internal vibrator in conformance with the requirements in ASTM Designation: C 31. No single test shall represent more than the production of that day or 100 cubic meters, whichever is less.

Modulus of rupture at early age may be estimated using the correlation established during trial slab placement or by using results from beam specimens cured under atmospheric conditions and at a temperature within 3°C of the pavement. Modulus of rupture at other ages will be determined using beams cured and tested in conformance with California Test 524 except beams will be placed into sand between 5 and 10 times final set time or 24 hours, whichever is earlier. The Contractor through a laboratory certified by the Department's Independent Assurance Program (IAP). The Engineer will perform the testing to determine modulus of rupture values of the RSC pavement. The modulus of rupture, as determined above, will be the basis for accepting or rejecting the RSC pavement for modulus of rupture requirements.

Pay Factor Adjustment for Low Modulus of Rupture

Where planned replacement pavement nominal thickness is less than 255 mm, payment for replace concrete pavement (Rapid Strength Concrete) will be adjusted for low modulus of rupture tests as follows:

A. Replace concrete pavement (Rapid Strength Concrete) with modulus of rupture of 2.8 MPa or greater before the lane is opened to the traffic and 7-day modulus of rupture of 4.2 MPa or greater will be paid for at the contract price per cubic meter for replace concrete pavement (Rapid Strength Concrete).
B. Replace concrete pavement (Rapid Strength Concrete) with a 7-day modulus of rupture of less than 3.4 MPa will not be paid for, and shall be removed and replaced, at the Contractor's expense with replace concrete pavement (Rapid Strength Concrete) conforming to the requirements of these special provisions.
C. Replace concrete pavement (Rapid Strength Concrete) with modulus of rupture of 2.1 MPa or greater before the lane is opened to traffic and a 7-day modulus of rupture of equal to or greater than 3.4 MPa will be paid for at a percentage of the contract price per cubic meter for replace concrete pavement (Rapid Strength Concrete) in conformance with the percentages in the pay table below.
D. Replace concrete pavement (Rapid Strength Concrete) with modulus of rupture of less than 2.1 MPa when the lane is opened to traffic will be rejected and shall be removed and replaced at the Contractor's expense with replace concrete pavement (Rapid Strength Concrete) conforming to the requirements of these special provisions.

Percentage Pay Table

Modulus of Rupture (MPa) at opening to traffic	7-Day Modulus of Rupture (MPa)		
	Greater than or equal to 4.2	Less than 4.2 and greater than or equal to 3.8	Less than 3.8 and greater than or equal to 3.4
Greater than or equal to 2.8	100%	95%	90%
Less than 2.8 and greater than or equal to 2.4	95%	95%	90%
Less than 2.4 and greater than or equal to 2.1	80%*	80%*	80%*

*Any replacement panels that develops one or more transverse cracks within 21 days after placement shall be removed and replaced at the Contractor's expense with replace concrete pavement (Rapid Strength Concrete) conforming to the requirements of these special provisions. A transverse crack is defined as a crack running from one longitudinal edge of the panel to the other.

Where planned replacement pavement nominal thickness is 255 mm or greater, payment for replace concrete pavement (Rapid Strength Concrete) will be adjusted for low modulus of rupture tests as follows:

A. Replace concrete pavement (Rapid Strength Concrete) with modulus of rupture of 2.3 MPa or greater before the lane is opened to the traffic and 7-day modulus of rupture of 4.2 MPa or greater will be paid for at the contract price per cubic meter for replace concrete pavement (Rapid Strength Concrete).
B. Replace concrete pavement (Rapid Strength Concrete) with a 7-day modulus of rupture of less than 3.4 MPa will not be paid for, and shall be removed and replaced, at the Contractor's expense with replace concrete pavement (Rapid Strength Concrete) conforming to the requirements of these special provisions.
C. Replace concrete pavement (Rapid Strength Concrete) with modulus of rupture of 1.8 MPa or greater before the lane is opened to traffic and a 7-day modulus of rupture of equal to or greater than 3.4 MPa will be paid for at a percentage of the contract price per cubic meter for replace concrete pavement (Rapid Strength Concrete) in conformance with the percentages in the pay table below.
D. Replace concrete pavement (Rapid Strength Concrete) with modulus of rupture of less than 1.8 MPa when the lane is opened to traffic will be rejected and shall be removed and replaced at the Contractor's expense with replace concrete pavement (Rapid Strength Concrete) conforming to the requirements of these special provisions.

Percentage Pay Table

Modulus of Rupture (MPa) at opening to traffic	7-Day Modulus of Rupture (MPa)		
	Greater than or equal to 4.2	Less than 4.2 and greater than or equal to 3.8	Less than 3.8 and greater than or equal to 3.4
Greater than or equal to 2.3	100%	95%	90%
Less than 2.3 and greater than or equal to 2.0	95%	95%	90%
Less than 2.0 and greater than or equal to 1.8	80%*	80%*	80%*

*Any replacement panels that develops one or more transverse cracks within 21 days after placement shall be removed and replaced at the Contractor's expense with replace concrete pavement (Rapid Strength Concrete) conforming to the requirements of these special provisions. A transverse crack is defined as a crack running from one longitudinal edge of the panel to the other.

The Contractor shall pay to the State adjustments in payment for low modulus of rupture tests in conformance with the requirements specified in the tables in this section. The Department will deduct the amount of the adjustments from moneys due or that may become due, the Contractor under the contract.

Proportioning

Weighing, measuring and metering devices used for proportioning materials shall conform to the provisions in Section 9-1.01, "Measurement of Quantities," of the Standard Specifications and these special provisions.

Over and under dials, and other indicators for weighing and measuring systems used in proportioning materials shall be grouped so that the smallest increment for each indicator can be accurately read from the point at which the proportioning operation is controlled for ingredients batched at a central batch plant. In addition, indicators for weighing and measuring cement batched from a remote weighing system shall also be placed so that each indicator can be accurately read from the point at which the proportioning operation is controlled

Aggregates shall be handled and stored in conformance with the provisions in Section 90-5.01, "Storage of Aggregates," of the Standard Specifications. Liquid admixtures shall be proportioned in conformance with the provisions in Section 90-4.10, "Proportioning and Dispensing Liquid Admixtures," of the Standard Specifications. Mineral admixtures shall be protected from exposure to moisture until used. Adequate facilities shall be provided to assure that mineral admixtures meeting the specified requirements are kept separate from other mineral admixtures to easily track the materials that are entering the work. Safe and suitable facilities for sampling mineral admixtures shall be provided at the weigh hopper or in the feed line immediately in advance of the hopper.

Weighing equipment shall be insulated against vibration or movement of other operating equipment. When the plant is in operation, the mass of each draft of material shall not vary from the designated mass by more than the tolerances specified herein. Each scale graduation shall be 0.001 of the usable scale capacity.

Aggregate shall be weighed cumulatively and equipment for the weighing of aggregate shall have a zero tolerance of ±0.5 percent of the designated total batch mass of the aggregate. Equipment for the separate weighing of the cement or mineral admixture shall have a zero tolerance of ±0.5 percent of their designated individual batch drafts. Equipment for measuring water shall have a zero tolerance of ±0.5 percent of its designated mass or volume.

The mass indicated for any individual batch of material shall not vary from the preselected scale setting by more than the following:

Material	Tolerance
Aggregate	± 1.0 percent of designated batch mass
Cement	± 0.5 percent of designated batch mass
Mineral Admixture	± 1.0 percent of designated batch mass
Water	± 1.5 percent of designated batch mass or volume

Proportioning shall consist of dividing the aggregates into the specified sizes, each stored in a separate bin, and combining them with cement, mineral admixture and water as provided in these special provisions. Dry ingredients shall be proportioned by mass. Liquid ingredients shall be proportioned by mass or volume.

At the time of batching, aggregates shall have been dried or drained sufficiently to result in stable moisture content, so that no visible separation of water from aggregate will take place during the proportioning process. In no event shall the free moisture content of the fine aggregate at the time of batching exceed 8 percent of its saturated, surface-dry mass.

If separate supplies of aggregate material of the same size group with different moisture content or specific gravity or surface characteristics affecting workability are available at the proportioning plant, withdrawals shall be made from one supply exclusively and the materials therein completely exhausted before starting upon another supply.

Cement shall be kept separate from the aggregates until released for discharge into the mixer. Cement shall be free of lumps and clods when discharged into the mixer. Fabric containers used for transportation or proportioning of cement shall be clean and free of residue before reuse.

Weigh systems for proportioning aggregate, cement, and mineral admixture shall be individual and distinct from all other weigh systems. Each weigh system shall be equipped with a hopper, a lever system, and an indicator to constitute an individual and distinct material-weighing device.

For batches with a volume of one cubic meter or more, proportioning equipment shall conform to one of the following methods:

A. All ingredients shall be batched at a central batch plant and charged into a mixer truck for transportation to the pour site. Ingredient proportioning shall meet the requirements of Section 90-5, "Proportioning," of the Standard Specifications.
B. All ingredients except the cement shall be batched at a central batch plant and charged into a mixer truck for transportation to a remote located silo and weigh system for the proportioning of the cement. The remote system shall proportion cement for charging the mixer truck.
C. All ingredients except the cement shall be batched at a central batch plant and charged into a mixer truck for transportation to a remote location where pre-weighed, containerized cement shall be added to the mixer truck. The cement pre-weighing operation shall utilize a platform scale. The platform scale shall have a maximum capacity of 2.5 tonnes with a maximum graduation size of 0.5 kilograms. Cement shall be pre-weighed into a fabric container. The minimum amount of cement to be proportioned into any single container shall be one half of the total amount required for the load of RSC being produced.
D. Cement, water, and aggregate shall be proportioned volumetrically in conformance with these special provisions.

In order to check the accuracy of batch masses, the gross mass and tare mass of truck mixers shall be determined when ordered by the Engineer. The equipment shall be weighed at the Contractor's expense on scales designated by the Engineer.

The Contractor shall install and maintain in operating condition an electrically actuated moisture meter. The meter shall indicate, on a readily visible scale, changes in the moisture content of the fine aggregate as it is batched. The meter shall have a sensitivity of 0.5 percent by mass of the fine aggregate.

No additional mixing water shall be incorporated into the concrete during hauling or after arrival at the delivery point, unless authorized by the Engineer. If the Engineer authorizes additional water to be incorporated into the concrete, the drum shall be revolved not less than 30 revolutions at mixing speed after the water is added and before discharge is commenced. Water added to the truck mixer at the job site shall be measured through a meter that conforms to the provisions in Section 9-1.01, "Measurement of Quantities," of the Standard Specifications.

Aggregate discharged from several bins shall be controlled by gates or by mechanical conveyors. The means of discharge from the bins and from the weigh hopper shall be interlocked so that no more than one bin can discharge at a time, and so that the weigh hopper can not be discharged until the required quantity from each of the bins has been deposited in the weigh hopper.

Weighmaster Certificates

Weighmaster certificates for RSC, regardless of the proportioning method used, shall include all information necessary to trace the manufacturer, and manufacturer's lot number for the cement being used. When proportioned into fabric containers the weighmaster certificates for the cement shall contain date of proportioning, location of proportioning and

actual net draft mass of the cement. When proportioned at the pour site from a storage silo the weighmaster certificates shall contain date of proportioning, location of proportioning and the net draft mass of the cement used in the load.

Volumetric Proportioning

When RSC is proportioned by volume, the method shall conform to requirements specified herein.

Aggregates shall be handled and stored in conformance with the provisions in Section 90-5.01, "Storage of Aggregates," of the Standard Specifications. Liquid admixtures shall be proportioned in conformance with the provisions in Section 90-4.10, "Proportioning and Dispensing Liquid Admixtures," of the Standard Specifications. Mineral admixtures shall be protected from exposure to moisture until used. Adequate facilities shall be provided to assure that mineral admixtures meeting the specified requirements are kept separate from other mineral admixtures in order to prevent any but the specified mineral admixtures from entering the work. Safe and suitable facilities for sampling mineral admixtures shall be provided at the batch-mixer storage hopper or in the feed line.

Batch-mixer trucks shall be equipped to proportion cement, water, aggregate and additives by volume. Aggregate feeders shall be connected directly to the drive on the cement vane feeder. The cement feed rate shall be tied directly to the feed rate for the aggregate and other ingredients. Any change in the ratio of cement to aggregate shall be accomplished by changing the gate opening for the aggregate feed. The drive shaft of the aggregate feeder shall be equipped with a revolution counter reading to the nearest full or partial revolution of the aggregate delivery belt.

Aggregate shall be proportioned using a belt feeder operated with an adjustable cutoff gate delineated to the nearest quarter increment. Height of the gate opening shall be readily determinable. Cement shall be proportioned by a method that conforms to the accuracy requirements of these special provisions. Water shall be proportioned by a meter conforming to the provisions in Section 9-1.01, "Measurement and Payment," of the Standard Specifications and these special provisions.

Delivery rate of aggregate and cement per revolution of the aggregate feeder shall be calibrated at appropriate gate settings for each batch-mixer truck used on the project and for each aggregate source. Batch-mixer trucks shall be calibrated at 3 different aggregate gate settings that are commensurate with production needs. Two or more calibration runs shall be required at each of the different aggregate gate openings. The actual mass of material delivered for aggregate proportioning device calibrations shall be determined by a platform scale as specified in these special provisions.

Aggregate belt feeder shall deliver aggregate to the mixer with volumetric consistency so that deviation for any individual aggregate delivery rate check-run shall not exceed 1.0 percent of the mathematical average of all runs for the same gate opening and aggregate type. Each test run shall be at least 500 kg. Fine aggregate used for calibration shall not be reused for device calibration.

At the time of batching, aggregates shall be dried or drained sufficiently to result in stable moisture content, so that no visible separation of water from aggregate takes place during the proportioning process. In no event shall the free moisture content of the fine aggregate at the time of batching exceed 8 percent of its saturated, surface-dry mass.

If separate supplies of aggregate material of the same size group with different moisture content or specific gravity or surface characteristics affecting workability are available at the proportioning plant, withdrawals shall be made from one supply exclusively and the materials therein completely exhausted before starting another supply.

Rotating and reciprocating equipment on batch-mixer trucks shall be covered with metal guards.

The cement proportioning system shall deliver cement to the mixer with a volumetric consistency so that the deviation for any individual delivery rate check-run shall not exceed 1.0 percent of the mathematical average of 3 runs of at least 500 kg each. Cement used for calibration shall not be reused for device calibration.

Water meter accuracy shall be such that, when operating between 50 percent and 100 percent of production capacity, the difference between the indicated mass of water delivered and the actual mass delivered shall not exceed 1.5 percent of the actual mass for each of two individual runs of 1200 liters. The water meter shall be calibrated in conformance with the requirements of California Test 109 and shall be equipped with a resettable totalizer and display the operating rate.

Calibration tests for aggregate, cement and water proportioning devices shall be conducted with a platform scale located at the calibration site. Weighing of test run calibration material shall be performed on a platform scale having a maximum capacity not exceeding 2.5 tonnes with maximum graduations of 0.5-kg. The platform scale shall be error tested within 8 hours of calibration of batch-mixer truck proportioning devices. Error testing shall be performed with test masses conforming to California Test 109 and shall produce a witness scale that is within 2 graduations of the test mass load. The scale shall be available for use at the production site throughout the production period. Equipment needed for the calibration of proportioning systems shall remain available at the production site throughout the production period. A Certificate of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," shall be furnished with each delivery of aggregate, cement, and admixtures used for calibration tests and shall be submitted to the Engineer with copies of the mass of each delivery. The Certificate of Compliance shall state that the source of materials used for the calibration tests is from the same source as to be used for the planned work. The Certificate of Compliance shall state that the material supplied conforms to the Standard Specifications and these Special Provisions and shall be signed by an authorized representative who shall have the authority to represent and act for the Contractor.

The batch-mixer truck shall be equipped so that an accuracy check can be made prior to the first operation for the project and at any other time as directed by the Engineer. Further calibration of proportioning devices shall be required every 30 days after production begins or when the source or type of any ingredient is changed. A spot calibration shall consist of calibration of the cement proportioning system only. A two run spot re-calibration of the cement proportioning system shall be performed each time 50 tonnes of cement has passed through the batch-mixer truck. Should the spot re-calibration of the cement proportioning system fall outside the limitations specified herein, a full calibration of the cement proportioning system shall be completed before the resumption of production.

Liquid admixtures shall be proportioned by a meter.

Cement storage shall be located immediately before the cement feeder and shall be equipped with a device that will automatically shut down the power to the cement feeder and aggregate belt feeder when the cement storage level is lowered to a point where less than 20 percent of the total volume is left in storage.

The Contractor shall furnish aggregate moisture determinations, made in conformance with the requirements of California Test 223, at least every 2 hours during proportioning and mixing operations. Moisture determinations shall be recorded and presented to the Engineer at the end of the production shift.

Each aggregate bin shall be equipped with a device that will automatically shut down the power to the cement feeder and the aggregate belt feeder when the aggregate discharge rate is less than 95 percent of the scheduled discharge rate of any bin.

Indicators specified herein shall be in working order prior to commencing proportioning and mixing operations and shall be visible when standing near the batch-mixer truck.

Identifying numbers of batch-mixer trucks shall be at least 75 mm in height, and be located on the front and rear of the vehicles.

Volumetric proportioned RSC shall be mixed in a mechanically operated mixer of adequate size and power for the type of RSC to be placed. Mixers may be of the auger type and shall be operated uniformly at the mixing speed recommended by the manufacturer. Mixers that have an accumulation of hard concrete or mortar shall be removed from service until cleaned. Other types of mixers may be used provided mixing quality will meet the requirements of these special provisions.

Charge or rate of feed to the mixer shall not exceed that which will permit complete mixing of the materials. Dead areas in the mixer, where material does not move or is not sufficiently agitated, shall be corrected by a reduction in the volume of material or by other adjustments. The mixer shall be designed to provide sufficient mixing action and movement to produce properly mixed RSC. Mixing shall continue until a homogeneous mixture is produced at discharge from the mixer. There shall be no lumps or evidence of non-dispersed cement at discharge from the mixer. No water shall be added to the RSC after discharge from the mixer.

Equipment having components made of aluminum or magnesium alloys, which may have contact with plastic concrete during mixing or transporting of RSC, shall not be used.

Uniformity of concrete mixtures will be determined by differences in penetration measurement made in conformance with the requirements in California Test 533. Difference in penetration, determined by comparing penetration tests on 2 samples of mixed concrete from the same batch or truck mixer load, shall not exceed 15 mm. The Contractor shall furnish samples of freshly mixed concrete and provide facilities for obtaining the samples. Sampling facilities shall be safe, accessible, clean and produce a sample, which is representative of production. Sample devices and sampling methods shall also conform to the requirements of California Test 125.

Ice shall not be used to cool RSC directly. When ice is used to cool water used in the mix, all of the ice shall be melted before entering the mixer.

Cement shall be proportioned and charged into the mixer by means that will result in no losses of cement due to wind, or due to accumulation on equipment, or other conditions, which will vary the required quantity of cement.

Each mixer shall have a metal plate or plates, prominently attached, on which the following information is provided:

A. Uses for which the equipment is designed.
B. Manufacturer's guaranteed capacity of the mixer in terms of the volume of mixed concrete.
C. Speed of rotation of the mixer.

Consistency and workability of mixed concrete when discharged at the delivery point shall be suitable for placement and consolidation.

Information generated by volumetric devices will not be used for payment calculations.

The device that controls the proportioning of cement, aggregate and water shall produce a log of production data. The log of production data shall consist of a series of snapshots captured at 15-minute intervals throughout the period of daily production. Each snapshot of production data shall be a register of production activity at that time and not a summation of the data over the preceding 15 minutes. The amount of material represented by each snapshot shall be the amount produced in the period of time from 7.5 minutes before to 7.5 minutes after the capture time. The daily log shall be submitted to the Engineer, in electronic or printed media, at the end of each production shift or as requested by the Engineer, and shall include the following:

A. Mass of cement per revolution count.
B. Mass of each aggregate size per revolution count.
C. Gate openings for each aggregate size being used.
D. Mass of water added to the concrete per revolution count.
E. Moisture content of each aggregate size being used.
F. Individual volume of all other admixtures per revolution count.
G. Time of day.
H. Day of week.
I. Production start and stop times.
J. Batch-mixer truck identification.
K. Name of supplier.
L. Specific type, size, or designation of concrete being produced.
M. Source of the individual aggregate sizes being used.
N. Source, brand and type of cement being used.
O. Source, brand and type of individual admixtures being used.
P. Name and signature of operator.

Required report items may be input by hand into a pre-printed form or captured and printed by the proportioning device. Electronic media containing recorded production data shall be presented in a tab-delimited format on a 90-mm diskette with a capacity of at least 1.4 megabytes. Each snapshot of the continuous production shall be followed by a line-feed carriage-return with allowances for sufficient fields to satisfy the amount of data required by these specifications. The reported data shall be in the above order and shall include data titles at least once per report.

Replacement base layer shall be finished to the grade of the original base layer. The surface shall not be textured and shall be finished to a smooth surface, free of mortar ridges and other projections. The finished surface shall be free from voids and porous areas.

Bond Breaker

Bond breaker shall be placed between replacement pavement and existing lean concrete base, cement treated base or (new base replacement layer). Bond breaker shall be one of the following:

A. Curing paper conforming to the requirements in ASTM Designation: C 171, white.
B. Polyethylene film conforming to the requirements in ASTM Designation: C 171, except that the minimum thickness shall be 0.15 mm, white opaque.

When curing paper or polyethylene film is used, material shall be placed in a wrinkle free manner. Adjacent sheets shall be overlapped a minimum of 150 mm.

When curing compound or paving asphalt is used, all foreign and loose materials remaining from slab removal shall be removed prior to application.

Spreading, Compacting and Shaping

Pavement to be placed adjacent to an existing asphalt concrete shoulder shall be formed. The existing asphalt concrete shall be sawcut and the asphalt concrete and underlying base shall be excavated to a depth and width to allow placement of side forms. Excavation of Asphalt Concrete surfacing and underlying base shall be performed without damage to any facility that is to remain in place. Excavated areas shall be backfilled, after removal of side forms, with Asphalt Concrete conforming to the requirements of 39-7.01, "Miscellaneous Areas" of the Standard Specifications. The contractor shall, at least 48 hours prior to the saw cutting operation, submit to the Engineer for approval, details of how the side forms are to be placed, and the shoulder to be repaired, around the area of excavation

Metal or wood side forms may be used. Wood side forms shall not be less than 38-mm thick. Side forms shall be of sufficient rigidity, both in the form and in the connection with adjoining forms, that movement will not occur under the force from subgrading and paving equipment or from the pressure of concrete.

Side forms shall remain in place until the pavement edge no longer requires the protection of forms. Side forms shall be thoroughly cleaned and oiled prior to each use.

Consolidation of RSC shall be by means of high-frequency internal vibrators after the RSC is deposited on the subgrade. Vibrating shall be done in a manner to assure uniform consolidation adjacent to forms and across the full paving width. RSC shall be placed as nearly as possible in its final position and use of vibrators for extensive shifting of the mass of RSC will not be permitted.

RSC shall be spread and shaped by suitable powered finishing machines and supplemented by hand finishing as necessary. Methods of spreading, shaping and consolidating that result in segregation, voids or rock pockets shall be discontinued. The Contractor shall use methods that will produce dense homogeneous pavement conforming to the required cross section.

After the RSC has been mixed and placed, no additional water shall be added to the surface to facilitate finishing. Surface finishing additives, when used, shall be as recommended by the manufacturer of the cement and shall be approved by the Engineer prior to use.

Joints

Prior to placing concrete against existing concrete, a 6-mm thick commercial quality polyethylene flexible foam expansion joint filler shall be placed across the original transverse and longitudinal joint faces and extend the full depth of the excavation. The top of the joint filler shall be placed flush with the top of pavement. Joint filler shall be secured to the joint face of the existing pavement by a method that will hold the joint filler in place during the placement of concrete.

Transverse weakened plane joints in pavement widenings shall be constructed to match the spacing and skew of the weakened plane joints in the adjacent existing pavement. Where the existing transverse weakened plane joint spacing in an adjacent lane exceeds 4.6 m, an additional transverse weakened plane joint shall be constructed midway between the existing joints. The provisions in the second and third paragraphs in Section 40-1.08B, "Weakened Plane Joints," and the third paragraph in Section 40-1.08B(1), "Sawing Method," of the Standard Specifications shall not apply. Sawing of weakened plane joints shall be completed within 2 hours of completion of final finishing. Minimum depth of cut for weakened plane joints shall be 85 mm.

Replacement Tie Bars

Tie bars shall be deformed reinforcing steel bars conforming to the requirements in ASTM Designation: A 615/A 615M, Grade 280 or 420 and shall be epoxy-coated in conformance with the provisions in Section 52-1.02B, "Epoxy-coated Reinforcement," of the Standard Specifications, except that references made to ASTM Designation: D 3963/D 3963M shall be deemed to mean ASTM Designation: A 934/A 934M or A 775/A 775M. Tie bars shall not be bent.

Tie bars shall be installed at longitudinal joints by drilling and bonding with epoxy. Epoxy shall be a two-component, epoxy-resin, conforming to the requirements of ASTM Designation: C 881, Type V, Grade 3 (None-Sagging). The class used shall be dependent on the internal temperature of the existing hardened concrete at the time of tie bar installation as follows: Class A for below 4.5°C, Class B for 4.5°C to 15.5°C, and Class C for above 15.5°C. Epoxy shall be accompanied by a Certificate of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. A copy of the manufacturer's recommended installation procedure shall be provided to the Engineer at least 7 days prior to the start of work. Drilled holes shall be cleaned in conformance with the epoxy manufacturer's instructions and shall be dry at the time of placing the epoxy and tie bars. Immediately after inserting the tie bars into the epoxy, the tie bars shall be supported as necessary to prevent movement during curing and shall remain undisturbed until epoxy has cured a minimum time as specified by the manufacturer. Tie bars that are improperly bonded, as determined by the Engineer, will be rejected. If rejected, new holes shall be drilled adjacent to the rejected holes, as directed by the Engineer, and new tie bars shall be placed and securely bonded to the concrete. Work necessary to correct improperly bonded tie bars shall be performed at the Contractor's expense.

Final Finishing

Tests to determine coefficient of friction of the final textured surface will be made only if the Engineer determines by visual inspection that the final texturing may not have produced a surface having the specified coefficient of friction. Any tests to determine the coefficient of friction will be made after the pavement is opened to public traffic, but not later than 5 days after concrete placement. Pavement areas having a coefficient of friction as determined in conformance with the requirements in California Test 342 of less than 0.30 shall be grooved in conformance with the provisions in Section 42-1.02, "Construction," of the Standard Specifications. Grooving shall be performed prior to the installation of any required edge drains adjacent to the areas to be grooved.

Transverse straightedge and longitudinal straightedge requirements will not apply to the pavement surface within 300 mm of the existing concrete pavement except as required in these special provisions. Longitudinal straightedge requirements in Section 40-1.10, "Final Finishing," of the Standard Specifications, shall be applied at transverse contact joints with existing concrete pavement where the straightedge is to be placed with the midpoint coincident with the joints. Pavement not meeting this straightedge requirement shall be corrected within 48 hours by grinding or other methods as approved by the Engineer.

Profiles of the completed pavement surface specified in Section 40-1.10, "Final Finishing," of the Standard Specifications will not be required. The Profile Index requirements in Section 40-1.10, "Final Finishing," of the Standard Specifications shall not apply.

Curing Method

The curing method for replacement pavement shall be as recommended by the manufacturer of the cement and as approved by the Engineer.

At least 21 days prior to the placement of the trial slab the Contractor shall submit to the Engineer for approval a written Quality Control Plan (QCP) that shall be used to ensure the quality of the product and the work. At the request of the Engineer or Contractor, the Contractor and Quality Control Managers (QCMs) shall meet with the Engineer to discuss the QCP. The Engineer will have 14 days to approve the Quality Control Plan (QCP). Should the Engineer fail to complete the review of the Quality Control Plan (QCP) within the time allowance and if, in the opinion of the Engineer, the Contractor's controlling operation is delayed or interfered with by reason of the delay in reviewing the Quality Control Plan (QCP), the delay will be considered a right of way delay in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

If in the judgement of the Engineer, the Contractor has not implemented or is not complying with the approved QCP, production and placement shall be suspended. Production and placement shall not resume until approved by the Engineer.

Replacement pavement production and placement shall not begin until the QCP has been approved by the Engineer. Approval of the QCP will be based on the inclusion of all required information. Approval of the QCP does not imply any warranty by the Engineer that adherence to the QCP will result in replacement pavement that complies with these specifications. It shall remain the responsibility of the Contractor to demonstrate this compliance.

The QCP shall include an outline of the production, transportation and placement of the replacement pavement. The QCP shall include a contingency plan for correcting situations if there is a problem in production, transportation or placement. The Contractor shall have equipment and personnel present to meet the requirements of the contingency plan. The QCP shall contain provisions for determining when placement of the replacement pavement will be suspended and temporary roadway will be substituted.

The QCP shall include the names of quality control personnel to be used and an outline of sampling, testing to be performed during and after construction of replacement pavement. At the time of submission of the QCP, quality control samplers and testers must be Caltrans qualified by the Department through the Independent Assurance Program (IAP) for the sampling and testing for which they will be responsible.

Before production and placement begins, the Contractor, QCMs and Engineer shall have a meeting with all production, transportation, placement, inspection, sampling and testing personnel to familiarize them with the requirements of the project. Items to be discussed include the production, transportation and placement processes for replacement pavement; contingency plan; and sampling and testing. The Contractor shall provide the facility for this meeting. The meeting date and location will be approved by the Engineer. Attendance at this meeting is mandatory for key personnel including the project manager, QCMs, production plant manager, plant inspector, all concrete delivery truck drivers, paving superintendent, paving foreman, paving machine operator, and all inspectors, samplers and testers. All meeting attendees shall sign in at the meeting. Production and placement operations shall not begin unless the above key personnel have attended the mandatory meeting.

The Contractor shall provide the required sampling, testing and inspection during all phases of replacement pavement production and placement. The Contractor shall provide a minimum of two working days notice to the Engineer, so the Engineer can witness all sampling and testing. The Engineer shall be given unrestricted access to the Contractor's quality control inspectors, samplers, testers and laboratories. During the production and placement period, the Contractor shall provide results of all testing to the Engineer within 15 minutes of completion of testing. The Contractor shall record all inspection, sampling and testing on forms approved by the Engineer. The Contractor shall provide written results of all inspection and testing to the Engineer within 48 hours of completion of each shift of paving and within 24 hours for all 7-day strength tests.

The Contractor shall provide a testing laboratory with adequate equipment and personnel for the performance of the quality control tests. This laboratory shall be located at a location approved by the Engineer and so that prompt testing requirements will be achieved. All sampling and testing equipment shall be maintained in proper working condition. Sampling shall be performed in conformance with the requirements of California Test 125. The QCP shall include a list the equipment to be used including date of last calibration, the names and certifications of sampling and testing personnel, and the location of the laboratory and testing equipment during and after paving operations.

Testing laboratories, testing equipment, and sampling and testing personnel shall conform to the requirements of the Department's IAP.

The minimum trial slab dimensions shall be 3 m by 6 m and shall be 225 mm thick where planned replacement pavement nominal thickness is less than 255 mm. The trial slab thickness shall be 260 mm where planned replacement pavement nominal thickness is 255 mm or greater. Where there are planned slab replacements with greater and less than 255 mm thickness then two trial slabs shall be required one at 225 mm thick and one at 255 mm thick. Trial slabs shall be placed near the project site at a location mutually acceptable to the Engineer and the Contractor except slabs shall not be placed on the roadway or within the project limits.

During trial slab construction, the Contractor shall sample and split the aggregate for gradings, cleanness value, and sand equivalent testing with the Engineer, at the Contractor's cost. Both sets of test results of these samples shall conform to the

provisions in Section 90-2.02, "Aggregates," of the Standard Specifications. If test results do not conform to the requirements, the trial slab will be rejected.

When proposed by the Contractor, in writing, and approved by the Engineer, ASTM Designation: C 805 or C 900 shall be used to estimate the modulus of rupture of the pavement at early ages. The selected test method shall be used to determine modulus of rupture until 7 days after the Contractor notifies the Engineer of withdrawal of the proposal or 7 days after the Engineer notifies the Contractor of withdrawal of approval, in writing. During trial slab curing, correlation testing shall be performed to determine the relation between the modulus of rupture and ASTM Designation: C 805 or C 900 performed on the trial slab. The correlation shall be established by testing at 4 or more time intervals. At a minimum, tests shall be performed one hour before and one hour after the opening age and two others within 15 minutes of the opening age. Modulus of rupture estimates shall be calculated with either a linear, exponential or logarithmic, least squares best-fit equation, whichever provides the best correlation coefficient.

Beams used for determining early age modulus of rupture shall be cured under the same conditions as the pavement until one hour prior to testing. Beams fabricated for the 7-day test shall be cured in conformance with California Test 523 as modified in these special provisions. Modulus of rupture test results will be used for accepting or rejecting the replacement pavement and pay factor adjustment for low modulus of rupture.

Materials resulting from the construction of the trial slab, test specimens, temporary roadway structural section, and all rejected replacement pavement shall become the property of the Contractor and shall be removed and disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

REPLACE EXISTING PAVEMENT DELINEATION

Whenever existing pavement delineation is removed, obliterated or damaged due to the work involved in replacing concrete pavement, the Contractor shall replace the delineation in conformance with the requirements of these special provisions.

MEASUREMENT AND PAYMENT

Replace concrete pavement (Rapid Strength Concrete) will be measured and paid for in the same manner specified for concrete pavement in Sections 40-1.13, "Measurement," and 40-1.14, "Payment," of the Standard Specifications, and these special provisions.

Replace concrete pavement (Rapid Strength Concrete) payments will be subject to the pay factor values listed in "Pay Factor Adjustment for Low Modulus of Rupture" of these special provisions.

Full compensation for the pre-operation conference, including furnishing the facility to hold the pre-operation conference in, shall be considered as included in the contract prices paid for the item involving RSC and no additional compensation will be made therefor.

Full compensation for all required Sampling and Testing, Process Control testing, testing to determine modulus of rupture and all other contractor required testing as described in these special provisions, including testing laboratories, testing personnel, testing equipment, and ancillary testing supplies, shall be considered as included in the contract prices paid for the item involving RSC and no additional compensation will be made therefor.

Costs for providing JITT will be made in conformance with the provisions in Section 9-1.03, "Force Account Payment," of the Standard Specifications, except no markups shall be added, and the Contractor will be paid for one half of the JITT cost. Costs for providing JITT shall include training materials, class site, and the JITT instructor including the JITT instructor's travel, lodging, meals and presentation materials. All costs incurred by the Contractor or Engineer for attending JITT shall be borne by the party incurring the costs.

The provisions in Section 40-1.135, "Pavement Thickness," of the Standard Specifications shall not apply.

Full compensation for removing and disposing of existing concrete pavement, constructing trial slabs, furnishing and placing bond breaker, furnishing and disposing of standby materials for temporary roadway structural section, constructing, maintaining, removing, and disposing of temporary roadway structural section, shall be considered as included in the contract price paid per cubic meter for replace concrete pavement (Rapid Strength Concrete), and no additional compensation will be allowed therefor.

The contract unit price paid for tie bar (drill and bond) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in placing epoxy-coated tie bars, drilling holes and bonding tie bars with epoxy resin, or furnishing and placing threaded dowel splice couplers, in concrete pavement complete in place, including properly aligning tie bars as shown on the plans, as specified in the Standard Specifications, and these special provisions, and as directed by the Engineer.

If calibration of volumetric batch-trucks is performed more than 160 km from the project limits, additional inspection expenses will be sustained by the State. Whereas it is and will be impracticable and extremely difficult to ascertain and determine the actual increase in these expenses, it is agreed that payment to the Contractor for Replace Concrete Pavement (Rapid Setting Concrete) will be reduced $1000.

10-1.62 SURVEY OF EXISTING NON-HIGHWAY FACILITIES

This work shall consist of performing photo survey, elevation survey and crack monitoring of existing facilities, buildings, and other improvements which might be damaged by the operations of the Contractor. In addition, this work shall include installing survey hubs in local streets.

The Contractor shall install up to 50 survey hubs along the length of the project or as requested by the Engineer. The Engineer will determine the exact location of the survey hubs at the time of the construction.

The photo survey, elevation survey and crack monitoring shall be conducted at the properties listed in the "Vibration Monitoring" section of these Special Provisions, or as directed by the Engineer. The pre-construction survey and monitoring shall be performed at least 30 days prior to beginning excavation, demolition activity, pile activity, shoring, installation, or other significant impact work that has a potential to cause damage to existing facilities that occurs within 30 meters of the listed facilities. Additional survey and monitoring shall be performed as the work progresses and as directed by the Engineer. A post construction survey and monitoring shall be performed on the same facilities within 10 days after the completion of excavation, demolition activity, pile activity, shoring installation, or other significant impact work that has a potential to cause damage to existing facilities.

The Contractor shall submit to the Engineer for approval a complete description of the work to be completed for each of the surveyed locations and existing facilities. The work to be completed shall consist of records of observations, videotapes, and photographs.

The Contractor shall notify the Engineer 48 hours prior to beginning the photo and elevation survey and crack monitoring work.

The scope of the examination for photo survey shall consist of photographic and video recording of the conditions of the facilities specified above.

The photo survey shall show the condition of the facility, including, but not limited to, any and all deficiencies in the facility such as cracks, settlement, leakage, distress and the like. The photo survey shall document the condition of the foundation walls, ceiling, roof, improvements and other building elements on the interiors and exteriors of the said facilities.

The photograph prints shall be in color, and have a printed image size of at least be 127 mm x 178 mm. All prints shall be on glossy photographic paper. Proof sheets, thumbnail prints, or contact prints are not acceptable. All negative shall be provided in protective sleeves. The negatives shall be indexed to facilitate expeditious reproduction. All photos shall be identified by date, location, orientation, and labeled with a detailed description. All photos shall be submitted in a 3-ring binder and shall include the following: protective photo sleeves, building layout (including layout of each floor as necessary), and a summary sheet indexing all photos.

The digital camera shall be color and shall have a minimum resolution of 1280 x 960 pixels or defined as "megapixel". Digital photo prints shall be on either dye sublimation printer capable of color fusion and continues tone, a color laser printer capable of printing 472x472 dots per centimeter, or a professional graphics color inkjet printer capable of printing 567x283 dots per centimeter and using six separate color reservoirs. All digital prints shall utilize photo quality glossy heavy weight paper (as defined by the printer manufacturer and as approved by the Engineer). All digital prints shall be printed at the highest print mode or print quality available to the approved printer (photo mode or best print quality). The digital prints shall also include the path name (folder and subfolder names) and file name of the picture is location on the photo CD-ROM. All digital photos saved on CD-ROM shall be saved in the JPEG file format. The image quality option of the JPEG file shall be set to high. The JPEG files should be stored in separate folders based on photo location. The CD-ROM shall be submitted to the Engineer as part of the photo survey submittal.

The contractor shall include a letter of authenticity certifying the that every digital photo image in the photo survey submittal has not been modified using photographic software. Said letter shall be included with every photo survey submittal.

The Contractor shall submit a list of digital photo equipment proposed for use, including digital cameras, photographic software, photo printers and photo quality glossy heavyweight paper. The submittal shall include actual recent samples of digital photos taken with the proposed camera and printed with the proposed printer. The photos shall be printed to the highest quality on the required photo quality glossy heavyweight paper.

The contractor shall videotape the foundation, floors, walls, ceilings, roof, improvements and all building elements inside and outside the specified facilities as part of the photo survey.

The video recording shall show the condition of the facility, including, but not limited to, any and all deficiencies in the facility such as cracks, settlement, leakage, distress and the like. The video tape recording shall be narrated contemporaneously by the camera operator, documenting the location, orientation, time and date of the scene. The narration may be supplemented by onscreen text either generated by the camera or by other methods approved by the Engineer. The video survey shall be conducted using premium grade VHS color tape and shall be recorded in the Standard Play (SP) mode. All video tape recording shall be made to the highest quality and standards. No more than one facility shall be recorded on a single videotape. The contractor shall submit the original, unedited video recording to the engineer. Copies of the video shall be professionally made and shall not incur signal degradation during copying.

A written report of the record of observations shall also be submitted with the videotape. The written report shall include the date and time of the recording and the location of the facility in question. The report shall also include a table listing the anomalies with a detailed description, and orientation. The table shall also list the beginning and the ending times of the videocassette counter for each anomaly recorded on the videotape.

Crack monitoring shall be made on all existing cracks in each of the facilities included in this survey and shall be performed concurrent with the photo survey. The gage installation shall be done concurrent with the pre-construction photo survey. Crack monitoring shall be performed using, a calibrated crack monitoring device approved by the Engineer. The crack gage shall be capable of measuring cracks to the nearest millimeter. The location of the crack gauges shall be identified in the pre-construction survey report.

Cracks shall be monitored weekly during the pre-construction photo survey and daily throughout the duration of any work that has a potential to cause damage to the existing facilities. The crack gauge measurements shall be recorded at the same time each day in an effort to eliminate deviations in crack magnitude due to heat fluctuations. A report detailing such readings shall be provided to the Engineer on a weekly basis.

The elevation survey shall be conducted to obtain vertical elevations of existing buildings, foundations and other improvements. A minimum of three points shall be monitored at each facility. Elevation measuring equipment shall be of a type approved by the Engineer. Such equipment shall be capable of measuring changes in elevations to the nearest 0.127 mm.

The elevation survey shall be performed by a Professional Land Surveyor registered in the State of California or by such a professional surveyor.

Three calendar days prior to beginning any impact work, the Contractor shall document elevations of the required points per facility and shall continue to document each point on a daily basis until the significant impact work begins. During the significant impact work, the Contractor shall document the elevations of the points three times per shift. After the impact work is complete for the specified location, the Contractor shall document the elevations on a daily basis for two days. If there is variation in elevation of a 3.2 mm or more, the impact work shall be halted, and the Engineer shall be immediately notified. If the work is halted due to fluctuations in elevation the Contractor shall modify their operations to eliminate future fluctuations in elevations, at no cost to the state.

Within 20 working days after the completion of any impact work, the Contractor shall submit to the Engineer a report documenting the results of the survey. Each facility shall have a separate report. The report shall be signed by a Professional Land Surveyor in the State of California who performed the survey or in whose authority the survey was made. The report shall include the location of the monitoring points, including the address of the facility surveyed and the building layout. A general layout plan shall be included in the report showing the elevations, dimensions and distances of the monitoring locations.

Survey hubs should be surveyed in x, y, and z directions and they should be surveyed every other week and as directed by the Engineer.

The photographs, videotapes, and reports of all observations shall be prepared in triplicate by the Contractor and the authorized representatives of the State and of the Contractor shall sign every document.

The pre-construction survey records and the documentation specified above shall be submitted to the Engineer prior to commencement of any significant impact work as defined above. The Engineer shall have five working days to review the submittal for adequacy. No work shall take place unless the Engineer approves the pre-construction survey records.

The package of the post-construction survey documents shall be submitted within 10 working days after the impact work has been completed adjacent to each of the specified facilities.

The photo survey package may be submitted in portions based on Stage Construction, if in the opinion of the Engineer, detrimental actions can be avoided in the subsequent stages. The submittal package shall include all records, documents, photos, videotapes, and observations. The Engineer shall have five working days to review the submittal for adequacy.

Records in triplicate of all observations shall be prepared by the Contractor and every document shall be signed by the authorized representatives of the State and of the Contractor. Video tapes and photographs, as deemed advisable by the Engineer will be made by the Contractor and signed in the manner specified above. One signed copy of every document and photograph will be kept on file by the Engineer.

The above referenced records, video tapes, and photographs are intended for use as indisputable evidence in ascertaining the extent of any damage which may occur as a result of the Contractor's operations. The above-referenced records, video tapes, and photographs are for the protection of the adjacent property owners, the Contractor, and the State. These records will be used to determine any damage from the Contractor's operations during the work.

Attention is directed to Sections 7-1.1. "Preservation of Property" and 7-1.12, "Responsibility Damage"' of the Standard Specifications. The Contractor will immediately inform the Engineer in writing, of any damage to these and other facilities.

PAYMENT

The contract lump sum price paid for survey of existing non-highway facilities shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in photo survey and elevation survey of existing facilities, crack monitoring, and survey hubs as specified in the Standard Specifications and these

special provisions, and as directed by the Engineer.

The Engineer may order photo surveys, elevation surveys and crack monitoring of existing facilities other than those facilities listed under "Photo and Elevation Survey and Crack Monitoring," Photo surveys, elevation surveys and crack monitoring of existing facilities other than those facilities listed under "Photo and Elevation Survey and Crack Monitoring," will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications.

10-1.63 VIBRATION MONITORING

This work shall consist of vibration monitoring as a means of protecting the following properties from excess vibration from construction activities:

VIBRATION MONITORING AND PHOTO SURVEY

1. 11 Burlingame Ave., Burlingame, CA 94010-2879
2. 320 Elm St. Apt. 201, San Mateo, CA 94401
3. 320 Elm St. Apt. 202, San Mateo, CA 94401
4. 320 Elm St. Apt. 203, San Mateo, CA 94401
5. 320 Elm St. Apt. 204, San Mateo, CA 94401
6. 320 Elm St. Apt. 205, San Mateo, CA 94401
7. 320 Elm St. Apt. 206, San Mateo, CA 94401
8. 320 Elm St. Apt. 207, San Mateo, CA 94401
9. 320 Elm St. Apt. 208, San Mateo, CA 94401
10. 320 Elm St. Apt. 209, San Mateo, CA 94401
11. 320 Elm St. Apt. 210, San Mateo, CA 94401
12. 320 Elm St. Apt. 211, San Mateo, CA 94401
13. 1025 Howard Ave., San Mateo, CA 94401-1116
14. 900 Larkspur Dr., Burlingame, CA 94010-2612
15. 851 Amphlett Ave., San Mateo, CA 94402
16. 1 N. Amphlett Blvd., San Mateo, CA 94401
17. 35 N. Amphlett Blvd., San Mateo, CA 94401
18. 101 N. Amphlett Blvd., San Mateo, CA 94401
19. 105 N. Amphlett Blvd., San Mateo, CA 94401
20. 119 N. Amphlett Blvd., San Mateo, CA 94401
21. 131 N. Amphlett Blvd., San Mateo, CA 94401
22. 145 N. Amphlett Blvd., San Mateo, CA 94401
23. 153 N. Amphlett Blvd., San Mateo, CA 94401
24. 201 N. Amphlett Blvd., San Mateo, CA 94401
25. 227 N. Amphlett Blvd., San Mateo, CA 94401
26. 241 N. Amphlett Blvd., San Mateo, CA 94401
27. 257 N. Amphlett Blvd., San Mateo, CA 94401
28. 267 N. Amphlett Blvd., San Mateo, CA 94401
29. 289 N. Amphlett Blvd., San Mateo, CA 94401
30. 301 N. Amphlett Blvd., San Mateo, CA 94401
31. 333 N. Amphlett Blvd., San Mateo, CA 94401
32. 345 N. Amphlett Blvd., San Mateo, CA 94401
33. 363 N. Amphlett Blvd., San Mateo, CA 94401
34. 1119 N. Amphlett Blvd., San Mateo, CA 94401-1107
35. 1125 N. Amphlett Blvd., San Mateo, CA 94401-1107
36. 1135 N. Amphlett Blvd., San Mateo, CA 94401-1107
37. 1145 N. Amphlett Blvd., San Mateo, CA 94401-1107
38. 14 S. Amphlett Blvd., San Mateo, CA 94401
39. 24 S. Amphlett Blvd., San Mateo, CA 94401
40. 100 S. Amphlett Blvd., San Mateo, CA 94401
41. 114 S. Amphlett Blvd., San Mateo, CA 94401
42. 120 S. Amphlett Blvd., San Mateo, CA 94401
43. 124 S. Amphlett Blvd., San Mateo, CA 94401
44. 130 S. Amphlett Blvd., San Mateo, CA 94401
45. 1130 N. Humboldt St., San Mateo, CA 94401-1132
46. 800 Morrell Ave., Burlingame, CA 94010-2690

47. 255 Rollins Rd., Burlingame, CA 94010-2872
48. 701 Rollins Rd., Burlingame, CA 94010-2710
49. 721 Rollins Rd., Burlingame, CA 94010-2794
50. 731 Rollins Rd., Burlingame, CA 94010-2793
51. 741 Rollins Rd., Burlingame, CA 94010-2792
52. 761 Rollins Rd., Burlingame, CA 94010-2791
53. 805 Rollins Rd., Burlingame, CA 94010-2689
54. 809 Rollins Rd., Burlingame, CA 94010-2645
55. 835 Rollins Rd., Burlingame, CA 94010-2688
56. 841 Rollins Rd., Burlingame, CA 94010-2667
57. 847 Rollins Rd., Burlingame, CA 94010-2687
58. 849 Rollins Rd. A, Burlingame, CA 94010-2686
59. 855 Rollins Rd., Burlingame, CA 94010-2667
60. 905 Rollins Rd., Burlingame, CA 94010-2685
61. 909 Rollins Rd. 4, Burlingame, CA 94010-2684
62. 913 Rollins Rd., Burlingame, CA 94010-2683
63. 917 Rollins Rd., Burlingame, CA 94010-2682
64. 921 Rollins Rd., Burlingame, CA 94010-2681
65. 925 Rollins Rd., Burlingame, CA 94010-2668
66. 929 Rollins Rd., Burlingame, CA 94010-2650
67. 933 Rollins Rd., Burlingame, CA 94010-2677
68. 937 Rollins Rd., Burlingame, CA 94010-2678
69. 941 Rollins Rd., Burlingame, CA 94010-2680
70. 945 Rollins Rd., Burlingame, CA 94010-2679
71. 949 Rollins Rd., Burlingame, CA 94010-2604
72. 975 Rollins Rd., Burlingame, CA 94010-2604
73. 240 Victoria Rd., Burlingame, CA 94010-2846
74. 820 Winchester Dr., Burlingame, CA 94010-2693
75. 821 Winchester Dr., Burlingame, CA 94010-2692
76. 1 Winchester Pl., Burlingame, CA 94010-2704
77. 2 Winchester Pl., Burlingame, CA 94010-2704
78. 3 Winchester Pl., Burlingame, CA 94010-2704
79. 4 Winchester Pl., Burlingame, CA 94010-2704
80. 1214 E. 2nd Ave., San Mateo, CA 94401
81. 1119 2nd Ave., San Mateo, CA 94401
82. 1215 2nd Ave., San Mateo, CA 94401
83. 1221 Terminal Pl., San Mateo, CA 94401
84. 1227 Terminal Pl., San Mateo, CA 94401
85. 1232 Terminal Pl., San Mateo, CA 94401
86. 1235 Terminal Pl., San Mateo, CA 94401
87. 1236 Terminal Pl., San Mateo, CA 94401
88. 10 N. Bayshore Blvd., San Mateo, CA 94401
89. 30 N. Bayshore Blvd., San Mateo, CA 94401
90. 56 N. Bayshore Blvd., San Mateo, CA 94401
91. 70 N. Bayshore Blvd., San Mateo, CA 94401
92. 100 N. Bayshore Blvd., San Mateo, CA 94401
93. 106 N. Bayshore Blvd., San Mateo, CA 94401
94. 112 N. Bayshore Blvd., San Mateo, CA 94401
95. 140 N. Bayshore Blvd., San Mateo, CA 94401
96. 220 N. Bayshore Blvd., San Mateo, CA 94401
97. 240 N. Bayshore Blvd. Apt. 101, San Mateo, CA 94401
98. 240 N. Bayshore Blvd. Apt. 102, San Mateo, CA 94401
99. 240 N. Bayshore Blvd. Apt. 103, San Mateo, CA 94401
100. 240 N. Bayshore Blvd. Apt. 104, San Mateo, CA 94401
101. 240 N. Bayshore Blvd. Apt. 105, San Mateo, CA 94401
102. 240 N. Bayshore Blvd. Apt. 106, San Mateo, CA 94401
103. 240 N. Bayshore Blvd. Apt. 107, San Mateo, CA 94401
104. 240 N. Bayshore Blvd. Apt. 108, San Mateo, CA 94401
105. 240 N. Bayshore Blvd. Apt. 109, San Mateo, CA 94401

106.240 N. Bayshore Blvd. Apt. 110, San Mateo, CA 94401
107.240 N. Bayshore Blvd. Apt. 111, San Mateo, CA 94401
108.240 N. Bayshore Blvd. Apt. 112, San Mateo, CA 94401
109.240 N. Bayshore Blvd. Apt. 113, San Mateo, CA 94401
110.240 N. Bayshore Blvd. Apt. 114, San Mateo, CA 94401
111.240 N. Bayshore Blvd. Apt. 115, San Mateo, CA 94401
112.240 N. Bayshore Blvd. Apt. 116, San Mateo, CA 94401
113.240 N. Bayshore Blvd. Apt. 117, San Mateo, CA 94401
114.240 N. Bayshore Blvd. Apt. 118, San Mateo, CA 94401
115.240 N. Bayshore Blvd. Apt. 119, San Mateo, CA 94401
116.240 N. Bayshore Blvd. Apt. 120, San Mateo, CA 94401
117.240 N. Bayshore Blvd. Apt. 121, San Mateo, CA 94401
118.300 N. Bayshore Blvd., San Mateo, CA 94401
119.350 N. Bayshore Blvd., San Mateo, CA 94401
120.400 N. Bayshore Blvd., San Mateo, CA 94401
121.404 N. Bayshore Blvd., San Mateo, CA 94401
122.408 N. Bayshore Blvd., San Mateo, CA 94401
123.412 N. Bayshore Blvd., San Mateo, CA 94401
124.416 N. Bayshore Blvd., San Mateo, CA 94401
125.420 N. Bayshore Blvd., San Mateo, CA 94401
126.480 N. Bayshore Blvd., San Mateo, CA 94401
127.200 S. Bayshore Blvd., San Mateo, CA 94401
128.19 N. Kingston St., San Mateo, CA 94401
129.57 N. Kingston St., San Mateo, CA 94401
130.101 N. Kingston St. 105, San Mateo, CA 94401-2047
131.6 S. Kingston St., San Mateo, CA 94401
132.10 S. Kingston St., San Mateo, CA 94401
133.14 S. Kingston St., San Mateo, CA 94401
134.20 S. Kingston St., San Mateo, CA 94401
135.28 S. Kingston St., San Mateo, CA 94401
136.100 S. Kingston St., San Mateo, CA 94401
137.104 S. Kingston St., San Mateo, CA 94401
138.110 S. Kingston St., San Mateo, CA 94401
139.116 S. Kingston St., San Mateo, CA 94401
140.120 S. Kingston St., San Mateo, CA 94401
141.1140 Cypress Ave., San Mateo, CA 94401
142.1220 Cypress Ave., San Mateo, CA 94401
143.1136 Monte Diablo Ave., San Mateo, CA 94401
144.1201 Monte Diablo Ave., San Mateo, CA 94401
145.1218 Monte Diablo Ave., San Mateo, CA 94401
146.1200 Dore Ave. Apt. 201, San Mateo, CA 94401
147.470 N. Idaho St., San Mateo, CA 94401
148.490 N. Idaho St., San Mateo, CA 94401
149.859 N. Idaho St., San Mateo, CA 94401
150.860 N. Idaho St., San Mateo, CA 94401
151.237 S. Idaho St., San Mateo, CA 94401
152.900 Toyon Dr., Burlingame, CA 94010-2606
153.904 Toyon Dr., Burlingame, CA 94010-2647

Vibration measurements and recording shall be conducted before and during pile driving, hauling of dirt, placing of base material, compaction, and during paving operations or other significant activity when that activity occurs within 30 m of the above listed properties. Vibration measurements shall be conducted for at least two hours at each location during a typical measurement day. The Contractor shall submit to the Engineer, for review and approval, written plans detailing the procedures for vibration monitoring, 14 days before beginning vibration monitoring activities.

The baseline vibration monitoring at each site shall be conducted prior to the start of construction activities or when there is a break in the construction activities.

Vibration monitoring instrument shall be furnished and installed by the Contractor and shall be capable of continuous operation with instant monitoring results. The vibration monitoring system shall be capable of measuring peak particle velocity and frequency levels as low as 2.5 mm/sec using a 3-axis geophone. The vibration monitoring system shall undergo

certified laboratory calibration conformance at least once a year. At the time of measurement the vibration monitoring system shall have a certificate that is not expired.

The Contractor shall have the instrument in place and functioning properly prior to any construction activities within 30 m of the above listed properties. The vibration monitoring instrument shall be set up in a manner such that an immediate warning is given when particle velocity equal to or exceeding 5 mm per second is produced. Monitoring instrument shall be stationed on the side undercrossing facing the Contractor's work site. When any reading on monitoring instrument equals or exceed 5 mm per second, work shall immediately cease and the Contractor shall immediately take whatever action is necessary to reduce and maintain the monitoring instrument reading below a particle velocity of 5 mm per second.

The results of the measurements shall be tabulated. A report shall be prepared to tabulate the measured vibration levels at three axes and associated frequencies. The report shall also include information such as measurement location, date, and source of vibration. The highest measured vibration levels for each axis and their relationship to the criteria shall also be included in the report. The Contractor shall submit the report no later than 5 working days after each monitoring.

The person who is responsible for the vibration monitoring and analysis shall have the following qualifications:

A. Registered Geophysicist or Bachelor of Science or higher degree from a qualified program in engineering, physics or geology offered by an accredited university or college, and five years experience in vibration monitoring and control.
B. Demonstrated substantial and responsible experience in preparing and implementing construction vibration monitoring plans and analyzing vibration impacts in an urban setting.

A technician under the supervision of the qualified person may conduct the actual measurements.

Compliance with this section does not relieve the Contractor of full responsibility for damage caused by Contractor's operations as per Section 7-1.12 "Responsibility for Damage," of the Standard Specifications.

The contract lump sum price paid for vibration monitoring shall include full compensation for furnishing all labor, materials, tools, equipment and incidentals, and doing all work involved in vibration monitoring, as specified in these special provisions and as directed by the Engineer.

Additional areas to receive vibration monitoring will be paid for as extra work as provided in Section 4-1.03D "Extra Work," of the Standard Specifications.

10-1.64 PILING

GENERAL

Piling shall conform to the provisions in Section 49, "Piling," of the Standard Specifications, and these special provisions.

Unless otherwise specified, welding of any work performed in conformance with the provisions in Section 49, "Piling," of the Standard Specifications, shall be in conformance with the requirements in AWS D1.1.

Foundation recommendations are included in the "Information Handout" available to the Contractor as provided for in Section 2-1.03, "Examination of Plans, Specifications, Contract, and Site of Work," of the Standard Specifications.

Attention is directed to "Precast Concrete Quality Control" of these special provisions.

Attention is directed to "Welding" of these special provisions.

Difficult pile installation is anticipated due to the presence of soft bay mud overlying sand and gravel layers, dense soils, hazardous and contaminated materials, tidal flow fluctuation, high ground water, subsurface concrete debris, low overhead clearance, underground utilities, overhead utilities, sound control, vibration monitoring and traffic control.

Driven piles for sound walls shall be driven to obtain the specified penetration; nominal resistance will not be determined in conformance with the provisions in Section 49-1.08, "Pile Driving Acceptance Criteria," of the Standard Specifications, nor by the provisions specified in these special provisions.

CAST-IN-DRILLED-HOLE CONCRETE PILES

Cast-in-drilled-hole concrete piling shall conform to the provisions in Section 49-4, "Cast-In-Place Concrete Piles," of the Standard Specifications and these special provisions.

The provisions of "Welding" of these special provisions shall not apply to temporary steel casings.

Cast-in-drilled-hole concrete piles 600 mm in diameter or larger may be constructed by excavation and depositing concrete under slurry.

Materials

Concrete deposited under slurry shall have a nominal penetration equal to or greater than 90 mm. Concrete shall be proportioned to prevent excessive bleed water and segregation.

Concrete deposited under slurry shall contain not less than 400 kg of cementitious material per cubic meter.

Attention is directed to "Corrosion Control for Portland Cement Concrete," of these special provisions.

The combined aggregate grading used in concrete for cast-in-drilled-hole concrete piling shall be either the 25-mm maximum grading, the 12.5-mm maximum grading, or the 9.5-mm maximum grading and shall conform to the requirements in Section 90-3 "Aggregate Gradings," of the Standard Specifications.

Mineral Slurry

Mineral slurry shall be mixed and thoroughly hydrated in slurry tanks, and slurry shall be sampled from the slurry tanks and tested before placement in the drilled hole.

Slurry shall be recirculated or continuously agitated in the drilled hole to maintain the specified properties.

Recirculation shall include removal of drill cuttings from the slurry before discharging the slurry back into the drilled hole. When recirculation is used, the slurry shall be sampled and tested at least every 2 hours after beginning its use until tests show that the samples taken from the slurry tank and from near the bottom of the hole have consistent specified properties. Subsequently, slurry shall be sampled at least twice per shift as long as the specified properties remain consistent.

Slurry that is not recirculated in the drilled hole shall be sampled and tested at least every 2 hours after beginning its use. The slurry shall be sampled mid-height and near the bottom of the hole. Slurry shall be recirculated when tests show that the samples taken from mid-height and near the bottom of the hole do not have consistent specified properties.

Slurry shall also be sampled and tested prior to final cleaning of the bottom of the hole and again just prior to placing concrete. Samples shall be taken from mid-height and near the bottom of the hole. Cleaning of the bottom of the hole and placement of the concrete shall not start until tests show that the samples taken from mid-height and near the bottom of the hole have consistent specified properties.

Mineral slurry shall be tested for conformance to the requirements shown in the following table:

MINERAL SLURRY		
PROPERTY	REQUIREMENT	TEST
Density (kg/m^3) - before placement in the drilled hole - during drilling - prior to final cleaning - immediately prior to placing concrete	1030* to 1110* 1030* to 1200*	Mud Weight (Density) API 13B-1 Section 1
Viscosity (seconds/liter) bentonite attapulgite	29 to 53 29 to 42	Marsh Funnel and Cup API 13B-1 Section 2.2
pH	8 to 10.5	Glass Electrode pH Meter or pH Paper
Sand Content (percent) - prior to final cleaning - immediately prior to placing concrete	less than or equal to 4.0	Sand API 13B-1 Section 5
*When approved by the Engineer, slurry may be used in salt water, and the allowable densities may be increased up to 32 kg/m^3. Slurry temperature shall be at least 4°C when tested.		

Any caked slurry on the sides or bottom of hole shall be removed before placing reinforcement. If concrete is not placed immediately after placing reinforcement, the reinforcement shall be removed and cleaned of slurry, the sides of the drilled hole cleaned of caked slurry, and the reinforcement again placed in the hole for concrete placement.

Synthetic Slurry

Synthetic slurries shall be used in conformance with the manufacturer's recommendations and these special provisions. The following synthetic slurries may be used:

PRODUCT	MANUFACTURER
SlurryPro CDP	KB Technologies Ltd. 3648 FM 1960 West Suite 107 Houston, TX 77068 (800) 525-5237
Super Mud	PDS Company c/o Champion Equipment Company 8140 East Rosecrans Ave. Paramount, CA 90723 (562) 634-8180
Shore Pac GCV	CETCO Drilling Products Group 1350 West Shure Drive Arlington Heights, IL 60004 (847) 392-5800
Novagel Polymer	Geo-Tech Drilling Fluids 220 N. Zapata Hwy, Suite 11A Laredo, TX 78043 (210) 587-4758

Inclusion of a synthetic slurry on the above list may be obtained by meeting the Department's requirements for synthetic slurries. The requirements can be obtained from the Office of Structure Design, P.O. Box 942874, Sacramento, CA 94274-0001.

Synthetic slurries listed may not be appropriate for a given site.

Synthetic slurries shall not be used in holes drilled in primarily soft or very soft cohesive soils as determined by the Engineer.

A manufacturer's representative, as approved by the Engineer, shall provide technical assistance for the use of their product, shall be at the site prior to introduction of the synthetic slurry into a drilled hole, and shall remain at the site until released by the Engineer.

Synthetic slurries shall be sampled and tested at both mid-height and near the bottom of the drilled hole. Samples shall be taken and tested during drilling as necessary to verify the control of the properties of the slurry. Samples shall be taken and tested when drilling is complete, but prior to final cleaning of the bottom of the hole. When samples are in conformance with the requirements shown in the following tables for each slurry product, the bottom of the hole shall be cleaned and any loose or settled material removed. Samples shall be obtained and tested after final cleaning and immediately prior to placing concrete.

SlurryPro CDP synthetic slurries shall be tested for conformance to the requirements shown in the following table:

SLURRYPRO CDP KB Technologies Ltd.		
PROPERTY	REQUIREMENT	TEST
Density (kg/m^3) - during drilling - prior to final cleaning - just prior to placing concrete	 less than or equal to 1075* less than or equal to 1025*	Mud Weight (Density) API 13B-1 Section 1
Viscosity (seconds/liter) - during drilling -prior to final cleaning - just prior to placing concrete	 53 to 127 less than or equal to 74	Marsh Funnel and Cup API 13B-1 Section 2.2
pH	6 to 11.5	Glass Electrode pH Meter or pH Paper
Sand Content (percent) - prior to final cleaning - just prior to placing concrete	 less than or equal to 0.5	Sand API 13B-1 Section 5
*When approved by the Engineer, slurry may be used in salt water, and the allowable densities may be increased up to 32 kg/m^3. Slurry temperature shall be at least 4°C when tested.		

Super Mud synthetic slurries shall be tested for conformance to the requirements shown in the following table:

SUPER MUD PDS Company		
PROPERTY	REQUIREMENT	TEST
Density (kg/m^3) - prior to final cleaning - just prior to placing concrete	less than or equal to 1025*	Mud Weight (Density) API 13B-1 Section 1
Viscosity (seconds/liter) - during drilling - prior to final cleaning - just prior to placing concrete	34 to 64 less than or equal to 64	Marsh Funnel and Cup API 13B-1 Section 2.2
pH	8 to 10.0	Glass Electrode pH Meter or pH Paper
Sand Content (percent) - prior to final cleaning -just prior to placing concrete	less than or equal to 0.5	Sand API 13B-1 Section 5
*When approved by the Engineer, slurry may be used in salt water, and the allowable densities may be increased up to 32 kg/m^3. Slurry temperature shall be at least 4°C when tested.		

Shore Pac GCV synthetic slurries shall be tested for conformance to the requirements shown in the following table:

Shore Pac GCV CETCO Drilling Products Group		
PROPERTY	REQUIREMENT	TEST
Density (kg/m^3) - prior to final cleaning - just prior to placing concrete	less than or equal to 1025*	Mud Weight (Density) API 13B-1 Section 1
Viscosity (seconds/liter) - during drilling - prior to final cleaning - just prior to placing concrete	35 to 78 less than or equal to 60	Marsh Funnel and Cup API 13B-1 Section 2.2
pH	8.0 to 11.0	Glass Electrode pH Meter or pH Paper
Sand Content (percent) - prior to final cleaning -just prior to placing concrete	less than or equal to 0.5	Sand API 13B-1 Section 5
*When approved by the Engineer, slurry may be used in salt water, and the allowable densities may be increased up to 32 kg/m^3. Slurry temperature shall be at least 4°C when tested.		

Novagel Polymer synthetic slurries shall be tested for conformance to the requirements shown in the following table:

NOVAGEL POLYMER Geo-Tech Drilling Fluids		
PROPERTY	REQUIREMENT	TEST
Density (kg/m^3) - during drilling - prior to final cleaning - just prior to placing concrete	 less than or equal to 1075* less than or equal to 1025*	Mud Weight (Density) API 13B-1 Section 1
Viscosity (seconds/liter) - during drilling - prior to final cleaning - just prior to placing concrete	 48 to 110 less than or equal to 110	Marsh Funnel and Cup API 13B-1 Section 2.2
pH	6.0 to 11.5	Glass Electrode pH Meter or pH Paper
Sand Content (percent) - prior to final cleaning -just prior to placing concrete	 less than or equal to 0.5	Sand API 13B-1 Section 5
*When approved by the Engineer, slurry may be used in salt water, and the allowable densities may be increased up to 32 kg/m^3. Slurry temperature shall be at least 4°C when tested.		

Water Slurry

At the option of the Contractor, water may be used as slurry when casing is used for the entire length of the drilled hole. Water slurry shall be tested for conformance to the requirements shown in the following table:

WATER SLURRY		
PROPERTY	REQUIREMENT	TEST
Density (kg/m^3) - prior to final cleaning - just prior to placing concrete	1017 *	Mud Weight (Density) API 13B-1 Section 1
Sand Content (percent) - prior to final cleaning -just prior to placing concrete	less than or equal to 0.5	Sand API 13B-1 Section 5
*When approved by the Engineer, salt water slurry may be used, and the allowable densities may be increased up to 32 kg/m^3.		

Construction

The Contractor shall submit a placing plan to the Engineer for approval prior to producing the test batch for cast-in-drilled-hole concrete piling and at least 10 working days prior to constructing piling. The plan shall include complete descriptions, details, and supporting calculations as listed below:

A. Requirements for all cast-in-drilled hole concrete piling:

1. Concrete mix design, certified test data, and trial batch reports.
2. Drilling or coring methods and equipment.
3. Proposed method for casing installation and removal when necessary.
4. Plan view drawing of pile showing reinforcement and inspection pipes, if required.
5. Methods for placing, positioning, and supporting bar reinforcement.
6. Methods and equipment for accurately determining the depth of concrete and actual and theoretical volume placed, including effects on volume of concrete when any casings are withdrawn.
7. Methods and equipment for verifying that the bottom of the drilled hole is clean prior to placing concrete.
8. Methods and equipment for preventing upward movement of reinforcement, including the Contractor's means of detecting and measuring upward movement during concrete placement operations.

B. Additional requirements when concrete is placed under slurry:

1. Concrete batching, delivery, and placing systems, including time schedules and capacities therefor. Time schedules shall include the time required for each concrete placing operation at each pile.
2. Concrete placing rate calculations. When requested by the Engineer, calculations shall be based on the initial pump pressures or static head on the concrete and losses throughout the placing system, including anticipated head of slurry and concrete to be displaced.
3. Suppliers' test reports on the physical and chemical properties of the slurry and any proposed slurry chemical additives, including Material Safety Data Sheet.
4. Slurry testing equipment and procedures.
5. Methods of removal and disposal of excavation, slurry, and contaminated concrete, including removal rates.
6. Methods and equipment for slurry agitating, recirculating, and cleaning.

In addition to compressive strength requirements, the consistency of the concrete to be deposited under slurry shall be verified before use by producing a test batch. The test batch shall be produced and delivered to the project under conditions and in time periods similar to those expected during the placement of concrete in the piles. Concrete for the test batch shall be placed in an excavated hole or suitable container of adequate size to allow for testing as specified herein. Depositing of

test batch concrete under slurry will not be required. In addition to meeting the specified nominal penetration, the test batch shall meet the following requirements:

A. For piles where the time required for each concrete placing operation, as submitted in the placing plan, will be 2 hours or less, the test batch shall demonstrate that the proposed concrete mix design achieves either a penetration of at least 50 mm or a slump of at least 125 mm after twice that time has elapsed.
B. For piles where the time required for each concrete placing operation, as submitted in the placing plan, will be more than 2 hours, the test batch shall demonstrate that the proposed concrete mix design achieves either a penetration of at least 50 mm or a slump of at least 125 mm after that time plus 2 hours has elapsed.

The time period shall begin at the start of placement. The concrete shall not be vibrated or agitated during the test period. Penetration tests shall be performed in conformance with the requirements in California Test 533. Slump tests shall be performed in conformance with the requirements in ASTM Designation: C 143. Upon completion of testing, the concrete shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

The concrete deposited under slurry shall be carefully placed in a compact, monolithic mass and by a method that will prevent washing of the concrete. Concrete deposited under slurry need not be vibrated. Placing concrete shall be a continuous operation lasting not more than the time required for each concrete placing operation at each pile, as submitted in the placing plan, unless otherwise approved in writing by the Engineer. The concrete shall be placed with concrete pumps and delivery tube system of adequate number and size to complete the placing of concrete in the time specified. The delivery tube system shall consist of one of the following:

A. A tremie tube or tubes, each of which are at least 250 mm in diameter, fed by one or more concrete pumps.
B. One or more concrete pump tubes, each fed by a single concrete pump.

The delivery tube system shall consist of watertight tubes with sufficient rigidity to keep the ends always in the mass of concrete placed. If only one delivery tube is utilized to place the concrete, the tube shall be placed near the center of the drilled hole. Multiple tubes shall be uniformly spaced in the hole. Internal bracing for the steel reinforcing cage shall accommodate the delivery tube system. Tremies shall not be used for piles without space for a 250-mm tube.

Spillage of concrete into the slurry during concrete placing operations shall not be allowed. Delivery tubes shall be capped with a watertight cap, or plugged above the slurry level with a good quality, tight fitting, moving plug that will expel the slurry from the tube as the tube is charged with concrete. The cap or plug shall be designed to be released as the tube is charged. The pump discharge or tremie tube shall extend to the bottom of the hole before charging the tube with concrete. After charging the delivery tube system with concrete, the flow of concrete through a tube shall be induced by slightly raising the discharge end. During concrete placement, the tip of the delivery tube shall be maintained as follows to prevent reentry of the slurry into the tube. Until at least 3 m of concrete has been placed, the tip of the delivery tube shall be within 150 mm of the bottom of the drilled hole, and then the embedment of the tip shall be maintained at least 3 m below the top surface of the concrete. Rapid raising or lowering of the delivery tube shall not be permitted. If the seal is lost or the delivery tube becomes plugged and must be removed, the tube shall be withdrawn, the tube cleaned, the tip of the tube capped to prevent entrance of the slurry, and the operation restarted by pushing the capped tube 3 m into the concrete and then reinitiating the flow of concrete.

When slurry is used, a fully operational standby concrete pump, adequate to complete the work in the time specified, shall be provided at the site during concrete placement. The slurry level shall be maintained within 300 mm of the top of the drilled hole.

A log of concrete placement for each drilled hole shall be maintained by the Contractor when concrete is deposited under slurry. The log shall show the pile location, tip elevation, dates of excavation and concrete placement, total quantity of concrete deposited, length and tip elevation of any casing, and details of any hole stabilization method and materials used. The log shall include a 215 mm x 280 mm sized graph of the concrete placed versus depth of hole filled. The graph shall be plotted continuously throughout placing of concrete. The depth of drilled hole filled shall be plotted vertically with the pile tip oriented at the bottom and the quantity of concrete shall be plotted horizontally. Readings shall be made at least at each 1.5 m of pile depth, and the time of the reading shall be indicated. The graph shall be labeled with the pile location, tip elevation, cutoff elevation, and the dates of excavation and concrete placement. The log shall be delivered to the Engineer within one working day of completion of placing concrete in the pile.

After placing reinforcement and prior to placing concrete in the drilled hole, if drill cuttings settle out of the slurry, the bottom of the drilled hole shall be cleaned. The Contractor shall verify that the bottom of the drilled hole is clean.

If temporary casing is used, concrete placed under slurry shall be maintained at a level at least 1.5 m above the bottom of the casing. The withdrawal of casings shall not cause contamination of the concrete with slurry.

Material resulting from using slurry shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Acceptance Testing and Mitigation

Vertical inspection pipes for acceptance testing shall be provided in all cast-in-drilled-hole concrete piles that are 600 mm in diameter or larger, except when the holes are dry or when the holes are dewatered without the use of temporary casing to control ground water.

Inspection pipes shall be Schedule 40 polyvinyl chloride pipes with a nominal inside diameter of 50 mm. Each inspection pipe shall be capped top and bottom and shall have watertight couplers to provide a clean, dry and unobstructed 50-mm diameter clear opening from 1.0 m above the pile cutoff down to the bottom of the reinforcing cage.

Inspection pipes shall be placed around the pile, inside the outermost spiral or hoop reinforcement, and 75 mm clear of the vertical reinforcement, at a uniform spacing not exceeding 840 mm measured along the circle passing through the centers of inspection pipes. A minimum of 2 inspection pipes per pile shall be used. When the vertical reinforcement is not bundled and each bar is not more than 26 mm in diameter, inspection pipes may be placed 50 mm clear of the vertical reinforcement. The inspection pipes shall be placed to provide the maximum diameter circle that passes through the centers of the inspection pipes while maintaining the clear spacing required herein. The pipes shall be installed in straight alignment, parallel to the main reinforcement, and securely fastened in place to prevent misalignment during installation of the reinforcement and placing of concrete in the hole.

The Contractor shall log the location of the inspection pipe couplers with respect to the plane of pile cut off, and these logs shall be delivered to the Engineer upon completion of the placement of concrete in the drilled hole.

After placing concrete and before requesting acceptance tests, each inspection pipe shall be tested by the Contractor in the presence of the Engineer by passing a 48.3-mm diameter rigid cylinder 610 mm long through the complete length of pipe. If the 48.3-mm diameter rigid cylinder fails to pass any of the inspection pipes, the Contractor shall attempt to pass a 32.0-mm diameter rigid cylinder 1.375 m long through the complete length of those pipes in the presence of the Engineer. If an inspection pipe fails to pass the 32.0-mm diameter cylinder, the Contractor shall immediately fill all inspection pipes in the pile with water.

The Contractor shall replace each inspection pipe that does not pass the 32.0-mm diameter cylinder with a 50.8-mm diameter hole cored through the concrete for the entire length of the pile. Cored holes shall be located as close as possible to the inspection pipes they are replacing and shall be no more than 150 mm inside the reinforcement. Coring shall not damage the pile reinforcement. Cored holes shall be made with a double wall core barrel system utilizing a split tube type inner barrel. Coring with a solid type inner barrel will not be allowed. Coring methods and equipment shall provide intact cores for the entire length of the pile concrete. The coring operation shall be logged by an Engineering Geologist or Civil Engineer licensed in the State of California and experienced in core logging. Coring logs shall include complete descriptions of inclusions and voids encountered during coring, and shall be delivered to the Engineer upon completion. Concrete cores shall be preserved, identified with the exact location the core was recovered from within the pile, and made available for inspection by the Engineer.

Acceptance tests of the concrete will be made by the Engineer, without cost to the Contractor. Acceptance tests will evaluate the homogeneity of the placed concrete. Tests will include gamma-gamma logging. Tests may also include crosshole sonic logging and other means of inspection selected by the Engineer. The Contractor shall not conduct operations within 8.0 m of the gamma-gamma logging operations. The Contractor shall separate reinforcing steel as necessary to allow the Engineer access to the inspection pipes to perform gamma-gamma logging or other acceptance testing. After requesting acceptance tests and providing access to the piling, the Contractor shall allow 3 weeks for the Engineer to conduct these tests and make determination of acceptance if the 48.3-mm diameter cylinder passed all inspection pipes, and 4 weeks if only the 32.0-mm diameter cylinder passed all inspection pipes. Should the Engineer fail to complete these tests within the time allowance, and if in the opinion of the Engineer, the Contractor's controlling operation is delayed or interfered with by reason of the delay in inspection, the delay will be considered a right of way delay as specified in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

All inspection pipes and cored holes in a pile shall be dewatered and filled with grout after notification by the Engineer that the pile is acceptable. Placement and removal of water in the inspection pipes shall be at the Contractor’s expense. Grout shall conform to the provisions in Section 50-1.09, "Bonding and Grouting," of the Standard Specifications. The inspection pipes and holes shall be filled using grout tubes that extend to the bottom of the pipe or hole or into the grout already placed.

If acceptance testing performed by the Engineer determines that a pile does not meet the requirements of the specifications, then that pile will be rejected and all depositing of concrete under slurry or concrete placed using temporary casing for the purpose of controlling groundwater shall be suspended until written changes to the methods of pile construction are approved in writing by the Engineer.

The Contractor shall submit to the Engineer for approval a mitigation plan for repair, supplementation, or replacement for each rejected cast-in-drilled-hole concrete pile, and this plan shall conform to the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. Prior to submitting this mitigation plan, the Engineer will hold a repair feasibility meeting with the Contractor to discuss the feasibility of repairing rejected piling. The Engineer will consider the

size of the defect, the location of the defect, and the design information and corrosion protection considerations for the pile. This information will be made available to the Contractor, if appropriate, for the development of the mitigation plan. If the Engineer determines that it is not feasible to repair the rejected pile, the Contractor shall not include repair as a means of mitigation and shall proceed with the submittal of a mitigation plan for replacement or supplementation of the rejected pile.

If the Engineer determines that a rejected pile does not require mitigation due to structural, geotechnical, or corrosion concerns, the Contractor may elect to 1) repair the pile per the approved mitigation plan, or 2) not repair anomalies found during acceptance testing of that pile. For such unrepaired piles, the Contractor shall pay to the State, $400 per cubic meter for the portion of the pile affected by the anomalies. The volume, in cubic meters, of the portion of the pile affected by the anomalies, shall be calculated as the area of the cross-section of the pile affected by each anomaly, in square meters, as determined by the Engineer, multiplied by the distance, in meters, from the top of each anomaly to the specified tip of the pile. If the volume calculated for one anomaly overlaps the volume calculated for additional anomalies within the pile, the calculated volume for the overlap shall only be counted once. In no case shall the amount of the payment to the State for any such pile be less than $400. The Department may deduct the amount from any moneys due, or that may become due the Contractor under the contract.

Pile mitigation plans shall include the following:

A. The designation and location of the pile addressed by the mitigation plan.
B. A review of the structural, geotechnical, and corrosion design requirements of the rejected pile.
C. A step by step description of the mitigation work to be performed, including drawings if necessary.
D. An assessment of how the proposed mitigation work will address the structural, geotechnical, and corrosion design requirements of the rejected pile.
E. Methods for preservation or restoration of existing earthen materials.
F. A list of affected facilities, if any, with methods and equipment for protection of these facilities during mitigation.
G. The State assigned contract number, bridge number, full name of the structure as shown on the contract plans, District-County-Route-Kilometer Post, and the Contractor's (and Subcontractor's if applicable) name on each sheet.
H. A list of materials, with quantity estimates, and personnel, with qualifications, to be used to perform the mitigation work.
I. The seal and signature of an engineer who is licensed as a Civil Engineer by the State of California.

For rejected piles to be repaired, the Contractor shall submit a pile mitigation plan that contains the following additional information:

A. An assessment of the nature and size of the anomalies in the rejected pile.
B. Provisions for access for additional pile testing if required by the Engineer.

For rejected piles to be replaced or supplemented, the Contractor shall submit a pile mitigation plan that contains the following additional information:

A. The proposed location and size of additional piling.
B. Structural details and calculations for any modification to the structure to accommodate the replacement or supplemental piling.

All provisions for cast-in-drilled-hole concrete piling shall apply to replacement piling.

The Contractor shall allow the Engineer 3 weeks to review the mitigation plan after a complete submittal has been received.

Should the Engineer fail to review the complete pile mitigation submittal within the time specified, and if, in the opinion of the Engineer, the Contractor's controlling operation is delayed or interfered with by reason of the delay in reviewing the pile mitigation plan, an extension of time commensurate with the delay in completion of the work thus caused will be granted in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

When repairs are performed, the Contractor shall submit a mitigation report to the Engineer within 10 days of completion of the repair. This report shall state exactly what repair work was performed and quantify the success of the repairs relative to the submitted mitigation plan. The mitigation report shall be stamped and signed by an engineer that is licensed as a Civil Engineer by the State of California. The mitigation report shall show the State assigned contract number, bridge number, full name of the structure as shown on the contract plans, District-County-Route-Kilometer Post, and the Contractor (and Subcontractor if applicable) name on each sheet. The Engineer will be the sole judge as to whether a mitigation proposal is acceptable, the mitigation efforts are successful, and to whether additional repairs, removal and replacement, or construction of a supplemental foundation is required.

STEEL SOLDIER PILING

This work shall consist of furnishing and installing steel piling and steel plates; cleaning and preparing portions of the pile for splicing; splicing steel piles; securing the piling prior to and during concrete encasement; shaping the tops of the piles; cleaning and preparing portions of the pile for welding steel plates to the piles, and furnishing, cleaning and welding concrete anchors to piling in accordance with the details shown on the plans, and these special provisions.

Construction

Steel soldier piles shall be placed in a drilled hole and shall be plumbed and aligned before placing concrete backfill and lean concrete backfill. Alignment shall be maintained while placing backfill material in the drilled holes.

Cleaning and preparing the pile shall be performed in heat affected areas before splicing steel piles.

Hair pins shall conform to the provisions for bar reinforcement in "Reinforcement" of these special provisions.

MEASUREMENT AND PAYMENT (PILING)

Measurement and payment for the various types and classes of piles shall conform to the provisions in Sections 49-6.01, "Measurement," and 49-6.02, "Payment," of the Standard Specifications and these special provisions.

Full compensation for slurry, depositing concrete under slurry, test batches, inspection pipes, filling inspection holes and pipes with grout, drilling oversized cast-in-drilled-hole concrete piling, filling cave-ins and oversized piles with concrete, and redrilling through concrete, shall be considered as included in the contract prices paid per meter for cast-in-drilled-hole concrete piling of the types and sizes listed in the Engineer's Estimate, and no additional compensation will be allowed therefor.

Full compensation for piling, including slurry, depositing concrete under slurry, test batches, inspection pipes, filling inspection holes and pipes with grout, drilling oversized cast-in-drilled-hole concrete piling, filling cave-ins and oversized piles with concrete, and redrilling through concrete, shall be considered as included in the contract lump sum prices paid for signal and lighting at various locations and no separate payment will be made therefor.

The contract price paid per meter for furnish steel pile at Retaining Wall #1and #2 of the type shown in the Engineer's Estimate shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing and installing the steel piles at the site to the required penetration, including securing the piling to maintain accurate alignment prior to and during encasing the pile with concrete, shaping pile tops, cutting holes for pile anchors, cleaning and preparing heat affected areas of piles for splicing and welding concrete anchors to the piles, splicing steel piles, furnishing pile anchors, and furnishing, cleaning, and welding concrete anchors to the piles as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.65 DRILLED HOLES

Holes for steel soldier piles shall be drilled into natural foundation materials at the location shown on the plans and shall conform to the provisions in Section 49, "Piling," of the Standard Specifications and these special provisions.

Drilled holes shall be accurately located and shall be straight and true. When the piles are plumbed and aligned, the steel piles shall be at least 25 mm clear of the sides of the hole for the full length of the hole to be filled with concrete backfill and lean concrete backfill. Holes which do not provide the clearance around steel piles shall be reamed or enlarged at the Contractor's expense.

Temporary casings or tremie seals shall be furnished and placed where necessary to control water or to prevent caving of the hole.

Difficult drilling is anticipated due to the presence of soft bay mud overlying dense soils, caving soils, hazardous and contaminated materials, tidal flow fluctuation, high ground water, cobbles and boulders, subsurface concrete debris, low overhead clearance, underground utilities, overhead utilities, the requirements of pile embedment into rock, sound control, vibration monitoring and traffic control.

Attention is directed to rock subsurface foundation material at the soldier pile retaining wall site. Conventional drilling equipment for drilling in soils may not be suitable for drilling piling for the soldier pile retaining wall.

Loose materials existing at the bottom of the hole after drilling operations have been completed shall be removed before placing the pile.

Materials resulting from drilling holes shall be disposed of in conformance with the provisions in Section 19-2.06, "Surplus Material," of the Standard Specifications.

Drilling mud or chemical stabilizers shall not be used. Surface water shall not be permitted to enter the hole and all water in the hole shall be removed before placing concrete therein.

Casing, if used in drilling operations, shall be removed from the hole as concrete is placed therein. The bottom of the casing shall be maintained not more than 1500 mm nor less than 300 mm below the top of the concrete during casing withdrawal and concrete placing operations. Separation of the concrete during withdrawal operations shall be avoided by

hammering or otherwise vibrating the casing. The methods used to withdraw temporary casings shall preclude contamination of the concrete and commingling of the soil and concrete or of any ground water and concrete.

If piles with larger diagonal dimensions are substituted for the piles shown on the plans, the Contractor shall, at his expense, ream or enlarge the drilled hole to provide a hole diameter at least 100 mm larger than the diagonal dimension of the pile.

The contract price paid per meter for drilled hole of the diameter shown on the plans shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in drilling holes for soldier piles, including disposing of the material resulting from drilled holes, dewatering, casing holes and removing casing, and providing tremie seals, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.66 PRESTRESSING CONCRETE

Prestressing concrete shall conform to the provisions in Section 50, "Prestressing Concrete," of the Standard Specifications and these special provisions.

The number of working drawings to be submitted for initial review shall be 6 sets for other structures.

The details shown on the plans for cast-in-place prestressed box girder bridges are based on a bonded full length draped tendon prestressing system. For these bridges the Contractor may, in conformance with the provisions in Section 5-1.14, "Cost Reduction Incentive," of the Standard Specifications, propose an alternative prestressing system utilizing bonded partial length tendons provided the proposed system and associated details meet the following requirements:

A. The proposed system and details shall provide moment and shear resistances at least equal to those used for the design of the structure shown on the plans.
B. The concrete strength shall not be less than that shown on the plans.
C. Not less than 35 percent of the total prestressing force at any section shall be provided by full length draped tendons.
D. Anchorage blocks for partial length tendons shall be located so that the blocks will not interfere with the placement of the utility facilities shown on the plans or of any future utilities to be placed through openings shown on the plans.
E. Temporary prestressing tendons, if used, shall be detensioned, and the temporary ducts shall be filled with grout before completion of the work. Temporary tendons shall be either removed or fully encased in grout before completion of the work.
F. All details of the proposed system, including supporting checked calculations, shall be included in the drawings submitted in conformance with the provisions in Section 50-1.02, "Drawings," of the Standard Specifications.

Moments and shears for loads used in the design shown on the plans will be made available to the Contractor upon written request to the Engineer.

10-1.67 TIEBACK ANCHORS

Anchors at retaining wall, consisting of holes drilled in foundation material, grouted steel bars or strands, and anchorage assemblies, and testing of installed anchors shall conform to the details shown on the plans, the provisions in Section 50, "Prestressing Concrete," of the Standard Specifications, and these special provisions.

Difficult tieback installation is anticipated due to the presence of temporary retaining wall B.

The Contractor shall determine the bond length necessary to meet acceptance criteria specified herein.

The submittal of reduced prints of corrected original tracings will not be required for tieback anchor installations.

In fabricating, handling, shipping, and placing tieback anchors, adequate care shall be taken to avoid damage to the sheathing. Damage to the sheathing caused by handling and fabrication prior to tieback anchor installation shall be repaired or replaced as determined by the Engineer. Repair procedure for the sheathing shall be included in the working drawings.

MATERIALS

Whenever "member" is referred to in Section 50, "Prestressing Concrete," of the Standard Specifications, it shall be considered to mean tieback anchor.

Structural steel for the tieback retaining wall shall conform to the provisions in Section 55, "Steel Structures," of the Standard Specifications and these special provisions. Structural steel shall consist of the anchorage assembly and the anchorage enclosure. The anchorage assembly and the anchorage enclosure shall be galvanized as indicated on the plans. The provisions of "Welding Quality Control" of these special provisions shall not apply to the anchorage enclosure or to the weld between the steel tube and the bearing plate of the anchorage assembly for tiebacks. Those provisions shall apply to all other welds of structural steel for tieback retaining walls.

Cleaning and painting structural steel for tieback retaining walls shall conform to the provisions in "Clean and Paint Steel Soldier Piling" of these special provisions.

The permanent bearing plate of the tieback anchor shall effectively distribute the design force (T) to the steel bearing surface, such that the bending stress does not exceed 0.55 f_y for steel nor 0.36 f_y for cast steel or cast iron.

Grout shall conform to the provisions in Section 50-1.09, "Bonding and Grouting," of the Standard Specifications. Fine aggregate may be added to the grout mixture of portland cement and water used outside of the grouted sheathing in drilled holes which are 200 mm or greater in diameter, but only to the extent that the cement content of the grout is not less than 500 kg per cubic meter of grout. Fine aggregate, if used, shall conform to the provisions in Section 90-2, "Materials," and Section 90-3, "Aggregate Gradings," of the Standard Specifications.

The plastic sheathing for tieback anchors shall conform to one of the following: polyvinyl chloride (PVC) sheathing, high density polyethylene (HDPE) sheathing, or polypropylene sheathing.

Corrugated plastic sheathing shall be PVC or HDPE. The width of corrugations, the distance between corrugations, and the height of corrugations of corrugated plastic sheathing shall be approximately the same.

PVC sheathing may be used for corrugated sheathing and smooth sheathing for bar tendons. PVC sheathing shall conform to ASTM Designation: D 1784, Class 13464-B. Corrugated PVC sheathing shall have a nominal wall thickness of 1.0 mm. HDPE sheathing may be used for corrugated sheathing and smooth sheathing for bar tendons. HDPE sheathing shall have a density between 940 kg/m^3 and 960 kg/m^3 as measured in accordance with ASTM Designation: D 792, A-2. Corrugated HDPE sheathing shall have a nominal wall thickness of 1.5 mm for sheathing with an outside diameter of 75 mm or greater, and a nominal thickness of 1.0 mm for sheathing with an outside diameter less than 75 mm, with a tolerance of minus 0.25-mm.

HDPE sheathing may be used for the smooth sheathing encapsulating individual strands of strand type tendons. Smooth HDPE sheathing for encapsulating strands shall have a minimum wall thickness of 1.0 mm. Polypropylene sheathing may be used for the smooth plastic sheathing encapsulating individual strands of strand type tendons. Polypropylene sheathing shall have a density between 900 kg/m^3 and 910 kg/m^3. Smooth polypropylene sheathing shall have a minimum wall thickness of 1.0 mm.

The smooth sheathing for the unbonded length of the individual strands shall have sufficient strength to prevent damage during construction operations and shall be watertight, chemically stable without embrittlement or softening, and nonreactive with concrete, steel, or corrosion inhibiting grease. Smooth plastic sheathing, including joints, shall be watertight.

The corrugated sheathing, including joints, shall have sufficient strength to prevent damage during construction operations and shall be grout-tight and watertight, chemically stable without embrittlement or softening, and nonreactive with concrete, steel, or corrosion inhibiting grease.

The transition between the corrugated plastic sheathing and the anchorage assembly shall be an approved detail that allows stressing to the design force without evidence of distress in the corrugated plastic sheathing.

Additional requirements for tiebacks with strand type tendons are as follows:

A. The strand anchorage assembly shall include an approved permanent type wedge retaining device. Where high strength bolts are a part of the device, the tensile capacity of the high strength bolts shall be 0.3 times the ultimate strength of the strands.
B. The individual strands of a tendon, except for the bonded length, shall be fully coated with corrosion inhibiting grease and then encapsulated by a smooth HDPE or polypropylene sheath. The corrosion inhibiting grease shall fill all space between strand wires and shall encapsulate the strand giving an encasement diameter at least 0.12-mm greater than the diameter of the bare strand. The sheath shall be hot melt extruded onto the strand or shall be shop applied by an approved method that assures that all spaces between the sheath and the strand and between the strand wires are filled with corrosion inhibiting grease.
C. The corrosion inhibiting grease shall provide a continuous nonbrittle film of corrosion protection to the prestressing steel and lubrication between the strand and the sheathing, shall resist flow from the sheathing, shall be chemically stable and nonreactive with the prestressing steel, sheathing material, and concrete, and shall be organic with appropriate polar, moisture displacing, and corrosion inhibiting additives.
D. The corrosion inhibiting grease shall have the physical properties listed in Table 3.2.1 of the Post Tensioning Manual, Fourth Edition, by the Post Tensioning Institute and as modified below. At least 40 days before use, a sample from the lot to be used and test results shall be provided for the corrosion inhibiting grease.

Test	Requirements	ASTM Designation:
Water Soluble Ions: Nitrates	10 ppm max.	D 3867
Corrosion Test: 5% Salt Fog @ 38° C. 125 µm coating on 76 mm x 152 mm Q panel Type S, 1000 hrs min.	Grade 7 or better	B 117, D 610
Compatibility with sheathing: Hardness change & volume change of polymer after exposure to grease 40 days at 66° C.	15% max. 10% max.	D 4289, except use D 792 for density

E. A Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications, shall be furnished to the Engineer certifying that the corrosion inhibiting grease complies with the requirements herein if sample and test results are not provided for the lot used.

CONSTRUCTION

Tieback anchors shall be installed in accordance with the manufacturer's recommendations. In case of a conflict between the manufacturer's recommendations and these special provisions, these special provisions shall prevail.

Water and grout from tieback anchor construction operations shall not be permitted to fall on public traffic, to flow across shoulders or lanes occupied by public traffic, or to flow into landscaping, gutters, or other drainage facilities. Excessive amounts of water shall not be used in any of the drilling and the tieback anchor installation procedures.

Tieback anchor steel shall be protected prior to completion of all grouting against rust, corrosion and physical damage in conformance with the provisions in Section 50, "Prestressing Concrete," of the Standard Specifications. In addition, there shall be no evidence of distress in the plastic sheathing or crushing of the cement grout within the pregrouted sheathing.

The tieback anchorage assembly shall be protected against rust, corrosion, and physical damage prior to completion of all grouting of enclosure or encasement in concrete.

The tieback anchor installation method selected by the Contractor shall be sufficient to achieve the loadings specified herein. Holes for tieback anchors shall be drilled in the foundation to a depth sufficient to provide the necessary bond length beyond the minimum unbonded length shown on the plans.

Tieback anchorage holes shall be drilled by either the rotary or rotary percussion drilling method.

The diameter of the drilled hole shall be large enough to provide a minimum of 25 mm grout cover within the bonded length of the tendon. Centralizers shall be used within the bonded length of the tendon.

Pregrouting shall occur at least 48 hours before placing the tendon in the drilled hole.

Prior to installing each anchor assembly into the drilled hole, the anchor assembly shall be clean and free of oil, grease, or other extraneous substances, and any damage to the sheathing shall be repaired or replaced.

Grout for all stages of tieback construction shall be injected at the low end of the void being filled and shall be expelled at the high end until there is no evidence of entrapped air, water, or diluted grout. The grout shall be placed using grout tubes, unless another method is approved by the Engineer. The quantity of the grout and the grout pressures shall be recorded.

After placing initial grout, the anchor shall remain undisturbed until the grout has reached a strength sufficient to provide anchorage during testing operations.

Additional requirements for tiebacks with strand type tendons are as follows:

A. The Contractor shall have the option of using Alternative A or Alternative B as shown on the plans for tieback tendons.
B. For Alternative A and Alternative B, strand tendons shall be sheathed with corrugated sheathing. The individual strands within the bonded length shall be separated by spaces so that the entire surface of each strand is bonded in the grout. The maximum spacing of strand spacers shall be 1.50 m. The strand spacers shall be plastic and of a construction and strength that will provide support for the individual strands during construction operations.
C. For Alternative A, the bonded length of the tendon shall be sheathed with corrugated sheathing and pregrouted full length of the corrugated sheathing before placing the tendon in the hole. The corrugated sheathing shall lap the

smooth sheathing on the strands 600 mm. For this alternative, the initial grout in the drilled hole may be placed before or after insertion of the strand tendon.

D. For Alternative B, the tendon shall be sheathed full length with corrugated sheathing and pregrouted a minimum length of 600 mm before placing the tendon in the hole. After placing the tendon into the drilled hole and before placing initial grout in the drilled hole, the grout shall be injected at the low end of the corrugated sheathing and the grout shall be expelled at the high end until there is no evidence of entrapped air, water, or diluted grout.

E. For Alternative A and Alternative B, anchors in holes of 150 mm diameter and smaller shall be initially grouted to within 150 mm of the end of the steel tube. Grout in the unbonded length shall not be placed under pressure. After placing the initial grout, the anchor shall remain undisturbed until the grout has reached a strength sufficient to provide anchorage during testing operations.

F. For Alternative A and Alternative B, anchors in holes of greater than 150 mm diameter shall be initially grouted within the bond length. After placing the initial grout, the anchor shall remain undisturbed until the grout has reached a strength sufficient to provide anchorage during testing operations.

Testing

All tiebacks shall be load tested by either a performance test or a proof test. Load testing shall be performed against a temporary waler which bears against existing soil or walers soldier piles or against the permanent concrete waler. The permanent waler shall either attain a compressive strength of 22 MPa or cure for 7 days before loading. Bearing pads shall be kept a minimum of 300 mm away from the edges of the drilled hole. Temporary yokes walers shall remain the property of the Contractor. The magnitude of applied test loads shall be determined with a calibrated pressure gauge or a load cell. Movements of the end of the tieback, relative to an independent fixed reference point, shall be measured and recorded to the nearest 0.025 mm at each load increment during the load tests. The Contractor shall perform the measuring and recording and shall furnish the Engineer copies of the recorded movements.

A minimum of 5 tiebacks shall be performance tested. The Engineer shall determine the location of the tiebacks to be performance tested.

The performance test or proof test shall be conducted by measuring the test load applied to the tieback and the tieback end movement during incremental loading and unloading of the anchor in accordance with the loading schedule. The test load shall be held constant for 10 minutes. During the test load hold, the movement of the end of the tendon shall be measured at 1, 2, 3, 4, 5, 6, and 10 minutes. If the total movement between one minute and 10 minutes exceeds one mm, the test load shall be held for an additional 50 minutes. Total movement shall be measured at 15, 20, 25, 30, 45, and 60 minutes. If the test load is held for 60 minutes, a creep curve showing the creep movement between one minute and 60 minutes shall be plotted as a function of the logarithm of time.

LOADING SCHEDULES		
PERFORMANCE TEST		PROOF TEST
	(CONT'D)	
AL	AL	AL
0.25T	0.25T	0.25T
AL	0.50T	0.50T
0.25T	0.75T	0.75T
0.50T	1.00T	1.00T
AL	1.25T	1.25T
0.25T	AL	1.50T (TEST LOAD)
0.50T	0.25T	AL
0.75T	0.50T	
AL	0.75T	
0.25T	1.00T	
0.50T	1.25T	
0.75T	1.50T (TEST LOAD)	
1.00T (CONT'D)	AL	
T = Design force for the anchor shown on the plans		
AL = Alignment load		

For performance and proof tests, each increment of load shall be applied in less than one minute and held for at least one minute but not more than 2 minutes or as specified above. The observation period for the load hold shall start when the pump begins to apply the last increment of load.

The jacking equipment, including the tendon movement measuring system, shall be stable during all phases of the tieback loading operations.

All tiebacks not performance tested shall be proof tested. If 1.5 times the design force cannot be obtained, the tieback shall be redesigned and replaced. Tieback anchors shall not be retested, unless the tieback bond length is post-grouted after the unacceptable test.

A performance tested tieback is acceptable if:

A. The measured elastic movement exceeds 0.80 of the theoretical elongation of the unbonded length plus the jacking length at the maximum test load; and
B. The creep movement between one and 10 minutes is less than 1.0 mm.

A proof tested tieback is acceptable if:

A. The pattern of movements is similar to that of adjacent performance tested tiebacks; and
B. The creep movement between one and 10 minutes is less than 1.0 mm.

Performance tested or proof tested tiebacks which fail to meet acceptance criterion B will be acceptable if the maximum load is held for 60 minutes and the creep curve plotted from the movement data indicates a creep rate of less than 2.0 mm for the last log cycle of time.

Lock-off

After successful testing of the tiebacks, the tiebacks shall be tensioned against the structure and locked off at a load equal to 1.00 T. The lock-off force is the load on the jacks which is maintained while the anchor head or anchor nuts on the tieback are permanently set. Immediately after lock-off, a lift-off test shall be performed to demonstrate that the specified lock-off force was obtained. Adjustments in the shim thickness shall be made if required to maintain the specified lock-off force.

For strand tendons, the permanent wedges shall be fully set in the anchor head while the tendon is stressed to the test load of 1.50 T, and then locked off at the lock-off force by removal of the shims or other appropriate means.

Grouting to the level of secondary grouting to the dimensions shown on the plans shall be completed only after successful testing and lock-off has been completed. At least 24 hours after the secondary grout has set, the remaining void in the steel tube and bearing plate shall be filled with grout. Grout shall be injected at the low end and expelled at the high end until there is no evidence of entrapped air or water. A minimum grout head of 600 mm shall be maintained until the grout has set.

The tieback anchor head or anchor nuts shall be enclosed with a grouted anchorage enclosure device. After grouting the steel tube, the bearing plate surface shall be cleaned, sealant placed, and the anchorage enclosure bolted in place. After bolting the anchorage enclosure in place the void in the anchorage enclosure shall be filled with grout by injecting grout at the low end of the void and venting at the high end. Any holes in the top of the anchorage enclosure used for grout placement shall be cleaned and sealed with sealant. Sealant shall be a non-sag polysulfide or polyurethane sealing compound conforming to the provisions in Federal Specification TT-S-230, Type II.

MEASUREMENT AND PAYMENT

No payment will be made for tiebacks which do not pass the specified testing requirements.

Tieback anchors will be measured and paid for by the unit, and the number for payment will be determined by the requirements of the details shown on the plans. No change in the number of tieback anchors to be paid for will be made because of the use by the Contractor of an alternative number of tiebacks.

The contract unit price paid for tieback anchor shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the tieback anchors, including special measures taken to contain grout in the drilled hole, testing, and furnishing and installing anchorage assemblies, complete in place, including repair or replacement of sheathing as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.68 CONCRETE STRUCTURES

Portland cement concrete structures shall conform to the provisions in Section 51, "Concrete Structures," of the Standard Specifications and these special provisions.

Attention is directed to "Precast Concrete Quality Control" of these special provisions.

Shotcrete shall not be used as an alternative construction method for reinforced concrete members unless otherwise specified.

Neoprene strip shall be furnished and installed at abutment backwall joint protection Peninsula Avenue Overcrossing and Broadway Avenue POC in conformance with the details shown on the plans, the provisions in the Standard Specifications, and these special provisions.

Furnishing and installing neoprene strip shall conform to the requirements for strip waterstops as provided in Section 51-1.145, "Strip Waterstops," of the Standard Specifications, except that the protective board will not be required.

Forms used to support the deck of cast-in-place box girders or to form the voids of precast members for the following structures may remain in place, provided the portions of the forms which obstruct access openings or conflict with utility facilities are removed, the forming system employed leaves no sharp projections into the cells or voids, and forms between hinges and 1.5 m beyond access openings adjacent to hinges are removed:

Broadway Avenue POC

Vertical, horizontal, radial, or normal dimensions shown on the Typical Section in the plans are for zero percent cross-slope. At the Contractor's option, the Typical Section of superelevated concrete box girder structures with 1) sloping exterior girders, 2) a straight uninterrupted cross slope between edges of deck, and 3) a single profile grade line, may be rotated around the profile grade line in superelevation areas. The horizontal distances between the profile grade line and the edges of deck shall remain unchanged. The planned girder widths and slab thicknesses shall remain unchanged and the interior girder stems shall remain vertical at the planned locations.

FALSEWORK

Falsework shall conform to the provisions in Section 51, "Concrete Structures," of the Standard Specifications and these special provisions.

Temporary crash cushion modules, as shown on the plans and conforming to the provisions in "Temporary Crash Cushion Module" of these special provisions, shall be installed at the approach end of temporary railings which are located less than 4.6 m from the edge of a traffic lane. For 2-way traffic openings, temporary crash cushion modules shall be installed at the departing end of temporary railings which are located less than 1.8 m from the edge of a traffic lane.

Welding and Nondestructive Testing

Welding of steel members, except for previously welded splices and except for when fillet welds are used where load demands are less than or equal to 175 N/mm for each 3 mm of fillet weld, shall conform to AWS D1.1 or other recognized welding standard. The welding standard to be utilized shall be specified by the Contractor on the working drawings. Previously welded splices for falsework members are defined as splices made prior to the member being shipped to the project site.

Splices made by field welding of steel beams at the project site shall undergo nondestructive testing (NDT). At the option of the Contractor, either ultrasonic testing (UT) or radiographic testing (RT) shall be used as the method of NDT for each field weld and any repair made to a previously welded splice in a steel beam. Testing shall be performed at locations selected by the Contractor. The length of a splice weld where NDT is to be performed, shall be a cumulative weld length equal to 25 percent of the original splice weld length. The cover pass shall be ground smooth at the locations to be tested. The acceptance criteria shall conform to the requirements of AWS D1.1, Section 6, for cyclically loaded nontubular connections subject to tensile stress. If repairs are required in a portion of the weld, additional NDT shall be performed on the repaired sections. The NDT method chosen shall be used for an entire splice evaluation including any required repairs.

For all field welded splices, the Contractor shall furnish to the Engineer a letter of certification which certifies that all welding and NDT, including visual inspection, are in conformance with the specifications and the welding standard shown on the approved working drawings. This letter of certification shall be signed by an engineer who is registered as a Civil Engineer in the State of California and shall be provided prior to placing any concrete for which the falsework is being erected to support.

For previously welded splices, the Contractor shall determine and perform all necessary testing and inspection required to certify the ability of the falsework members to sustain the stresses required by the falsework design. This welding certification shall be in writing, shall be signed by an engineer who is registered as a Civil Engineer in the State of California, and shall be provided prior to placing any concrete for which the falsework is being erected to support.

The Contractor's engineer who signs the falsework drawings shall also certify in writing that the falsework is constructed in conformance with the approved drawings and the contract specifications prior to placing concrete. This certification shall include performing any testing necessary to verify the ability of the falsework members to sustain the stresses required by the falsework design. The engineer who signs the drawings may designate a representative to perform this certification. Where falsework contains openings for railroads, vehicular traffic, or pedestrians, the designated representative shall be qualified to perform this work, shall have at least three years of combined experience in falsework design or supervising falsework construction, and shall be registered as a Civil Engineer in the State of California. For other falsework, the designated representative shall be qualified to perform this work and shall have at least three years of combined experience in falsework

design or supervising falsework construction. The Contractor shall certify the experience of the designated representative in writing and provide supporting documentation demonstrating the required experience if requested by the Engineer.

COST REDUCTION INCENTIVE PROPOSALS FOR CAST-IN-PLACE PRESTRESSED BOX GIRDER BRIDGES

Except as provided herein, cast-in-place prestressed box girder bridges shall be constructed in conformance with the details shown on the plans and the provisions in Section 50, "Prestressing Concrete," and Section 51, "Concrete Structures," of the Standard Specifications.

If the Contractor submits cost reduction incentive proposals for cast-in-place prestressed box girder bridges, the proposals shall be in conformance with the provisions in Section 5-1.14, "Cost Reduction Incentive," of the Standard Specifications and these special provisions.

The Engineer may reject any proposal which, in the Engineer's judgment, may not produce a structure which is at least equivalent to the planned structure.

At the time the cost reduction incentive proposal (CRIP) is submitted to the Engineer, the Contractor shall also submit 4 sets of the proposed revisions to the contract plans, design calculations, and calculations from an independent checker for all changes involved in the proposal, including revisions in camber, predicted deck profile at each construction stage, and falsework requirements to the Office of Structure Design, Documents Unit, P.O. Box 942874, Sacramento, CA 94274-0001 (1801 30th Street, Sacramento, CA 95816), telephone (916) 227-8230. When notified in writing by the Engineer, the Contractor shall submit 12 sets of the CRIP plan revisions and calculations to the Office of Structure Design for final approval and use during construction. The calculations shall verify that all requirements are satisfied. The CRIP plans and calculations shall be signed by an engineer who is registered as a Civil Engineer in the State of California.

The CRIP plans shall be either 279 mm x 432 mm {11 inch x 17 inch}, or 559 mm x 864 mm {22 inch x 34 inch} in size. Each CRIP plan sheet and calculation sheet shall include the State assigned designations for the contract number, bridge number, full name of the structure as shown on the contract plans, and District-County-Route-Kilometer Post {Post Mile}. Each CRIP plan sheet shall be numbered in the lower right hand corner and shall contain a blank space in the upper right hand corner for future contract sheet numbers.

Within 3 weeks after final approval of the CRIP plan sheets, one set of the corrected good quality prints on 75-g/m^2 {20 pound} (minimum) bond paper, 559 mm x 864 mm {22 inch x 34 inch} in size, of all CRIP plan sheets prepared by the Contractor for each CRIP shall be furnished to the Office of Structure Design, Documents Unit.

Each CRIP shall be submitted prior to completion of 25 percent of the contract working days and sufficiently in advance of the start of the work that is proposed to be revised by the CRIP to allow time for review by the Engineer and correction by the Contractor of the CRIP plans and calculations without delaying the work. The Contractor shall allow a minimum of 8 weeks for the review of a CRIP. In the event that several CRIPs are submitted simultaneously, or an additional CRIP is submitted for review before the review of a previously submitted CRIP has been completed, the Contractor shall designate the sequence in which the CRIPs are to be reviewed. In this event, the time to be provided for the review of any proposal in the sequence shall be not less than the review time specified herein for that proposal, plus 2 weeks for each CRIP of higher priority which is still under review.

Should the review not be complete by the date specified in the Contractor's CRIP, or such other date as the Engineer and Contractor may subsequently have agreed to in writing and if, in the opinion of the Engineer, the Contractor's controlling operation is delayed or interfered with by reason of the delay in review of CRIP plans and calculations, an extension of time commensurate with the delay in completion of the work thus caused will be granted as provided in Section 8-1.07, "Liquidated Damages," of the Standard Specifications except that the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications shall not apply.

Permits and approvals required of the State have been obtained for the structures shown on the plans. Proposals which result in a deviation in configuration may require new permits or approvals. The Contractor shall be responsible for obtaining the new permits and approvals before the Engineer will reach a decision on the proposal. Delays in obtaining permits and approvals will not be reason for granting an extension of contract time.

All proposed modifications shall be designed in conformance with the bridge design specifications and procedures currently employed by the Department. The proposal shall include all related, dependent or incidental changes to the structure and other work affected by the proposal. The proposal will be considered only when all aspects of the design changes are included for the entire structure. Changes, such as but not limited to, additional reinforcement and changes in location of reinforcement, necessary to implement the CRIP after approval by the Engineer, shall be made at the Contractor's expense.

Modifications may be proposed in (1) the thickness of girder stems and deck slabs, (2) the number of girders, (3) the deck overhang dimensions as specified herein, (4) the amount and location of reinforcing steel, (5) the amount and location of prestressing force in the superstructure, and (6) the number of hinges, except that the number of hinges shall not be increased. The strength of the concrete used may be increased but the strength employed for design or analysis shall not exceed 42 MPa {6,100 pounds per square inch}.

Modifications proposed to the minimum amount of prestressing force which must be provided by full length draped tendons are subject to the provisions in "Prestressing Concrete" of these special provisions.

No modifications will be permitted in (1) the foundation type, (2) the span lengths or (3) the exterior dimensions of columns or bridge superstructure. Fixed connections at the tops and bottoms of columns shown on the plans shall not be eliminated.

The Contractor shall be responsible for determining construction camber and obtaining the final profile grade as shown on the plans.

The Contractor shall reimburse the State for the actual cost of investigating CRIPs for cast-in-place prestressed box girder bridges submitted by the Contractor. The Department will deduct this cost from any moneys due, or that may become due the Contractor under the contract, regardless of whether or not the proposal is approved or rejected.

DECK CLOSURE POURS

Where a deck closure pour is shown on the plans, reinforcement protruding into the closure space and forms for the closure pour shall conform to the following:

A. During the time of placement of concrete in the deck, other than for the closure pour itself, reinforcing steel which protrudes into the closure space shall be completely free from any connection to the reinforcing steel, concrete, or other attachments of the adjacent structure, including forms. The reinforcing steel shall remain free of any connection for a period of not less than 24 hours following completion of the pour.
B. Forms for the closure pour shall be supported from the superstructure on both sides of the closure space.

SLIDING BEARINGS

Sliding bearings consisting of elastomeric bearing pads lubricated with grease and covered with sheet metal shall conform to the following requirements:

A. Grease shall conform to the requirements of Military Specification: MIL-S-8660. A uniform film of grease shall be applied to the upper surface of the pads prior to placing the sheet metal.
B. Sheet metal shall be commercial quality galvanized sheet steel. The sheet metal shall be smooth and free of kinks, bends, or burrs.
C. Construction methods and procedures shall prevent grout or concrete seepage into the sliding bearing assembly.

ELASTOMERIC BEARING PADS

Elastomeric bearing pads shall conform to the provisions in Section 51-1.12H, "Elastomeric Bearing Pads," of the Standard Specifications and these special provisions.

CURING

The formed surfaces which will be exposed in the completed work, of the columns, caps, bents, or abutments listed in the following table shall be cured by the forms-in-place method. Other surfaces of said units shall be cured in conformance with the provisions in Section 90-7.03, "Curing Structures," of the Standard Specifications.

Bridge Name & Number	Abutment Number	Pier or Bent Number
Peninsula Ave OC (Br. No. 35-0088)	1 & 6	2, 3, & 4
Broadway Ave POC (Br. No. 03427)	1 & 3	2 thru 12
Monte Diablo POC (Br. No. 35-0134)	1 & 3	2

DECK CRACK TREATMENT

The Contractor shall use all means necessary to minimize the development of shrinkage cracks.

The Contractor shall remove all equipment and materials from the deck and clean the surface as necessary for the Engineer to measure the surface crack intensity. Surface crack intensity will be determined by the Engineer after completion of concrete cure, before prestressing, and before the release of falsework. In any 50-m^2 portion of deck within the limits of the new concrete deck, should the intensity of cracking be such that there are more than 5 m of cracks whose width at any location exceeds 0.5-mm, the deck shall be treated with methacrylate resin. The area of deck to be treated shall have a width that extends for the entire width of new deck inside the concrete barriers and a length that extends at least 1.5 m beyond the

furthest single continuous crack outside the 50-m^2 portion, measured from where that crack exceeds 0.5-mm in width, as determined by the Engineer.

Deck crack treatment shall consist of test sealing, and furnishing and applying methacrylate resin in conformance with the requirements of these special provisions. If grinding operation is required, deck treatment shall take place before grinding.

Before the start of deck treatment work, the Contractor shall submit for approval by the Engineer, a program for public safety associated with the use of methacrylate resin. The program shall identify materials, equipment, and methods to be used. The Contractor shall not perform deck treatment work, other than that specifically authorized in writing by the Engineer, until the program has been approved.

If the measures being taken by the Contractor are inadequate to provide for public safety associated with use of methacrylate resin, the Engineer will direct the Contractor to revise the operations and the public safety program. Directions for revisions will be in writing and will specify the items in which the Contractor's program is inadequate. No further deck treatment shall be performed until public safety measures are adequate, and a revised program for public safety has been approved.

The Engineer will notify the Contractor of the approval or rejection of any submitted or revised program for public safety associated with the use of methacrylate resin within 10 working days of receipt of the final submitted program.

The State will not be liable to the Contractor for failure to approve all or any portion of an originally submitted or revised program for public safety associated with the use of methacrylate resin, nor for any delays to the work due to the Contractor's failure to submit an acceptable program for public safety associated with the use of methacrylate resin. If the Engineer does not review or approve the program submitted by the Contractor within the time specified and if, in the opinion of the Engineer, the Contractor's controlling operation is delayed or interfered with by reason of the delay in reviewing the program for public safety, the delay will be considered a right of way delay in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

The Contractor shall furnish an airborne emissions monitoring plan prepared by a certified industrial hygienist. Emissions will be monitored at a minimum of 4 points including the point of mixing, the point of application, and the point of nearest public contact, as determined by the Engineer. At the completion of work, a report by the certified industrial hygienist with results of the airborne emissions monitoring plan shall be furnished to the Engineer.

Materials

The material used for treating the deck shall be a low odor, high molecular weight methacrylate resin. Before adding initiator, the resin shall have a maximum volatile content of 30 percent when tested in conformance with the requirements in ASTM Designation: D 2369, and shall conform to the following:

PROPERTY	TEST METHOD	REQUIREMENT
Viscosity Pa·s, maximum, (Brookfield RVT with UL adaptor, 50 RPM at 25°C)	ASTM D 2196	0.025
Specific Gravity minimum, at 25°C	ASTM D 1475	0.90
Flash Point °C, minimum	ASTM D 3278	82
Vapor Pressure mm Hg, maximum, at 25°C	ASTM D 323	1.0
Tack-free time minutes, maximum at 25°C	California Test 551	400
PCC Saturated Surface-Dry Bond Strength MPa, minimum at 24 hours and 21±1°C	California Test 551	3.5
* Test shall be performed before adding initiator.		

A Material Safety Data Sheet shall be furnished before use for each shipment of high molecular weight methacrylate resin.

The promoter and initiator, if supplied separately from the resin, shall not be mixed directly with each other. Containers of promoters and initiators shall not be stored together in a manner that will allow leakage or spillage from one to contact the containers or material of the other.

Testing

The Contractor shall allow 14 days for sampling and testing by the Engineer of the high molecular weight methacrylate resin before proposed use.

The Contractor shall treat a test area within the project limits of approximately 50 m^2 at a location approved by the Engineer. Conditions during the test treatment shall be similar to those expected on the deck. Equipment used in the test shall be similar to those used for the deck treating operations. If the test area is on the traveled way, traffic shall not be allowed on the treated test area until (1) the treated surface is tack free (non-oily), (2) the sand cover adheres sufficiently to resist brushing by hand, and (3) the coefficient of friction of the deck is at least 0.35 when tested in conformance with the requirements in California Test 342.

Should the above requirements for traffic use not be met, the Contractor shall suspend treating of bridge decks until another test area is treated and complies with the requirements.

Construction

Before deck treatment with methacrylate resin, the bridge deck surface shall be cleaned by abrasive blasting and all loose material shall be blown from visible cracks using high-pressure air. Concrete curing seals shall be cleaned from the deck surface to be treated, and the deck shall be dry when blast cleaning is performed. If the deck surface becomes contaminated at any time before placing the penetrating sealer, the deck surface shall be cleaned by abrasive blasting.

Equipment shall be fitted with suitable traps, filters, drip pans, or other devices as necessary to prevent oil or other deleterious material from being deposited on the deck.

Where abrasive blasting is being performed within 3 m of a lane occupied by public traffic, the residue including dust shall be removed immediately after contact between the abrasive and the surface being treated. The removal shall be by a vacuum attachment operating concurrently with the abrasive blasting operation.

The relative humidity shall be less than 90 percent at time of treatment.

A compatible promoter/initiator system shall be capable of providing a resin gel time of not less than 40 minutes nor more than 1.5 hours at the temperature of application. Gel time shall be adjusted to compensate for the changes in temperature throughout treatment application.

The quantity of resin mixed with promoter and initiator shall be limited to 20 L at a time for manual application.

Machine application of the resin shall be performed by using a two-part resin system using a promoted resin for one part and an initiated resin for the other part. This two-part resin system shall be combined at equal volumes to the spray bars through separate positive displacement pumps. Combining of the 2 components shall be by either static in-line mixers or by external intersecting spray fans. The pump pressure at the spray bars shall not be great enough to cause appreciable atomization of the resin. Compressed air shall not be used to produce the spray. A shroud shall be used to enclose the spray bar apparatus. Hand held spray apparatus shall not be used.

The Contractor shall allow methacrylate resin to be applied only to the specified area. Barrier rails, joints, and drainage facilities shall be adequately protected to prevent contamination by the treatment material. Contaminated items shall be repaired at the Contractor's expense.

The prepared area shall be dry and the surface temperature shall be less than or equal to 38°C when the resin is applied. The rate of application of promoted/initiated resin shall be approximately 2.5 square meters per liter, ± 0.1 square meter per liter.

The deck surfaces to be treated shall be flooded with resin, allowing penetration into the concrete and filling of all cracks. The treatment shall be applied within 5 minutes after complete mixing. A significant increase in viscosity shall be cause for rejection. Excess material shall be redistributed by squeegees or brooms within 10 minutes after application.

After the resin has been applied, at least 20 minutes shall elapse before applying sand. The sand shall be commercial quality dry blast sand. Ninety-five percent of the sand shall pass the 2.36-mm sieve, and 95 percent shall be retained on the 850-µm sieve. The sand shall be applied at a rate of one kilogram per square meter, ± 0.1 kilogram per square meter.

Excess sand shall be removed from the deck surface by vacuuming or sweeping before opening to traffic.

Traffic shall not be allowed on the treated area until (1) the treated surface is tack free (non-oily), (2) the sand cover adheres sufficiently to resist brushing by hand, and (3) the coefficient of friction of the deck is at least 0.35 when tested in conformance with the requirements in California Test 342.

10-1.69 PRECAST CONCRETE GIRDERS

Precast reinforced concrete girders shall conform to the provisions in Section 51, "Concrete Structures," of the Standard Specifications.

PRECAST PRESTRESSED CONCRETE BRIDGE MEMBERS

The top surface of the member shall be given a coarse texture by brooming with a stiff bristled broom or by other suitable devices that will result in uniform transverse scoring, in advance of curing operations. .

The anticipated deflection and method of accommodation of deflection of precast prestressed concrete girders, prior to the time the deck concrete is placed, shall be shown on the working drawings in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. The deflection shall include the following:

A. Anticipated upward deflection caused by the prestressing forces.
B. Downward deflection caused by the dead load of the girder.
C. Deflection caused by the creep and shrinkage of the concrete for the time interval between the stressing of the girders and the planned placement of the deck.

Such deflection shall be substantiated by calculations that consider the ages of the girder concrete at the time of stressing and the Contractor's planned placement of the deck. All deflection calculations shall be based on the concrete producer's estimate of the modulus of elasticity at the applicable concrete age.

Adjustments to accommodate girder deflections, which occur prior to the time the deck concrete is placed, may include revisions in bearing seat elevations, but any such adjustments shall be limited by the following conditions:

A. The minimum permanent vertical clearance under the structure as shown on the plans shall not be reduced.
B. The profile grade and cross slope of the deck shall not be changed.
C. A minimum of 25 mm of deck slab concrete between the top of the precast girders and the deck slab reinforcement shall be maintained.

Girders with unanticipated girder deflection and which cannot comply with conditions A, B, and C will be rejected in conformance with the provisions in Section 6-1.04, "Defective Materials," of the Standard Specifications.

Adjustments to accommodate girder deflections will not be considered a change in dimensions. Full compensation for increases in the cost of construction, including increases in the quantity of deck or bearing seat concrete, resulting from adjustments to accommodate girder deflections shall be considered as included in the contract price paid for the various items of work involved and no additional compensation will be allowed therefor.

Temporary lateral bracing shall be provided for girders located over the roadway and over Route 101 at the Monte Diablo Ave POC. The bracing shall be installed at each end of each girder, except notched ends, prior to the release of the erection equipment from the girder and shall remain in place until 2 days after the concrete diaphragms have been placed. The bracing shall be adequate to prevent overturning of the girders prior to completion of the work and as a minimum shall be capable of resisting a lateral force of 720 Pa of girder side area applied laterally in either direction to the top of the girder. Girder erection shall not be started until the temporary lateral bracing proposed for use by the Contractor has been approved by the Engineer.

MEASUREMENT AND PAYMENT

Measurement and payment for concrete in structures shall conform to the provisions in Section 51-1.22, "Measurement," and Section 51-1.23, "Payment," of the Standard Specifications and these special provisions.

The contract price paid per cubic meter for structural concrete, barrier slab at retaining wall No. 1 and No. 2 shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the barrier slab, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Full compensation for furnishing and installing plastic pipe located at vertical drains used behind retaining walls and bridge abutments, including horizontal or sloping drains down slopes and across sidewalk areas, including excavation and backfill involved in placing the plastic pipe, shall be considered as included in the contract price paid per cubic meter for the various items of concrete work involved and no separate payment will be made therefor.

Full compensation for deck crack treatment, including a program for public safety shall be considered as included in the contract price paid per cubic meter for structural concrete, bridge and no additional compensation will be allowed therefor.

10-1.70 PRECAST CONCRETE BOX CULVERTS

Precast concrete box culvert shall conform to the provisions in Section 51, "Concrete Structures," of the Standard Specifications and the following:

PRECAST CONCRETE BOX CULVERTS

The Precast concrete box culvert shall conform to the details shown on the plans and the following:

A. Earthwork, including sand bedding, shall conform to the provisions in Section 19, "Earthwork," of the Standard Specifications.
B. Reinforcement shall conform to the requirements in Section 52, "Reinforcement," of the Standard Specification and these Special Provisions.
C. A Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications shall be provided to the Engineer for each precast member shipment. The certificate shall be signed by the manufacturer's quality control representative and shall state that all materials and workmanship comply in all respects with the specification requirements and all approved submittals.
D. The dry cast method of construction will be permitted when designated on the working drawings. When the dry cast method is used, the results shall be equal in all respects to those obtained by conformance with the provisions in Section 51 and adequate arrangements shall be made and carried out for curing, finishing and protecting the concrete. External vibrators shall be used and the forms shall be sufficiently rigid to resist displacement or damage. The dry casting forms may be removed at any time after consolidating the concrete providing no slumping of the concrete occurs.
E. Working drawings shall be submitted to the Engineer for approval in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. Working drawings shall show the construction method, precast unit dimensions, configuration of the reinforcement (including splice type and location), and height of earth cover.
F. Concrete for precast units shall be sampled and tested by the precast manufacturer for compressive strength at least once every production shift and not less often than once daily. Test result records shall be available to the Engineer at all times during regular work shifts.
G. Each precast unit shall be clearly marked by indentation, waterproof paint, or other approved means. Markings shall include the State contract number, date of manufacture, name or trademark of the manufacturer, and design earth cover. Each precast unit shall be clearly marked by indentation on either the inner or outer surface during the process of manufacture so that the location of the top will be evident immediately after the forms are stripped. In addition, the word "top" shall be lettered with waterproof paint on the inside and outside surfaces of the top of each precast unit.
H. Manufacturing tolerances for precast concrete box culvert sections shall conform to the requirements in Section 11, "Permissible Variations," of AASHTO Specification: M 259M.
I. The ends of the precast members shall be so formed that the sections can be laid together to make a continuous line of box sections with a smooth interior free of appreciable irregularities in the flow line.
J. Handling devices or holes will be permitted in each member for the purpose of handling and laying. Cored and handling holes shall be plugged and sealed so the members meet all the requirements in the specification.
K. Splices in circumferential reinforcement shall be made by lapping. Welded connections at splices for the outside apron of steel will be allowed only in the splice area shown on the plans. The wall reinforcement on the inside of the box may be lapped and welded at any location or connected by welding at the corners to the slab reinforcement at the inside of the box.
L. The exposure of spacers, standoffs or the ends of longitudinals used to position the reinforcement shall not be a cause for rejection. Spacers or standoffs shall not be welded to circumferential reinforcement. Spacers or standoffs may be welded to longitudinal reinforcement.
M. Laying of precast concrete box culvert shall conform to the provisions for laying reinforced concrete pipe in Section 65-1.07, "Laying Pipe," of the Standard Specifications and these special provisions.
N. Joints shall conform to the provisions for cement mortar or resilient material joints in Section 65-1.06, "Joints," of the Standard Specifications. An external sealing band conforming to the requirements in ASTM Designation: C 877 or C 877M may be used in lieu of the joint material in Section 65-1.06.
O. Precast concrete box culvert, will be measured and paid for by the meter in the same manner as specified for reinforced concrete pipe in Sections 65-1.09, "Measurement," and 65-1.10, "Payment," of the Standard Specifications.
P. Full compensation for erecting precast concrete box culvert members shall be considered as included in the contract price paid per meter for precast concrete box culvert and no additional compensation will be allowed therefor.
Q. The precast concrete box culvert shall include a basin floor as shown on the plans. The basin floor shall be minor concrete (miscellaneous construction).

10-1.71 STRUCTURE APPROACH SLABS (Type N)

This work shall consist of constructing reinforced concrete approach slabs, structure approach drainage system, and treated permeable base at structure approaches in conformance with the details shown on the plans, the provisions in Section 51, "Concrete Structures," of the Standard Specifications, and these special provisions.

GENERAL

Attention is directed to "Engineering Fabrics" of these special provisions.

STRUCTURE APPROACH DRAINAGE SYSTEM

Geocomposite Drain

Geocomposite drain shall consist of a manufactured core not less than 6.35 mm thick nor more than 50 mm thick with one or both sides covered with a layer of filter fabric that will provide a drainage void. The drain shall produce a flow rate, through the drainage void, of at least 25 liters per minute per meter of width at a hydraulic gradient of 1.0 and a minimum externally applied pressure of 168 kPa.A Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications shall be furnished for the geocomposite drain certifying that the drain produces the required flow rate and complies with these special provisions. The Certificate of Compliance shall be accompanied by a flow capability graph for the geocomposite drain showing flow rates and the externally applied pressures and hydraulic gradients. The flow capability graph shall be stamped with the verification of an independent testing laboratory.

Filter fabric for the geocomposite drain shall conform to the provisions for fabric for underdrains in Section 88, "Engineering Fabrics," of the Standard Specifications.

The manufactured core shall be either a preformed grid of embossed plastic, a mat of random shapes of plastic fibers, a drainage net consisting of a uniform pattern of polymeric strands forming 2 sets of continuous flow channels, or a system of plastic pillars and interconnections forming a semirigid mat.

The core material and filter fabric shall be capable of maintaining the drainage void for the entire height of geocomposite drain. Filter fabric shall be integrally bonded to the side of the core material with the drainage void. Core material manufactured from impermeable plastic sheeting having nonconnecting corrugations shall be placed with the corrugations approximately perpendicular to the drainage collection system.

The geocomposite drain shall be installed with the drainage void and the filter fabric facing the embankment. The fabric facing the embankment side shall overlap a minimum of 75 mm at all joints and wrap around the exterior edges a minimum of 75 mm beyond the exterior edge. If additional fabric is needed to provide overlap at joints and wrap-around at edges, the added fabric shall overlap the fabric on the geocomposite drain at least 150 mm and be attached thereto.

Should the fabric on the geocomposite drain be torn or punctured, the damaged section shall be replaced completely or repaired by placing a piece of fabric that is large enough to cover the damaged area and provide a 150-mm overlap.

Plastic Pipe

Plastic pipe shall conform to the provisions for pipe for edge drains and edge drain outlets in Section 68-3, "Edge Drains," of the Standard Specifications.

Drainage Pads

Concrete for use in drainage pads shall be minor concrete, except the concrete shall contain not less than 300 kilograms of cement per cubic meter.

Treated Permeable Base At Bottom Of Geocomposite Drains

Treated permeable base to be placed around the slotted plastic pipe at the bottom of geocomposite drains shall conform to the provisions in "Treated Permeable Base Under Approach Slabs." If asphalt treated permeable base is used, it shall be placed at a temperature of not less than 82°C nor more than 110°C.

The filter fabric to be placed over the treated permeable base at the bottom of geocomposite drains shall conform to the provisions for filter fabric for edge drains in Section 88, "Engineering Fabrics," of the Standard Specifications.

ENGINEERING FABRICS

Filter fabric to be placed between the structure approach embankment material and the treated permeable base shall conform to the provisions for filter fabric for edge drains in Section 88, "Engineering Fabrics," of the Standard Specifications and these special provisions.

The subgrade to receive the filter fabric, immediately prior to placing, shall conform to the compaction and elevation tolerance specified for the material involved.

Filter fabric shall be aligned, handled, and placed in a wrinkle-free manner in conformance with the manufacturer's recommendations.

Adjacent borders of the filter fabric shall be overlapped from 300 to 450 mm or stitched. The preceding roll shall overlap the following roll in the direction the material is being spread or shall be stitched. When the fabric is joined by stitching, it shall be stitched with yarn of a contrasting color. The size and composition of the yarn shall be as recommended by the fabric manufacturer. The number of stitches per 25 mm of seam shall be 5 to 7.

Equipment or vehicles shall not be operated or driven directly on the filter fabric.

Woven tape fabric to be placed between the treated permeable base and the approach slab shall be a fabric made of woven strips or tapes and shall conform to the following:

Specification	ASTM Designation	Requirement
Weight, grams per square meter, min.	D 3776	100
Grab Tensile Strength, kilonewtons, min.	D 4632	0.22
Elongation, percent, max.	D 4632	35
Toughness, kilonewtons, min. (Percent elongation times grab tensile strength)	----	5

Woven tape fabric shall be treated to provide a minimum of 70 percent breaking strength retention after 500 hours exposure when tested in conformance with the requirements in ASTM Designation: D 4355. The Contractor shall notify the Engineer, in writing, of the source of woven tape fabric at least 45 days prior to use.

TREATED PERMEABLE BASE UNDER APPROACH SLAB

Treated permeable base under structure approach slabs shall consist of constructing either an asphalt treated permeable base or a cement treated permeable base in accordance with Section 29, "Treated Permeable Bases," of the Standard Specifications and these special provisions.

The type of treatment, asphalt or cement, to be used shall be at the option of the Contractor.

The Contractor shall notify the Engineer in writing, not less than 30 days prior to the start of placing the treated permeable base, which type of treated permeable base will be furnished. Once the Contractor has notified the Engineer of the selection, the type to be furnished shall not be changed without a prior written request to do so and approval thereof in writing by the Engineer.

Asphalt treated permeable base shall be placed at a temperature of not less than 93°C nor more than 121°C. Material stored in excess of 2 hours shall not be used in the work.

Asphalt treated permeable base material may be spread in one layer. The base material shall be compacted with a vibrating shoe type compactor or rolled with a roller weighing at least 1.3 tonnes but no more than 4.5 tonnes. Rolling shall begin as soon as the mixture has cooled sufficiently to support the weight of the rolling equipment without undue displacement.

Cement treated permeable base material may be spread in one layer. The base material shall be compacted with either a vibrating shoe type compactor or with a steel-drum roller weighing at least 1.3 tonnes but no more than 4.5 tonnes. Compaction shall follow within one-half hour after the spreading operation and shall consist of 2 complete coverages of the treated material.

APPROACH SLABS

Concrete for use in approach slabs shall contain not less than 400 kilograms of cementitious material per cubic meter.

Structure approach slabs shall be cured for not less than 5 days prior to opening to public traffic, unless, at the option of the Contractor, the structure approach slabs are constructed using concrete with a non-chloride Type C chemical admixture conforming to these special provisions.

Portland cement for use in concrete using a non-chloride Type C chemical admixture shall be Type II Modified, Type II Prestress, or Type III. Type II Modified and Type III cement shall conform to the provisions in Section 90-2.01, "Cement," of the Standard Specifications. Type II Prestress cement shall conform to the requirements of Type II Modified cement, except the mortar containing the portland cement to be used and Ottawa sand, when tested in conformance with California Test 527, shall not contract in air more than 0.053-percent.

The non-chloride Type C chemical admixture, approved by the Engineer, shall conform to the requirements in ASTM Designation: C 494 and Section 90-4, "Admixtures," of the Standard Specifications.

The concrete with non-chloride Type C chemical admixture shall be prequalified prior to placement in conformance with the provisions for prequalification of concrete specified by compressive strength in Section 90-9.01, "General," of the Standard Specifications and the following:

A. Immediately after fabrication of the 5 test cylinders, the cylinders shall be stored in a temperature medium of 21 ± 1.5°C until the cylinders are tested.
B. The 6-hour average strength of the 5 test cylinders shall not be less than 5.85 MPa. No more than 2 test cylinders shall have a strength of less than 5.5 MPa.

The top surface of approach slabs shall be finished in conformance with the provisions in Section 51-1.17, "Finishing Bridge Decks," of the Standard Specifications. Edges of slabs shall be edger finished.

Approach slabs shall be cured with pigmented curing compound (1) in conformance with the provisions for curing structures in Section 90-7.01B, "Curing Compound Method," of the Standard Specifications.

Structure approach slabs constructed using concrete with a non-chloride Type C chemical admixture shall be cured for not less than 6 hours prior to opening to public traffic. The curing period shall be considered to begin at the start of discharge of the last truck load of concrete to be used in the slab.

If the ambient temperature is below 18°C during the curing period for approach slabs using concrete with a non-chloride Type C chemical admixture, an insulating layer or blanket shall be used to cover the surface. The insulating layer or blanket shall have an R-value rating given in the table below. At the Contractor's option, a heating tent may be used in lieu of or in combination with the insulating layer or blanket.

Temperature range during curing period	R-value, minimum
13°C to 18°C	1
7°C to 13°C	2
4°C to 7°C	3

JOINTS

Hardboard and expanded polystyrene shall conform to the provisions in Section 51-1.12D, "Sheet Packing, Preformed Pads and Board Fillers," of the Standard Specifications.

Type AL joint seals shall conform to the provisions in Section 51-1.12F, "Sealed Joints" of the Standard Specifications. The sealant may be mixed by hand-held power-driven agitators and placed by hand methods.

The pourable seal between the steel angle and concrete barrier shall conform to the requirements for Type A and AL seals in Section 51-1.12F(3), "Materials and Installation," of the Standard Specifications. The sealant may be mixed by hand-held power-driven agitators and placed by hand methods. Immediately prior to placing the seal, the joint shall be thoroughly cleaned, including abrasive blast cleaning of the concrete surfaces, so that all foreign material and concrete spillage are removed from all joint surfaces. Joint surfaces shall be dry at the time the seal is placed.

MEASUREMENT AND PAYMENT

Structural concrete, approach slab (Type N) and structural concrete, will be measured and paid for in conformance with the provisions in Section 51-1.22, "Measurement," and Section 51-1.23, "Payment," of the Standard Specifications and these special provisions.

Full compensation for the structure approach drainage system including geocomposite drain, plastic pipe, and drainage pads, treated permeable base, filter fabric, woven tape fabric, miscellaneous metal, and pourable seals shall be considered as included in the contract price paid per cubic meter for structural concrete, approach slab of the type shown in the Engineer's Estimate, and no additional compensation will be allowed therefor.

10-1.72 SOUND WALL

DESCRIPTION

This work shall consist of constructing sound walls of masonry block, precast concrete panel, composite panel, and ribbed steel panels. Sound walls shall be supported on concrete barriers, retaining walls, footings, piles, pile caps, grade beams or posts as shown on the plans.

SOUND WALL (MASONRY BLOCK)

Sound wall (masonry block), consisting of a reinforced hollow unit masonry block stem, shall be constructed in conformance with the provisions in Section 19, "Earthwork," Section 52, "Reinforcement," and Section 90, "Portland Cement Concrete," of the Standard Specifications and these special provisions.

Sound wall masonry unit stems shall be constructed with joints of portland cement mortar. Wall stems shall be constructed with hand laid block. Wall stems shall not be constructed with preassembled panels.

Concrete for sound wall footings, pile caps, and grade beams, if required, shall be minor concrete.

The angle of internal friction (ϕ) for the soils at sound wall No. 1 is 30°. The ϕ value for sound walls No. 2, 3 and 6B (Sta. 203+50 to Sta. 207+7.085) is 25, and for sound walls No. 4, 5 and 6A (Sta 193+00 to Sta. 203+50), the ϕ value is 20°.

Concrete masonry units shall be hollow, load bearing, lightweight or medium weight class units conforming to the requirements in ASTM Designation: C 90. Standard or open-end units may be used. Open-end units, if used, shall not reduce the spacing of the bar reinforcement as shown on the plans.

The mass of concrete masonry units shall not exceed 17.2 kg.

The masonry units shall be nominal size and texture and of uniform color. The color shall be as shown on the plans, selected from the manufacturer's standards. Color samples shall be submitted to the Engineer for approval from Caltrans District 4, Office of Landscape Architecture.

When high strength concrete masonry units with f'm=17.24 MPa are shown on the plans, the high strength masonry units shall have a minimum compressive strength of 25.86 MPa based on net area. When high strength concrete masonry units with f'm=13.79 MPa are shown on the plans, the high strength masonry units shall have a minimum compressive strength of 19.31 MPa based on net area. Each high strength concrete masonry unit shall be identified with a groove embedded in an interior corner. The groove shall extend from a mortar surface for a length of about 50 mm and shall have a depth of about 5 mm. When regular strength concrete masonry units with f'm=10.34 MPa are shown on the plans, the regular strength masonry units shall have a minimum compressive strength of 13.1 MPa based on net area.

Expansion joint filler shall conform to the requirements in ASTM Designation: D 1751 or ASTM Designation: D 2000 M2AA 805.

Portland cement mortar shall be colored to match the units. Coloring shall be chemically inert, fade resistant mineral oxide or synthetic type.

Portland cement for wall stems shall conform to the provisions in Section 90-2.01, "Portland Cement," of the Standard Specifications.

Hydrated lime shall conform to the requirements in ASTM Designation: C 207, Type S.

Mortar sand shall be commercial quality.

Mortar for laying masonry units shall consist, by volume, of one part portland cement, zero to 0.5 part hydrated lime, and 2.25 to 3 parts mortar sand. Sufficient water shall be added to make a workable mortar. Each batch of mortar shall be accurately measured and thoroughly mixed. Mortar shall be freshly mixed as required. Mortar shall not be retempered more than one hour after mixing.

Prepackaged mortar materials and mortar containing admixtures may be used when approved in writing by the Engineer, provided the mortar shall not contain more than 0.05-percent soluble chlorides when tested in conformance with California Test 422 nor more than 0.25-percent soluble sulfates, as SO_4, when tested in conformance with California Test 417.

Before laying masonry units using prepackaged mortar materials or mortar containing admixtures, the Contractor shall submit to the Engineer the proposed sources of the materials together with test data from an independent testing laboratory for mortar tested in conformance with California Test 551. The test data shall be from specimens having a moist cure, except that the sample shall not be immersed in lime water. The average 28-day compressive strength of the mortar shall be not less than 17.2 MPa.

Aggregate for grout used to fill masonry units shall consist of fine aggregate and coarse aggregate conforming to the provisions in Section 90-2.02, "Aggregates," of the Standard Specifications. At least 20 percent of the aggregate shall be coarse aggregate. The Contractor shall determine the grading except that 100 percent of the combined grading shall pass the 12.5-mm sieve.

At the option of the Contractor, grout for filling masonry units may be proportioned either by volume or mass. Grout shall contain only enough water to cause the grout to flow and fill the voids without segregation. The maximum amount of free water shall not exceed 0.7 times the weight of the cement for regular strength masonry. The maximum amount of free water shall not exceed 0.6 times the mass of the cement for high strength masonry.

Grout proportioned by volume for regular strength masonry shall consist of at least one part portland cement and 4.5 parts aggregate. Grout proportioned by volume for high strength masonry shall consist of at least one part portland cement and 3.5 parts aggregate. Aggregate volumes shall be based on a loose, air-dry condition.

Grout proportioned by mass for regular strength masonry shall contain not less than 325 kilograms of portland cement per cubic meter. Grout proportioned by mass for high strength masonry shall contain not less than 400 kg of portland cement per cubic meter.

Reinforced concrete masonry unit wall stems shall be constructed with portland cement mortar joints in conformance with the following:

A. Concrete masonry unit construction shall be true and plumb in the lateral direction and shall conform to the grade shown on the plans in the longitudinal direction. Bond beam units or recesses for horizontal reinforcement shall be provided.
B. Mortar joints shall be approximately 10 mm wide. Walls and cross webs forming cells to be filled with grout shall be full bedded in mortar to prevent leakage of grout. All head and bed joints shall be solidly filled with mortar for a distance in from the face of the wall or unit not less than the thickness of the longitudinal face shells. Head joints shall be shoved tight.
C. Mortared joints around cells to be filled shall be placed so as to preserve the unobstructed vertical continuity of the grout filling. Any overhanging mortar or other obstruction or debris shall be removed from the inside of such cells.
D. Reinforcement shall be securely held in position at top and bottom with either wire ties or spacing devices and at intervals not exceeding 192 bar diameters before placing any grout. Wire shall be 16-gage (1.57 mm) or heavier. Wooden, aluminum, or plastic spacing devices shall not be used.
E. Splices in vertical reinforcement shall be made only at the locations shown on the plans.

F. Only those cells containing reinforcement shall be filled solidly with grout. All grout in the cells shall be consolidated at the time of placement by vibrating, and reconsolidated after excess moisture has been absorbed, but before plasticity is lost. Grout shall not be sliced with a trowel.
G. Walls shall be constructed in 1.2-m maximum height lifts. Grouting of each lift shall be completed before beginning masonry unit construction for the next lift. The top course of each lift shall consist of a bond beam.
H. A construction joint shall be constructed at the top of the top course to permit placement of the mortar cap. The mix design for the mortar cap shall be as approved by the Engineer.
I. Construction joints shall be made when the placing of grout, in grout filled cells, is stopped for more than one hour. The construction joint shall be approximately 12 mm below the top of the last course filled with grout.
J. Bond beams shall be continuous. The top of unfilled cells under horizontal bond beams shall be covered with metal or plastic lath.
K. When fresh masonry joins masonry that is partially or totally set, the contact surface shall be cleaned, roughened, and lightly wetted.
L. Surfaces of concrete on which the masonry walls are to be constructed shall be roughened and cleaned, exposing the aggregate, and shall be flushed with water and allowed to dry to a surface dry condition immediately before laying the masonry units.
M. Where cutting of masonry units is necessary, all cuts shall be made with a masonry saw to neat and true lines. Masonry units with cracking or chipping of the finished exposed surfaces will not be acceptable.
N. Masonry shall be protected in the same manner specified for concrete structures in Section 90-8, "Protecting Concrete," of the Standard Specifications and these special provisions.
O. During erection, all cells shall be kept dry in inclement weather by covering partially completed walls. The covering shall be waterproof fabric, plastic or paper sheeting, or other approved material. Wooden boards and planks shall not be used as covering materials. The covering shall extend down each side of masonry walls approximately 0.6-m.
P. Splashes, stains, or spots on the exposed faces of the wall shall be removed.

ACCESS GATES

Access gates shall conform to the details shown on the plans and these special provisions.

Timber members shall be tongue and groove Douglas fir sub-flooring free of knotholes. The location of knots of adjoining boards shall be staggered. The construction of the gate shall be with the tongue placed in the up position. The tongue of the top board and the groove of the bottom board shall be removed.

Timber members, steel frames, channels, anchorage devices, mounting hardware, gate rollers, corrugated steel pipe, nylon washers, and neoprene tubing shall be of commercial quality.

The 25-mm round ladder rungs with non-skid surface shall consist of No. 25 deformed, diamond pattern, bar reinforcing steel of commercial quality.

Gate rollers shall be rigid casters with self-lubricating bearings and hard rubber wheels.

All metal parts and hardware shall be hot-dip galvanized.

Timber surfaces of the access gates shall be primed and then stained with 2 coats of stain to match the adjacent sound wall. Primer and stain shall be of the top grade primer and stain from an established manufacturer. An established manufacturer is one who has manufactured industrial paints and stains to meet custom specifications for at least 10 years.

Where the back side of the masonry wall is to be split faced, or rough surface blocks, the bond beam above the gate opening upon which the upper gate guide is to be mounted shall have smooth sided blocks.

Material from excavation may be used for backfill outside of the pipe landings. Aggregate filling inside the pipe landings shall be a coarse concrete aggregate of commercial quality. Compacting of the aggregate will not be required.

MEASUREMENT AND PAYMENT

Sound walls of the types designated in the Engineer's Estimate will be measured by the square meter of the area of wall projected on a vertical plane between the elevation lines shown on the plans and length of wall (including the exposed posts, back up wall for access openings, and access gates).

The contract price paid per square meter for sound wall of the types designated in the Engineer's Estimate shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the sound wall, complete in place, including all anchorages, access gates, soundwall openings for electroliers and overhead sign foundations, cover plates for overhead sign foundation openings and reinforcement, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer. Sound wall supports will be measured and paid for as separate items of work.

Sound wall footings, pile caps, and grade beams will be measured and paid for as minor concrete (sound wall).

The contract price paid per cubic meter for minor concrete (sound wall) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the footings, pile caps,

and grade beams, complete in place, including excavation, backfill and reinforcement, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.73 SEALING JOINTS

Joints in concrete bridge decks and joints between concrete structures and concrete approach slabs shall be sealed in conformance with the details shown on the plans, the provisions in Section 51, "Concrete Structures," of the Standard Specifications, and these special provisions.

Where polyurethane seals are shown on the plans, a silicone sealant conforming to the provisions in Section 51–1.12F, "Sealed Joints," of the Standard Specifications may be used.

When ordered by the Engineer, a joint seal larger than called for by the Movement Rating shown on the plans shall be furnished and installed. Payment to the Contractor for furnishing the larger seal and for saw cutting the increment of additional depth of groove required will be determined as provided in Section 4-1.03, "Changes," of the Standard Specifications.

10-1.74 JOINT SEAL ASSEMBLIES (MAXIMUM MOVEMENT RATING, 100 mm)

Joint seal assemblies shall conform to the details shown on the plans, the provisions in Section 51, "Concrete Structures," of the Standard Specifications, and these special provisions.

All metal parts of the joint seal assembly shall conform to the provisions in Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications. Bolts, nuts, and washers shall conform to the requirements in ASTM Designation: A 325 or A 325M.

At the Contractor's option, cleaning and painting of all new metal surfaces of the joint seal assembly, except stainless steel and anchorages embedded in concrete, may be substituted for galvanizing. Cleaning and painting shall be in conformance with the provisions in "Clean and Paint Structural Steel" of these special provisions.

Certification in conformance with the requirements in SSPC-QP 1, SSPC-QP 2, and SSPC-QP 3 of the "SSPC: The Society for Protective Coatings" will not be required for cleaning and painting joint seal assemblies.

Finish coats will not be required on joint seal assemblies.

Sheet neoprene shall conform to the provisions for neoprene in Section 51-1.14, "Waterstops," of the Standard Specifications. The sheet neoprene shall be fabricated to fit the joint seal assembly accurately.

Metal parts of the joint seal assembly shall be pre-assembled before installation to verify the geometry of the completed seal.

The bridge deck surface shall conform to the provisions in Section 51-1.17, "Finishing Bridge Decks," of the Standard Specifications prior to placing and anchoring the joint seal assembly.

The assembly shall be placed in a blocked out recess in the concrete deck surface. The depth and width of the recess shall permit the installation of the assembly anchorage components or anchorage bearing surface to the lines and grades shown on the plans.

Sheet neoprene shall be installed at such time and in such manner that the sheet neoprene will not be damaged by construction operations. The joint shall be cleaned of all dirt, debris and other foreign material immediately prior to installation of the sheet neoprene.

ALTERNATIVE JOINT SEAL ASSEMBLY

At the Contractor's option, an alternative joint seal assembly may be furnished and installed provided: (1) that the quality of the alternative and its suitability for the intended application are at least equal to that of the joint seal assembly shown on the plans, (2) that acceptable working drawings and a Certificate of Compliance are furnished as specified herein and (3) that the alternative conforms to the following requirements:

A. The determination as to the quality and suitability of a joint seal assembly will be made in the same manner as provided in Section 6-1.05, "Trade Names and Alternatives," of the Standard Specifications. The factors to be considered will include: the ability of the assembly to resist the intrusion of foreign material and water throughout the full range of movement for the application, and the ability to function without distress to any component.
B. Joint seal assemblies will not be considered for approval unless it can be proven that the assembly has had at least one year of satisfactory service under conditions similar to this application.
C. The Contractor shall submit complete working drawings for each joint seal assembly to the Division of Structure Design (DSD) in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. The working drawings shall show complete details of the joint seal assembly and anchorage components and the method of installation to be followed, including concrete blockout details and additions or rearrangements of the reinforcing steel from that shown on the plans. For initial review, 5 sets of working drawings shall be submitted. After review, between 6 and 12 sets of working drawings, as requested by the Engineer, shall be submitted to DSD for final approval and use during construction.

D. The working drawings shall be supplemented with calculations for each proposed joint seal assembly, as requested by the Engineer. Working drawings shall be either 279 mm x 432 mm or 559 mm x 864 mm in size. Each drawing and calculation sheet shall include the State assigned designations for the contract number, bridge number, full name of the structure as shown on the contract plans, and District-County-Route-Kilometer Post. The design firm's name, address, and telephone number shall be shown on the working drawings. Each sheet shall be numbered in the lower right hand corner and shall contain a blank space in the upper right hand corner for future contract sheet numbers.

E. Calculations, when requested, and working drawings, shall be stamped and signed by an engineer who is registered as a Civil Engineer. The Contractor shall allow the Engineer 4 weeks to review the drawings after a complete set has been received.

F. Within 3 weeks after final working drawing approval, one set of the corrected good quality prints on 75 g/m^2 (minimum) bond paper (559 mm x 864 mm in size) of all working drawings prepared by the Contractor for each joint seal assembly shall be furnished to DSD.

G. Each shipment of joint seal materials shall be accompanied by a Certificate of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. The certificate shall state that the materials and fabrication involved comply in all respects to the specifications and data submitted in obtaining the approval.

H. The elastomer portion of the joint seal assembly shall be neoprene conforming to the requirements in Table 1 of ASTM Designation: D 2628 and the following, except that no recovery tests or compression-deflection tests will be required:

PROPERTY	TEST METHOD	REQUIREMENT
Hardness, Type A Durometer, points	ASTM D 2240 (Modified)	55-70
Compression set, 70 hours at 100°C, maximum, percent	ASTM D 395 (Modified)	40

I. All metal parts of an alternative joint seal assembly shall conform to the requirements above for the joint seal assembly shown on the plans. At the Contractor's option, metal parts may conform to the requirements in ASTM Designation: A 572/A 572M.

J. The assembly and its components shall be designed to support the AASHTO HS20-44 loading with 100 percent impact. The tire contact area used to distribute the tire loads shall be 244 mm, measured normal to the longitudinal axis of the assembly, by 508 mm wide. The assembly shall provide a smooth riding joint without slapping of components or wheel tire rumble.

K. The Movement Rating of the assembly shall be measured normal to the longitudinal axis of the assembly. The dimensions for positioning the assembly within the Movement Rating during installation shall be measured normal to the longitudinal axis, disregarding any skew of the deck expansion joint.

L. The assembly shall have cast-in-place anchorage components forming a mechanical connection between the joint components and the concrete deck.

M. The maximum depth and width of the recess shall be such that the primary reinforcement to provide the necessary strength of the structural members is outside the recess. The maximum depth of the recess at abutments and at hinges shall be 300 mm. The maximum width of the recess on each side of the expansion joint shall be 250 mm.

N. All reinforcement other than the primary reinforcement shall continue through the recess construction joint into the recess and engage the anchorage components of the assembly.

O. Horizontal angle points and vertical corners at curbs in assemblies shall consist of either pre-molded sections or standard sections of the joint seal assembly that have been specially miter cut or bent to fit the structure.

P. The elastomer portion of the assembly shall be installed in conformance with the manufacturer's recommendations at such time and in such a manner that the elastomer portion will not be damaged by construction operations. The joint and blockout shall be cleaned of all dirt, debris, and other foreign material immediately prior to the installation of the elastomer.

Full compensation for additional materials or work required because of the application of the optional cleaning and painting or the use of an alternative type joint seal assembly, shall be considered as included in the contract price paid per meter for the joint seal assembly involved and no additional compensation will be allowed therefor.

10-1.75 ARCHITECTURAL SURFACE (TEXTURED CONCRETE)

Architectural texture for concrete surfaces shall conform to the details shown on the plans and the provisions in Section 51, "Concrete Structures," of the Standard Specifications and these special provisions.

Architectural textures listed below are required at concrete surfaces shown on the plans:

A. Fractured rib Texture
B. Concrete Surface Texture (Stone)

The fractured rib texture shall be an architectural texture simulating the appearance of straight ribs of concrete with a fractured concrete texture imparted to the raised surface between the ribs. Grooves between ribs shall be continuous with no apparent curves or discontinuities. Variation of the groove from straightness shall not exceed 6 mm for each 3 m of groove. The architectural texture shall have random shadow patterns. Broken concrete at adjoining ribs and groups of ribs shall have a random pattern. The architectural texture shall not have secondary patterns imparted by shadows or repetitive fractured surfaces.

The Concrete surface texture (stone) shall simulate a formed relief constructed to the dimensions and shapes shown on the plans. Corners at the intersection of plane surfaces shall be sharp and crisp without easing or rounding. A Class 1 surface finish with a light sand blast shall be applied to the textured surface.

TEST PANEL

A test panel at least 1.25 m x 1.25 m in size shall be successfully completed at a location approved by the Engineer before beginning work on architectural textures. The test panel shall be constructed and finished with the materials, tools, equipment and methods to be used in constructing the architectural texture. If ordered by the Engineer, additional test panels shall be constructed and finished until the specified finish, texture and color are obtained, as determined by the Engineer.

The test panel approved by the Engineer shall be used as the standard of comparison in determining acceptability of architectural texture for concrete surfaces.

FORM LINERS

Form liners shall be used for textured concrete surfaces and shall be installed in conformance with the manufacturer's recommendations, unless other methods of forming textured concrete surfaces are approved by the Engineer. Form liners shall be manufactured from an elastomeric material or a semi-elastomeric polyurethane material by a manufacturer of commercially available concrete form liners. No substitution of other types of formliner material will be allowed. Form liners shall leave crisp, sharp definition of the architectural surface. Recurring textural configurations exhibited by repeating, recognizable shadow patterns shall be prevented by proper casting of form liner patterns. Textured concrete surfaces with such recurring textural configurations shall be reworked to remove such patterns as approved by the Engineer or the concrete shall be replaced.

Form liners shall have the following properties:

Description	ASTM Designation:	Range
Elastomeric material		
Shore A hardness	D 2240	20 to 65
Tensile strength (MPa)	D 412	0.9 to 6.2
Semi-elastomeric polyurethane		
Shore D hardness	D 2240	55 to 65
Tensile strength (MPa)	D 2370	18 minimum

Cuts and tears in form liners shall be sealed and repaired in conformance with the manufacturer's recommendations. Form liners that are delaminated from the form shall not be used. Form liners with deformations to the manufactured surface caused by improper storage practices or any other reason shall not be used.

Form liners shall extend the full length of texturing with transverse joints at 2.5 m minimum spacing. Small pieces of form liners shall not be used. Grooves shall be aligned straight and true. Grooves shall match at joints between form liners. Joints in the direction of grooves in grooved patterns shall be located only in the depressed portion of the textured concrete.

Adjoining liners shall be butted together without distortion, open cracks or offsets at the joints. Joints between liners shall be cleaned before each use to remove any mortar in the joint.

Adhesives shall be compatible with the form liner material and with concrete. Adhesives shall be approved by the liner manufacturer. Adhesives shall not cause swelling of the liner material.

RELEASING FORM LINERS

Products and application procedures for form release agents shall be approved by the form liner manufacturer. Release agents shall not cause swelling of the liner material or delamination from the forms. Release agents shall not stain the concrete or react with the liner material. For reliefs simulating fractured concrete or wood grain surfaces the application method shall include the scrubbing method using a natural bristle scrub brush in the direction of grooves or grain The release agent shall coat the liner with a thin film. Following application of form release agent, the liner surfaces shall be cleaned of excess amounts of agent using compressed air. Buildup of form release agent caused by the reuse of a liner shall be removed at least every 5 uses.

Form liners shall release without leaving particles or pieces of liner material on the concrete and without pulling or breaking concrete from the textured surface. The concrete surfaces exposed by removing forms shall be protected from damage.

ABRASIVE BLASTING

The architectural texture shall be abrasive blasted with fine abrasive to remove the sheen without exposing coarse aggregate.

CURING

Concrete surfaces with architectural texture shall be cured only by the forms-in-place or water methods. Seals and curing compounds shall not be used.

MEASUREMENT AND PAYMENT

Architectural texture will be measured and paid for by the square meter.

The contract price paid per square meter for architectural texture of the types listed in the Engineer's Estimate shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in architectural texture, complete in place, including test panels, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Full compensation for architectural texture on Concrete Barrier Type 26 (Mod) shall be considered as included in the contract price paid per meter for Concrete Barrier Type 26 (Mod) and no separate payment will be made therefor.

Full compensation for Concrete Surface Texture on MSE walls shall be considered as included in the contract price paid per square meter for Earth Retaining Structures at locations listed in the Engineer's Estimate and no separate payment will be made therefor.

10-1.76 ARCHITECTURAL SURFACE (STONE)

Agricultural Surface (Stone) shall conform to plans of Retaining Wall #2 and these Special Provisions.

A. Provide stone work including anchors and accessories as required for complete installation.

RELATED WORK

B. Miscellaneous metal fabrications.

QUALITY ASSURANCE

C. Source: Obtain each stone from single quarry source, with consistent color range and texture throughout work; do not change sources or kinds of materials during course of work.
   1. Quality Control: Observe stone during fabrication and ensure consistency of appearance; do not use pieces with defects and blemishes beyond normal characteristics anticipated for stone.
      a. Defects and Blemishes: Contrasting spots, foreign elements, irregular color variations, and irregularities in typical characteristics shall be considered defects and blemishes.
   2. Granite: Comply with National Building Granite Quarries Association, Inc. (NBGQA) for color and finish.

D. Fabricator Qualification: Minimum five years successfully fabricating work similar to quality specified in quantity shown.

E. Design Requirements: Design, fabricate, and erect stone to withstand anticipated loads from wind, gravity, movement of building structure, and thermally induced movement; comply with applicable codes.

1. Safety Factors: Safety factor of 3 for Granite.
2. Drawings are diagrammatic and intended to indicate external dimensions, organization of stone, profiles, conditions, and scope.
3. Provide supports as required to connect stone to structural components indicated on Drawings.

SUBMITTALS

F. Submit the following to the Engineer.
G. Shop Drawings: Cutting and setting drawings showing sizes, dimensions, sections and profiles of units.
   1. Indicate arrangement and provisions for jointing, anchoring, fastening and supports and details for reception of other work.
   2. Indicate location of each unit on setting drawings with number designation corresponding to number marked on each unit.
   3. Show location of insets for anchors and supports which are to be built into substrate.
H. Product Data: Submit manufacturers literature for prefabricated items.
I. Certification: Provide certification by a structural engineer registered in State of California, indicating stone work complies with applicable code requirements.
J. Samples: Indicate color, grade and finish of stone required; include full range of exposed color and texture to be expected.
K. Mock-Up: Erect full-size mock-up representative of installation of stone installation; minimum 3.05m x 4.56m (10 feet x 15 feet).
   1. Mock-Up may be used as part of work if conforming to specified requirements and accepted by the Engineer.
   2. Accepted mock-up establishes minimum standard of quality and workmanship for stone work.

DELIVERY, STORAGE AND HANDLING

L. Handle material to prevent chipping, breakage, soiling or other damage.
M. Protect edges of materials with wood or other rigid materials.
N. Lift with wide-belt type slings wherever possible. If required, use wood rollers and provide cushion at end of wood slides.
O. Place and stack skids and units to distribute weight evenly and to prevent breakage or cracking.

PRODUCTS

MATERIALS

A. Stone: Match the texture, color and finish of the granite sample available for inspection by bidders at the Office of Structures Design, Specifications Section, Second Floor, 1801 30th Street, Sacramento, California.
   1. Granite Building Stone Standard: ASTM C615; type as indicated.
      a. Acceptable Manufacturers:
         1) Cold Spring Granite Company, Cold Spring, Minnesota.
      b. Color and Finish: Cold Spring Granite Company/Carnelian/Sculptured Finish.
B. Joint Materials:
   1. Sealant: Single Component Low Modulus Silicon Sealant: ASTM C920 Type S, Class 25, Grade NS; minimum 50% expansion and compaction capability.
      a. Acceptable Manufacturers:
         1) General Electric Co./ Silpruf, Silglaz or GESIL.
         2) Dow Corning Corp./790 or 795
         3) Pecora Corp./864 Architectural Silicone.
C. Anchors and Dowels: Provide materials of sizes and strengths to support anticipated loads.
   1. Stone Anchors, Anchor Bolts, Nuts and Washers: ASTM A666, Type 302/304 stainless steel where in contact with stone, unless more durable alloy is indicated.
   2. Panel Anchor Grid System: Complete anchoring system designed to support stone as indicated; including live and dead loads as required by applicable codes.
      a. Acceptable Manufacturers:
         1) Georgia Marble/Zibell Anchoring System.
         2) Vermont Marble/Vermarco I-S-R Anchoring System.
         3) Custom designed systems are acceptable.
D. Wall Setting Buttons: Lead or plastic buttons of thickness required for joint size indicated; as required to maintain uniform joint width, but softer than stone.

E. Concealed Stone Flashing: ASTM A666, Type 302/304 stainless steel flashing, minimum 26 gage (0.015" thick); comply with requirements specified in Section 07600 for fabrication and installation.

FABRICATION

F. Verify dimensions of supporting structure at site by accurate field measurements before final submittal of shop drawings and fabrication of stone.
   1. Coordinate fabrication schedule with construction progress to avoid delay of work.

G. Fabricate as shown and as detailed on final shop drawings and in compliance with recommendations of referenced stone association.
   1. Provide holes and sinkages cut or drilled for anchors, fasteners and supports as shown and as necessary to secure work in place.
   2. Cut and back-check as required for proper fit and clearance.

H. Provide openings and similar spaces and features as required for contiguous work.

I. Cut accurately to shape and dimensions shown on final shop drawings; comply with fabrication tolerances stone association for specified finishes.
   1. Dress joints (bed and vertical) straight and at 90 degree angle to face, unless otherwise shown or specified.
   2. Provide quirk-mitered corners unless otherwise shown; provide for cramp anchorage in top and bottom bed joints of corner units.
   3. Joint Width: Cut to provide joint widths as indicated, or if not indicated, cut to allow for uniform 19mm (3/4") wide joints.

J. Provide units of thickness shown, saw-cut or roughly dress back surfaces concealed in finished work to approximately true planes.
   1. Maximum variations in thickness from that shown not to exceed 1.6mm (1/16") on units less than 75mm (3") thick.
   2. K. Stone Wall Facing: Panels of stone, thickness and pattern as indicated on Drawings.

EXECUTION

INSPECTION

A. Examine supporting structure for stone.
B. Start of work indicates acceptance of conditions.

PREPARATION

C. Clean stone before setting by thoroughly scrubbing with fiber brushes followed by thorough sponging with clear water.
D. Use only mild cleaning compounds that contain no caustic or harsh fillers or abrasives.

GENERAL INSTALLATION REQUIREMENTS

E. Do not use material with chips, cracks, voids, discolorations or other defects which might be visible or cause staining in finished work.
F. Execute work with skilled mechanics and employ skilled fitters at site to do necessary field cutting as stone is set.
G. Provide openings and other spaces as shown or required for contiguous work. Close up openings in stone after other work is in place. Use materials and set to match surrounding work.
H. Set stone in accordance with Drawings and final setting drawings.
   1. Provide anchors, supports, fasteners and other attachments shown, or necessary to secure in place.
   2. Shim and adjust accessories as required for proper setting.
   3. Completely fill holes, slots and other sinkages for anchors, dowels, fasteners and supports with mortar.

INSTALLATION OF WALL STONE

I. Install using anchor system appropriate for type of stone and backup indicated; install anchor systems in accordance with manufacturer's recommendations.
J. Let anchors into edges of panels in sufficient quantity to secure installation.
K. Provide mechanically fastened anchors, as required.
L. Provide relieving angle supports, as required.

M. Provide shims and setting buttons as required for proper setting, plumb, level and true to lines indicated.
N. Set sealant joints 12.7mm (1/2")
O. back from stone joint face surface.
P. Clean face of stone after sealant application.
Q. Provide sealant joint slightly concave.

INSTALLATION TOLERANCES

R. Tolerances: Specified tolerances are non-cumulative.
   1. Variation From Level: Maximum 12.7mm (1/2") in 6.09m (20'-0"); maximum 19mm (3/4") in 12.18m (40'-0").
   2. Variation in Line: Maximum 12.7mm (1/2") in 6.09m (20'-0"); maximum 19mm (3/4") in 12.18m (40'-0").
   3. Variation in Cross-Sectional Dimension: Maximum plus 12.7mm (1/2"), minus 6mm (1/4").

CLEANING

S. After completion of work, seal any open joints and replace defective work.
T. Cleaning: Use clean water and stiff bristle fiber brushes.
   1. Do not use wire brushes, acid type cleaning agents, cleaning compounds with caustic or harsh fillers, or other materials or methods which could damage stone.

MEASUREMENT AND PAYMENT

The contract price paid per square meter for Architectural Surface (Stone) listed in the Engineer's Estimate shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in Architectural Surface (Stone), complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.77 REINFORCEMENT

Reinforcement shall conform to the provisions in Section 52, "Reinforcement," of the Standard Specifications and these special provisions.

The Department's mechanical splices prequalified list can be found at the following internet site:

http://www.dot.ca.gov/hq/esc/approved_products_list/

The provisions of "Welding Quality Control" of these special provisions shall not apply to resistance butt welding.

Reinforcement shown on the plans to be galvanized shall be galvanized in conformance with the provisions in Section 75-1.05,"Galvanizing," of the Standard Specifications.

EPOXY-COATED PREFABRICATED REINFORCEMENT

Bar reinforcement to be epoxy-coated shall conform to the ASTM Designation and grade required or permitted by Section 52-1.02A, "Bar Reinforcement," of the Standard Specifications, for the location or type of structure involved. The coated bar reinforcement shall conform to the requirements in ASTM Designation: A 934/A 934M except as provided herein.

Wire reinforcement to be epoxy-coated shall conform to the ASTM Designation and grade required or permitted by Section 52-1.02D, "Reinforcing Wire and Plain Bars," of the Standard Specifications, for the location or type of structure involved. The coated wire reinforcement shall conform to the requirements for Class A, Type 2 coating of ASTM Designation: A 884/A 884M except as provided herein.

Appendices X1 and X2, "Guidelines For Job-Site Practices," of ASTM Designation: A 884/A 884M and A 934/A 934M, respectively, shall apply except as provided herein. The term "shall" shall replace the term "should" in these appendices. Section X1.2 of Appendix X1 and Section X2.2 of Appendix X2 shall not apply.

All coatings shall be purple or gray in color.

Except for field welding of butt splices, all welding of reinforcement shall be complete prior to epoxy coating the reinforcement.

Prior to epoxy coating, all resistance butt welds shall have the weld flash removed to produce a smooth profile free of any sharp edges that would prevent proper coating of the bar. The flash shall be removed such that the ultimate tensile strength and elongation properties of the bar are not reduced, and the outside radius of the flash, at any point along the circumference of the bar, is 1) not less than the nominal radius of the bar, nor 2) greater than 5 mm beyond the nominal radius of the bar.

A proposed weld flash removal process shall be submitted to and approved by the Engineer in writing, prior to performing any removal work. The submittal shall demonstrate that the proposed flash removal process produces a smooth profile that can be successfully epoxy-coated in conformance with the requirements specified herein.

Bending of epoxy-coated reinforcement after the coating has been applied will not be allowed.

When any portion of a reinforcing bar or wire requires epoxy coating, the entire bar or wire shall be coated, except, when the bar or wire is spliced outside of the limits of epoxy coating shown on the plans, epoxy coating will not be required on the portion of bar or wire beyond the splice.

Within areas where epoxy-coated reinforcement is required, tie wire and bar chairs or other metallic devices used to secure or support the reinforcement shall be plastic-coated or epoxy-coated to prevent corrosion of the devices or damage to the coated reinforcement.

Prior to coating, the Contractor shall furnish to the Transportation Laboratory a representative 110 g sample from each batch of epoxy coating material to be used. Each sample shall be packaged in an airtight container identified with the manufacturer's name and batch number.

Two 700-mm long samples of coated bar or wire reinforcement from each size and from each load shipped to the jobsite shall be furnished to the Engineer for testing. These samples shall be representative of the material furnished. These samples, as well as any additional random samples taken by the Engineer, may be tested for specification compliance. Additional sampling, and all tests performed by the Engineer, may be performed at any location deemed appropriate by the Engineer. Failure of any sample to meet the requirements of the specifications will be cause for rejection.

If any bar tested for coating thickness or for adhesion of coating fails to meet the requirements for coated bars in Section 9 of ASTM Designation: A 934/A 934M, 2 retests on random samples taken from bars represented by the failed test will be conducted for each failed test. If the results of both retests meet the specified requirements, the coated bars represented by the samples may be certified as meeting the test requirements.

If any wire reinforcement tested for coating thickness or for flexibility fails to meet the requirements for coated wire in Section 8 of ASTM Designation: A 884/A 884M, 2 retests on random samples taken from wire represented by the failed test will be conducted for each failed test. If the results of both retests meet the specified requirements, the coated wire represented by the samples may be certified as meeting the test requirements.

Epoxy-coated reinforcement shall be covered with an opaque polyethylene sheeting or other suitable protective material to protect the reinforcement from exposure to sunlight, salt spray, and weather. For stacked bundles, the protective covering shall be draped around the perimeter of the stack. The covering shall be adequately secured; however, it should allow for air circulation around the reinforcement to prevent condensation under the covering. Epoxy-coated reinforcement shall not be stored within 300 m of ocean or tidal water for more than 2 months.

All visible damage to coatings caused by shipping, handling, or installation shall be repaired as required for repairing coating damaged prior to shipment conforming to the requirements in ASTM Designation: A 934/A 934M for bar reinforcement or ASTM Designation: A 884/A 884M for wire reinforcement. When the extent of coating damage prior to repair exceeds 2 percent of the bar or wire surface area in any 300-mm length, repair of the bar or wire will not be allowed, and the coated bar or wire will be rejected.

The patching material and process shall be suitable for field application. The patching material shall be prequalified as required for the coating material and shall be either identified on the container as a material compatible with the reinforcement coating, or shall be accompanied by a Certificate of Compliance certifying that the material is compatible with the reinforcement coating. Damaged areas shall be patched in conformance with the patching material manufacturer's recommendations.

Except for lap splices, all splices for epoxy-coated reinforcement shall be coated with a corrosion protection covering that is on the Department's list of approved products. The covering shall be installed in conformance with the manufacturer's recommendations and as directed by the Engineer. The list is available from the Transportation Laboratory.

A Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications, shall be furnished for each shipment of epoxy-coated bar or wire reinforcement certifying that the coated bars or wire conform to the requirements in ASTM Designation: A 934/A 934M for bars or A 884/A 884M for wire and Section 52-1.02B, "Epoxy-coated Reinforcement," of the Standard Specifications. This Certificate of Compliance shall include all the certifications specified in ASTM Designation: A 934/A 934M for bars or ASTM Designation: A 884/A 884M for wire and a statement that the coating material has been prequalified by acceptance testing performed by the Valley Forge Laboratories, Inc., Devon, Pennsylvania.

Any portion of bar or wire reinforcement extending beyond the limits for epoxy-coated reinforcement shown on the plans will be measured and paid for as bar reinforcing steel (bridge).

MEASUREMENT AND PAYMENT

Measurement and payment for reinforcement in structures shall conform to the provisions in Section 52-1.10, "Measurement," and Section 52-1.11, "Payment," of the Standard Specifications and these special provisions.

Full compensation for galvanizing steel reinforcement shall be considered as included in the prices paid for the various items of work involved and no additional compensation will be allowed therefor.

Full compensation for epoxy coating bar reinforcement shall be considered as included in the prices paid for the various items of work involved and no additional compensation will be allowed therefor.

10-1.78 STEEL STRUCTURES

Construction of steel structures shall conform to the provisions in Section 55, "Steel Structures," of the Standard Specifications and these special provisions.

Attention is directed to "Welding" in Section 8, "Materials," of these special provisions.

The following substitutions of high-strength steel fasteners shall be made:

METRIC SIZE SHOWN ON THE PLANS	SIZE TO BE SUBSTITUTED
ASTM Designation: A 325M (Nominal bolt diameter (mm))	ASTM Designation: A 325 (Nominal bolt diameter (inch))
13, 12.70, or M12	1/2
16, 15.88, or M16	5/8
19, 19.05, or M20	3/4
22, 22.22, or M22	7/8
24, 25, 25.40, or M24	1
29, 28.58, or M27	1 1/8
32, 31.75, or M30	1 1/4
38, 38.10, or M36	1 1/2

MATERIALS

High-strength fastener assemblies and other bolts attached to structural steel with nuts and washers shall be zinc-coated. When direct tension indicators are used in these assemblies, the direct tension indicator and all components of the fastener assembly shall be zinc-coated by the mechanical deposition process.

ROTATIONAL CAPACITY TESTING PRIOR TO SHIPMENT TO JOB SITE

Rotational capacity tests shall be performed on all lots of high-strength fastener assemblies prior to shipment of these lots to the project site. Zinc-coated assemblies shall be tested after all fabrication, coating, and lubrication of components has been completed. One hardened washer shall be used under each nut for the tests.

The requirements of this section do not apply to high-strength cap screws or high-strength bolts used for slip base plates.

Each combination of bolt production lot, nut lot, and washer lot shall be tested as an assembly.

A rotational capacity lot number shall be assigned to each combination of lots tested. Each shipping unit of fastener assemblies shall be plainly marked with the rotational capacity lot number.

Two fastener assemblies from each rotational capacity lot shall be tested.

The following equipment, procedure, and acceptance criteria shall be used to perform rotational capacity tests on and determine acceptance of long bolts. Fasteners are considered to be long bolts when full nut thread engagement can be achieved when installed in a bolt tension measuring device:

A. Long Bolt Test Equipment:

1. Calibrated bolt tension measuring device with adequate tension capacity for the bolts being tested.
2. Calibrated dial or digital torque wrench. Other suitable tools will be required for performing Steps 7 and 8 of the Long Bolt Test Procedure. A torque multiplier may be required for large diameter bolts.
3. Spacer washers or bushings. When spacer washers or bushings are required, they shall have the same inside diameter and equal or larger outside diameter as the appropriate hardened washers conforming to the requirements in ASTM Designation: F436.
4. Steel beam or member, such as a girder flange or cross frame, to which the bolt tension measuring device will be attached. The device shall be accessible from the ground.

B Long Bolt Test Procedure:

1. Measure the bolt length. The bolt length is defined as the distance from the end of the threaded portion of the shank to the underside of the bolt head.

2. Install the nut on the bolt so that 3 to 5 full threads of the bolt are located between the bearing face of the nut and the underside of the bolt head. Measure and record the thread stickout of the bolt. Thread stickout is determined by measuring the distance from the outer face of the nut to the end of the threaded portion of the shank.
3. Insert the bolt into the bolt tension measuring device and install the required number of washers, and additional spacers as needed, directly beneath the nut to produce the thread stickout measured in Step 2 of this procedure.
4. Tighten the nut using a hand wrench to a snug-tight condition. The snug tension shall not be less than the Table A value but may exceed the Table A value by a maximum of 2 kips.

Table A

High-Strength Fastener Assembly Tension Values to Approximate Snug-Tight Condition	
Bolt Diameter (inches)	Snug Tension (kips)
1/2	1
5/8	2
3/4	3
7/8	4
1	5
1 1/8	6
1 1/4	7
1 3/8	9
1 1/2	10

5. Match-mark the assembly by placing a heavy reference start line on the face plate of the bolt tension measuring device which aligns with 1) a mark placed on one corner of the nut, and 2) a radial line placed across the flat on the end of the bolt, or on the exposed portions of the threads of tension control bolts. Place an additional mark on the outside of the socket that overlays the mark on the nut corner such that this mark will be visible while turning the nut. Make an additional mark on the face plate, either 2/3 of a turn, one turn, or 1 1/3 turn clockwise from the heavy reference start line, depending on the bolt length being tested as shown in Table B.

Table B

Required Nut Rotation for Rotational Capacity Tests[a,b]	
Bolt Length (measured in Step 1)	Required Rotation (turn)
4 bolt diameters or less	2/3
Greater than 4 bolt diameters but no more than 8 bolt diameters	1
Greater than 8 bolt diameters, but no more than 12 bolt diameters[c]	1 1/3
(a) Nut rotation is relative to bolt, regardless of the element (nut or bolt) being turned. For bolts installed by 1/2 turn and less, the tolerance shall be plus or minus 30 degrees; for bolts installed by 2/3 turn and more, the tolerance shall be plus or minus 45 degrees. (b) Applicable only to connections in which all material within grip of the bolt is steel. (c) When bolt length exceeds 12 diameters, the required rotation shall be determined by actual tests in a suitable tension device simulating the actual conditions.	

6. Turn the nut to achieve the applicable minimum bolt tension value listed in Table C. After reaching this tension, record the moving torque, in foot-pounds, required to turn the nut, and also record the corresponding bolt tension value in pounds. Torque shall be measured with the nut in motion. Calculate the value, T (in ft-lbs), where T=[(the measured tension in pounds) x (the bolt diameter in inches) / 48 in/ft].

Table C

Minimum Tension Values for High-Strength Fastener Assemblies	
Bolt Diameter (inches)	Minimum Tension (kips)
1/2	12
5/8	19
3/4	28
7/8	39
1	51
1 1/8	56
1 1/4	71
1 3/8	85
1 1/2	103

7. Turn the nut further to increase bolt tension until the rotation listed in Table B is reached. The rotation is measured from the heavy reference line made on the face plate after the bolt was snug-tight. Record this bolt tension.
8. Loosen and remove the nut and examine the threads on both the nut and bolt.

C. Long Bolt Acceptance Criteria:

1. An assembly shall pass the following requirements to be acceptable: 1) the measured moving torque (Step 6) shall be less than or equal to the calculated value, T (Step 6), 2) the bolt tension measured in Step 7 shall be greater than or equal to the applicable turn test tension value listed in Table D, 3) the nut shall be able to be removed from the bolt without signs of thread stripping or galling after the required rotation in Step 7 has been achieved, 4) the bolt does not shear from torsion or fail during the test, and 5) the assembly does not seize before the final rotation in Step 7 is reached. Elongation of the bolt in the threaded region between the bearing face of the nut and the underside of the bolt head is expected and will not be considered a failure. Both fastener assemblies tested from one rotational capacity lot shall pass for the rotational capacity lot to be acceptable.

Table D

Turn Test Tension Values	
Bolt Diameter (inches)	Turn Test Tension (kips)
1/2	14
5/8	22
3/4	32
7/8	45
1	59
1 1/8	64
1 1/4	82
1 3/8	98
1 1/2	118

The following equipment, procedure, and acceptance criteria shall be used to perform rotational capacity tests on and determine acceptance of short bolts. Fasteners are considered to be short bolts when full nut thread engagement cannot be achieved when installed in a bolt tension measuring device:

A. Short Bolt Test Equipment:

1. Calibrated dial or digital torque wrench. Other suitable tools will be required for performing Steps 7 and 8 of the Short Bolt Test Procedure. A torque multiplier may be required for large diameter bolts.
2. Spud wrench or equivalent.
3. Spacer washers or bushings. When spacer washers or bushings are required, they shall have the same inside diameter and equal or larger outside diameter as the appropriate hardened washers conforming to the requirements in ASTM Designation: F436.
4. Steel plate or girder with a hole to install bolt. The hole size shall be 1.6 mm greater than the nominal diameter of the bolt to be tested. The grip length, including any plates, washers, and additional spacers as needed, shall provide the proper number of threads within the grip, as required in Step 2 of the Short Bolt Test Procedure.

B. Short Bolt Test Procedure:

1. Measure the bolt length. The bolt length is defined as the distance from the end of the threaded portion of the shank to the underside of the bolt head.
2. Install the nut on the bolt so that 3 to 5 full threads of the bolt are located between the bearing face of the nut and the underside of the bolt head. Measure and record the thread stickout of the bolt. Thread stickout is determined by measuring the distance from the outer face of the nut to the end of the threaded portion of the shank.
3. Install the bolt into a hole on the plate or girder and install the required number of washers and additional spacers as needed between the bearing face of the nut and the underside of the bolt head to produce the thread stickout measured in Step 2 of this procedure.
4. Tighten the nut using a hand wrench to a snug-tight condition. The snug condition shall be the full manual effort applied to the end of a 305 mm long wrench. This applied torque shall not exceed 20 percent of the maximum allowable torque in Table E.

Table E

Maximum Allowable Torque for High-Strength Fastener Assemblies	
Bolt Diameter (inches)	Torque (ft-lbs)
1/2	145
5/8	285
3/4	500
7/8	820
1	1220
1 1/8	1500
1 1/4	2130
1 3/8	2800
1 1/2	3700

5. Match-mark the assembly by placing a heavy reference start line on the steel plate or girder which aligns with 1) a mark placed on one corner of the nut and 2) a radial line placed across the flat on the end of the bolt or on the exposed portions of the threads of tension control bolts. Place an additional mark on the outside of the socket that overlays the mark on the nut corner such that this mark will be visible while turning the nut. Make 2 additional small marks on the steel plate or girder, one 1/3 of a turn and one 2/3 of a turn clockwise from the heavy reference start line on the steel plate or girder.
6. Using the torque wrench, tighten the nut to the rotation value listed in Table F. The rotation is measured from the heavy reference line described in Step 5 made after the bolt was snug-tight. A second wrench shall be used to prevent rotation of the bolt head during tightening. Measure and record the moving torque after this rotation has been reached. The torque shall be measured with the nut in motion.

Table F

Nut Rotation Required for Turn-of-Nut Installation[a,b]	
Bolt Length (measured in Step 1)	Required Rotation (turn)
4 bolt diameters or less	1/3
(a) Nut rotation is relative to bolt, regardless of the element (nut or bolt) being turned. For bolts installed by 1/2 turn and less, the tolerance shall be plus or minus 30 degrees. (b) Applicable only to connections in which all material within grip of the bolt is steel.	

7. Tighten the nut further to the 2/3-turn mark as indicated in Table G. The rotation is measured from the heavy reference start line made on the plate or girder when the bolt was snug-tight. Verify that the radial line on the bolt end or on the exposed portions of the threads of tension control bolts is still in alignment with the start line.

Table G

Required Nut Rotation for Rotational Capacity Test	
Bolt Length (measured in Step 1)	Required Rotation (turn)
4 bolt diameters or less	2/3

8. Loosen and remove the nut and examine the threads on both the nut and bolt.

C. Short Bolt Acceptance Criteria:

1. An assembly shall pass the following requirements to be acceptable: 1) the measured moving torque from Step 6 shall be less than or equal to the maximum allowable torque from Table E, 2) the nut shall be able to be removed from the bolt without signs of thread stripping or galling after the required rotation in Step 7 has been achieved, 3) the bolt does not shear from torsion or fail during the test, and 4) the assembly shall not seize before the final rotation in Step 7 is reached. Elongation of the bolt in the threaded region between the bearing face of the nut and the underside of the bolt head will not be considered a failure. Both fastener assemblies tested from one rotational capacity lot shall pass for the rotational capacity lot to be acceptable.

INSTALLATION TENSION TESTING AND ROTATIONAL CAPACITY TESTING AFTER ARRIVAL ON THE JOB SITE

Installation tension tests and rotational capacity tests on high-strength fastener assemblies shall be performed by the Contractor prior to acceptance or installation and after arrival of the fastener assemblies on the project site. Installation tension tests and rotational capacity tests shall be performed at the job-site, in the presence of the Engineer, on each rotational capacity lot of fastener assemblies.

The requirements of this section do not apply to high-strength cap screws or high-strength bolts used for slip base plates.

Installation tension tests shall be performed on 3 representative fastener assemblies in conformance with the provisions in Section 8, "Installation," of the RCSC Specification. For short bolts, Section 8.2, "Pretensioned Joints," of the RCSC Specification shall be replaced by the "Pre-Installation Testing Procedures," of the "Structural Bolting Handbook," published by the Steel Structures Technology Center, Incorporated.

The rotational capacity tests shall be performed in conformance with the requirements for rotational capacity tests in "Rotational Capacity Testing Prior to Shipment to Job Site" of these special provisions.

At the Contractor's expense, additional installation tension tests, tests required to determine job inspecting torque, and rotational capacity tests shall be performed by the Contractor on each rotational capacity lot, in the presence of the Engineer, if 1) any fastener is not used within 3 months after arrival on the jobsite, 2) fasteners are improperly handled, stored, or subjected to inclement weather prior to final tightening, 3) significant changes are noted in original surface condition of threads, washers, or nut lubricant, or 4) the Contractor's required inspection is not performed within 48 hours after all fasteners in a joint have been tensioned.

Failure of a job-site installation tension test or a rotational capacity test will be cause for rejection of unused fasteners that are part of the rotational capacity lot.

When direct tension indicators are used, installation verification tests shall be performed in conformance with Appendix Section X1.4 of ASTM Designation: F959, except that bolts shall be initially tensioned to a value 5 percent greater than the minimum required bolt tension.

SURFACE PREPARATION

For all bolted connections, the contact surfaces and inside surfaces of bolt holes shall be cleaned and coated before assembly in conformance with the provisions for cleaning and painting structural steel of these special provisions.

For all bolted connections, the 1) contact surfaces, 2) outer surfaces of existing members that are within the grip and will be hidden by surfaces of outside existing members within the grip under bolt heads, nuts, and washers, and 3) inside surfaces of bolt holes shall be cleaned and coated before assembly in conformance with the provisions for cleaning and painting structural steel of these special provisions.

For all bolted connections, the new contact surfaces and inside surfaces of bolt holes shall be cleaned and coated before assembly in conformance with the provisions for cleaning and painting structural steel of these special provisions.

SEALING

The perimeter around all direct tension indicator gaps shall be completely sealed with non-silicone type sealing compound conforming to the provisions in Federal Specification TT-S-230, Type II. The sealant shall be gray in color and have a minimum thickness of 1.3 mm. If painting is required, the sealing compound shall be applied prior to painting.

When zinc-coated tension control bolts are used, the sheared end of each fastener shall be completely sealed with non-silicone type sealing compound conforming to the provisions in Federal Specification TT-S-230, Type II. The sealant shall be gray in color and shall have a minimum thickness of 1.3 mm. The sealant shall be applied to a clean sheared surface on the same day that the splined end is sheared off.

WELDING

Dimensional details and workmanship for welded joints in tubular and pipe connections shall conform to the provisions in Part A, "Common Requirements of Nontubular and Tubular Connections," and Part D, "Specific Requirements for Tubular Connections," in Section 2 of AWS D1.1.

The requirement of conformance with AWS D1.5 shall not apply to work conforming to Section 56-1, "Overhead Sign Structures," or Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications.

10-1.79 SIGN STRUCTURES

Sign structures and foundations for overhead signs shall conform to the provisions in Section 56-1, "Overhead Sign Structures," of the Standard Specifications, "Steel Structures" of these special provisions, and the following requirements.

Before commencing fabrication of sign structures, the Contractor shall submit 2 sets of working drawings to the Engineer in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications. The working drawings shall include sign panel dimensions, span lengths, post heights, anchorage layouts, proposed splice locations, a snugging and tensioning pattern for anchor bolts and high strength bolted connections, and details for permanent steel anchor bolt templates. The working drawings shall be supplemented with a written quality control program that includes methods, equipment, and personnel necessary to satisfy the requirements specified herein.

Working drawings shall be 559 mm x 864 mm or 279 mm x 432 mm in size and each drawing and calculation sheet shall include the State assigned designations for the sign structure type and reference as shown on the contract plans, District-County-Route-Kilometer Post, and contract number.

The Engineer shall have 20 working days to review the sign structure working drawings after a complete submittal has been received. No fabrication or installation of sign structures shall be performed until the working drawings are approved in writing by the Engineer.

Should the Engineer fail to complete the review within the time allowance and if, in the opinion of the Engineer, the Contractor's controlling operation is delayed or interfered with by reason of the delay in reviewing the sign structure working drawings, the delay will be considered a right of way delay in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

Steel bolts not designated on the plans as high-strength (HS) or stainless steel shall be for general applications and shall conform to the requirements in ASTM Designation: A 307.

A permanent steel template shall be used to maintain the proper anchor bolt spacing.

One top nut, one leveling nut, and 2 washers shall be provided for the upper threaded portion of each anchor bolt.

Flatness of surfaces of 1) base plates that are to come in contact with concrete, grout, or washers and leveling nuts, and 2) plates in high-strength bolted connections, shall conform to the requirements in ASTM Designation: A 6/A 6M.

No holes shall be made in members unless the holes are shown on the plans or are approved in writing by the Engineer.

Longitudinal seam welds shall have 60 percent minimum penetration, except that within 150 mm of circumferential welds, longitudinal seam welds shall be complete joint penetration (CJP) groove welds. In addition, longitudinal seam welds on structures having telescopic pole segment splices shall be CJP groove welds on the female end for a length on each end equal to the designated slip fit splice length plus 150 mm.

Steel members used for overhead sign structures shall receive nondestructive testing (NDT) in conformance with AWS D1.1 and the following:

A.

Weld Location	Weld Type	Minimum Required NDT
Splice welds around the perimeter of tubular sections, poles, and arms.	CJP groove weld with backing ring	100% UT[a] or RT[b]
Longitudinal seam welds	CJP or PJP[c] groove weld	Random 25% MT[d]
Longitudinal seam welds within 150 mm of a circumferential splice.	CJP groove weld	100% UT or RT
Welds attaching base plates, flange plates, or pole or mast arm plates, to poles or arm tubes.	CJP groove weld with backing ring and reinforcing fillet	t> 4.5 mm: 100%UT and MT t< 4.5 mm: 100% MT after root weld pass & final weld pass t = pole or arm thickness
	External (top) fillet weld for socket-type connections	100% MT

[a] ultrasonic testing
[b] radiographic testing
[c] partial joint penetration
[d] magnetic particle testing

B. The acceptance and repair criteria for UT of welded joints where any of the members are less than 8 mm thick or where tubular sections are less than 325 mm in diameter, shall conform to the requirements in AWS D1.1, Section 6.13.3.1. A written procedure approved by the Engineer shall be used when performing this UT. These written procedures shall conform to the requirements in AWS D1.1, Annex K. The acceptance and repair criteria for other welded joints receiving UT shall conform to the requirements in AWS D1.1, Section 6, Table 6.3 for cyclically loaded nontubular connections.

C. The acceptance and repair criteria for radiographic or real time image testing shall conform to the requirements of AWS D1.1 for tensile stress welds.

D. For longitudinal seam welds, the random locations for NDT will be selected by the Engineer. The cover pass shall be ground smooth at the locations to be tested. If repairs are required in a portion of a tested weld, the repaired portion shall receive NDT, and additional NDT shall be performed on untested portions of the weld. The additional NDT shall be performed on 25 percent of that longitudinal seam weld. After this additional NDT is performed, and if more repairs are required, then that entire longitudinal seam weld shall receive NDT.

Circumferential welds and base plate to post welds may be repaired only one time without written permission from the Engineer.

All ferrous metal parts of tubular sign structures shall be galvanized and shall not be painted.

Full compensation for furnishing anchor bolt templates and for testing of welds shall be considered as included in the contract price paid per kilogram for furnish sign structure and no additional compensation will be allowed therefor.

10-1.80 ROADSIDE SIGNS

Roadside signs shall be furnished and installed at the locations shown on the plans or where designated by the Engineer and in conformance with the provisions in Section 56-2, "Roadside Signs," of the Standard Specifications and these special provisions.

The Contractor shall furnish roadside sign panels in conformance with the provisions in "Furnish Sign" of these special provisions.

Wood posts shall be pressure treated after fabrication in conformance with the provisions in Section 58, "Preservative Treatment of Lumber, Timber and Piling," of the Standard Specifications and AWPA Use Category System: UC4A, Commodity Specification A or B.

Type N, Type P, and Type R marker panels mounted on a post with a roadside sign shall be considered to be sign panels and will not be paid for as markers.

10-1.81 INSTALL SIGN PANEL ON EXISTING FRAME

Sign panels shall be installed on existing frames at the locations shown on the plans or where designated by the Engineer and in conformance with the provisions in Section 56-1.06, "Sign Panels and Fastening Hardware," of the Standard Specifications and these special provisions.

The Contractor shall furnish sign panels in conformance with the provisions in "Furnish Sign" of these special provisions.

Existing sign panels, as shown on the plans, shall be removed and salvaged or removed and disposed of as provided in Section 15, "Existing Highway Facilities," of the Standard Specifications.

Installing sign panels on existing frames will be measured by the square meter and the quantity to be paid for will be the total area, in square meters, of sign panels installed in place.

The contract price paid per square meter for install sign panel on existing frame shall include full compensation for furnishing all labor, materials (except State-furnished sign panels and mounting bolts), tools, equipment, and incidentals, and for doing all the work involved in installing sign panels on existing frames, complete in place (including removing, salvaging, and disposing of existing sign panels), as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.82 INSTALL REMOVABLE SIGN PANEL FRAME

Removable sign panel frames shall be installed on new or existing sign structures as shown on the plans and in conformance with the provisions in Section 56-1, "Overhead Sign Structures," of the Standard Specifications and these special provisions.

Sign panels and removable sign panel frames will be furnished by the State as provided in "Materials" of these special provisions.

The Contractor shall furnish sign panels and removable sign panel frames as provided in "Furnish Sign" of these special provisions.

Installing removable sign panel frames will be measured by the unit as determined from actual count in place. A unit shall consist of one removable sign panel frame with sign panels attached.

The contract unit price paid for installing removable sign panel frame shall include full compensation for furnishing all labor, materials (except sign panel and removable sign panel frame), tools, equipment, and incidentals, and for doing all the work involved in install removable sign panel frames, complete in place, including installing sign panels to the panel frames, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.83 FURNISH SIGN

Signs shall be fabricated and furnished in accordance with details shown on the plans, the Traffic Sign Specifications, and these special provisions.

Traffic Sign Specifications for California sign codes are available for review at the Department's internet site:

http://www.dot.ca.gov/hq/traffops/signtech/signdel/specs.htm

Traffic Sign Specifications for signs referenced with Federal MUTCD sign codes can be found in Standard Highway Signs Book, administered by the Federal Highway Administration, which is available for review at the following Internet website:

http://mutcd.fhwa.dot.gov/ser-pubs.htm

Information on cross-referencing California sign codes with the Federal MUTCD sign codes is available at the Department's internet site:

http://www.dot.ca.gov/hq/traffops/signtech/signdel/specs.htm

Temporary or permanent signs shall be free from blemishes that may affect the serviceability and detract from the general sign color and appearance when viewing during daytime and nighttime from a distance of 8 m. The face of each finished sign shall be uniform, flat, smooth, and free of defects, scratches, wrinkles, gel, hard spots, streaks, extrusion marks, and air bubbles. The front, back, and edges of the sign panels shall be free of router chatter marks, burns, sharp edges, loose rivets, delaminated skins, excessive adhesive over spray and aluminum marks.

QUALITY CONTROL FOR SIGNS

The requirements of "Quality Control for Signs" in this section shall not apply to construction area signs.

No later than 14 days before sign fabrication, the Contractor shall submit a written copy of the quality control plan for signs to the Transportation Laboratory, Materials Engineering and Testing Services (METS), Telephone (916) 227-7291. METS will have 10 days to review the quality control plan. Sign fabrication shall not begin until METS approves the Contractor's quality control plan in writing. The Contractor shall submit to the Engineer at least 3 copies of the approved quality control plan. The quality control plan shall include, but not be limited to the following requirements:

1. Identification of the party responsible for quality control of signs,
2. Basis of acceptance for incoming raw materials at the fabrication facility,
3. Type, method and frequency of quality control testing at the fabrication facility,
4. List (by manufacturer and product name) of process colors, protective overlay film, retroreflective sheeting and black non-reflective film,
5. Recommended cleaning procedure for each product,
6. Method of packaging, transport and storage for signs.

No legend shall be installed at the project site. Legend shall include letters, numerals, tildes, bars, arrows, route shields, symbols, logos, borders, artwork, and miscellaneous characters. The style, font, size, and spacing of the legend shall conform to the Standard Alphabets published in the FHWA Standard Highway Signs Book. The legend shall be oriented in the same direction in accordance with the manufacturer's orientation marks found on the retroreflective sheeting.

On multiple panel signs, legend shall be placed across joints without affecting the size, shape, spacing, and appearance of the legend. Background and legend shall be wrapped around interior edges of formed panel signs as shown on plans to prevent delamination.

The following notation shall be placed on the lower right side of the back of each sign where the notation will not be blocked by the sign post or frame:

1. PROPERTY OF STATE OF CALIFORNIA.
2. Name of the sign manufacturer.
3. Month and year of fabrication.
4. Type of retroreflective sheeting
5. Manufacturer's identification and lot number of retroreflective sheeting.

The above notation shall be applied directly to the aluminum sign panels in 6-mm upper case letters and numerals by die-stamp and applied by similar method to the fiberglass reinforced plastic signs. Painting, screening, or engraving the notation will not be allowed. The notation shall be applied without damaging the finish of the sign.

Signs with a protective overlay film shall be marked with a dot of 10 mm diameter. The dot placed on white border shall be black while the dot placed on black border shall be white. The dot shall be placed on the lower border of the sign before application of the protective overlay film and shall not be placed over the legend and bolt holes. The application method and exact location of the dot shall be determined by the manufacturer of the signs.

For sign panels that have a minor dimension of 1220 mm or less, no splice will be allowed in the retroreflective sheet except for the splice produced during the manufacturing of the retroreflective sheeting. For sign panels that have a minor dimension greater than 1220 mm, only one horizontal splice will be allowed in the retroreflective sheeting.

Unless specified by the manufacturer of the retroreflective sheeting, splices in retroreflective sheeting shall overlap by a minimum of 25 mm. Splices shall not be placed within 50 mm from edges of the panels. Except at the horizontal borders, the splices shall overlap in the direction from top to bottom of the sign to prevent moisture penetration. The retroreflective sheeting at the overlap shall not exhibit a color difference under the incident and reflected light.

Signs exhibiting a significant color difference between daytime and nighttime shall be replaced immediately at the Contractor's expenses.

Repairing sign panels will not be allowed except when approved by the Engineer.

The Department will inspect signs at the Contractor's facility and delivery location, and in accordance with Section 6, "Control of Materials," of the Standard Specifications. The Engineer will inspect signs for damage and defects before and after installation.

Regardless of kind, size, type, or whether delivered by the Contractor or by a common carrier, signs shall be protected by thorough wrapping, tarping, or other methods to ensure that signs are not damaged by weather conditions and during transit. Signs shall be dry during transit and shipped on palettes, in crates, or tier racks. Padding and protective materials shall be placed between signs as appropriate. Finished sign panels shall be transported and stored by method that protects the face of signs from damage. The Contractor shall replace wet, damaged, and defective signs at the Contractor's expense.

Signs shall be stored in dry environment at all times. Signs shall not rest directly on the ground or become wet during storage. Signs, whether stored indoor or outdoor, shall be in free standing. When stored outdoor, signs shall be placed at a minimum spacing of 100 mm apart. In areas of high heat and humidity signs shall be stored in enclosed climate-controlled trailers or containers. Signs shall be stored indoor if duration of the storage will exceed 30 days.

Screen processed signs shall be protected, transported and stored as recommended by the manufacturer of the retroreflective sheeting.

When requested, the Contractor shall provide the Engineer test samples of signs and materials used at various stages of production. Sign samples shall be 300 mm x 300 mm in size with applied background, letter or numeral, and border strip.

The Contractor shall assume the costs and responsibilities resulting from the use of patented materials, equipment, devices, and processes for the Contractor's work.

SHEET ALUMINUM

Alloy and temper designations for sheet aluminum shall be in accordance with ASTM Designation: B209.

The Contractor shall furnish the Engineer a Certificate of Compliance in accordance to Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for the sheet aluminum.

Sheet aluminum shall be pretreated in accordance to ASTM Designation: B449. Surface of the sheet aluminum shall be cleaned, deoxidized, and coated with a light and tightly adherent chromate conversion coating free of powdery residue. The conversion coating shall be Class 2 with a mass between 108 mg/m^2 and 377 mg/m^2, and an average mass of 269 mg/m^2. Following the cleaning and coating process, the sheet aluminum shall be protected from exposure to grease, oils, dust, and contaminants.

Sheet aluminum shall be free of buckles, warps, dents, cockles, burrs, and defects resulting from fabrication.

Base plate for standard route marker shall be die cut.

RETROREFLECTIVE SHEETING

The Contractor shall furnish retroreflective sheeting for sign background and legend in accordance with ASTM Designation: D4956 and "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

Retroreflective sheeting shall be applied to sign panels as recommended by the retroreflective sheeting manufacturer without stretching, tearing, and damage.

Class 1, 3, or 4 adhesive backing shall be used for Type II, III, IV, VII, VIII, and IX retroreflective sheeting. Class 2 adhesive backing may also be used for Type II retroreflective sheeting. The adhesive backing shall be pressure sensitive and fungus resistant.

When the color of the retroreflective sheeting determined from instrumental testing is in dispute, the Engineer's visual test will govern.

PROCESS COLOR AND FILM

The Contractor shall furnish and apply screened process color, non-reflective opaque black film, and protective overlay film of the type, kind, and product that are approved by the manufacturer of the retroreflective sheeting.

The Contractor shall furnish the Engineer a Certificate of Compliance in accordance to Section 6-1.07, "Certificates of Compliance," of the Standard Specifications for the screened process color, non-reflective opaque black film, and protective overlay film.

The surface of the screened process color shall be flat and smooth. When the screened process colors determined from the instrumental testing in accordance to ASTM Designation: D4956 are in dispute, the Engineer's visual test will govern.

The Contractor shall provide patterns, layouts, and set-ups necessary for the screened process.

The Contractor may use green, red, blue, and brown reverse-screened process colors for background and non-reflective opaque black film or black screened process color for legend. The coefficient of retroreflection for reverse-screened process colors on white retroreflective sheeting shall not be less than 70 percent of the coefficient of retroreflection specified in ASTM Designation: D4956.

The screened process colors and non-reflective opaque black film shall have the same outdoor weatherability as that of the retroreflective sheeting.

After curing, screened process colors shall withstand removal when tested by applying 3M Company Scotch Brand Cellophane Tape No. 600 or equivalent tape over the color and removing with one quick motion at 90°angle.

SINGLE SHEET ALUMINUM SIGN

Single sheet aluminum signs shall be fabricated and furnished with or without frame. The Contractor shall furnish the sheet aluminum in accordance to "Sheet Aluminum" of these special provisions. Single sheet aluminum signs shall be fabricated from sheet aluminum alloy 6061-T6 or 5052-H38.

Single sheet aluminum signs shall not have a vertical splice in the sheet aluminum. For signs with depth greater than 1220 mm, one horizontal splice will be allowed in the sheet aluminum.

Framing for single sheet aluminum sign shall consist of aluminum channel or rectangular aluminum tubing. The framing shall have a length tolerance of +3 mm. The face sheet shall be affixed to the frame with rivets of 5-mm diameter. Rivets shall be placed within the web of channels and shall not be placed less than 13 mm from edges of the sign panels. Rivets shall be made of aluminum alloy 5052 and shall be anodized or treated with conversion coating to prevent corrosion. The exposed portion of rivets on the face of signs shall be the same color as the background or legend where the rivets are placed.

Finished signs shall be flat within a tolerance of +3 mm per meter when measured across the plane of the sign in all directions. The finished signs shall have an overall tolerance within +3 mm of the detailed dimensions.

Aluminum channels or rectangular aluminum tubings shall be welded together with the inert gas shielded-arc welding process using E4043 aluminum electrode filler wires as shown on the plans. Width of the filler shall be equal to wall thickness of smallest welded channel or tubing.

LAMINATED PANEL SIGN

Laminated panel signs shall consist of two sheet aluminum laminated to a honeycomb core and extruded aluminum frame to produce flat and rigid panels of 25.4-mm or 63.5-mm nominal thickness.

The face of laminated panel signs shall be fabricated from sheet aluminum alloy 6061-T6 or 5052-H32 of 1.6-mm thickness. The back of laminated panel signs shall be fabricated from sheet aluminum alloy 3003-H14 of 1.0-mm thickness. The Contractor shall furnish sheet aluminum as provided in "Sheet Aluminum" of these special provisions.

The core material shall be phenolic impregnated kraft paper honeycomb and fungus resistant in accordance to Military Specification MIL-D-5272. The honeycomb cell size shall be 13 mm. Weight of the kraft paper shall be 300 g/m^2 and impregnated minimum 18 percent by weight.

A laminating adhesive that can produce a resilient oil and water-resistant bond shall be used to adhere the extruded aluminum frame and the honeycomb core to the sheet aluminum. Edge and interior delamination occur when a 0.25-mm thick feeler gauge of 13 mm in length can be inserted into a depth of more than 13 mm between the extruded aluminum frame and the sheet aluminum. Laminated panel sign with delamination will be rejected.

Laminated panels shall be able to resist a wind load of 161 kg/m^2 for the following simple span lengths with a bending safety factor of 1.25:

Panel Type	Nominal Panel Thickness	Simple Span Length
A	25.4 mm	2.7 m
B	25.4 mm	2.7 m
	63.5 mm	4.42 m
H	63.5 mm	4.42 m

The tensile strength of laminated panels shall be at least 138 kPa when tested in accordance with the following modification and with ASTM Designations: C297 and C481, Cycle B after aging. Instead of spraying with hot water, the specimen shall be totally immersed in 70°C hot water. When requested by the Engineer or the Transportation Laboratory, at least one test sample of 300 mm x 300 mm in size shall be taken for every 186 m^2 of the panel production cycle or of the total factory production order, whichever occurs first.

Rivets used to secure the sheet aluminum to the perimeter frame shall be fabricated from aluminum alloy 5052 and annodized or treated with a conversion coating to prevent corrosion. Size of the aluminum rivets shall be 5 mm in diameter and placed at the corners of the laminated panels. Color of the exposed portion of the rivets shall be the same color as the sign background or legend on which the rivets are placed. Rivets or stainless steel screws shall be placed in holes drilled during fabrication in the perimeter frame.

On laminated multiple panel signs, a closure H-Section shall be placed in the top channel of the bottom panel. Perimeter frame of adjoining panel shall accommodate the closure H-Section in the closed position.

For signs with a depth of 1524 mm or less, the laminated panels shall be fabricated with no horizontal joints, splices or seams. For signs with a depth of greater than 1524 mm, the laminated panels may be fabricated in two panels.

The face of laminated panels shall be flat with a tolerance of +8 mm per meter when measured across the plane of each panel in all directions. Where laminated panels adjoin, the gap between adjoining edges from one corner to the other corner shall not deviate by more than 1 mm. Non-adjoining edges from one corner to the other corner shall not deviate by more than 3 mm from a straight plane. The front and back sheet aluminum shall be flush with the perimeter frame. The panel edges shall be smooth.

Laminated panel signs shall be within +3 mm or -13 mm of the detailed dimensions. The difference in length between adjoining panels of multiple panel signs shall not be greater than 13 mm.

Overhead laminated panel signs shall be Type A and have a nominal thickness of 25.4 mm.

For overhead laminated signs with a length of 7315 mm or less, the laminated panels shall be fabricated with no vertical joints, splices or seams. For signs with a length of greater than 7315 mm, the length of each adjoining panel shall be as determined by the Engineer or as shown on the plans.

The perimeter frame of Type A overhead laminated panels shall be connected by self-tapping hex head stainless steel screws. Sealant shall be placed at the corners of the perimeter frame to prevent moisture penetration. The perimeter frame of Type A panels shall consist of extruded channel edges on the vertical sides and consist of modified "H" section extrusion on the horizontal sides. The modified "H" section extrusion acts as an integral retainer track for affixing the bolts to provide blind fastening of panels to the structure support.

The Contractor shall furnish mounting hardware for overhead laminated panel signs, such as closure H-sections, clamps, bolts, nuts, and washers. The clamps shall be cast aluminum alloy with a minimum tensile strength of 170 MPa. Bolt torque used for installing clamps shall not exceed 12 N-m.

FORMED PANEL SIGN

Formed panel signs shall be fabricated from one continuous sheet aluminum alloy 5052-H32 of 1.6 -mm thickness. The Contractor shall furnish sheet aluminum as provided in "Sheet Aluminum" of these special provisions.

The aluminum frame shall be affixed to the panel with aluminum rivets through the face of the sign panels. Color of the exposed portion of the rivets shall be the same color as the sign background or legend on which the rivets are placed.

The face of finished formed panel sign shall be flat with a tolerance of 10 mm per meter when measured across the plane of each panel in all directions.

The Contractor shall furnish mounting hardware for overhead formed panel signs. Hardware for the overhead formed panel signs shall include bolts, nuts, and washers.

The length and depth of the overhead formed panel signs shall be within ±2 mm of the detailed dimension.

The formed edges of the overhead panel signs shall be square. The mounting holes shall be straight and perpendicular to the front and back surfaces of the formed edges at the spacing shown on the plans. Holes that are improperly spaced and placed at the wrong angle will be rejected.

10-1.84 TIMBER LAGGING

Timber lagging shall conform to the details shown on the plans and the provisions in Sections 57, "Timber Structures," and 58, "Preservative Treatment of Lumber, Timber and Piling," of the Standard Specifications and these special provisions.

Attention is directed to the section, "Order of Work," in these special provisions regarding timber lagging.

All timber members shall be preservative treated Douglas fir of the grades shown on the plans. Timber members shall be full sawn to the dimensions shown on the plans.

Preservative treatment shall conform to AWPA Use Category System: UC4B, Commodity Specification A, except that chromated copper arsenate shall not be used.

All cuts, daps and holes in the timber lagging shall be thoroughly swabbed with three applications of one of the preservatives specified in Section 58-1.04, "Wood Preservative for Manual Treatment," of the Standard Specifications.

Timber lagging that is split, broken, or otherwise damaged or misfitted by the Contractor’s operations shall be replaced at the Contractor’s expense.

Timbers 100 mm thick or less shall be installed with a 10 mm gap between lagging members except where shown on the plans. Timbers greater than 100 mm thick shall be installed with a 13 mm gap between lagging members except where shown on the plans.

10-1.85 CLEAN AND PAINT STRUCTURAL STEEL

Exposed new metal surfaces of joint seal assemblies except stainless steel and anchorages embedded in the concrete may be cleaned and painted in conformance with the provisions in Section 59-2, "Painting Structural Steel," Section 59-3, "Painting Galvanized Surfaces," and Section 91, "Paint," of the Standard Specifications and these special provisions.

GENERAL

Prior to performing any painting or paint removal, the Contractor shall submit to the Engineer, in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications, 3 copies of a separate Painting Quality Work Plan (PQWP) for each item of work for which painting or paint removal is to be performed. As a minimum, each PQWP shall include the following:

A. The name of each Contractor or subcontractor to be used.
B. One copy each of all current ASTM and "SSPC: The Society for Protective Coatings" specifications or qualification procedures applicable to the painting or paint removal to be performed. These documents shall become the permanent property of the Department.

C. A copy of the coating manufacturer's guidelines and recommendations for surface preparation, painting, drying, curing, handling, shipping, and storage of painted structural steel, including testing methods and maximum allowable levels for soluble salts.
D. Proposed methods and equipment to be used for any paint application.
E. Proof of each of any required certifications, SSPC-QP 1, SSPC-QP 2, SSPC-QP 3. Where SSPC-QP 3 certification is required, an enclosed shop facility shall be required. Certification of AISC Sophisticated Paint Endorsement Quality Program, P-1 Enclosed endorsement, will be considered equivalent to SSPC-QP 3.
F. Proposed methods to control environmental conditions in accordance with the manufacturer's recommendations and these special provisions.
G. Proposed methods to protect the coating during curing, shipping, handling, and storage.
H. Proposed rinse water collection plan.
I. A detailed paint repair plan for the repair of damaged areas.
J. Procedures for containing blast media and water during application of coatings and coating repair of erected steel.
K. Examples of proposed daily reports for all testing to be performed, including type of testing, location, lot size, time, weather conditions, test personnel, and results.

Prior to submitting the PQWP, a pre-painting meeting between the Engineer, the Contractor, and a representative from each entity performing painting for this project shall be held to discuss the requirements for the PQWP.

The Engineer shall have 3 weeks to review the PQWP submittal after a complete plan has been received. No painting or paint removal shall be performed until the PQWP for that work is approved by the Engineer. Should the Engineer fail to complete the review within this time allowance and if, in the opinion of the Engineer, the Contractor's controlling operation is delayed or interfered with by reason of the delay in reviewing the PQWP, the delay will be considered a right of way delay in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

The Engineer's approval of the Contractor's PQWP shall not relieve the Contractor of any responsibility under the contract for the successful completion of the work in conformity with the requirements of the plans and specifications.

The Contractor shall provide enclosures to permit cleaning and painting during inclement weather. Provisions shall be made to control atmospheric conditions inside the enclosures within specified limits during cleaning and painting operations, drying to solvent insolubility, and throughout the curing period in accordance with the manufacturer's recommendations and these special provisions. Full compensation for providing and maintaining such enclosures shall be considered as included in the prices paid for the various contract items of work requiring paint and no additional compensation will be allowed therefor.

Fresh, potable water with a maximum chloride content of 75 mg/L and a maximum sulfate content of 200 mg/L shall be used for water rinsing or pressure washing operations. No continuous recycling of rinse water will be permitted. If rinse water is collected into a tank and subsequent testing determines the collected water conforms to the specified requirements, reuse may be permitted by the Engineer if no collected water is added to the tank after sample collection for determination of conformance to specified requirements.

CLEANING

New metal surfaces, except where galvanized, shall be dry blast cleaned in conformance with the requirements in SSPC-SP 10, "Near White Blast Cleaning," of the "SSPC: The Society for Protective Coatings." Blast cleaning shall leave surfaces with a dense, uniform, angular anchor pattern of not less than 40 µm nor more than 86 µm as measured in conformance with the requirements in ASTM Designation: D 4417.

Mineral and slag abrasives used for blast cleaning steel surfaces shall conform to the requirements for Class A, Grade 2 to 3 abrasives contained in SSPC-AB 1, "Mineral and Slag Abrasives," of the "SSPC: The Society for Protective Coatings," and shall not contain hazardous material.

Steel abrasives used for blast cleaning steel surfaces shall comply with the requirements of SSPC-AB 3, "Ferrous Metallic Abrasive," of the "SSPC: The Society for Protective Coatings." If steel abrasive is recycled through shop or field abrasive blast cleaning units, the recycled abrasive shall conform to the requirements of SSPC-AB 2, "Specification for Cleanliness of Recycled Ferrous Metallic Abrasive," of the "SSPC: The Society for Protective Coatings."

A Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications and a Material Safety Data Sheet shall be furnished prior to use for each shipment of blast cleaning material for steel.

The inside surfaces of bolt holes shall be cleaned in conformance with the requirements in SSPC-SP 1, "Solvent Cleaning," of the "SSPC: The Society for Protective Coatings," and visible rust shall be removed.

Abrasive blast cleaned surfaces shall be tested by the Contractor for soluble salts using a Class A or B retrieval method as described in Technology Guide 15, "Field Methods for Retrieval and Analysis of Soluble Salts on Steel and Other Nonporous Substrates," of the "SSPC: The Society for Protective Coatings," and cleaned so the maximum level of soluble salts does not exceed the lesser of the coating manufacturer's written recommendations or 10 micrograms per square

centimeter. Areas of abrasive blast cleaned steel shall be tested at the rate of 3 tests for the first 100 square meters prepared per day, and one test for each additional 100 square meters or portion thereof, at locations selected by the Engineer. When less than 100 square meters of surface area is prepared in a shift, at least 2 tests shall be performed. If levels of soluble salts exceed the maximum allowed by these special provisions, the entire area represented by the testing will be rejected. The Contractor shall perform additional cleaning and testing of rejected areas until soluble salt levels conform to these requirements.

Corners shall be chamfered to remove sharp edges.

Thermal cut edges (TCEs) to be painted shall be conditioned before blast cleaning by shallow grinding or other method approved by the Engineer to remove the thin, hardened layer of material resulting from resolidification during cooling.

Visually evident base metal surface irregularities and defects shall be removed in accordance with ASTM Designation: A 6 or AASHTO Designation: M 160 prior to blast cleaning steel. When material defects exposed by blast cleaning are removed, the blast profile shall be restored by either blast cleaning or by using mechanical tools in accordance with SSPC-SP 11, "Power Tool Cleaning to Bare Metal," of the "SSPC: The Society for Protective Coatings."

PAINTING

Blast cleaned surfaces of bearings shall receive a single undercoat, consisting of an inorganic zinc coating conforming to the requirements in AASHTO Designation: M 300, Type I or Type II, except that: 1) the first 3 sentences of Section 5.6, "Primer Field Performance Requirements," shall not apply for Type II coatings, and 2) the entire Section 5.6.1 shall not apply for either type of inorganic zinc coating.

The inside surfaces of bolt holes shall be painted with one application of a zinc rich primer (organic vehicle type) after the application of the undercoat of inorganic zinc on adjacent steel. The steel surfaces adjacent to the bolt holes shall be kept clean and protected from drippings during the application of the primer.

The color of the final application of inorganic zinc coating shall match Federal Standard 595B No. 36373.

Inorganic zinc coating shall be used within 12 hours of initial mixing.

Application of inorganic zinc coating shall conform to the provisions for applying zinc-rich coating in Section 59-2.13, "Application of Zinc-Rich Primer," of the Standard Specifications.

The single undercoat of inorganic zinc coating shall be applied to the required dry film thickness in 2 or more applications within 8 hours of the start of blast cleaning. Abrasive blast cleaned steel shall not be exposed to relative humidity exceeding 85 percent prior to application of inorganic zinc coating.

The total dry film thickness of all applications of the inorganic zinc undercoat shall be not less than 100 µm nor more than 200 µm for a Class B coating on blast-cleaned steel, as specified in the RCSC Specification. The Contractor shall provide results of certified testing showing the maximum allowable dry film thickness for the Class B coating from the qualifying tests for the coating chosen, and shall maintain the coating thickness on actual faying surfaces of the structure at or below this maximum allowable coating thickness.

Areas where mudcracking occurs in the inorganic zinc coating shall be blast cleaned and repainted with inorganic zinc coating to the specified thickness.

Steel surfaces coated with Type II inorganic zinc coating shall be protected from conditions that may cause the coating film to dissolve. The Contractor, at the Contractor's expense, shall repair areas where the coating has dissolved by blast cleaning and repainting with inorganic zinc coating to the specified thickness.

Dry spray, or overspray, as defined in the Steel Structures Painting Manual, Volume 1, "Good Painting Practice," of the "SSPC: The Society for Protective Coatings," shall be removed prior to application of subsequent coats or final acceptance. Removal of dry spray shall be by screening or other methods that minimize polishing of the inorganic zinc surface. The dry film thickness of the coating after removal of dry spray shall be in conformance with the provisions for applying the single undercoat, as specified herein.

The Contractor shall test the inorganic zinc coating . The locations of the tests will be determined by the Engineer. The Contractor shall determine the sequence of the testing operations. The testing for adhesion and hardness will be performed no sooner than 72 hours after application of the single undercoat of inorganic zinc coating. At the Contractor's expense, satisfactory access shall be provided to allow the Engineer to determine the location of the tests.

The inorganic zinc coating shall pass the following tests:

A. The inorganic zinc coating shall have a minimum adhesion to steel of 4 MPa when measured using a self-aligning adhesion tester in conformance with the requirements in ASTM Designation: D 4541. The Engineer shall select 6 locations per joint seal assemblies for adhesion testing. If 2 or more of the locations tested fail to meet adhesion requirements, the entire area represented by the tests shall be rejected. If one of the locations tested fails to meet adhesion requirements, an additional 3 locations shall be tested. Should any of the additional locations fail to meet adhesion requirements, the entire area represented by the tests shall be rejected. The Contractor, at the Contractor's expense, shall repair the rejected area by blast cleaning and repainting with inorganic zinc to the specified thickness. Test locations for areas of inorganic zinc meeting adhesion testing requirements shall be repaired by application of

organic zinc primer as specified in Section 91-1.04, "Materials," of the Standard Specifications to the specified minimum dry film thickness.

B. The inorganic zinc coating shall exhibit a solid, hard, and polished metal surface when firmly scraped with the knurled edge of a quarter. Inorganic zinc coating that is powdery, soft, or does not exhibit a polished metal surface, as determined by the Engineer, shall be repaired by the Contractor, at the Contractor's expense, by blast cleaning and repainting with inorganic zinc coating to the specified thickness.

The Contractor, at the Contractor's expense, shall retest all rejected areas of inorganic zinc coating after repairs have been completed.

Finish coats will not be required.

10-1.86 CLEAN AND PAINT STEEL SOLDIER PILING

Steel piling surfaces and surfaces of the plates attached shall be cleaned and painted in conformance with the provisions in Sections 59-2, "Painting Structural Steel," and 91, "Paint," of the Standard Specifications and these special provisions. Limits of the steel soldier pile surfaces to be dry blast cleaned and shop primed with the inorganic zinc coating shall be as shown on the plans.

Clean and paint steel soldier piling and plates shall consist of dry blast cleaning and painting a portion of steel soldier piles with an inorganic zinc undercoat prior to pile installation, and field painting with finish coats after pile installation and soldier pile wall excavation.

Whenever the Standard Specifications refer to "Steel Structures Painting Council," the reference shall be replaced with "SSPC: The Society for Protective Coatings."

Prior to performing any painting or paint removal, the Contractor shall submit to the Engineer, in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings," of the Standard Specifications, 3 copies of a separate Painting Quality Work Plan (PQWP) for each item of work for which painting or paint removal is to be performed. As a minimum, each PQWP shall include the following:

A. The name of each Contractor or subcontractor to be used.
B. One copy each of all current "SSPC: The Society for Protective Coatings" specifications or qualification procedures which are applicable to the painting or paint removal to be performed. These documents shall become the permanent property of the Department.
C. Proposed methods and equipment to be used for any paint application.
D. Proof of each of any required certifications, SSPC-QP or SSPC-QP 3.
   1. In lieu of certification in conformance with the requirements in SSPC-QP 1 for this project, the Contractor may submit written documentation showing conformance with the requirements in Section 3, "General Qualification Requirements," of SSPC-QP 1.

The Engineer shall have 10 working days to review the PQWP submittal after a complete plan has been received. No painting or paint removal shall be performed until the PQWP for that work is reviewed by the Engineer. Should the Engineer fail to complete the review within this time allowance and if, in the opinion of the Engineer, the Contractor's controlling operation is delayed or interfered with by reason of the delay in reviewing the PQWP, the delay will be considered a right of way delay in conformance with the provisions in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

It is expressly understood that the Engineer's review of the Contractor's PQWP shall not relieve the Contractor of any responsibility under the contract for the successful completion of the work in conformity with the requirements of the plans and specifications. The Engineer's review shall not constitute a waiver of any of the requirements of the plans and specifications nor relieve the Contractor of any obligation thereunder, and defective work, materials, and equipment may be rejected notwithstanding review of the PQWP.

Open joints between concrete and painted or galvanized metal surfaces shall be caulked with non-silicone type sealing compound conforming to the requirements in Federal Specification TT-S-230, Type II, or other approved material. The sealing compound shall be applied no sooner than 24 hours after the high pressure cleaning has been applied. The sealing compound shall be allowed to cure as recommended by the manufacturer prior to the water rinsing and application of the first finish coat. When no finish coats are applied, the sealing compound shall be gray in color.

CLEANING

All designated piling surfaces to be blast cleaned shall be dry blast cleaned in conformance with the requirements of Surface Preparation Specification No. 10, "Near White Blast Cleaning," of the "SSPC: The Society for Protective Coatings." Blast cleaning shall leave all surfaces with a dense, uniform, angular, anchor pattern of not less than 40 µm nor more than 86 µm as measured in conformance with the requirements in ASTM Designation: D 4417.

Mineral and slag abrasives used for blast cleaning steel shall conform to the requirements in Abrasive Specification No. 1, "Mineral and Slag Abrasives," of the "SSPC: The Society for Protective Coatings," and shall not contain hazardous material. Mineral and slag abrasives shall comply with the requirements for Class A, Grade 2 to 3 as defined therein.

A Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications and a Material Safety Data Sheet shall be furnished prior to use for each shipment of blast cleaning material to be used on steel.

PAINTING

Blast cleaned surfaces shall receive a single undercoat, and a final coat where specified or shown on the plans, consisting of a waterborne inorganic zinc coating conforming to the requirements in AASHTO Designation M 300, Type II, except that: 1) the first 3 sentences of Section 4.7, "Primer Field Performance Requirements," and the entire Section 4.7.1 shall not apply, and 2) zinc dust shall be Type II in conformance with the requirements in ASTM Designation: D 520. The inorganic zinc coating shall be listed on the qualified products list which may be obtained from the Transportation Laboratory.

The color of the final application of inorganic zinc coating shall essentially match Federal Standard 595B No. 36373.

Inorganic zinc coating shall be used within 12 hours of initial mixing.

Application of inorganic zinc coating shall conform to the provisions for applying zinc-rich coating in Section 59-2.13, "Application of Zinc-Rich Primer," of the Standard Specifications.

Inorganic zinc coating shall not be applied when the atmospheric or surface temperature is less than 7°C nor more than 29°C nor when the relative humidity exceeds 85 percent.

The single undercoat of inorganic zinc coating shall be applied to the required dry film thickness in 2 or more applications within 4 hours after blast cleaning.

The total dry film thickness of all applications of the single undercoat of inorganic zinc coating shall be not less than 100 µm nor more than 200 µm.

Areas where mudcracking occurs in the inorganic zinc coating shall be blast cleaned and repainted with inorganic zinc coating to the specified thickness.

Dry spray, or overspray, as defined in the Steel Structures Painting Manual, Volume 1, "Good Painting Practice," of the "SSPC: The Society for Protective Coatings," shall be removed prior to application of subsequent coats or final acceptance. Removal of dry spray shall be by screening or other methods that minimize polishing of the inorganic zinc surface. The dry film thickness of the coating after removal of dry spray shall be in conformance with the provisions for applying the single undercoat, as specified herein.

The inorganic zinc coating shall be tested for adhesion and cure. The locations of the tests will be determined by the Engineer. The sequence of the testing operations shall be determined by the Contractor. The testing for adhesion and cure will be performed no sooner than 72 hours after application of the single undercoat of inorganic zinc coating. At the Contractor's expense, satisfactory access shall be provided to allow the Engineer to determine the location of the tests and to test the inorganic zinc coating cure. The inorganic zinc coating shall pass the following tests:

Adhesion

The inorganic zinc coating shall have a minimum adhesion to steel of 4 MPa when measured at no more than 3 locations on each pile using a self-aligning adhesion tester in conformance with the requirements in ASTM Designation: D 4541. The Contractor, at the Contractor's expense, shall: (1) verify compliance with the adhesion requirements, (2) furnish test results to the Engineer, and (3) repair the coating after testing.

Cure

The inorganic zinc coating, when properly cured, shall exhibit a solid, hard, and polished metal surface when firmly scraped with the knurled edge of a quarter. Inorganic zinc coating that is powdery, soft, or does not exhibit a polished metal surface, as determined by the Engineer, shall be repaired by the Contractor, at the Contractor's expense, by blast cleaning and repainting with inorganic zinc coating to the specified thickness.

After installation of the piling, surfaces of steel piling and plates shall receive a final coat of a waterborne inorganic zinc coating of the same product used in the single undercoat at the locations and to the limits shown on the plans.

The final coat of inorganic zinc coating shall be applied after testing for adhesion, testing for cure, and completion of all operations that may damage or discolor the steel surface, including correction of runs, sags, thin and excessively thick areas in the paint film, skips and holidays, dry spray, or areas of non-uniform appearance.

The area to receive the final coat of inorganic zinc coating shall be lightly roughened by abrasive blasting using an abrasive no larger than 600 µm. Abrasive blasting shall remove no more than 15 µm of inorganic zinc. The surface to be lightly roughened shall be free from moisture, dust, grease or deleterious material. The undercoated areas of pile surfaces not receiving a final coat shall be protected from abrasive blast cleaning operations.

The final coat of inorganic zinc coating shall be applied to the required dry film thickness in one uniform application within 24 hours after light roughening. The dry film thickness of the final coat shall be not less than 25 µm nor more than 75 µm.

The total dry film thickness of all applications of the single undercoat and final coat of inorganic zinc coating shall be not less than 125 µm nor more than 275 µm.

Finish coats will not be required.

REPAIR

Shop waterborne inorganic zinc coated surfaces of piling that are abraded or damaged at any time after the application of the shop coat shall be repaired prior to installation. If the repair area exceeds 1 percent of the total coated surface as determined by the Engineer, the Contractor shall repair the surface by blast cleaning and painting the surface with waterborne inorganic zinc coating as previously specified. If the repair area is less than 1 percent of the total coated surface, the Contractor will be permitted to repair the area by thoroughly wire brushing the damaged areas and removing all loose and cracked coating, after which the cleaned areas shall be painted with 2 applications of unthinned zinc-rich primer (organic vehicle type) conforming to the provisions in Section 91, "Paint," of the Standard Specifications. Repair of abraded or damaged surfaces shall be at the Contractor's expense. Aerosol cans shall not be used.

PAYMENT

The contract lump sum price paid for clean and paint steel soldier piling and plates shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in cleaning and painting piling, complete in place, including water rinsing, adhesion testing of inorganic zinc coating, and the protecting, cleaning and repair of surfaces prior to and after pile installation, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.87 ALTERNATIVE PIPE

Alternative pipe culverts shall conform to the provisions in Section 62, "Alternative Culverts," of the Standard Specifications and these special provisions.

SPIRAL RIB PIPE

Spiral rib pipe shall conform to the provisions in "Corrugated Metal Pipe" of these special provisions, except for profile and fabrication requirements.

Spiral rib pipe shall, at the option of the Contractor, consist of either (1) three rectangular ribs spaced midway between seams with ribs 19 mm wide by 19 mm high at a maximum rib pitch of 191 mm, (2) two rectangular ribs and one half-circle rib equally spaced between seams with ribs 19 mm wide by 25 mm high at a maximum rib pitch of 292 mm. The half-circle rib diameter shall be spaced midway between the rectangular ribs or (3) two rectangular ribs equally spaced between seams with ribs 19 mm wide by 25 mm high at a maximum rib pitch of 213 mm. Rib pitch measured at right angles to the direction of the ribs may vary ±13 mm.

Corrugated steel spiral rib pipe shall be fabricated by a continuous helical lock seam fabricated in conformance with the provisions in Section 66-3.03C(1), "Fabrication by Continuous Lock Seam," of the Standard Specifications.

Corrugated aluminum spiral rib pipe shall be fabricated by a continuous helical lock seam fabricated in conformance with the provisions in Section 66-2.03B, "Fabrication by Continuous Helical Lock Seam," of the Standard Specifications.

Coupling bands for spiral rib pipe shall conform to the provisions in Section 66-1.07, "Coupling Bands," of the Standard Specifications. A coupling band shown on the plans or approved by the Engineer in conformance with the provisions in Section 61-1.02, "Performance Requirements for Culvert and Drainage Pipe Joints," of the Standard Specifications, for use on a pipe corrugation of 68 mm x 13 mm for corrugated metal pipe may be used on spiral rib pipe having 68 mm x 13 mm rerolled annular ends. The width of band (W) for hat bands for pipe sizes larger than 1200 mm in diameter shall be 95 mm.

Concrete backfill for alternative culverts shall be constructed in conformance with the provisions in Section 66-1.045, "Concrete Backfill," of the Standard Specifications and will be measured and paid for in conformance with the provisions in Section 66-4, "Measurement and Payment," of the Standard Specifications and the following:

A. The quantity of concrete backfill to be paid for, regardless of the kind of culvert and wall thickness of the culvert installed, will be based on the dimensions shown on the plans and the installation of corrugated steel pipe.

10-1.88 PLASTIC PIPE

Plastic pipe shall conform to the provisions in Section 64, "Plastic Pipe," of the Standard Specifications and these special provisions.

10-1.89 REINFORCED CONCRETE PIPE

Reinforced concrete pipe shall conform to the provisions in Section 65, "Reinforced Concrete Pipe," of the Standard Specifications and these special provisions.

Where embankment will not be placed over the top of the pipe, a relative compaction of not less than 85 percent shall be required below the pipe spring line for pipe installed using Method 1 backfill in trench, as shown on Standard Plan A62D. Where the pipe is to be placed under the traveled way, a relative compaction of not less than 90 percent shall be required unless the minimum distance between the top of the pipe and the pavement surface is the greater of 1.2 m or one half of the outside diameter of the pipe.

Except as otherwise designated by classification on the plans or in the specifications, joints for culvert and drainage pipes shall conform to the plans or specifications for standard joints.

When reinforced concrete pipe is installed in conformance with the details shown on Standard Plan A62DA, the fifth paragraph of Section 19-3.04, "Water Control and Foundation Treatment," of the Standard Specifications shall not apply.

When solid rock or other unyielding material is encountered at the planned elevation of the bottom of the bedding, the material below the bottom of the bedding shall be removed to a depth of 1/50 of the height of the embankment over the top of the culvert, but not less than 150 mm nor more than 300 mm. The resulting trench below the bottom of the bedding shall be backfilled with structure backfill material in conformance with the provisions in Section 19-3.06, "Structure Backfill," of the Standard Specifications.

The excavation and backfill below the planned elevation of the bottom of the bedding will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

The Outer Bedding shown on Standard Plan A62DA shall not be compacted prior to placement of the pipe.

Portland cement for concrete backfill shall be Type III conforming to the provisions in Section 90-2.01, "Cement," of the Standard Specifications. A Type C accelerating admixture conforming to the requirements in ASTM Designation: C 494 shall be added to the concrete mix for concrete backfill. The admixture shall be used at the rate recommended by the manufacturer of the admixture. The admixture shall not contain chlorides as Cl in excess of one percent by mass as determined by California Test 415.

Timber bulkheads shall be constructed and placed across the ends of unconnected reinforced concrete pipe as shown on the plans. Wood for timber bulkheads shall be construction heart grade redwood at least 25 mm thick. Full compensation for constructing and placing timber bulkheads shall be considered as included in the contract price paid per meter for the reinforced concrete pipe involved and no separate payment will be made therefor.

Reinforced concrete pipe shall be either cast or spun. Cast reinforced concrete pipe shall be manufactured by placing the concrete into stationary, vertical, cylindrical metal forms. Spun reinforced concrete pipe shall be manufactured by introducing the concrete into a rotating, horizontal, cylindrical metal form.

Reinforced concrete pipe shall contain not less than 330 kg of portland cement per cubic meter of concrete. The amount of free water used in concrete shall not exceed 130 kg per cubic meter of concrete. The concrete cover over the pipe reinforcement shall not be less than 50 mm. Cement type shall be Type IP (MS) modified cement or Type II modified cement.

Special reinforced concrete pipe, having concrete cover over the steel reinforcement greater than the cover specified in AASHTO Designation: M 170M, shall conform to the provisions in Section 65-1.02, "Materials," and Section 65-1.02A, "Circular Reinforced Concrete Pipe," of the Standard Specifications, except the width of crack produced by the D-load test specified in AASHTO Designation: M 170M shall be the width determined by the following formula:

$$b = \frac{t - 3 / 8d}{t - 3 / 8d - C} \times 0.3\text{-mm}$$

Where:

b = Width of crack to be produced in lieu of the 0.3-mm crack specified in AASHTO Designation: M 170M

t = Wall thickness of pipe, mm

d = Effective depth of the section to be tested, m

C = Concrete cover over steel reinforcement in excess of cover specified in AASHTO Designation: M 170M

Reinforced concrete pipe that is to be hydrostatically tested shall be strength tested by the 3-edge bearing method to a maximum D-load of 10 percent greater than the 0.3-mm cracking D-load specified in AASHTO Designation: M 170M or to the actual D-load required to produce a 0.3-mm crack, whichever is the lesser.

Special oval shaped reinforced concrete pipe, having concrete cover over the steel reinforcement greater than the cover specified in AASHTO Designation: M 207M, shall conform to the provisions in Section 65-1.02, "Materials," and Section 65-1.02B, "Oval Shaped Reinforced Concrete Pipe," of the Standard Specifications, except the width of crack produced by the D-load test specified in AASHTO Designation: M 207M shall be the width determined by the following formula:

$$b = \frac{t - 3 / 8d}{t - 3 / 8d - C} \times 0.3\text{-mm}$$

Where:
b = Width of crack to be produced in lieu of the 0.3-mm crack specified in AASHTO Designation: M 207M
t = Wall thickness of pipe, mm
d = Effective depth of the section to be tested, m
C = Concrete cover over steel reinforcement in excess of cover specified in AASHTO Designation: M 207

Oval shaped reinforced concrete pipe that is to be hydrostatically tested shall be strength tested by the 3-edge bearing method to a maximum D-load of 10 percent greater than the 0.3-mm cracking D-load specified in AASHTO Designation: M 207M or to the actual D-load required to produce a 0.3-mm crack, whichever is the lesser.

10-1.90 CORRUGATED METAL PIPE

Corrugated steel pipe culverts shall conform to the provisions in Section 66, "Corrugated Metal Pipe," of the Standard Specifications and these special provisions.

Asphaltic mastic coating or polymeric sheet coating substituted for bituminous coating shall be placed on the outside and inside surfaces of the pipe.

Corrugated steel pipe shall be fabricated from zinc-coated steel sheet.

Portland cement for concrete backfill shall be Type III conforming to the provisions in Section 90-2.01, "Cement," of the Standard Specifications. A Type C accelerating admixture conforming to the requirements in ASTM Designation: C 494 shall be added to the concrete mix for concrete backfill. The admixture shall be used at the rate recommended by the manufacturer of the admixture. The admixture shall not contain chlorides as Cl in excess of one percent by mass as determined by California Test 415.

Timber bulkheads shall be constructed and placed across the ends of unconnected corrugated metal pipe as shown on the plans. Wood for timber bulkheads shall be construction heart grade redwood at least 25 mm thick. Full compensation for constructing and placing timber bulkheads shall be considered as included in the contract price paid per meter for the size of corrugated metal pipe involved and no separate payment will be made therefor.

Pipe reducers will be measured and paid for by the meter as the corrugated metal pipe of the larger diameter connected to the reducer.

10-1.91 MISCELLANEOUS FACILITIES

Concrete flared end sections and drainage manholes shall conform to the provisions in Section 70, "Miscellaneous Facilities," of the Standard Specifications.

10-1.92 DRAINAGE INLET MARKER

The Contractor shall furnish and install stamped drainage inlet markers in conformance with the details and locations shown on the plans, as specified in these special provisions, and as directed by the Engineer.

The surface of drainage inlets shall be imprinted as shown on the plans with an approved stamp. The stamp shall be furnished by the Contractor. Stamped surfaces shall be free from blemishes.

Full compensation for furnishing the approved stamp and for stamping drainage inlets shall be considered as included in the contract price paid per cubic meter for minor concrete (minor structure) and no separate payment will be made therefor.

10-1.93 GRATED LINE DRAIN

This work shall consist of furnishing and installing precast grated line drain, with necessary fittings, coupling systems, frames, grates and associated items as shown on the plans and in conformance with these special provisions.

The interior surface of the grated line drain, below the level of the frame and grate and associated connections, shall be smooth. Grated line drain channel sections shall be manufactured of monolithic polymer concrete with no side extensions.

Monolithic polymer concrete shall be made from a composition of aggregate and polyester resin or vinylester resin and shall have the following properties when tested as follows:

PROPERTY	ASTM TEST METHOD	VALUE
Tensile Strength, MPa	C 307	10 min.
Compressive Strength, MPa	C 579	80 min.
Bending Strength, MPa	C 580	20 min.
Moisture Absorption, %	C 140	0.5 max.
Chemical Resistance	C 267	Pass
Freeze/Thaw, number of cycles w/o weight loss	C 666	1600 min.

The manufacturer of the grated line drain shall furnish the Engineer a Certificate of Compliance in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications.

Grated line drain frames and grates shall be manufactured of ductile iron conforming to the provisions in Section 75-1.02, "Miscellaneous Iron and Steel," of the Standard Specifications. The frames and grates need not be galvanized or coated with asphalt paint. Bolts, nuts, frame anchors, and other connecting hardware shall conform to the provisions in Section 75-1.02, "Miscellaneous Iron and Steel," of the Standard Specifications.

Frames and grates, when installed in conformance with the manufacturer's recommendations and these special provisions, shall be classified as heavy duty (112 kN proof load) when tested in accordance with Commercial Item Description A-A-60005 for "Frames, Covers, Gratings, Steps, Manhole, Sump and Catch Basin." Frames and grates shall be matchmarked in pairs before delivery to the work and grates shall fit into the frames without rocking.

Frames shall be secured to the surrounding concrete backfill with steel anchoring rods as shown on the plans. Other methods may be used to secure the frame to the concrete backfill or grated line drain wall provided that a minimum pullout resistance of 10 kN per meter of length of grated line drain frame is maintained.

Grates and frames shall be one piece or the grates shall be removable. Removable grates shall be held in place by locking devices that are tamper resistant. Removable grates shall provide a minimum repetitive pullout resistance of 5 kN per meter of length after completion of 1000 hours of salt spray testing in conformance with the requirements in ASTM Designation: B 117. When a combination of one piece frame and grate and removable grates are used, the locations of the removable grates shall be shown on the plans.

Except for grates installed within designated pedestrian paths of travel, grates shall accept inflow of runoff through openings. The openings shall consist of a minimum of 60 percent of the total top surface area of the grate, with individual openings or slots having a dimension not greater than 50 mm measured in the direction of the grated line drain flow line. Grates installed within designated pedestrian paths of travel shall be certified as conforming to the requirements of the "Americans with Disabilities Act."

Grated line drains shall be installed in trenches excavated to the lines and grades established by the Engineer. The bottom of the trench shall be graded and prepared to provide a firm and uniform bearing throughout the entire length of the grated line drain.

Grated line drains shall be installed and jointed in conformance with the manufacturer's recommendations.

Grated line drains shall be installed to the lines and grades with sections closely jointed and secured to ensure that no separation of the line drains occurs during backfilling.

The frame or grate of the grated line drain shall not extend above the level of the surrounding concrete backfill.

Grated line drains shall be connected to new or existing drainage facilities as shown on the plans.

Excavation and backfill shall conform to the provisions in Section 19-3, "Structure Excavation and Backfill," of the Standard Specifications.

Backfill for the grated line drains shall be either minor concrete or Class 3 concrete conforming to the provisions in Section 90, "Portland Cement Concrete," of the Standard Specifications, except that minor concrete shall contain not less than 300 kg of cement per cubic meter.

Concrete backfill shall be placed in the trench as shown on the plans. Concrete backfill shall be placed against undisturbed material at the sides and bottom of the trench and in a manner that will prevent floating or shifting of the grated line drain and voids in, or segregation of, the concrete. Foreign material which falls into the trench, prior to or during placement of the concrete, shall be immediately removed. Where necessary, earth plugs shall be constructed and compacted at the ends of the planned concrete backfill to contain the concrete within the trench.

Concrete backfill shall be finished flush with the adjacent surfacing.

The surface of the concrete shall be textured with a broom or burlap drag to produce a durable skid-resistant surface.

The length the grated line drain to be paid for will be the length measured by the meter along the pavement surface as designated by the Engineer. No payment will be made for grated line drain placed in excess of the designated length.

The contract price paid per meter for grated line drain shall include full compensation for furnishing all labor, materials (including frames and grates), tools, equipment, and incidentals, and for doing all the work involved in installing grated line drains, complete in place, including excavation and backfill, connecting grated line drains to new or existing facilities,

concrete collars, reinforcement, and other connecting devices, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.94 WELDED STEEL PIPE CASING (BRIDGE)

Welded steel pipe casings through bridges and under approach slabs shall be of the size shown and shall conform to the provisions in Section 70, "Miscellaneous Facilities," of the Standard Specifications and these special provisions.

Unless otherwise shown on the project plans, casings shall be installed at each abutment, and casings shall be extended to the greater of: (1) 1.5 m beyond the approach slab, (2) 1.5 m beyond the end of the adjacent wingwall or (3) 6 m beyond the abutment.

WORKING DRAWINGS

Working drawings for temporary support of casing pipe at the abutments shall be submitted for approval in conformance with the provisions in Section 5-1.02, "Plans and Working Drawings" of the Standard Specifications.

MATERIALS

Casing pipe

Casing pipe shall be welded steel pipe conforming to the provisions in Section 70-1.02B, "Welded Steel Pipe," of the Standard Specifications, except that the pipe shall be treated in accordance with the following requirements, prior to shipping. Exterior surfaces of welded steel pipe shall be cleaned and coated in conformance with the requirements in ANSI/AWWA C213 or at the option of the Contractor, cleaned, primed, and coated in accordance with specifications of ANSI/AWWA C214.

Pipe wrapping tape

Wrapping tapes for pipe in contact with the ground shall be a pressure sensitive polyvinyl chloride or polyethylene tape having thickness of 1.27 mm, minimum.

Pipe hanger assembly

Pipe hanger assembly shall consist of embedded steel welded linked eye rods, adjustable steel yoke, cast iron pipe roller, steel roller rod and hex nuts. All parts shall be galvanized. The pipe hanger assembly shall be suitable for the type and size of pipe installed and shall be as shown on the plans.

All steel cover plates, steel hangers, anchor bolts, pipe clamps, nuts and bolts, and other fittings shall be suitable for the type and size of the welded steel pipe casing and conform to the provisions in Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications.

CONSTRUCTION

If a blockout is provided in the bridge abutment wall for casing pipe, the space between the casing pipe and bridge abutment wall shall be filled with portland cement mortar conforming to the provisions in Section 51-1.135, "Mortar," of the Standard Specifications.

Openings for utilities through bridge superstructure concrete shall either be formed or shall consist of pipe sleeves.

Wrapping and coating pipe

Damaged coating on steel pipe casing in contact with earth shall be wrapped as follows:

A. Pipe to be wrapped shall be thoroughly cleaned and primed as recommended by the tape manufacturer.
B. Tapes shall be tightly applied with 1/2 uniform lap, free from wrinkles and voids to provide not less than 2.5 mm thickness.
C. Field joints and fittings for wrapped pipe shall be covered by double wrapping 1.27 mm thick tape. Wrapping at joints shall extend a minimum of 150 mm over adjacent pipe coverings. Width of tape for wrapping fittings shall not exceed 50 mm. Adequate tension shall be applied so tape will conform closely to contours of joint.

Where a welded steel pipe casing passes through the abutment wall, the welded steel pipe casing shall be additionally wrapped with 2 layers of No. 15 asphalt-felt building paper, securely taped or wired in place.

MEASUREMENT AND PAYMENT

Measurement and payment for welded steel pipe casing for each size listed in the Engineers Estimate shall conform to the provisions in Sections 70-1.04, "Measurement," and 70-1.05, "Payment," of the Standard Specifications.

Full compensation for furnishing and installing steel hangers, steel brackets, steel cover plates, mortar and building paper, and other fittings, casing, shall be considered as included in the contract prices paid per meter for the sizes of welded steel pipe casing involved and no additional compensation will be allowed therefor.

10-1.95 WELDED STEEL PIPE

Welded steel pipe shall conform to the provisions in Section 70, "Miscellaneous Facilities," of the Standard Specifications and these special provisions.

Coating and wrapping will not be required.

Coating the interior surface of the pipe will not be required.

Wrapping will not be required.

The exterior of the pipe shall be double coated and double wrapped in conformance with the requirements in AWWA Designation: C 203.

10-1.96 JACKED WELDED STEEL PIPE

Jacked welded steel pipe shall consist of furnishing and jacking welded steel pipe at the location and sizes as shown on the plans and these special provisions.

Attention is directed to "Tunnel Safety Orders" and "Non-Storm Water Discharges" of these special provisions.

The work shall also conform to the requirements in Section 623.1, "Bore and Jack," of the Encroachment Permit Manual. Microtunneling and auger boring to install welded steel pipes will not be permitted.

Welded steel pipe shall conform to the provisions in Section 70-1.02B, "Welded Steel Pipe," of the Standard Specifications except:

A. Coating and wrapping will not be required.
B. Testing for leaks will not be required.

The wall thickness of the welded steel pipe to be jacked shall not be less than the following:

Welded Steel Pipe Diameter	Up to 45.7 m Length	Over 45.7 m Length
152 mm to 711 mm	6 mm	6 mm
762 mm to 965 mm	10 mm	13 mm
1020 mm to 1520 mm	13 mm	19 mm
1575 mm to 1829 mm	19 mm	19 mm

Jacking pit excavation, bracing, dewatering, backfill and equipment shall conform to the provisions in Section 5.02, "Plans and Working Drawings," and Section 19-3, "Structure Excavation and Backfill," of the Standard Specifications.

Additional strength of pipe required to withstand jacking pressure shall be determined and furnished by the Contractor at the Contractor's expense.

Variation from theoretical alignment and grade at the time of completion of jacking shall not exceed one percent of the distance from the jacking point.

The distance between multiple pipes shall be the greater of either 610mm or twice that of the diameter of the larger pipe being installed.

Difficult jacked steel pipe installation is anticipated due to the presence of cobbles and boulders, subsurface concrete debris, abandoned utilities and traffic control. The Contractor shall fill annular space with lubricant during the jacking process.

Once the jacking of the welded steel pipe has commenced, the Contractor shall continue the operation until the pipe has been jacked into its final location as shown on the plans.

The Contractor shall monitor pavement settlement or heave during the jacking process. Heave and settlement of the road surface above the pipe shall not exceed 6 mm. If heave or settlement exceeds 6 mm the Contractor shall revise the operations to reduce such induced movement. If heave or settlement exceeds 12 mm, the Contractor shall cease operations and submit to the Engineer a Working Plan to repair damage and limit such movement. The Contractor shall make repairs as directed by the Engineer to the roadway surface as required to correct damage from the jacking operation. Repairs to the roadway surface or subsurface grouting of voids created by pipe jacking shall be at the Contractor's expense and will not be measured nor paid for.

The diameter of the excavated hole shall not be more than 10 mm (3/8”) greater than the outside diameter of the pipe. Sluicing or jetting with water will not be permitted. When material tends to cave in from outside these limits, a shield shall

be used ahead of the first section of pipe or the face of excavation shall not extend beyond the end of pipe more than 0.5-m, unless permitted by the Engineer.

Areas resulting from caving or excavating outside the above limits shall be backfilled with sand or mortar by a method which will fill the voids.

The Contractor may be required to pressure grout, filling any voids generated in the course of the installing jacked pipe. Grouting shall be at the expense of the Contractor. Grout holes when placed inside the of the pipe, shall be on 2.43 m centers, longitudinally and offset 22 degrees from vertical, and staggered to the left and right of the top longitudinal axis of the pipe. Grout pressure shall not exceed 34.5 kPa for a duration sufficient to fill all voids. Annular space shall be grouted within 24 hours.

MEASUREMENT

The length of the 900 mm jacked welded steel pipe and 1200 mm jacked welded steel pipe to be paid for will be the slope length designated by the Engineer. Pipe placed in excess of the length designated will not be paid for. The Contractor shall keep accurate count of volume excavated during jacking welded steel pipes.

PAYMENT

The contract price paid per meter for 900 mm jacked welded steel pipe and 1200 mm jacked welded steel pipe include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in 900 mm jacked welded steel pipe and 1200 mm jacked welded steel pipe complete in place, including structure excavation, bracing for jacking pits, dewatering, structure backfill, grouting, pavement monitoring and repair, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

Full compensation for monitoring pavement settlement or heave shall be considered as included in the contract price paid per meter for jacked welded steel pipe and no additional compensation will be allowed therefor.

10-1.97 SLOPE PROTECTION

Slope Protection shall be placed or constructed in conformance with the provisions in Section 72, "Slope Protection," of the Standard Specifications.

Rock slope protection fabric shall be woven or nonwoven type fabric, Type A or Type B, at the option of the Contractor.

10-1.98 MISCELLANEOUS CONCRETE CONSTRUCTION

Miscellaneous concrete construction shall conform to the provisions in Section 73, "Concrete Curbs and Sidewalks," of the Standard Specifications and these special provisions.

Curb ramp detectable warning surface shall consist of raised truncated domes constructed or installed on curb ramps in conformance with the details shown on the plans and these special provisions. At the option of the Contractor, the detectable warning surface shall be prefabricated, cast-in-place, or stamped into the surface of the curb ramp. The color of the detectable warning surface shall be yellow conforming to Federal Standard 595B, Color No. 33538.

Prefabricated detectable warning surface shall be in conformance with the requirements established by the Department of General Services, Division of State Architect and be attached in conformance with the manufacturer's recommendations.

Cast-in-place and stamped detectable warning surfaces shall be painted in conformance with the provisions in Section 59-6, "Painting Concrete," of the Standard Specifications.

The finished surfaces of the detectable warning surface shall be free from blemishes.

Prior to constructing the cast-in-place or stamping the detectable warning surface, the Contractor shall demonstrate the ability to produce a detectable warning surface conforming to the details shown on the plans and these special provisions by constructing a 600-mm by 600-mm test panel.

The manufacturer shall provide a written 5-year warranty for prefabricated detectable warning surfaces, guaranteeing replacement when there is defect in the dome shape, color fastness, sound-on-cane acoustic quality, resilience, or attachment. The warranty period shall begin upon acceptance of the contract.

Full compensation for constructing or furnishing and installing curb ramp detectable warning surfaces shall be considered as included in the contract price paid per cubic meter for minor concrete (curb ramp) and no separate payment will be made therefor.

The concrete for curbs, sidewalks, driveways, curb ramps and minor concrete (miscellaneous construction) from drainage items shall be cured by the curing compound method. The curing compound shall be curing compound (6) conforming to the provisions in Section 90-7.01B, "Curing Compound Method," of the Standard Specifications.

The curing compound shall be applied in a manner that will provide a complete coating of all exposed faces of the concrete surface.

10-1.99 MINOR CONCRETE (GUTTER)

The gutter behind the retaining walls shall conform to the provisions in Section 73, "Concrete Curbs and Sidewalks," of the Standard Specifications and these special provisions.

Minor concrete (gutter) will be measured and paid for by the linear meter.

The contract price paid per linear meter for minor concrete (gutter) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the gutter, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.100 MINOR CONCRETE (MEDIAN)

The minor concrete (median) shall conform to the provisions in Section 73, "Concrete Curbs and Sidewalks," of the Standard Specifications and these special provisions.

Minor concrete (median) will be measured and paid for by the cubic meter.

The contract price paid per cubic meter for minor concrete (median) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing the median, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.101 MISCELLANEOUS IRON AND STEEL

Miscellaneous iron and steel shall conform to the provisions in Section 75, "Miscellaneous Metal," of the Standard Specifications.

10-1.102 MISCELLANEOUS METAL (LAGGING WALL)

Miscellaneous metal (lagging wall) shall conform to the provisions for miscellaneous bridge metal in Section 75, "Miscellaneous Metal," of the Standard Specifications and these special provisions.

Attention is directed to "Welding" of these special provisions.

Miscellaneous metal (lagging wall) shall consist of the miscellaneous bridge metal items listed in Section 75-1.03, "Miscellaneous Bridge Metal," of the Standard Specifications

10-1.103 BRIDGE DECK DRAINAGE SYSTEM

Bridge deck drainage systems shall conform to the provisions for miscellaneous bridge metal in Section 75, "Miscellaneous Metal," of the Standard Specifications and these special provisions.

Self-tapping screws used for sleeve connections shall be hex-head stainless steel, installed in holes drilled to fit the self-tapping screws, conforming to the requirements of ASTM Designation: A 276, Type 316.

At the Contractor's option, fiberglass pipes and fittings with the same diameter and minimum bend radius as those shown on the plans, may be substituted for welded steel pipe in deck drain systems.

Fiberglass pipe and fittings shall conform to the requirements in ASTM Designation: D 2996, and shall have a minimum short-term rupture strength of 207 MPa. The adhesive type recommended by the manufacturer shall be used for joining pipe and fittings. Fiberglass pipe not enclosed in a box girder cell or encased in concrete shall be manufactured from ultraviolet-resistant resin pigmented with concrete-gray color, or be coated with a concrete-gray resin-rich exterior coating. Paint shall not be used. Fiberglass pipe treated with ultraviolet protection shall withstand a minimum of 2500 hours of accelerated weathering when tested in conformance with the requirements in ASTM Designation: G 154. Lamps shall be UV-B (313 nm wavelength). The resting cycle shall be 4 hours of ultraviolet exposure at 60°C, and then 4 hours of condensate exposure at 50°C. After testing, the surface of the pipe shall exhibit no fiber exposure, crazing, or checking, and only a slight chalking or color change.

Support spacing for fiberglass pipe shall be the same as shown on the plans for welded steel pipe. Pipe supports shall have a width of not less than 38 mm.

A Certificate of Compliance for fiberglass pipe and fittings shall be furnished to the Engineer in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. The Certificate of Compliance shall include all laboratory test results conforming to the provisions specified herein.

For drainage piping NPS 8 or smaller, which is: (1) enclosed in a box girder cell and exposed for a length not greater than 6 m within the cell, or (2) encased in concrete, the Contractor shall have the option of substituting polyvinyl chloride (PVC) plastic pipe and fittings, with the same diameter and minimum bend radius as shown on the plans, for welded steel pipe.

The PVC plastic pipe and fittings shall be Schedule 40 conforming to the requirements of ASTM Designations: D 1785. The maximum support spacing for PVC plastic pipe shall be 2 m.

Couplings used to connect PVC plastic pipe or fiberglass pipe to steel shall be threaded or flanged. The sleeve connections shown on the plans shall not be used for either PVC plastic pipe or fiberglass pipe.

If PVC plastic pipe or fiberglass pipe is substituted for welded steel pipe, the quantity of drainage piping will be computed on the basis of the dimensions and details shown on the plans, and no change in the quantities to be paid for will be made because of the use of PVC plastic pipe or fiberglass pipe.

Bridge deck drainage systems will be measured and paid for by the kilogram in the same manner specified for miscellaneous metal (bridge) in Section 75-1.06, "Measurement," and Section 75-1.07, "Payment," of the Standard Specifications.

10-1.104 MISCELLANEOUS METAL (RESTRAINER-CABLE TYPE)

Miscellaneous metal (restrainer-cable type) shall conform to the provisions for bridge joint restrainer units in Section 75-1.035, "Bridge Joint Restrainer Units," of the Standard Specifications and these special provisions.

New concrete adjacent to restrainers shall be placed prior to installing restrainers.

Miscellaneous metal (restrainer-cable type) will be measured and paid for by the kilogram in the same manner specified for miscellaneous metal (restrainer) in Sections 75-1.06, "Measurement," and 75-1.07, "Payment," of the Standard Specifications.

10-1.105 CHAIN LINK FENCE

Chain link fence shall be Type CL-1.2 (Mod) and CL-1.8, and shall conform to the provisions in Section 80, "Fences," of the Standard Specifications.

10-1.106 CHAIN LINK WALK GATE

Chain link walk gates shall be 1.5 m chain link gate (Type CL-1.8) conforming to the provisions in Section 80, "Fences," of the Standard Specifications and these special provisions.

Gates shall be installed at the locations shown on the plans. Gate installations shall be complete with gate post, latch post, concrete footings, braces, truss rods, and hardware. Gate and latch posts shall be braced to the next existing line post as shown on the plans.

Gate mounting and latching hardware shall not contain open-end slots for the fastening bolts.

Chain link fabric for gates shall be of the same mesh size as the existing fence in which the gates are installed.

10-1.107 MARKERS AND DELINEATORS

Markers and delineators shall conform to the provisions in Section 82, "Markers and Delineators," of the Standard Specifications and these special provisions.

Markers and delineators on flexible posts shall conform to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions. Flexible posts shall be made from a flexible white plastic which shall be resistant to impact, ultraviolet light, ozone, and hydrocarbons. Flexible posts shall resist stiffening with age and shall be free of burns, discoloration, contamination, and other objectionable marks or defects which affect appearance or serviceability.

Retroreflective sheeting for metal and flexible target plates shall be the retroreflective sheeting designated for channelizers, markers, and delineators conforming to the requirements in ASTM Designation: D 4956-95 and in conformance with the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions.

10-1.108 METAL BEAM GUARD RAILING

Metal beam guard railing shall be constructed in conformance with the provisions in Section 83-1, "Railings," of the Standard Specifications and these special provisions.

Attention is directed to "Order of Work" of these special provisions.

Line posts shall be wood, steel, or plastic. Blocks shall be wood or plastic.

Metal beam guard railing elements and required backup plates, terminal sections, end caps, and return caps shall conform to the requirements of Type 2 W-Beam as shown in AASHTO Designation: M 180.

ALTERNATIVE FLARED TERMINAL SYSTEM

Alternative flared terminal system shall be furnished and installed as shown on the plans and in conformance with these special provisions.

The allowable alternatives for a flared terminal system shall consist of one of the following or a Department approved equal.

(1) TERMINAL SYSTEM (TYPE FLEAT) - Terminal system (Type FLEAT) shall be a Flared Energy Absorbing Terminal 350 manufactured by Road Systems, Inc., located in Big Spring, Texas, and shall include items detailed for

terminal system (Type FLEAT) shown on the plans. The Flared Energy Absorbing Terminal 350 can be obtained from the distributor, Universal Industrial Sales, P.O. Box 699, Pleasant Grove, UT 84062, Telephone (801) 785–0505 or from the distributor, Gregory Highway Products, 4100 13th Street, S.W., Canton, OH 44708, Telephone (330) 477–4800.

(2) TERMINAL SYSTEM (TYPE SRT) - Terminal system (Type SRT) shall be an SRT-350 Slotted Rail Terminal (8-post system) as manufactured by Trinity Industries, Inc., and shall include items detailed for terminal system (Type SRT) shown on the plans. The SRT-350 Slotted Rail Terminal (8-post system) can be obtained from the manufacturer, Trinity Industries, Inc., P.O. Box 99, 950 West 400S, Centerville, UT 84014, Telephone (800) 772–7976.

The Contractor shall provide the Engineer with a Certificate of Compliance from the manufacturer in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. The Certificate of Compliance shall certify that the terminal systems furnished conform to the contract plans and specifications, conform to the prequalified design and material requirements, and were manufactured in conformance with the approved quality control program.

Terminal systems shall be installed in conformance with the manufacturer's installation instructions and these requirements. Each terminal system installed shall be identified by painting the type of terminal system in neat black letters and figures 60 mm high on the backside of the rail element between system posts numbers 4 and 5.

For terminal system (Type SRT), the steel foundation tubes with soil plates attached shall be, at the Contractor's option, either driven, with or without pilot holes, or placed in drilled holes. Space around the steel foundation tubes shall be backfilled with selected earth, free of rock, placed in layers approximately 100 mm thick and each layer shall be moistened and thoroughly compacted. The wood terminal posts shall be inserted into the steel foundation tubes by hand and shall not be driven. Before the wood terminal posts are inserted, the inside surfaces of the steel foundation tubes to receive the wood posts shall be coated with a grease which will not melt or run at a temperature of 65°C or less. The edges of the wood terminal posts may be slightly rounded to facilitate insertion of the post into the steel foundation tubes.

For terminal system (Type FLEAT), the soil tubes shall be, at the Contractor's option, driven with or without pilot holes, or placed in drilled holes. Space around the steel foundation tubes shall be backfilled with selected earth, free of rock, placed in layers approximately 100 mm thick and each layer shall be moistened and thoroughly compacted. Wood posts shall be inserted into the steel foundation tubes by hand. Before the wood terminal posts are inserted, the inside surfaces of the steel foundation tubes to receive the wood posts shall be coated with a grease which will not melt or run at a temperature of 65°C or less. The edges of the wood posts may be slightly rounded to facilitate insertion of the post into the steel foundation tubes.

Surplus excavated material remaining after the terminal system has been installed shall be disposed of in a uniform manner along the adjacent roadway where designated by the Engineer.

The contract unit price paid for alternative flared terminal system shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing and installing alternative flared terminal system, complete in place, including excavation, backfill and disposal of surplus material, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.109 CHAIN LINK RAILING

Chain link railing shall conform to the provisions in Section 83-l, "Railings," of the Standard Specifications and these special provisions.

The chain link fabric shall be 9-gage (3.76 mm), Type IV, Class B, bonded vinyl coated fabric, conforming to the requirements in AASHTO Designation: M 181.

The strength of the bond between the coating material and steel of the bonded vinyl coated chain link fabric shall be equal to or greater than the cohesive strength of the polyvinyl chloride (PVC) coating material.

10-1.110 METAL BRIDGE RAILING

Metal railing and tubular handrailing shall conform to the provisions in Section 83-1, "Railings," of the Standard Specifications.

10-1.111 CONCRETE BARRIER

Concrete barriers shall conform to the provisions in Section 83-2, "Barriers," of the Standard Specifications and these special provisions.

Bar reinforcing steel for use in concrete barriers of all types, located from STA "US101" 151+00 to STA "US101" 181+00, shall conform to the provisions in "Epoxy-Coated Prefabricated Reinforcement," of these special provisions.

Tubular lower railing shown on the plans for concrete barrier (Type 80SW) shall conform to the provisions for tubular handrailing in "Metal Bridge Railing" of these special provisions.

Forms for Type 80 concrete barrier railing shall remain in place for a minimum of 36 hours after the concrete has been placed.

Full compensation for epoxy-coated bar reinforcement and sealing concrete barrier surfaces shall be considered as included in the contract price paid per meter for concrete barrier of the type or types listed in the Engineer's Estimate and no separate payment will be made therefor.

Full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing and installing steel cover plates for barrier openings, as shown on the plans, shall be considered as included in the contract price paid per meter for concrete barrier of the types designated in the Engineer's Estimate separate payment will be made therefor.

10-1.112 PORTABLE CONCRETE BARRIER (TYPE 60K)

Portable concrete barrier (Type 60K) shall consist of constructing and placing interconnected new or undamaged used precast portable concrete barrier units at the locations and in conformance with the details shown on the plans, the Standard Specifications and these special provisions.

Concrete for use in portable concrete barrier (Type 60K) shall conform to the provisions in Section 90-10, "Minor Concrete," of the Standard Specifications. Load tickets and a Certificate of Compliance will not be required.

Reinforcing steel for use in portable concrete barrier (Type 60K) shall conform to the provisions in Section 52, "Reinforcement," of the Standard Specifications.

Steel plates shall conform to the requirements in ASTM Designation: A 36/A 36M. The connection pin shall be a round bar conforming to the requirements in ASTM Designation: A 36/A 36M.

The final surface finish of portable concrete barrier (Type 60K) shall conform to the provisions in Section 51-1.18A, "Ordinary Surface Finish," of the Standard Specifications.

Exposed surfaces of concrete elements shall be cured by the water method, the forms-in-place method, or the pigmented curing compound method. The pigmented curing compound shall be curing compound (1) as specified in Section 90-7.01B, "Curing Compound Method," of the Standard Specifications.

The Contractor shall furnish a Certificate of Compliance to the Engineer in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," for all new or used portable concrete barrier (Type 60K) that is not cast on the project.

Portable concrete barrier (Type 60K) shall have the fabrication date and Contractor's name or logo on each panel. The fabrication date and name or logo shall not be more than 100 mm in height and shall be located not more than 300 mm above the bottom of the rail panel.

Portable concrete barrier (Type 60K) shall be set on firm, stable foundation. The foundation shall be graded to provide a uniform bearing throughout the entire length of the railing.

Any excavation and backfill shall conform to the provisions in Section 19-3, "Structure Excavation and Backfill," of the Standard Specifications.

Abutting ends of precast concrete units shall be placed and maintained in alignment without substantial offset to each other. The precast concrete units shall be positioned straight on tangent alignment and on a true arc on curved alignment.

Portable concrete barrier (Type 60K) will be measured by the meter along the top of the barrier.

The contract price paid per meter for portable concrete barrier (Type 60K) shall include full compensation for furnishing all labor, materials, tools, equipment and incidentals, and for doing all the work involved in constructing and placing the portable concrete barrier (Type 60K), complete in place, including bar reinforcing steel, steel plates, excavation and backfill, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.113 THRIE BEAM BARRIER

Thrie beam barrier shall conform to the provisions in Section 83-2, "Barriers," of the Standard Specifications and these special provisions.

Attention is directed to "Order of Work" of these special provisions.

10-1.114 TRANSITION RAILING (TYPE WB)

Transition railing (Type WB) shall be furnished and installed in conformance with details shown on the plans, the provisions in Section 83-2, "Barriers," of the Standard Specifications and these special provisions.

The 10-gage rail elements shall conform to Class B, Type 2 thrie beam guard railing as shown in AASHTO Designation: M 180. Other rail elements including end caps shall conform to the requirements of Class A, Type 2 thrie beam guard railing as shown in AASHTO Designation: M 180.

Surplus excavated material remaining after the transitional railing (Type WB) has been constructed shall be disposed of in a uniform manner along the adjacent roadway where designated by the Engineer.

The contract unit price paid for transition railing (Type WB) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing and installing transition railing (Type WB), complete in place, including drilling holes for wood posts, driving posts, backfill, and disposal of surplus

material, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.115 TRANSITION RAILING (TYPE STB)

Transition railing (Type STB) shall be furnished and installed in conformance with details shown on the plans, the provisions in Section 83-2, "Barriers," of the Standard Specifications and these special provisions.

The 10-gage rail elements shall conform to the requirements of Class B, Type 1 thrie beam guard railing as shown in AASHTO Designation: M 180. End caps shall conform to the requirements of Class A, Type 1 thrie beam guard railing as shown in AASHTO Designation: M 180.

The 10-gage rail elements shall conform to Class B, Type 2 thrie beam guard railing as shown in AASHTO Designation: M 180. Other rail elements including end caps shall conform to the requirements of Class A, Type 2 thrie beam guard railing as shown in AASHTO Designation: M 180.

Surplus excavated material remaining after the transitional railing (Type STB) has been constructed shall be disposed of in a uniform manner along the adjacent roadway where designated by the Engineer.

The contract unit price paid for transition railing (Type STB) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing and installing transition railing (Type STB), complete in place, including drilling holes for wood posts, driving posts, backfill, and disposal of surplus material, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.116 TRANSITION RAILING (TYPE DTB)

Transition railing (Type DTB) shall be furnished and installed in conformance with details shown on the plans, the provisions in Section 83-2, "Barriers," of the Standard Specifications and these special provisions.

The 10-gage rail elements shall conform to Class B, Type 2 thrie beam guard railing as shown in AASHTO Designation: M 180. Other rail elements including end caps shall conform to the requirements of Class A, Type 2 thrie beam guard railing as shown in AASHTO Designation: M 180.

Surplus excavated material remaining after the transitional railing (Type DTB) has been constructed shall be disposed of in a uniform manner along the adjacent roadway where designated by the Engineer.

The contract unit price paid for transition railing (Type DTB) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing and installing transition railing (Type DTB), complete in place, including drilling holes for wood posts, driving posts, backfill, and disposal of surplus material, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.117 CRASH CUSHION (REACT)

Crash cushion (REACT) shall be furnished and installed as shown on the plans and in conformance with the provisions in the Standard Specifications and these special provisions.

Crash cushion (REACT) shall be a multiple recoverable type, manufactured by Energy Absorption Systems, Inc. Crash cushion (REACT) and additional components shall conform to the descriptions as follows:

Contract Item Description	Manufacturer's Product Description
Crash Cushion (REACT 9SCBS)	REACT 350.9 Self Contained

The successful bidder can obtain from the following distributors the crash cushion (REACT) manufactured by Energy Absorption Systems, Inc., A Quixote Company, at One East Wacker Drive, Suite 3000, Chicago, Illinois 60601:

1. Southern California: Traffic Control Service, Inc., 1881 Betmor Lane, Anaheim, California 92805, Telephone 800-222-8274, FAX 714-937-1070.
2. Northern California: Traffic Control Service, Inc., 8585 Thys Court, Sacramento, California 95828, Telephone 800-884-8274, FAX 916-387-9734.

The price quoted by the manufacturer for Crash Cushion (REACT 9SCBS), FOB Pell City, Alabama is $40,000, not including sales tax.

The above prices will be firm for orders placed within 30 days of contract award, and provided delivery is accepted within 90 days after the order is placed.

The price quoted for crash cushion (REACT 9SCBS) includes the concrete anchorage devices, but does not include the concrete anchor slab or the W-Beam connection to the barrier.

The price quoted for crash cushion (REACT 9CBB) includes the concrete anchorage devices, but does not include the concrete anchor slab or the concrete backup block.

Crash cushion shall be installed in conformance with the manufacturer's recommendations.

Concrete anchorage devices used for attaching the crash cushion to the base slab shall be limited to those which have been provided by the manufacturer.

The concrete anchor slab shall conform to the provisions in Section 51, "Concrete Structures," and Section 52, "Reinforcement," of the Standard Specifications and these special provisions.

The concrete anchor slab shall be constructed of concrete containing not less than 350 kg of cement per cubic meter.

For crash cushion (REACT 9SCBS), W-Beam connections to the barrier shall conform to the provisions in Section 83-1, "Railings," of the Standard Specifications. The high strength bolts and nuts for W-Beam connections to the barrier shall conform to the requirements in ASTM Designation: A 325/A 325M and A 563/A 563M, respectively.

The Contractor shall furnish the Engineer one copy of the manufacturer's plan and parts list for each model installed.

The Contractor shall provide the Engineer with a Certificate of Compliance from the manufacturer in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. The Certificate of Compliance shall certify that crash cushion conforms with the contract plans and specifications, and conforms to the prequalified design and material requirements.

Crash cushion will be measured by the unit as determined from actual count in place in the completed work.

The contract unit prices paid for crash cushion (REACT 9SCBS) shall include full compensation for furnishing all labor, materials (including anchor bolts, nuts, washers, and marker panels), tools, equipment, and incidentals, and for doing all the work involved in furnishing and installing the crash cushions, complete in place, including structure excavation, structure backfill, concrete anchor slab with bar reinforcing steel, transition plate and W-beam connector, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

The contract unit prices paid for crash cushion (REACT 9CBB) shall include full compensation for furnishing all labor, materials (including anchor bolts, nuts, washers, and marker panels), tools, equipment, and incidentals, and for doing all the work involved in furnishing and installing the crash cushions, complete in place, including structure excavation, structure backfill, and concrete anchor slab and backup block with bar reinforcing steel, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.118 CRASH CUSHION, SAND FILLED

Sand filled crash cushions shall be furnished and installed as shown on the plans and in conformance with these special provisions.

A sand filled crash cushion shall consist of a grouping of sand filled modules.

Crash cushions shall be installed at the following locations: "TL-2" STA 207+00 Lt.

At the Contractor's option, modules for use in sand filled crash cushions shall be either Energite III Inertial Modules, Fitch Inertial Modules or TrafFix Sand Barrels manufactured after March 31, 1997, or equal:

A. Energite III and Fitch Inertial Modules, manufactured by Energy Absorption Systems, Inc., One East Wacker Drive, Chicago, IL 60601-2076. Telephone 1-312-467-6750, FAX 1-800-770-6755

   1. Distributor (North): Traffic Control Service, Inc., 8585 Thys Court, Sacramento, CA 95828. Telephone 1-800-884-8274, FAX 1-916-387-9734
   2. Distributor (South): Traffic Control Service, Inc., 1881 Betmor Lane, Anaheim, CA 92805. Telephone 1-800-222-8274, FAX 1-714-937-1070

B. TrafFix Sand Barrels, manufactured by TrafFix Devices, Inc., 220 Calle Pintoresco, San Clemente, CA 92672. Telephone 1-949 361-5663, FAX 1-949 361-9205

   1. Distributor (North): United Rentals, Inc., 1533 Berger Drive, San Jose, CA 95112. Telephone 1-408 287-4303, FAX 1-408 287-1929
   2. Distributor (North): Statewide Safety & Sign, Inc., P.O. Box 1440, Pismo Beach, CA 93448. Telephone 1-800-559-7080, FAX 1-805 929-5786

Modules contained in the crash cushion shall be of the same type at each location. The color of the modules shall be the standard yellow color as furnished by the vendor, with black lids. The exterior components of the modules shall be

formulated or processed to resist deterioration from ambient ultraviolet rays. The modules shall exhibit good workmanship free from structural flaws and objectionable surface defects.

The Contractor shall provide the Engineer with a Certificate of Compliance from the manufacturer in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications. The Certificate of Compliance shall certify that the crash cushions comply with the contract plans and specifications, conform to the prequalified design and material requirements, and were manufactured in conformance with the approved quality control program.

Sand for filling the modules shall be clean washed concrete sand of commercial quality. At the time of placing in the modules, the sand shall contain not more than 7 percent water, as determined by California Test 226.

Modules placed on bridge decks shall be provided with positioning blocks fastened to the deck surface. Positioning blocks shall be shaped as segments of a ring and placed along the inner or outer periphery of the module wall. A minimum of 2 blocks, a minimum of one-sixth of a ring in length shall be provided for each module. Positioning blocks and fasteners shall be of a material that is corrosion and water resistant.

Module cylinders shall be filled with sand in conformance with the manufacturer's directions and to the sand capacity in kilograms for each module shown on the plans.

Lids shall be securely attached as recommended by the manufacturer.

A Type R or Type P marker panel shall be attached to the front of the crash cushion as shown on the plans, when the closest point of the crash cushion array is within 3.6 m of the traveled way. The marker panel, when required, shall be firmly fastened to the crash cushion with commercial quality hardware or by other methods approved by the Engineer.

Sand filled crash cushions, regardless of the number of modules required in each sand filled crash cushion, will be measured and paid for by the unit as crash cushion, sand filled. The quantity to be paid for will be determined from actual count of the units in place in the completed work.

The contract unit price paid for crash cushion, sand filled shall include full compensation for furnishing all labor, materials (including sand and marker panels), tools, equipment, and incidentals, and for doing all the work involved in furnishing and installing crash cushions, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

10-1.119 THERMOPLASTIC TRAFFIC STRIPE AND PAVEMENT MARKING

Thermoplastic traffic stripes (traffic lines) and pavement markings shall be applied in conformance with the provisions in Section 84, "Traffic Stripes and Pavement Markings," of the Standard Specifications and these special provisions.

Thermoplastic material shall be free of lead and chromium, and shall conform to the requirements in State Specification PTH-02ALKYD.

Retroreflectivity of the thermoplastic traffic stripes and pavement markings shall conform to the requirements in ASTM Designation: D 6359-99. White thermoplastic traffic stripes and pavement markings shall have a minimum initial retroreflectivity of 250 $mcd \cdot m^{-2} \cdot lx^{-1}$. Yellow thermoplastic traffic stripes and pavement markings shall have a minimum initial retroreflectivity of 150 $mcd \cdot m^{-2} \cdot lx^{-1}$.

Where striping joins existing striping, as shown on the plans, the Contractor shall begin and end the transition from the existing striping pattern into or from the new striping pattern a sufficient distance to ensure continuity of the striping pattern.

Thermoplastic traffic stripes shall be applied at the minimum thickness and application rate as specified below. The minimum application rate is based on a solid stripe of 100 mm in width.

Minimum Stripe Thickness (mm)	Minimum Application Rate (kg/m)
2.0	0.4

Thermoplastic traffic stripes and pavement markings shall be free of runs, bubbles, craters, drag marks, stretch marks, and debris.

At the option of the Contractor, permanent traffic striping and pavement marking tape conforming to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions may be placed instead of the thermoplastic traffic stripes and pavement markings specified herein. Permanent tape, if used, shall be installed in conformance with the manufacturer's specifications.

If permanent tape is placed instead of thermoplastic traffic stripes and pavement markings, the tape will be measured and paid for by the meter as thermoplastic traffic stripe and by the square meter as thermoplastic pavement marking.

10-1.120 PAINT TRAFFIC STRIPE

Painted traffic stripes (traffic lines) shall be applied in conformance with the provisions in Section 84, "Traffic Stripes and Pavement Markings," of the Standard Specifications and these special provisions.

Traffic stripe paint shall conform to the requirements in State Specification No. PTWB-01.

The color of the painted traffic stripes shall conform to the requirements in ASTM Designation: D 6628-01.

Retroreflectivity of the paint traffic stripes shall conform to the requirements in ASTM Designation: D 6359-99. White painted traffic stripes shall have a minimum initial retroreflectivity of 250 $mcd \cdot m^{-2} \cdot lx^{-1}$. Yellow painted traffic stripes shall have a minimum initial retroreflectivity of 150 $mcd \cdot m^{-2} \cdot lx^{-1}$.

At the option of the Contractor, permanent traffic striping tape conforming to the provisions in "Prequalified and Tested Signing and Delineation Materials" of these special provisions may be placed instead of painted traffic stripes. Permanent tape, if used, shall be placed in conformance with the manufacturer's specifications.

If permanent tape is placed instead of painted traffic stripes , the tape will be measured and paid for by the meter as paint traffic stripe of the number of coats designated in the Engineer's Estimate.

10-1.121 PAVEMENT MARKERS

Pavement markers shall be placed in conformance with the provisions in Section 85, "Pavement Markers," of the Standard Specifications and these special provisions.

Attention is directed to "Traffic Control System For Lane Closure" of these special provisions regarding the use of moving lane closures during placement of pavement markers with bituminous adhesive.

The Contractor shall furnish the Engineer certificates of compliance for the pavement markers in conformance with the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications.

Retroreflective pavement markers shall be marked as abrasion resistant on the body of the markers.

Retroreflective pavement markers placed in pavement recesses shall be cemented with a flexible, polymer-modified, hot-melt asphaltic adhesive conforming to the following requirements:

Specification	ASTM Designation	Requirement
Penetration, mm, 100 g, 5 seconds, 25°C	D 5	3.0 Maximum
Softening Point, °C	D 36	93 Minimum
Brookfield Thermosel Viscosity, Pa·s, No. 27 Spindle, 20 RPM, 191°C	D 4402	2.5 - 6
Ductility, cm, 5 cm/min, 25°C	D 113	15 Minimum
Ductility, cm, 1 cm/min, 4°C	D 113	5 Minimum
Flexibility	D 3111[1, 2, 3, 4]	No breaks or cracks

Notes:
1. Modify ASTM Designation: D 3111, Paragraph 6, to "The test apparatus consists of a mandrel 25.4 mm in diameter by 75 to 150 mm in length, supported at each end."
2. Modify ASTM Designation: D 3111, Paragraph 7, to "The test specimen dimensions are 25.4 mm wide, 152 mm long, and 3.18 mm thick."
3. Modify ASTM Designation: D 3111, Paragraph 8, to "Condition the test specimens and apparatus for 4 hours at –7°C before testing.
4. Modify ASTM Designation: D 3111, Paragraph 10.5, to "Bend the test specimens 90° over the mandrel at a uniform rate in 10 seconds while maintaining intimate contact with the mandrel."

Testing of adhesive bond strength will be performed on sandblasted concrete brick surface in conformance with the requirements in California Test 669 and these special provisions. The concrete brick surface will be sandblasted in conformance with the requirements in California Test 423. The test plugs of 51 mm diameter will be conditioned at 105°C for a minimum of 2 hours before bonding to the sandblasted concrete surface. The adhesive sample will be heated to the application temperature as recommended by the manufacturer and a sample of 75 mm diameter in area will be poured onto the sandblasted concrete surface. The heated plug will immediately be pressed onto the puddle of hot adhesive to squeeze out excess adhesive. The excess adhesive extruding from under the plug will be removed. The assembly will be allowed to cure for 24 hours at 23°C ± 2°C and then be tested to bond failure at a crosshead speed of 5.1 mm per minute. The reported peak load and the bond strength value will be the average of 3 tests, respectively. The same bond strength test will be performed on retroreflective pavement markers. Instead of placing the heated adhesive sample on the sandblasted concrete surface, it will be placed on the bottom of the pavement markers.

Minimum bond strength to the sandblasted concrete brick surface shall be 0.69-MPa and minimum bond strength to retroreflective pavement markers shall be 0.82-MPa.

Adhesive placed in pavement recesses shall be applied as recommended by the manufacturer.

Retroreflective pavement markers placed in pavement recesses will be measured and paid for as pavement marker (retroreflective-recessed).

SECTION 10-2 HIGHWAY PLANTING AND IRRIGATION SYSTEMS

10-2.01 GENERAL

The work performed in connection with highway planting and irrigation systems shall conform to the provisions in Section 20, "Erosion Control and Highway Planting," of the Standard Specifications and these special provisions.

The Contractor shall notify the Engineer not less than 72 hours prior to requiring initial access to the existing irrigation controllers. When the Engineer determines that access to the controllers is required at other times, arrangements will be made to provide this access.

When fluctuations of water pressure and water supply are encountered during normal working hours, plants shall be watered at other times, as often, and in sufficient amounts as conditions may require to keep the soil and plant roots moist during the life of the contract.

Full compensation for watering plants outside normal working hours shall be considered as included in the contract lump sum prices paid for highway planting and plant establishment work and no additional compensation will be allowed therefor.

PROGRESS INSPECTIONS

Progress inspections will be performed by the Engineer for completed highway planting and irrigation system work at designated stages during the life of the contract.

Progress inspections will not relieve the Contractor of responsibility for installation in conformance with the special provisions, plans and Standard Specifications. Work within an area shall not progress beyond each stage until the inspection has been completed, corrective work has been performed, and the work is approved, unless otherwise permitted by the Engineer.

The requirements for progress inspections will not preclude additional inspections of work by the Engineer at other times during the life of the contract.

The Contractor shall notify the Engineer, in writing, at least 4 working days prior to completion of the work for each stage of an area and shall allow a minimum of 3 working days for the inspection.

Progress inspections will be performed at the following stages of work:

A. During pressure testing of the pipelines on the supply side of control valves.
B. During testing of low voltage conductors.
C. Before planting begins and after completion of the work specified for planting in Section 20-4.03, "Preparing Planting Areas," of the Standard Specifications.
D. Before plant establishment work begins and after completion of the work specified for planting in Section 20-4.05, "Planting," of the Standard Specifications.
E. At intervals of one month during the plant establishment period.

COST BREAK-DOWN

The Contractor shall furnish the Engineer a cost break-down for the contract lump sum items of highway planting and irrigation system. Cost break-down tables shall be submitted to the Engineer for approval within 15 working days after the contract has been approved. Cost break-down tables will be approved, in writing, by the Engineer before any partial payment will be made for the applicable items of highway planting and irrigation system involved.

Attention is directed to "Time-Related Overhead" of these special provisions regarding compensation for time-related overhead.

Cost break-downs shall be completed and furnished in the format shown in the samples of the cost break-downs included in this section. Line item descriptions of work shown in the samples are the minimum to be submitted. Additional line item descriptions of work may be designated by the Contractor. If the Contractor elects to designate additional line item descriptions of work, the quantity, value and amount for those line items shall be completed in the same manner as for the unit descriptions shown in the samples. The line items and quantities given in the samples are to show the manner of preparing the cost break-downs to be furnished by the Contractor.

The Contractor shall determine the quantities required to complete the work shown on the plans. The quantities and their values shall be included in the cost break-downs submitted to the Engineer for approval. The Contractor shall be responsible for the accuracy of the quantities and values used in the cost break-downs submitted for approval.

The sum of the amounts for the line items of work listed in each cost break-down table for highway planting and for irrigation system work shall be equal to the contract lump sum price bid for Highway Planting and Irrigation System, respectively. Overhead and profit, except for time-related overhead, shall be included in each individual line item of work listed in a cost break-down table.

No adjustment in compensation will be made in the contract lump sum prices paid for highway planting and irrigation system due to differences between the quantities shown in the cost break-downs furnished by the Contractor and the quantities required to complete the work as shown on the plans and as specified in these special provisions.

Individual line item values in the approved cost break-down tables will be used to determine partial payments during the progress of the work and as the basis for calculating an adjustment in compensation for the contract lump sum items of highway planting and irrigation system due to changes in line items of work ordered by the Engineer. When the total of ordered changes to line items of work increases or decreases the lump sum price bid for either Highway Planting or Irrigation System by more than 25 percent, the adjustment in compensation for the applicable lump sum item will be determined in the same manner specified for increases and decreases in the total pay quantity of an item of work in Section 4-1.03B, "Increased or Decreased Quantities," of the Standard Specifications.

HIGHWAY PLANTING COST BREAK-DOWN

Contract No. 04-264204

UNIT DESCRIPTION	UNIT	APPROXIMATE QUANTITY	VALUE	AMOUNT
ROADSIDE CLEARING	LS	LUMP SUM		
SOIL AMENDMENT	M3	257		
CULTIVATE	M2	2,750		
MULCH (75MM DEPTH)	M3	1,995		
COMMERCIAL FERTILIZER (GRANULAR)	KG	124		
COMMERCIAL FERTILIZER (PACKET)	EA	11,524		
PLANT (GROUP A)	EA	1,350		
PLANT (GROUP B)	EA	2,194		
PLANT (GROUP F)	EA	34,350		
PLANT (GROUP U)	EA	8		

TOTAL

IRRIGATION SYSTEM COST BREAK-DOWN

Contract No. 04-264204

UNIT DESCRIPTION	UNIT	APPROXIMATE QUANTITY	VALUE	AMOUNT
CONTROL AND NEUTRAL CONDUCTORS	LS	LUMP SUM		
65mm BACKFLOW PREVENTER	EA	6		
BACKFLOW ENCLOSURE	EA	6		
50mm FLOW SENSING ASSEMBLY	EA	7		
50mm MASTER REMOTE CONTROL VALVE	EA	6		
25mm QUICK COUPLING VALVE	EA	15		
65mm GATE VALVE	EA	9		
32mm WYE STRAINER	EA	3		
40mm WYE STRAINER	EA	3		
50mm WYE STRAINER	EA	9		
25mm ELECTRIC REMOTE CONTROL VALVE	EA	4		
32mm ELECTRIC REMOTE CONTROL VALVE	EA	16		
40mm ELECTRIC REMOTE CONTROL VALVE	EA	13		
50mm ELECTRIC REMOTE CONTROL VALVE	EA	11		
IRRIGATION CONTROLLER ENCLOSURE CABINET	EA	9		
12 STATION IRRIGATION CONTROLLER	EA	9		
REMOTE CONTROL VALVE ACTUATOR SYSTEM	EA	1		
20mm PLASTIC PIPE (PR 200) (LATERAL LINE)	M	8,780		
25mm PLASTIC PIPE (PR 200) (LATERAL LINE)	M	2,036		
32mm PLASTIC PIPE (PR 200) (LATERAL LINE)	M	2,978		
40mm PLASTIC PIPE (PR 200) (LATERAL LINE)	M	1,271		
50mm PLASTIC PIPE (PR 200) (LATERAL LINE)	M	2,318		
65mm PLASTIC PIPE (PR 315) (PRESSURE SUPPLY)	M	4,884		
SPRINKLER (TYPE A)	EA	27		
SPRINKLER (TYPE B)	EA	50		
SPRINKLER (TYPE C)	EA	3,490		

CHECK, TEST, AND REMOVE EXISTING IRRIGATION FACILITIES	LS	LUMP SUM		
REMOVE EXISTING PLANTS FOR TRENCHING	LS	LUMP SUM		

TOTAL

10-2.02 EXISTING HIGHWAY PLANTING

In addition to the provisions in Section 20, "Erosion Control and Highway Planting," of the Standard Specifications, work performed in connection with existing highway planting shall conform to the provisions in "Existing Highway Facilities," of these special provisions.

Replacement planting shall conform to the provisions in "Preservation of Property" of these special provisions.

MAINTAIN EXISTING PLANTED AREAS

Existing planted areas, designated on the plans to be maintained, shall be maintained throughout the life of the contract in conformance with these special provisions.

Attention is directed to "Preservation of Property" of these special provisions.

Existing plants shall be watered in conformance with the provisions in Section 20-4.06, "Watering," of the Standard Specifications.

Existing planted areas to be maintained shall be inspected for deficiencies by the Contractor in the presence of the Engineer. Deficiencies requiring corrective action shall include weeds; dead, diseased, or unhealthy plants; missing plant stakes and tree ties; inadequate plant basins; and other deficiencies needing corrective action to promote healthy plant life. The inspection shall be completed within 10 working days after the start of work.

Deficiencies found during the inspection shall be corrected within 10 working days after the inspection ends. Correction of deficiencies, as directed by the Engineer, will be paid for as extra work in conformance with the provisions in Section 4-1.03D, "Extra Work," of the Standard Specifications.

After deficiencies have been corrected, the Contractor shall perform work to maintain existing planted areas in a neat appearance and to promote healthy plant growth. The work shall include the following:

A. Weeds shall be killed before the weeds reach the seed stage of growth or exceed 150 mm in length.
B. Trash, debris and weeds shall be removed from existing planted areas. Weeds shall be killed prior to removal. Trash, debris and weed removal in ground cover areas shall extend beyond the outer limits of ground cover areas to the adjacent edges of paving, fences and proposed plants and planting areas, and a 2-m diameter area centered at each existing tree and shrub outside of existing ground cover areas.
C. Existing plant basins shall be kept well-formed and free of silt. If existing plant basins require repairs, and the plant basins contain mulch, the mulch shall be replaced after the plant basins have been repaired.
D. When a portion of a new automatic irrigation system is completed, the existing plants to be watered by that portion of the irrigation system shall be watered automatically.
E. Pesticides for maintaining existing planted areas shall conform to the provisions in "Pesticides" of these special provisions.

The contract lump sum price paid for maintain existing planted areas shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in maintain existing planted areas, complete in place, as specified in the standard specifications and these special provisions, and as directed by the Engineer.

REMOVE EXISTING PLANTS FOR TRENCHING

Removing existing plants for trenching shall conform to the provisions in Section 20-5.026, "Remove Existing Plants for Trenching," of the Standard Specifications and these special provisions.

Removing existing plants for trenching work shall consist of removing and replacing ground cover, pruning trees and shrubs within trench locations, applying preemergents and disposing of removed ground cover and prunings.

Replacement of removed ground cover within the maximum 1.8–m width, as specified in Section 20-5.026, "Remove Existing Plants for Trenching," of the Standard Specifications, will be required, except for trenches within 1.8-m of fences, curbs, dikes or shoulders.

Trees and shrubs adjacent to dikes, walks, fences, guard railing, and pavement edges may be pruned back 3 m from these facilities to facilitate trenching work. When trenching is to be performed adjacent to other trees and shrubs that cannot be avoided, the trees and shrubs may be pruned upon receipt of prior written approval of the Engineer.

Pruning shall include removal of deadwood, suckers, and broken or bruised branches 25 mm or larger in diameter. Pruning shall conform to the provisions in Section 20-4.055, "Pruning," of the Standard Specifications.

Removed ground cover and pruned materials shall be disposed of outside the highway right of way in conformance with the provisions in Section 7-l.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

Shrubs adjacent to dikes, fences, guard railing, and the edge of pavement within the 3-m pruned area designated above, that in the opinion of the Engineer should be removed after pruning, shall be removed and disposed of. Removing and disposing of the shrubs not otherwise provided for will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications.

One application of a preemergent pesticide shall be applied to trenched areas in existing ground cover areas and to trenched areas adjacent to fences, curbs, dikes and shoulders. The Engineer will determine when the preemergent pesticide shall be applied.

PRUNE EXISTING PLANTS

Existing plants, as determined by the Engineer, shall be pruned. Pruning of the existing plants, except as otherwise provided in these special provisions, will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications.

10-2.03 EXISTING HIGHWAY IRRIGATION FACILITIES

The work performed in connection with the various existing highway irrigation system facilities shall conform to the provisions in "Existing Highway Facilities," of these special provisions.

Water shall be maintained in conformance with the provisions in Section 20-5.025, "Maintain Existing Water Supply," of the Standard Specifications.

LOCATE EXISTING CROSSOVERS AND CONDUITS

Existing crossovers and conduits shown on the plans to be incorporated in the new work shall be located in conformance with the provisions for locating conduits in Section 20-5.03B, "Conduit for Irrigation Crossovers," of the Standard Specifications.

Unless otherwise directed by the Engineer, existing crossovers and conduits shown on the plans to be incorporated in the new work shall be located prior to performing work on irrigation systems.

If debris is encountered in the ends of conduits, the debris shall be removed prior to performing other work in the conduits. Removal of debris within the first one meter in these conduits shall be at the Contractor's expense. If debris is encountered in the conduits more than one meter from the ends of the conduits, the additional debris shall be removed as directed by the Engineer and the removal work will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications.

CHECK AND TEST EXISTING IRRIGATION FACILITIES

Existing irrigation facilities that are to remain or to be relocated, and that are within those areas where clearing and grubbing or earthwork operations are to be performed, shall be checked for missing or damaged components and proper operation prior to performing clearing and grubbing or earthwork operations. Existing irrigation facilities outside of work areas that are affected by the construction work shall also be checked for proper operation.

A written list of existing irrigation system deficiencies shall be submitted to the Engineer within 5 working days after checking the existing facilities.

Deficiencies found during checking of the existing facilities shall be corrected as directed by the Engineer. Corrective work ordered by the Engineer will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

When existing irrigation facilities are checked, existing backflow preventers shall be tested for proper operation in conformance with the provisions in Section 20-5.03J, "Check and Test Backflow Preventers," of the Standard Specifications.

Existing backflow preventers shall be retested one year after the satisfactory completion of the previous test, and each year thereafter until the plant establishment period is completed. An additional test shall be provided not more than 10 days prior to acceptance of the contract.

Length of watering cycles for use of potable water from water meters for checking or testing existing irrigation facilities shall be as determined by the Engineer.

Additional repairs required for the existing irrigation system as ordered by the Engineer, except as otherwise provided for in "Existing Highway Irrigation Facilities" of these special provisions, will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

Additional repairs required for the existing irrigation system as ordered by the Engineer, except as otherwise provided for in "Maintain Existing Irrigation Facilities" of these special provisions, will be paid for as extra work as provided in Section 4-1.03D, "Extra Work," of the Standard Specifications.

MAINTAIN EXISTING IRRIGATION FACILITIES

Existing irrigation facilities shall be maintained throughout the life of the contract. Prior to the start of maintaining existing irrigation facilities work, the facilities shall be checked for proper operation, and repaired in conformance with the provisions in "Check and Test Existing Irrigation Facilities" of these special provisions.

After the existing facilities have been checked and repaired, the Contractor shall be responsible for the routine maintenance of existing irrigation systems. The work shall include, but not limited to, checking irrigation systems for proper

operation and adjusting, repairing or replacing valves, valve boxes, sprinklers, risers, swing joints, wye strainers, valve assembly units, and filter assembly units.

The Contractor will not be responsible for maintaining existing water meters, underground pipe supply lines, control and neutral conductors, and electrical conduits. Except as otherwise specified in "Existing Highway Irrigation Facilities" of these special provisions, repair work to these facilities ordered by the Engineer will be paid for as extra work as provided in Section 4-l.03D, "Extra Work," of the Standard Specifications.

Existing automatic irrigation systems shall be operated automatically during the life of the contract, except manual operation will be allowed for the work during plant replacement, fertilization, weed germination, and the repair of irrigation facilities.

Irrigation controllers shall be programmed by the Contractor for seasonal water requirements. During winter seasons irrigation systems shall be operated automatically a minimum of 2 minutes every 2 weeks.

Irrigation systems and facilities shall be checked for proper operation at least once every 30 days. When required, as determined by the Engineer, adjusting, repairing or replacing irrigation facilities shall be completed within 5 working days after checking the irrigation systems. Except as provided in these special provisions, repair and replacement of irrigation facilities shall conform to the provisions in "Existing Highway Irrigation Facilities" of these special provisions.

Except as provided in these special provisions, the contract lump sum price paid for maintain existing irrigation facilities shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in maintaining existing irrigation facilities, complete in place, including checking irrigation facilities, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

REMOVE EXISTING IRRIGATION FACILITIES

Existing irrigation facilities where shown on the plans to be removed, shall be removed. Facilities that are more than 150 mm below finished grade, excluding facilities to be salvaged, may be abandoned in place.

Immediately after disconnecting an existing irrigation facility to be removed or abandoned from an existing facility to remain, the remaining facility shall be capped or plugged, or shall be connected to a new or existing irrigation facility.

Existing remote control valves, where shown on the plans to be removed, shall be salvaged.

The Engineer shall be given written notification of the intent to salvage existing irrigation facilities a minimum of 72 hours prior to salvaging these facilities.

Salvaged irrigation facilities shall remain the property of the State and shall be delivered to Caltrans South Bay Maintenance Station, 500 Queens Lane, San Jose, CA 95035, (408) 452-7129.

Facilities to be removed, excluding facilities to be salvaged, shall be disposed of in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.

10-2.04 HIGHWAY PLANTING

The work performed in connection with highway planting shall conform to the provisions in Section 20-4, "Highway Planting," of the Standard Specifications and these special provisions.

HIGHWAY PLANTING MATERIALS

Plants

Plants that are found to be in a root bound condition or have an underdeveloped root ball as determined by the Engineer will not be accepted.

Mulch

Mulch shall be wood chips. Wood chips produced from tree trimmings may contain leaves and small twigs.

Commercial Fertilizer (Granular)

Commercial fertilizer (granular) shall be a pelleted or granular form and shall fall within 20 percent of the following guaranteed chemical analysis:

Ingredient	Percentage
Nitrogen	18
Phosphoric Acid	6
Water Soluble Potash	12

Commercial Fertilizer (Packets)

Commercial fertilizer (packet) shall be slow or controlled release and shall be in a biodegradable packet form. The packet shall gradually release nutrients over a 12-month period. Each packet shall have a mass of 10 g ± 1 g and shall have the following guaranteed chemical analysis:

Ingredient	Percentage
Nitrogen	20
Phosphoric Acid	10
Water Soluble Potash	5

ROADSIDE CLEARING

Prior to preparing planting areas, mulch areas, and wild flower seeding areas, or commencing irrigation trenching operations for planting areas, trash and debris shall be removed from the entire highway right of way within the project limits, excluding paved areas, medians and existing planted areas where existing plants are to remain.

In addition to removing trash and debris, the project area shall be cleared as specified herein:

A. Existing ground cover, where shown on the plans to be removed, shall be removed.
B. Weeds shall be killed and removed within the entire highway right of way, within the project limits, except for existing planting areas to be maintained, and including median areas, new and existing pavement, curb, sidewalk and other surfaced areas.
C. Disposal of weeds killed during the initial roadside clearing will not be required, unless otherwise directed by the Engineer. When directed by the Engineer, killed weeds shall be disposed of and the disposal will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications.

After the initial roadside clearing is complete, additional roadside clearing work shall be performed as necessary to maintain the areas, as specified above, in a neat appearance until the start of the plant establishment period. This work shall include the following:

A. Trash and debris shall be removed.
B. Rodents shall be controlled.
C. Weed growth shall be killed before the weeds reach the seed stage of growth or exceed 150 mm in length.
D. Weeds in plant basins, including basin walls, shall be removed by hand pulling, after the plants have been planted.
E. Areas outside the areas specified to be cleared of weeds shall be mowed.

Weed Control

Weed control shall also conform to the following:

A. Stolon type weeds shall be killed with glyphosate.
B. Removed weeds and ground cover shall be disposed of outside the highway right of way in conformance with the provisions in Section 7-1.13, "Disposal of Material Outside the Highway Right of Way," of the Standard Specifications.
C. Areas to be mowed shall be mowed when weed height exceeds 300 mm. Weeds shall be mowed to a height of 50 mm to 150 mm.
D. Disposal of mowed material and killed weeds after initial roadside clearing will not be required, unless otherwise directed by the Engineer. When directed by the Engineer, mowed material and killed weeds shall be disposed of and the disposal will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications.

Roadside clearing work shall not include work required to be performed as clearing and grubbing as specified in Section 16, "Clearing and Grubbing," of the Standard Specifications.

PESTICIDES

Pesticides used to control weeds shall conform to the provisions in Section 20-4.026, "Pesticides," of the Standard Specifications. Except as otherwise provided in these special provisions, pesticide use shall be limited to the following materials:

Diquat
Glyphosate

Isoxaben (Preemergent)
Pendimethalin (Preemergent)

Granular preemergents may be used when applied to areas that will be covered with mulch, excluding plant basins. Granular preemergents shall be limited to the following materials:

Dichlobenil (Preemergent

Granular preemergents shall be applied prior to the application of mulch. Mulch applications shall be completed in these areas on the same working day. Photosensitive dye will not be required.

Glyphosate shall be used to kill stolon type weeds.

Prior to the application of preemergents, ground cover plants shall have been planted a minimum of 3 days and shall have been thoroughly watered.

A minimum of 100 days shall elapse between applications of preemergents.

Except for ground cover plants, preemergents shall not be applied within 450 mm of plants or within wild flower seeding areas.

Growth regulators shall not be applied within 2 m of trees, shrubs or vines.

If the Contractor elects to request the use of other pesticides on this project, the request shall be submitted, in writing, to the Engineer not less than 15 days prior to the intended use of the other pesticides. Except for the pesticides listed in these special provisions, no pesticides shall be used or applied without prior written approval of the Engineer.

Pesticides shall not be applied within the limits of the plant basins. Pesticides shall not be applied in a manner that allows the pesticides to come in contact with the foliage and woody parts of the plants.

PREPARING PLANTING AREAS

Plants adjacent to drainage ditches shall be located so that after construction of the basins, no portion of the basin walls shall be less than the minimum distance shown on the plans for each plant involved.

CULTIVATE

Areas to be planted with Groundcover shall be cultivated.

Immediately prior to cultivation, soil amendment and commercial fertilizer shall be added to the areas to be cultivated. Soil amendment shall be added at the rate shown on the plans and commercial fertilizer shall be applied at the rate of 450 kilograms per hectare. Soil amendment and fertilizer shall be thoroughly mixed with the soil.

PLANTING

Backfill material for plant holes shall be a mixture of soil and soil amendment. The quantity of soil amendment shall be as shown on the Plant List. Soil amendment shall conform to the provisions in Section 20-2.03, "Soil Amendment," of the Standard Specifications. Backfill material shall be thoroughly mixed and uniformly distributed throughout the entire depth of the plant hole without clods and lumps.

Commercial fertilizer (pelleted and granular) shall be applied or placed at the time of planting and at the rates shown on the Plant List and in conformance with the provisions in Section 20-4.05, "Planting," of the Standard Specifications and these special provisions.

Commercial fertilizer packets shall be placed in the backfill of each plant at the time of planting and at the rate shown on the Plant List to within 150 to 200 mm {6 to 8 inches} of the soil surface and approximately 25 mm {one inch} from the roots. When more than one fertilizer packet is required per plant, the packets shall be distributed evenly around the root ball.

A granular preemergent shall be applied to areas to be covered with mulch outside of plant basins in conformance with the provisions in "Pesticides" of these special provisions.

Mulch placed in areas outside of plant basins shall be spread to a uniform depth of 75 mm {3 inches}.

Mulch shall be spread from the outside of the proposed plant basin to the adjacent edges of shoulders, dikes, curbs, sidewalks, walls, fences, and existing plantings. If the proposed plant material is 3.6 m {12 feet} or more from the adjacent edges of shoulders, dikes, curbs, sidewalks, walls, fences, and other existing plantings, the mulch shall be spread 2 m {6 feet} beyond the outside edge of the proposed plant basins.

Mulch shall not be placed within one meter {3 feet} of the centerline of earthen drainage ditches, within one meter {3 feet} of the edge of paved ditches, and within one meter {3 feet} of the centerline of drainage flow lines.

Attention is directed to "Irrigation Systems Functional Test" of these special provisions regarding functional tests of the irrigation systems. Planting shall not be performed in an area until the functional test has been completed for the irrigation system serving that area.

PLANT ESTABLISHMENT WORK

The plant establishment period shall be Type 2 and shall not be less than 250 working days.

Attention is directed to "Relief From Maintenance and Responsibility" in these special provisions regarding relief from maintenance and protection.

Commercial fertilizer (granular) shall be applied to trees, shrubs, vines and ground cover during the first week of March and June of each year. Commercial fertilizer shall be applied at the rates shown on the plans and shall be spread with a mechanical spreader wherever possible.

The center to center spacing of replacement plants for unsuitable ground cover plants shall be determined by the number of completed plant establishment working days at the time of replacement and the original spacing in conformance with the following:

ORIGINAL SPACING (Millimeters)	SPACING OF REPLACEMENT GROUND COVER PLANTS (Millimeters)		
	Number of Completed Plant Establishment Working Days		
	1-125	126-190	191-End of Plant Establishment
230	230	150	150
300	300	230	150
460	460	300	230
600	600	460	300
910	910	600	460

During the plant establishment period, the plants shall be watered utilizing the Remote Irrigation Control System (RICS) software program. A watering schedule shall be submitted to the Engineer for use during the plant establishment period.

Weeds within plant basins, including basin walls and ground cover, shall be controlled by hand pulling.

Weeds within mulched and ground cover areas and outside of plant basins shall be controlled by killing.

Weeds outside of mulched areas, plant basins, ground cover, the median, and paved areas shall be controlled by mowing. At locations where proposed planting areas are 3.6 m or more from the edges of existing plantings to remain and from shoulders, dikes, curbs, sidewalks, fences, and walls, the mowing limit shall be 2 m beyond the outer limits of the proposed planting area.

Weeds within median areas, pavement, curbs, sidewalk, and other surfaced areas shall be controlled by killing.

Vines shall be trained onto fences and walls or through cored holes in walls.

At the option of the Contractor, plants of a larger container size than those originally specified may be used for replacement plants during the first 125 working days of the plant establishment period. The use of plants of a larger container size than those originally specified for replacement plants shall be at the Contractor's expense.

After 125 working days of the plant establishment period have been completed, replacement of plants, except for ground cover plants, shall be No. 1 size for seedlings, pot and liner size plants; No. 5 size for No. 1 size plants; No. 15 size for No. 5 size plants; and other plant replacement plants shall be the same size as originally specified.

Wye strainers shall be cleaned at least 15 days prior to the completion of the plant establishment period.

The final inspection shall be performed in conformance with the provisions in Section 5-1.13, "Final Inspection," of the Standard Specifications and shall be completed a minimum of 20 working days before the estimated completion of the contract.

10-2.05 IRRIGATION SYSTEMS

Irrigation systems shall be furnished and installed in conformance with the provisions in Section 20-5, "Irrigation Systems," of the Standard Specifications, except materials containing asbestos fibers shall not be used.

Attention is directed to the provisions in "Obstructions" of these special provisions, regarding work over or adjacent to existing underground facilities. Excavation for proposed irrigation facilities shall not be started until the existing underground facilities have been located.

Method A pressure testing shall conform to the provisions in Section 20-5.03H(1), "Method A", of the Standard Specifications, except leaks that develop in the tested portion of the system shall be located and repaired after each test period when a drop of more than 35 kPa is indicated by the pressure gage. After the leaks have been repaired, the one hour pressure test shall be repeated and additional repairs made until the drop in pressure is 35 kPa or less.

Only pipeline trenches and excavation pits for supply lines being supplied from one water service point shall be open at one time. After pressure testing is complete, trenches and pits excavated for pipe supply lines, being supplied from one water service point, shall be backfilled prior to commencing excavations for pipe supply lines being supplied from another water service point.

VALVE BOXES

Valve boxes shall conform to the provisions in Section 20-2.24, "Valve Boxes," of the Standard Specifications, except as otherwise provided herein.

Valve boxes shall be precast portland cement concrete.

Covers for concrete valve boxes shall be concrete.

Valve boxes shall be identified on the top surface of the covers by labels containing the appropriate abbreviation for the irrigation facility contained in the valve box as shown on the plans. Valve boxes that contain remote control valves shall be identified by the appropriate letters and numbers (controller and station numbers). Labels for valve boxes shall conform to the provisions in Section 20-5.03F, "Valves and Valve Boxes," of the Standard Specifications.

Label material shall be plate plastic or polyurethane.

ELECTRIC AUTOMATIC IRRIGATION COMPONENTS

Irrigation Controllers

Irrigation controllers shall consist of an irrigation controller, communication equipment and a central control interface installed in an irrigation controller enclosure cabinet conforming to the provisions in "Irrigation Controller Enclosure Cabinet" of these special provisions.

Irrigation controllers shall be assembled and programmed by the equipment manufacturer's authorized representative or distributor.

Irrigation controllers shall conform to the following:

MODEL NO.	UNIT DESCRIPTION	UNIT	QUOTED UNIT COST
ESP12SITESAT	12-STATION ESP-SITE SATELLITE SERIES CONTROLLER	EA	$3,532
CELLPKG	CELL PHONE PACKAGE	EA	$1,500
PT1502PKG	FLOW MONITORING PACKAGE *	EA	$2,500
NOTE: *Not required for ICC A-1 and ICC B-1			

Arrangements have been made to insure that any successful bidder can obtain the specified equipment listed above from Horizon Irrigation, 1521 South Fresno Ave., Stockton, CA 95206 (209) 992-2313.

Prices are guaranteed by Horizon Irrigation until 12/31/06. The quoted prices do not include sales tax or shipping costs.

The Contractor shall be responsible for establishing communication and programming interface between the irrigation controller and the existing remote irrigation control system (RICS) base station, and demonstrating that controllers and base station are in operating condition and performs the functions specified.

The irrigation controllers shall communicate with the base station at the Department of Transportation's District Maintenance Yard, located at 380 Foster City Blvd., Foster City, CA 94404.

The irrigation controller shall be programmed to perform the following minimum activities in association with the existing base station:

A. Monitor the main line flows when operating with, or independently of, the base station.
A. Be programmable to monitor flow rate to allow selection of:

   1. Percent-high flow
   2. Percent-low flow
   3. Provisions for supply line fill time
   3. Leak detection in excess of 19 liters per minute.

B. Closing of remote control valve (master), shutting off pumps and remote control valves when flow rates are exceeded on main lines or through remote control valve (as determined by operator-entered parameters). When an excess high flow is determined by the irrigation controller, the irrigation program shall conduct a series of test steps to determine one of the following and take the corresponding action:

   1. For a mainline break or stuck open remote control valve: The entire irrigation system shall be shut down.

2. For a lateral line break or missing sprinklers: The current operating remote control valve shall be shut down and the irrigation program shall go on to the next scheduled remote control valve.

C. A time delay feature shall prevent an instantaneous response to a temporary surge at start-up or momentary system condition.
D. The following irrigation controller activities (alarms) shall be logged at the field unit and uploaded to the base station upon request of the base station in real-time and scheduled unattended time:

1. A low flow alarm when the actual flow is less than the percent-low and the supply line fill time has passed.
2. A high flow alarm when the actual flow is greater than the percent-high and the supply line fill time has passed.
3. There is no actual flow detected and the supply line fill time has passed.

The Contractor shall make application and arrangements for cellular service and assign the services to the State upon the date of acceptance of the contract. Fees for the applications, licenses and leases will be reimbursed by the State.

Inputs and outputs of the communication system shall be lightning, transient and surge protected, including the power, antenna and control connections.

Irrigation controllers shall include auxiliary items such as cables, antennas and other additional equipment necessary for functional operation with monitoring sensors and the existing base station.

Rubberized antenna to be compatible with GPRS modem units. Antenna range should be 824-896 MHz & 1850-1990 MHz.

Attention is directed to the provisions in "Electric Service (Irrigation)" of these special provisions regarding electrical power for irrigation controllers and irrigation controller enclosure cabinets.

Electric Remote Control Valves

Electric remote control valves shall conform to the provisions in Section 20-2.23, "Control Valves," of the Standard Specifications and the following:

A. Valves shall be, brass, or cast iron construction.
B. Brass valves shall be straight pattern (side inlet) as shown on the plans.
C. Cast iron valves shall be combination angle pattern (bottom inlet and side inlet) installed as an angle pattern (bottom inlet), as shown on the plans. Electrical requirements for cast iron valve solenoids shall not exceed 70 milliampres at 18 VAC when water pressure equals 1,035 kiloPascals.

Flow Sensing Assembly

Flow sensing assembly shall consist of flow sensors and any auxiliary items such as cables, valve boxes and other additional items necessary for a functional flow sensing communication with the irrigation controllers and base station.

Flow sensors shall conform to the following:

MODEL NO.	UNIT DESCRIPTION	UNIT	QUOTED UNIT COST
FS200P	50 MM FLOW SENSOR IN PLASTIC TEE HOUSING	EA	$635
PE893	FLOW SENSOR CABLE*	M	$1.80
NOTE: *Contractor shall determine length of cable required for connection with each irrigation controller.			

Arrangements have been made to insure that any successful bidder can obtain the specified equipment listed above from Horizon Irrigation, 1521 South Fresno Ave., Stockton, CA 95206 (209) 992-2313.

Prices are guaranteed by Horizon Irrigation until 12/31/06. The quoted prices do not include sales tax or shipping costs.

Flow sensing assembly shall be furnished and installed as shown on the plans and in accordance with the manufacturer's instructions, and the requirements of these special provisions. A copy of the manufacturer's instructions shall be submitted to the Engineer at least 2 working days prior to installation.

Flow sensors shall be installed in valve boxes with a minimum clearance of 50 to 100 mm to the sides and top. Flow sensors shall be identified with labels of the same size and material in conformance with "Valve Boxes," of the special provisions. Valve boxes for flow sensors shall be identified on the top surface of the valve box cover by the appropriate abbreviation as shown on the plans.

Pull Boxes

Pull box installations shall conform to the provisions in Section 20-5.027I, "Conductors, Electrical Conduits and Pull Boxes," of the Standard Specifications.

Conductors

Low voltage, as used in this section "Conductors," shall mean 36 V or less.

Low voltage control and neutral conductors in pull boxes and valve boxes, at irrigation controller terminals, and at splices shall be marked as follows:

A. Conductor terminations and splices shall be marked with adhesive backed paper markers or adhesive cloth wrap-around markers, with clear, heat-shrinkable sleeves sealed over the markers.
B. Non-spliced conductors in pull boxes and valve boxes shall be marked with clip-on, "C" shaped, white extruded polyvinyl chloride sleeves. Marker sleeves shall have black, indented legends of uniform depth with transparent overlays over the legends and "chevron" cuts for alignment of 2 or more sleeves.

Markers for the control conductors shall be identified with the appropriate number or letter designations of irrigation controllers and station numbers. Markers for neutral conductors shall be identified with the appropriate number or letter designations of the irrigation controllers.

New control and neutral conductors that are to replace existing control and neutral conductors shall be the same size and color as the existing control and neutral conductors being connected to.

The color of low voltage neutral and control conductor insulation, except for the striped portions, shall be homogeneous throughout the entire thickness of the insulation.

Insulation for conductors may be UL listed polyethylene conforming to UL44 test standards with a minimum insulation thickness of 1.05 mm for wire sizes 10AWG and smaller.

Relief from maintenance and responsibility for electric automatic irrigation components will be granted in conformance with "Relief from Maintenance and Responsibility" of these special provisions. Before the Engineer grants relief from maintenance and responsibility, the functional test specified in Section 20-5.027J, "Testing," of the Standard Specifications shall be satisfactorily completed, and the manufacturer's written instructions shall be provided to the Engineer on the use and adjustment of the installed irrigation controllers.

ARMOR-CLAD CONDUCTORS

Armor-clad conductors shall be used in direct burial applications from pull boxes adjacent to irrigation controller to remote control valves and other irrigation facilities in conformance with the details shown on the plans and these special provisions.

Armor-clad conductors shall conform to the following:

A. Conductors shall be the proper size for the application, and shall be solid, uncoated copper with a conductor size not less than 90 percent of the AWG diameter required.
B. At the Contractor's option, conductor insulation coverings shall be either of the following:

    1. Polyvinyl chloride (PVC) conforming to UL style, Type UF 60°C, 600 V. Average thickness of insulation shall be not less than 1.52 mm, with a minimum thickness of 1.37 mm, or
    2. UL listed polyethylene conforming to UL44 test standards with a minimum insulation thickness of 1.05 mm for wire sizes 10AWG and smaller.

C. Armor shall be a minimum 0.13-mm thick by 12.7 mm wide Type 304 stainless steel tape that is helically wrapped over each conductor with a 33 percent minimum overlap.
D. Outer jacket for conductors shall be sunlight resistant PVC and shall conform to the Insulated Power Cable Engineer's Association (ICEA) S-61-402, NEMA Standard WC5, and UL Listing 1263. Nominal thickness of the outer jacket shall be 0.76-mm with a minimum thickness of 0.61-mm.

At the option of the Contractor, conductors conforming to the provisions in Section 20-2.31D, "Conductors," of the Standard Specifications may be used when the conductors are installed in an electrical conduit.

REMOTE CONTROL VALVE ACTUATOR SYSTEM

A remote control valve actuator system shall conform to the following:

MODEL NO.	UNIT DESCRIPTION	UNIT	QUOTED UNIT COST
FREEDOMFOR/ M9000	FREEDOM FOR MAXICOM2™	EA	$2,420

Arrangements have been made to insure that any successful bidder can obtain the specified equipment listed above from Horizon Irrigation, 1521 South Fresno Ave., Stockton, CA 95206 (209) 992-2313.

Prices are guaranteed by Horizon Irrigation until 12/31/06. The quoted prices do not include sales tax or shipping costs.

IRRIGATION CONTROLLER ENCLOSURE CABINET

Irrigation controller enclosure cabinets shall be constructed and equipment installed in the cabinets in conformance with the details shown on the plans, the provisions of Section 86-3.04A, "Cabinet Construction," of the Standard Specifications, and these special provisions.

Electric service shall be installed in accordance with "Electric Service (Irrigation)" of these special provisions.

Irrigation controller enclosure cabinets shall conform to the following:

MODEL NO.	UNIT DESCRIPTION	UNIT	QUOTED UNIT COST
SB24SS	STRONG BOX 24” STAINLESS STEEL ENCLOSURE W/ PEDESTAL	EA	$2,500

Arrangements have been made to insure that any successful bidder can obtain the specified equipment listed above from Horizon Irrigation, 1521 South Fresno Ave., Stockton, CA 95206 (209) 992-2313.

Prices are guaranteed by Horizon Irrigation until 12/31/06. The quoted prices do not include sales tax or shipping costs.

Inside of the doors shall have provisions for storage of the irrigation plans.

Equipment, except for field wiring, shall be installed in the cabinet in a shop by the equipment manufacturer's representative or distributor prior to field installation.

IRRIGATION SYSTEMS FUNCTIONAL TEST

Functional tests for the remote irrigation controller system (RICS) and associated automatic irrigation systems shall conform to the provisions in Section 20-5.027J, "Testing," of the Standard Specifications and these special provisions.

Two functional tests shall be performed, one without and one with connection to the remote irrigation controller system base station. Both tests shall consist of demonstrating to the Engineer, through one complete cycle of the irrigation controllers in the automatic mode, that the associated automatic components of the irrigation systems operate properly.

The Contractor shall notify the Engineer not less than 2 weeks prior to starting the functional tests for the remote irrigation control system.

The existing remote irrigation controller system base station is located at 380 Foster City Blvd., Foster City, CA 94404.

Associated automatic components for both tests shall include, but not limited to, new and existing remote control valve actuator systems, irrigation controllers, remote control valves, conductors. Associated automatic components for the second test shall include, but not be limited to, new and existing irrigation software programs, cellular phone, existing trunked radio transmission systems, and flow alarms for high, low, zero, and maximum mainline flows.

The first test shall be performed prior to planting the plants and shall consist of testing the irrigation controllers and associated automatic irrigation systems without connection to the remote irrigation controller system base station. Upon completion of a satisfactory functional test, and correction of the deficiencies, the plants to be planted in the areas watered by the irrigation system may be planted, provided the planting areas have been prepared as specified in these special provisions.

The second test shall be performed prior to the start of plant establishment and shall consist of testing the irrigation controllers (field units) and associated automatic irrigation systems with connection to the remote irrigation controller system base station. As part of the second test, a remote irrigation controller system watering schedule shall be submitted for each irrigation controller (field unit) to the Engineer. The Engineer will enter the watering schedule into the irrigation software program, and a computer printout will be made available to the Contractor for verification. If the Engineer determines the submitted watering schedule is unacceptable, a revised watering schedule shall be submitted to the Engineer for approval within 5 working days. Also as part of the second test, the Contractor shall demonstrate to the Engineer that the remote irrigation controller system base station detects and reports the high, low, zero, and maximum mainline flow alarms. Upon completion of a satisfactory test, including correction of deficiencies, the plant establishment period may begin, provided planting work as specified in these special provisions has been completed except for plant establishment work.

If existing and new automatic components of the irrigation systems, including remote irrigation controller system base station components, fail a functional test, the components shall be repaired. Repairs shall be at the Contractor's expense, except for repairs to an existing base station (personal computer, printer, mouse, keyboard, cables, and software) which will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications. Testing shall be repeated until satisfactory operation is obtained.

Repair or replacement of existing irrigation facilities due to unsatisfactory performance shall conform to the provisions in Section 20-5.025, "Maintain Existing Water Supply," of the Standard Specifications and "Existing Highway Irrigation Facilities" of these special provisions.

PIPE

Steel Pipe

Galvanized steel pipe supply lines installed between water meters and backflow preventer assemblies shall be installed not less than 450 mm below finished grade, measured to the top of the pipe.

Plastic Pipe

Plastic pipe supply lines shall be polyvinyl chloride (PVC) 1120 or 1220 pressure rated pipe with the minimum pressure rating (PR) shown on the plans.

Plastic pipe supply lines less than 100 mm in diameter shall have solvent cemented type joints. Primers shall be used on the solvent cemented type joints.

Plastic pipe supply lines downstream from the remote control valves for Type C sprinklers shall have a minimum cover of 150 mm.

Plastic pipe (irrigation lines) shall be installed not less than 300 mm below the finished grade, measured to the top of the pipe.

A nonhardening joint compound shall be used in place of the pipe thread sealant tape conforming to the provisions in Section 20-5.03E, "Pipe," of the Standard Specifications. Joint compounds shall be applied in conformance with the manufacturer's recommendations.

Fittings for plastic pipe supply lines with a pressure rating (PR) of 315 shall be Schedule 80.

WATER METER

Water meters for the irrigation systems will be furnished and installed by the serving utility at the locations shown on the plans.

The Contractor shall make the arrangements and pay the costs and fees required by the serving utility.

The California Water Service Company has established a fee of $10,300 for furnishing and installing a water meter. If, at the time of installation, this fee has been changed, the State will take a credit for the reduction in the fee, or the State will pay the difference for the increase in the fee. The credit or payment will be taken or paid on the first monthly progress payment made after the meter is installed. The Contractor shall furnish the Engineer with a copy of the invoice for the installation fee.

Attention is directed to Section 20-4.06, "Watering," of the Standard Specifications. The Contractor shall make the arrangements for furnishing and applying water until the water meters have been installed by the serving utility.

The quantity of water meters will be measured by the unit as determined from actual count in place.

The contract unit price paid for water meter shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in furnishing and installing water meters, complete in place, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

BACKFLOW PREVENTER ASSEMBLIES

Backflow preventers shall conform to the provisions in Section 20-2.25, "Backflow Preventers," of the Standard Specifications and these special provisions.

Backflow preventers shall have current approval from the University of Southern California Foundation for Cross-Connection Control and Hydraulic Research (USC Foundation).

Before backflow preventer assembly installation, the Contractor shall provide the Engineer with the portion of the USC Foundation "List of Approved Backflow Prevention Assemblies" showing type of assembly, manufacturer's name, model number, edition of the manual under which the assembly was approved, approval date and the last renewal date.

The "List of Approved Backflow Prevention Assemblies" is available to Foundation Members. Membership information to join the USC Foundation is available at:

http://www.usc.edu/dept/fccchr/membership.html

Questions concerning the USC Foundation "List of Approved Backflow Prevention Assemblies" can be answered by calling the Foundation at toll free (866) 545-6340.

Pressure loss through the backflow preventers shall not exceed the following:

BACKFLOW PREVENTER SIZE (millimeters)	FLOW RATE (Liters per minute)	PRESSURE LOSS (kPa)
50	180	90

Backflow preventer assemblies shall be painted with a minimum of 2 applications of a commercial quality enamel paint. The color of the paint shall be light brown.

BACKFLOW PREVENTER ASSEMBLY ENCLOSURE

Enclosures shall be fabricated of structural steel angles and flattened expanded metal and shall be installed over backflow preventer assemblies on a portland cement concrete pad as shown on the plans and in conformance with these special provisions.

Expanded metal for sides, ends and top panels shall be fabricated from 1.9 mm (14-gage), minimum thickness, sheet steel. The flattened expanded metal openings shall be approximately 20 mm by 45 mm in size.

Expanded metal panels shall be attached to the steel frames by a series of welds, not less than 6.4 mm in length and spaced not more than 100 mm on centers, along the edges of the enclosure.

Padlocks will be State-furnished in accordance with "State-furnished Materials" of these special provisions.

Enclosures shall be galvanized, after fabrication, in conformance with the provisions in Section 75-1.05, "Galvanizing," of the Standard Specifications.

Concrete for the concrete pad shall conform to Section 90-10, "Minor Concrete," of the Standard Specifications.

Hold down bolt assemblies shall be galvanized and shall be installed when the portland cement concrete pad is still plastic. Nuts shall be hexagonal and washers shall be the lock type.

Enclosures shall be painted with one application of a commercial quality pre-treatment, vinyl wash primer and a minimum of one application of a commercial quality, exterior enamel for metal. The finish color shall be light brown.

All parts of the backflow preventer assembly enclosure, including hold down assemblies, may be constructed of stainless steel instead of standard steel materials specified above. Stainless steel enclosures shall conform to the provisions herein except galvanizing, priming and painting shall not be required. Stainless steel enclosures shall be powder coated a light brown color by the manufacturer.

The minimum clearance between the backflow preventer assembly and the backflow preventer assembly enclosure shall be 50 mm.

TESTING NEW BACKFLOW PREVENTERS

New backflow preventers shall be tested for proper operation in conformance with the provisions in Section 20-5.03J, "Check and Test Backflow Preventers," of the Standard Specifications and these special provisions.

Tests for new backflow preventers shall be satisfactorily completed after installation and before operation of the irrigation systems.

New backflow preventers shall be retested one year after the satisfactory completion of the previous test, and each year thereafter until the plant establishment period is completed. An additional test shall be provided not more than 10 days prior to acceptance of the contract.

SPRINKLERS

Sprinklers shall conform to the type, pattern, material, and operating characteristics listed in the "Sprinkler Schedule" shown on the plans.

WYE STRAINERS

Wye strainers shall be installed on the upstream side of the electric remote control valves as shown on the plans.

Removable stainless steel strainers for wye strainers shall be 130 µm size mesh.

When garden valves are opened, discharge shall be up and out of the valve box.

FINAL IRRIGATION SYSTEM CHECK

A final check of existing and new irrigation facilities shall be performed not more than 20 working days prior to acceptance of the contract.

The length of watering cycles using potable water measured by water meters for the final check of irrigation facilities will be determined by the Engineer.

Remote control valves connected to existing and new irrigation controllers shall be checked for automatic performance when the controllers are in automatic mode.

Unsatisfactory performance of irrigation facilities installed or modified by the Contractor shall be repaired and rechecked at the Contractor's expense until satisfactory performance is obtained, as determined by the Engineer.

Repair or replacement of existing irrigation facilities due to unsatisfactory performance shall conform to the provisions in "Existing Highway Irrigation Facilities" of these special provisions.

Nothing in this section "Final Irrigation System Check" shall relieve the Contractor of full responsibility for making good or repairing defective work or materials found before the formal written acceptance of the entire contract by the Director.

Full compensation for checking the irrigation systems prior to the acceptance of the contract shall be considered as included in the contract lump sum price paid for plant establishment work and no additional compensation will be allowed therefor.

SECTION 10-3. SIGNALS, LIGHTING AND ELECTRICAL SYSTEMS

10-3.01 DESCRIPTION

Modifying and installing traffic signals, flashing beacon, lighting, sign illumination, electric service (irrigation), traffic operations system, interconnect system, fiber optic system, and emergency vehicle detection system, shall conform to the provisions in Section 86, "Signals, Lighting and Electrical Systems," of the Standard Specifications and these special provisions.

Lighting equipment is included in the following structures:

A. Peninsula Avenue OC BR. No. 35-0088
B. Broadway Avenue POC_ BR. No. 35-0342
C. Monte Diablo Avenue POC BR. No. 35-0134
D Broadway OC (Exist)
E. Concrete Barriers

Traffic signal work shall be performed at the following locations:

A. RT 101 NB ON/OFF Ramps and Airport Blvd.
B. Airport Blvd. and Peninsula Avenue
C. Peninsula Avenue and N. Bayshore Blvd.
D Airport Boulevard and Bayshore Highway`
E. Peninsula Avenue and Humboldt Street

Traffic Operations System shall consist of:

A. Changeable Message Sign System
B. CCTV Camera System.
C. Ramp Metering System.
D. Traffic Monitoring System.

Unless shown otherwise, locations of cabinets, standards, foundations, lighting fixtures, conduits, pull boxes, appurtenances, and other similar electrical equipment are approximate and may be changed to suit field conditions or as directed by the Engineer.

10-3.02 COST BREAK-DOWN

Cost break-downs shall conform to the provisions in Section 86-1.03, "Cost Break-Down," of the Standard Specifications and these special provisions.

The Engineer shall be furnished a cost break-down for each contract lump sum item of work described in this Section 10-3.

The cost break-down shall be submitted to the Engineer for approval within 30 days after the contract has been approved. The cost break-down shall be approved, in writing, by the Engineer before any partial payment for the items of electrical work will be made.

The cost breakdown shall include the following items in addition to those listed in the Standard Specifications:

A. Weigh-in-Motion Equipment
B. Flashing Beacon
C. Contractor-furnished City Traffic Signal Controller Cabinet Assemblies

10-3.03 EQUIPMENT LIST AND DRAWINGS

The controller cabinet schematic wiring diagram and intersection sketch shall be combined into one drawing, so that, when the cabinet door is fully open, the drawing is oriented with the intersection.

A maintenance manual shall be furnished for all controller units, auxiliary equipment, and vehicle detector sensor units, control units, and amplifiers. The maintenance manual and operation manual may be combined into one manual. The maintenance manual or combined maintenance and operation manual shall be submitted at the time the controllers are delivered for testing or, if ordered by the Engineer, prior to purchase. The maintenance manual shall include, but need not be limited to, the following items:

A. Specifications
B. Design characteristics
C. General operation theory
D. Function of all controls
E. Trouble shooting procedure (diagnostic routine)
F. Block circuit diagram
G. Geographical layout of components
H. Schematic diagrams
I. List of replaceable component parts with stock numbers

10-3.04 MAINTAINING EXISTING AND TEMPORARY ELECTRICAL SYSTEMS

Traffic signal system shutdowns shall be limited to periods between the hours of 9 a.m. and 3 p.m.

All existing and operational TOS elements and Ramp Metering equipment must be kept operational through all phases of construction. Any TOS elements that may be affected by this project must be relocated, modified or fully replaced as necessary.

At least three working days prior to performing any work on each existing system, the Contractor shall notify the Department of Transportation, Electrical and Signal Maintenance Superintendent, Phone (415) 330-6500.

10-3.05 FOUNDATIONS

Reinforced cast-in-drilled-hole concrete pile foundations for closed circuit television pole, traffic signal and lighting standards shall conform to the provisions in "Piling" of these special provisions.

Where cast-in-drilled-hole concrete pile foundations are to be constructed in slag aggregate embankments, the diameter of the pile shall be increased to provide a minimum of 75 mm of concrete cover over the reinforcing steel.

Full compensation for the increased diameter of cast-in-drilled-hole concrete pile foundations in slag aggregate embankments, including additional portland cement concrete, and increased drilling and placement costs shall be considered as included in the contract lump sum price paid for the item requiring the cast-in-drilled-hole concrete pile foundation and no additional compensation will be allowed therefor.

10-3.06 STANDARDS, STEEL PEDESTALS, AND POSTS

Standards, steel pedestals, and posts for traffic signal and lighting standards shall conform to the provisions in Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications, "Steel Structures" of these special provisions, and the following requirements.

Steel bolts not designated on the plans as high-strength (HS) or stainless steel shall be for general applications and shall conform to the requirements in ASTM Designation: A 307.

Where the plans refer to the side tenon detail at the end of the signal mast arm, the applicable tip tenon detail may be substituted.

The sign mounting hardware shall be installed at the locations shown on the plans.

Handhole reinforcement rings for standards, steel pedestals, and posts shall be continuous around the handholes.

Type 1 standards shall be assembled and set with the handhole on the downstream side of the pole in relation to traffic or as shown on the plans.

Handholes for closed circuit television pole, signal and lighting standards shall be accessible.

10-3.07 CONDUIT

Conduit to be installed underground shall be Type 1 or Type 3 unless otherwise specified. Detector termination conduits shall be Type 3 or Type 4.

The conduit in a foundation and between a foundation and the nearest pull box shall be Type 1.

Conduit sizes shown on the plans and specified in the Standard Specifications and these special provisions are referenced to metallic type conduit. When rigid non-metallic conduit is required or allowed, the nominal equivalent industry size shall be used as shown in the following table:

Size Designation for Metallic Type Conduit	Equivalent Size for Rigid Non-metallic Conduit
21	20
27	25
41	40
53	50
63	65
78	75
103	100

When Type 3 conduit is placed in a trench (not in pavement or under portland cement concrete sidewalk), after the bedding material is placed and the conduit is installed, the trench shall be backfilled with commercial quality concrete, containing not less than 250 kg of portland cement per cubic meter, to not less than 100 mm above the conduit before additional backfill material is placed.

Conduit runs shown on the plans to be located behind curbs may be installed in the street, within 0.9-m of, and parallel with the face of the curb, by the "Trenching in Pavement Method" in conformance with the provisions in Section 86-2.05C, "Installation," of the Standard Specifications. Pull boxes shall be located behind the curb or at the locations shown on the plans.

After conductors have been installed, the ends of conduits terminating in pull boxes, service equipment enclosures, and controller cabinets shall be sealed with an approved type of sealing compound.

At locations where conduit is required to be installed under pavement and if a delay to vehicles will not exceed 5 minutes, conduit may be installed by the "Trenching in Pavement Method."

At the option of the Contractor, the final 0.6-m of conduit entering a pull box in a reinforced concrete structure may be Type 4.

Locate and mark all conduit runs before the project begins.

10-3.08 PULL BOXES

Grout shall not be placed in the bottom of pull boxes.

Pull boxes for circuits labeled "CITY" on the plans shall not have the "Caltrans" cover marking. The covers shall be marked "CITY".

Pull boxes shall be reset if necessary to match the final paving or grade.

The following work shall be completed if any work needs to be done in an existing pullbox:

A. Bring pullbox up to grade
B. Replace pull box if damaged
C. Install new base rock
D. Band all conduits including existing conduits.
E. Duct seal all conduits
F. Replace lids if damaged

Pull boxes shall be located to minimize the potential for vehicular damage. If this is not possible traffic rated pull boxes shall be provided.

10-3.09 CONDUCTORS AND WIRING

Splices shall be insulated by "Method B".

The minimum insulation thickness, at any point, for Type USE, RHH or RHW wire shall be 1.0 mm for conductor sizes No. 14 to No. 10, inclusive, and 1.3 mm for No. 8 to No. 2, inclusive. The minimum insulation thickness, at any point, for Type THW and TW wires shall be 0.69 mm for conductor sizes No. 14 to No. 10, inclusive, 1.02 mm for No. 8, and 1.37 mm for No. 6 to No. 2, inclusive.

Signal conductors for ramp meters shall be color coded as follows:

Phase	Base	Stripe	Band Symbols
1	RE, Ye, Brn	None	1
2	RE, Ye, Brn	Black	2
3	RE, Ye, Brn	Purple	3
4	RE, Ye, Brn	Orange	4

Signal Cable shall not be used.

Type TW insulation shall not be used for the CMS service feeder, nor for the CMS branch circuit conductors between the service pedestal and the CMS.

Splices for cables will not be allowed, except where shown on the plans.

10-3.10 CLOSED CIRCUIT TELEVISION CABLES

Television control (TVC) cable shall consist of 15 No. 18 conductors, unshielded and with an outer jacket. Each conductor shall have a minimum of 16 tinned copper stands with a minimum of 400 µm insulation. Individual conductor insulation shall be chrome PVC with a nominal thickness of 1 mm. The outside diameter of the jacket shall not exceed 14 mm.

Color code for TVC cable shall be:

A. Black
B. White
C. Red
D. Green
E. Orange
F. Blue
G. White/Black
H. Red/Black
I. Green/Black
J. Orange/Black
K. Blue/Black
L. Black/White
M. Red/White
N. Green/White
O. Blue/White

Television power (TVP) conductors shall be No. 12 (120 VAC, AC-, equipment ground) individually insulated, stranded copper conductors in conformance with Section 86-2.08, "Conductors" of the Standard Specifications. The conductors shall be color coded black, white, and green respectively.

Flexible cords and cables as specified in NES article 400 shall not be used

Television control power (TVCP) cable shall consist of 12 No. 18 conductors, unshielded and with an outer jacket. Each conductor shall have a minimum of 16 tinned copper strands with a minimum of 400 µm insulation. Individual conductor insulation shall be polyvinyl chloride (PVC), rated for 300 V (see color code below). The jacket shall be chrome PVC with a nominal thickness of 1 mm. The outside diameter of the jacket shall not exceed 12 mm.

Color code for TVCP cable shall be:

A. Black
B. White
C. Red
D. Green
E. Orange
F. Blue
G. White/Black
H. Red/Black
I. Green/Black
J. Orange/Black
K. Blue/Black
L. Black/White

Television video (TVL) cable shall consist of an RG-6/U coaxial cable. Each cable shall be provided with a solid No. 18 copper clad steel center conductor and shall conform to the following requirements:

Electrical	TVL
Capacitance (picofarads/m nominal)	54.1
Impedance (ohms-nominal)	75
Velocity of propagation (nominal)	84%
D.C. loop resistance (ohms/100 m)	11.7

Attenuation at 20°C:

Frequency (MHz)	TVL (Nominal dB/100 m)
Copper-clad steel center conductor	1.00
Foam polyethylene dielectric	4.57
Sealed APA tape with 1.6 mm overlap	4.75
Woven aluminum braid	5.39
Sealed APA tape with 1.6 mm overlap	5.49
Woven aluminum braid	6.12
Flooding compound	
PVC outer jacket	7.55

(APA = Aluminum polyolefin and aluminum with adhesive)
TVL cable shall be terminated with BNC plug connector at both ends. The telephone cable (TC)

COAXIAL CABLE CONNECTORS (TVL COAXIAL CABLES)

Coaxial cable connectors for attaching Type TVL coaxial cable shall meet the following requirements:

1. Electrical:

Impedance	75 Ω nominal
Return loss	30 dB minimum (5 MHz to 300 Mhz)
Rated working voltage	500 V rms

2. Mechanical:

Type of construction	Integral sleeve BNC
Method of attachment	Crimp-crimp
Composition	Bodies- alloy Finish – chromate conversion, silver plating, or other corrosion resistant metal

3. Environmental:

Temperature	-10°C to +50°C
Moisture	Weather resistant design

The mating connector for TVL cable in junction box shall be provided. The center contact of this jack shall be beryllium copper.

TESTING

Testing of TVL cables and connectors shall be performed in accordance with provisions in Section 86-2.14B, "Field Testing," of the Standard Specifications and these special provisions.

Cable lengths found to have faults shall be replaced and retested. The removed faulty cable shall be disposed of by the Contractor.

Prior to the beginning of work, each length of coaxial cable shall be tested for attenuation and faults to ensure compliance with specifications contained herein using a time domain reflectometer (TDR). For the purpose of these special provisions, a fault in a long length of cable is defined by one or more of the following:

a. Return loss measurements indicating that attenuation exceeds 3 dB at 5 MHz to 30 MHz in a portion of cable less than 3 m long.
b. A return loss measurement indicating that there is a short in the cable.
c. A return loss measurement indicating a cut or open circuit in the cable.
d. A visual inspection which reveals exposure of or damage to the cable shielding.

10-3.11 TELEPHONE CABLE

The telephone cable (TC) shall consist of 6 pairs of No.19 solid copper conductors. Conductors shall be twisted in pairs. Each conductor shall be insulated with a high molecular weight, heat stabilized, color-coded polyethylene material. The insulation shall be 440 µm nominal.

Color coded for TC shall be as follows:

A. White/Blue
B. White/Orange
C. White/Green
D. White/Brown
E. White/Grey
F. Red/Blue

The core shall be protected by a non-hygroscopic polyester film with a single longitudinally applied 120 µm thick corrugated copper shield (or 190 µm thick plastic coated aluminum shield). A moisture barrier of petrolatum-polyethylene compound shall be applied over the core tape and over and under the cable shield to fill all cable interstices.

The cable shall be provided with an outer jacket of extruded, black, high molecular weight, heat stabilized polyethylene material. The outer jacket shall have a thickness of 1.5 mm nominal. The outer diameter of the cable shall be 15.25 mm maximum.

Splices will not be allowed, except where shown on the plans.

All conductors shall be terminated inside the telephone demarcation cabinet and the controller cabinet as shown on the plans. All connections from the TBO terminal block to the 8-position connecting block shall be via a cable consisting of 2 pairs of No. 22 solid conductors and shall meet the same specifications as the TC cable.

10-3.12 BONDING AND GROUNDING

Bonding and grounding shall conform to the provisions in Section 86-2.10, "Bonding and Grounding," of the Standard Specifications and these special provisions.

Bonding jumpers in standards with handholes and traffic pull box lid covers shall be attached by a UL listed lug using 4.5-mm diameter or larger brass or bronze bolts and shall run to the conduit or bonding wire in the adjacent pull box. The grounding jumper shall be visible after the standard has been installed and the mortar pad and cap have been placed on the foundation.

Standards without handholes shall have bonding accomplished by jumpers attached to UL listed ground clamps on each anchor bolt.

For slip base standards or slip base inserts, bonding shall be accomplished by jumpers attached to UL listed ground clamps on each anchor bolt, or a UL listed lug attached to the bottom slip base plate with a 4.5-mm diameter or larger brass or bronze bolt.

Equipment bonding and grounding conductors are required in conduits, except when the conduits contain combinations of loop lead-in cable, fiber optic cable, or signal interconnect cable. A No. 8 minimum, bare copper wire shall run continuously in circuits, except for series lighting circuits, where No. 6 bare copper wire shall run continuously. The bonding wire size shall be increased to match the circuit breaker size in conformance with the Code, or shall be as shown on the plans. Conduits to be installed for future conductors, may omit the copper wire.

Bonding of metallic conduits in metal pull boxes shall be by means of bonding bushings and bonding jumpers connected to the bonding wire running in the conduit system.

10-3.13 SERVICE

Type III service equipment enclosures shall be the aluminum type.

Circuit breakers shall be the cable-in/cable-out type, mounted on non-energized clips. All circuit breakers shall be mounted vertically with the up position of the handle being the "ON" position.

Circuits with Model 500 changeable message signs shall have service equipment enclosures which have main busses and terminal lugs rated for 200 A, minimum, and a No. 2 bare copper ground wire.

Type H service shall consist of a conduit and conductors with length and size as required by the serving utility company.

The neutral conductor shall run from the service equipment enclosure to the controller cabinet without splicing to any other neutral conductor.

The clearance between the bottom of the lowest circuit breaker and the bottom of the service equipment enclosure for a Type III-A series shall be 600 mm minimum.

Installation of barrier type terminal block in service equipment enclosures is not required

ELECTRIC SERVICE (IRRIGATION)

Electric service (irrigation) shall be from the service points to the irrigation controllers (IC) and to the spaces provided in the irrigation controller enclosure cabinets (CEC) for irrigation controllers as shown on the plans.

Irrigation Controllers (IC) C1, E1, F1 and G1: Electric service (irrigation) shall be a metered 120/240 V(ac), single-phase service in a Type III service equipment enclosure.

Irrigation Controllers (IC) A, B, A1, B1, D1, I1 and H1: Electric service (irrigation) shall be a metered 120/240 V(ac), single-phase circuit in a Type III service equipment enclosure.

Service disconnects in service equipment enclosures shall be 1-pole, 15-A circuit breaker.

Nameplate inscriptions shall be as follows:

ITEMS	INSCRIPTION
Service Disconnect	IC A1

The inscription on other nameplates shall be the identifying letter designation used on the plans and in these special provisions, or shall be as directed by the Engineer.

The contract lump sum price paid for electric service (irrigation) (City) for each location shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in installing electric service (irrigation) for irrigation controllers, complete in place, including conductors, conduit and pull boxes to the pull box adjacent to irrigation controller enclosure cabinets and irrigation controllers, as shown on the plans, as specified in these special provisions, and as directed by the Engineer.

10-3.14 NUMBERING ELECTRICAL EQUIPMENT

The placement of numbers on electrical equipment will be done by others.

Self-adhesive reflective numbers and edge sealer will be State-furnished in conformance with the provisions in "Materials" of these special provisions.

The numbers and edge sealer shall be placed on the equipment where designated by the Engineer.

Where new numbers are to be placed on existing or relocated equipment, the existing numbers shall be removed.

Reflective numbers shall be applied to a clean surface. Only the edges of the numbers shall be treated with edge sealer.

Where shown on the plans, 5-digit, self-adhesive equipment numbers shall be placed for all electroliers, soffit lighting, sign lighting, and service pedestals. On service pedestals, the numbers shall be placed on the front door. On electroliers, the numbers shall be placed as shown on the plans.

Numbers for illuminated signs mounted on overcrossings or for soffit luminaires shall be placed on the nearest adjacent bent or abutment at approximately the same station as the sign or soffit luminaire. Where no bent or abutment exists near the sign or soffit luminaire, the number shall be placed on the underside of the structure adjacent to the sign or soffit luminaire. Arrangement of numbers shall be the same as those used for electroliers.

Numbers for overhead sign bridges shall be placed on both posts.

Numbers for wood poles shall be 75-mm embossed aluminum fastened to the pole with 30-mm aluminum nails. Numbers for wood poles shall be furnished by the Contractor.

10-3.15 STATE-FURNISHED CONTROLLER ASSEMBLIES

The Model 170 controller assemblies, including controller unit, completely wired controller cabinet and inductive loop detector sensor units, but without anchor bolts, will be State-furnished as provided under "Materials" of these special provisions.

The Contractor shall construct each controller cabinet foundation as shown on the plans for Model 332 and 334 cabinets (including furnishing and installing anchor bolts), shall install the controller cabinet on the foundation, and shall make field wiring connections to the terminal blocks in the controller cabinet.

A listing of field conductor terminations, in each State-furnished controller cabinet, will be furnished free of charge to the Contractor at the site of the work.

State forces will maintain controller assemblies. The Contractor's responsibility for controller assemblies shall be limited to conforming to the provisions in Section 6-1.02, "State-Furnished Materials," of the Standard Specifications.

The Contractor shall furnish and install one rackmount surge power strip with a switch in each Model 334 controller cabinet. The power strip shall be plugged into the non-GFCI duplex outlet normally labeled with "Controller Unit Recp." In the back of the PDA unit. The power strip shall be mounted at the top of the standard EIA-310 rack cage and across the two vertical back rails with four stainless steel EIA mounting screws, two on each side. The power strip shall not hinder the accessibility to the back of all existing electrical equipment. All power cords for permanently field installed electrical equipment shall be plugged into the power strip.

The power strip, at a minimum, shall meet the following requirements:

A. It shall have a maximum rating of 15 A, 120 VAC, 60 Hz.
B. It shall have a surge protection with UL 1449 Clamping Level of 400 V, an IEEE Let-Through Voltage rating of less than 336 V, a single-pulse energy rating of 210 J and EMI/RFI noise protection rating of 40 dB.
C. It shall be 46 mm (H) x 483 mm (W) x 70 mm (D) maximum and shall not weigh more than 2.0 kg.
D. The front plate of the power strip shall have four cut-off EIA mounting screw holes, two on each side.
E. It shall have six rear outlets with 38 mm minimum apart center to center. The power cord shall enter from the rear with a length of 2 meters minimum. The clearance between the power cord entrance and the nearest outlet shall be 90 mm minimum.

It shall have a 15 Amp circuit breaker and an internally illuminated switch to cut off power to all outlets. Both the circuit and the switch shall be front mounted.

10-3.16 CONTRACTOR-FURNISHED CITY CONTROLLER ASSEMBLIES

The Model 2070 controller assemblies for City Signal and Lighting locations shall conform to the provisions of Section 86-3 of the Standard Specifications and these Special Provisions.

City cabinets shall be the aluminum type.

The controller unit shall meet the most current Caltrans Transportation Electrical Equipment Specifications (TEES).

The Model 2070 controller assemblies, including controller unit, completely wired type 332 controller cabinet and inductive loop detector sensor units, but without anchor bolts, will be Contractor-furnished.

The Contractor shall construct each controller cabinet foundation as shown on the plans for Model 332 cabinets (including furnishing and installing anchor bolts), shall install the controller cabinet on the foundation, and shall make field wiring connections to the terminal blocks in the controller cabinet.

10-3.17 VEHICLE SIGNAL FACES AND SIGNAL HEADS

Light Emitting Diode (LED) type signal modules for vehicular traffic signal units will be State-furnished in conformance with the provisions in "Materials" of these special provisions.

Type SV-1-T mountings with 5 sections and SV-2-TD mountings shall be bolted to the standard through the upper pipe fitting in the same manner shown for bolting the terminal compartment.

10-3.18 PROGRAMMED VISIBILITY VEHICLE TRAFFIC SIGNAL HEADS

Lamps shall be furnished by the Contractor.

A signal technician qualified to program the programmed visibility signal heads shall be present at the time the signal heads are placed in operation.

Lamps for the signal units shall be 150-W, 120 V(ac), incandescent lamps with a minimum average rated life of 6,000 hours. The lamp and socket shall be the 3-prong type.

10-3.19 PEDESTRIAN SIGNALS

LED modules for Type A pedestrian signals will be State-furnished in conformance with the provisions in "Materials" of these special provisions.

10-3.20 AUDIBLE PEDESTRIAN SIGNALS

Audible pedestrian signals shall be mounted to the signal frameworks as shown on the plans and shall conform to these specifications. Audible pedestrian signals shall produce a distinctive sound for each direction (typically "North-South" and "East-West") of pedestrian crossing at the traffic signal for which it is required.

Audible pedestrian signals shall meet the following requirements:

Size:	127 mm height, 95 mm width, 127 mm depth.
Power:	115 VAC ±5%, 60 Hz, 3 W.
Temperature Range:	-20ºC to +60ºC
Output:	90 dB/W at one meter. Output shall be self switching to one of two adjustable output levels on ambient noise conditions.
Color:	Dark olive green that shall match Color Chip No. 68 on file at the Transportation Laboratory.

The audible output shall produce the following sounds:

A. Electronic bird chirp that produces a "Cuckoo" sound for the North-South audible signal by method of two combined frequencies. Output duration from 0.48 to 0.72 seconds. Frequency base range from 880 Hz to 1320 Hz with frequency modulation from 96 Hz to 144 Hz.
B. Electronic bird chirp that produces a "Peep-Peep" sound for the East-West audible signal by method of two combined frequencies. Output duration from 0.16 to 0.24 seconds. Frequency base range from 2240 Hz to 3360 Hz with frequency modulation of -640 Hz to -960 Hz.

10-3.21 FLASHING BEACONS

Incandescent lamps for flashing beacon units will be State-furnished in conformance with the provisions in "Materials" of these special provisions.

10-3.22 DETECTORS

Loop detector sensor units, will be State-furnished in conformance with the provisions in "Materials" of these special provisions.

Loop wire shall be Type 2.

Loop detector lead-in cable shall be Type B.

Slots shall be filled with elastomeric sealant or hot-melt rubberized asphalt sealant.

Slots in portland cement concrete shall be filled with elastomeric sealant or hot-melt rubberized asphalt sealant, or shall be filled with an epoxy sealant conforming to the provisions in Section 95-2.09, "Epoxy Sealant for Inductive Loops (State Specification 8040-06)," of the Standard Specifications.

10-3.23 EMERGENCY VEHICLE DETECTOR SYSTEM

Each traffic signal shall have an emergency vehicle detector system which shall conform to the details shown on the plans and these special provisions.

GENERAL

Each emergency vehicle detector system shall consist of an optical emitter assembly or assemblies located on the appropriate vehicle and an optical detector/discriminator assembly or assemblies located at the traffic signal.

Emitter assemblies are not required for this project except units for testing purposes to demonstrate that the systems perform as specified. Tests shall be conducted in the presence of the Engineer as described below under "System Operation" during the signal test period. The Engineer shall be given a minimum of 2 working days notice prior to performing the tests.

Each system shall permit detection of 2 classes of authorized vehicles. Class I (mass transit) vehicles shall be detected at ranges of up to 300 m from the optical detector. Class II (emergency) vehicles shall be detected at ranges up to 550 m from the optical detector.

Class I signals (those emitted by Class I vehicles) shall be distinguished from Class II signals (those emitted by Class II vehicles) on the basis of the modulation frequency of the light from the respective emitter. The modulation frequency for Class I signal emitters shall be 9.639 Hz ± 0.110 Hz. The modulation frequency for Class II signal emitters shall be 14.035 Hz ± 0.250 Hz.

A system shall establish a priority of Class II vehicle signals over Class I vehicle signals and shall conform to the requirements in Section 25352 of the California Vehicle Code.

EMITTER ASSEMBLY

Each emitter assembly, provided for testing purposes, shall consist of an emitter unit, an emitter control unit, and connecting cables.

General

Each emitter assembly, including lamp, shall operate over an ambient temperature range of -34°C to 60°C at both modulation frequencies and operate continuously at the higher frequency for a minimum of 3000 hours at 25°C ambient before failure of the lamp or other components.

Each emitter unit shall be controlled by a single, maintained-contact switch on the respective emitter control unit. The switch shall be located to be readily accessible to the vehicle driver. The control unit shall contain a pilot light to indicate that the emitter power circuit is energized and shall generate only one modulating code, either that for Class I vehicles or that for Class II vehicles.

Functional

Each emitter unit shall transmit optical energy in one direction only.

The signal from each Class I signal emitter unit shall be detectable at a distance of 300 m when used with a standard optical detection/discriminator assembly and filter to eliminate visible light. Visible light shall be considered eliminated when the output of the emitter unit with the filter is less than an average of 0.0003-candela per energy pulse in the wavelength range of 380 nm to 750 nm when measured at a distance of 3 m. A Certificate of Compliance, conforming to the requirements in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications shall be submitted to the Engineer with each Class I emitter unit.

The signal from each Class II signal emitter unit shall be detectable at a distance of 550 m when used with a standard optical detection/discriminator assembly.

The standard optical detection/discriminator assembly to be used in making the range tests shall be available from the manufacturer of the system. A certified performance report shall be furnished with each assembly.

Electrical

Each emitter assembly shall provide full light output with input voltages of between 12.5 V (dc) and 17.5 V (dc). An emitter assembly shall not be damaged by input voltages up to 7.5 V (dc) above supply voltage. The emitter assembly shall not generate voltage transients, on the input supply, which exceed the supply voltage by more than 4 volts.

Each emitter assembly shall consume not more than 100 W at 17.5 V (dc) and shall have a power input circuit breaker rated at 10 A to 12 A, 12 V (dc).

The design and circuitry of each emitter shall permit its use on vehicles with either negative or positive ground without disassembling or rewiring of the unit.

Mechanical

Each emitter unit shall be housed in a weatherproof corrosion-resistant housing. The housing shall be provided with facilities to permit mounting on various types of vehicles and shall have provision for aligning the emitter unit properly and for locking the emitter unit into this alignment.

Each emitter control unit shall be provided with hardware to permit the unit to be mounted in or on an emergency vehicle or mass transit vehicle. Where required for certain emergency vehicles, the emitter control unit and exposed controls shall be weatherproof.

OPTICAL DETECTION/DISCRIMINATOR ASSEMBLY

General

Each optical detection/discriminator assembly shall consist of one or more optical detectors, connecting cable and a discriminator module.

Each assembly, when used with standard emitters, shall have a range of at least 300 m for Class I signals and 550 m for Class II signals. Standard emitters for both classes of signals shall be available from the manufacturer of the system. Range measurements shall be taken with all range adjustments on the discriminator module set to "maximum".

Optical Detector

Each optical detector shall be a waterproof unit capable of receiving optical energy from two separately aimable directions. The horizontal angle between the 2 directions shall be variable from 180 degrees to 5 degrees.

The reception angle for each photocell assembly shall be a maximum of 8 degrees in all directions about the aiming axis of the assembly. Measurements of reception angle will be taken at a range of 300 m for a Type I emitter and at a range of 550 m for a Type II emitter.

Internal circuitry shall be solid state and electrical power shall be provided by the associated discriminator module.

Each optical detector shall be contained in a housing, which shall include 2 rotatable photocell assemblies, an electronic assembly and a base. The base shall have an opening to permit mounting on a mast arm or a vertical pipe nipple, or suspension from a span wire. The mounting opening shall have female threads for Size 21 conduit. A cable entrance shall be

provided which shall have male threads and gasketing to permit a waterproof cable connection. Each detector shall have mass of less than 1.1 kg and shall present a maximum wind load area of 230 cm^2. The housing shall be provided with weep holes to permit drainage of condensed moisture.

Each optical detector shall be installed, wired and aimed as specified by the manufacturer.

Cable

Emergency vehicle cable (EV-C) shall meet the requirements of IPCEA-S-61-402/NEMA WC 5, Section 7.4, 600-V (ac) control cable, 75°C, Type B, and the following:

A. The cable shall contain 3 conductors, each of which shall be No. 20 (7 x 28) stranded, tinned copper with low-density polyethylene insulation. Minimum average insulation thickness shall be 0.63-mm. Insulation of individual conductors shall be color coded: 1-yellow, 1-blue, 1-orange.
B. The shield shall be either tinned copper braid or aluminized polyester film with a nominal 20 percent overlap. Where film is used, a No. 20 (7 x 28) stranded, tinned, bare drain wire shall be placed between the insulated conductors and the shield and in contact with the conductive surface of the shield.
C. The jacket shall be black polyvinyl chloride with minimum ratings of 600 V (ac) and 80°C and a minimum average thickness of 1.1 mm. The jacket shall be marked as required by IPCEA/NEMA.
D. The finished outside diameter of the cable shall not exceed 8.9 mm.
E. The capacitance, as measured between any conductor and the other conductors and the shield, shall not exceed 157 pf per meter at 1000 Hz.
F. The cable run between each detector and the controller cabinet shall be continuous without splices or shall be spliced only as directed by the detector manufacturer.

Discriminator Module

Each discriminator module shall be designed to be compatible and usable with a Model 170 and 2070 controller unit and to be mounted in the input file of a Model 332 or Model 336 controller cabinet, and shall conform to the requirements of Chapter I of the State of California, Department of Transportation, "Traffic Signal Control Equipment Specifications."

Each discriminator module shall be capable of operating two channels, each of which shall provide an independent output for each separate input.

Each discriminator module, when used with its associated detectors, shall perform the following:

A. Receive Class I signals at a range of up to 300 m and Class II signals at a range of up to 550 m.
B. Decode the signals, on the basis of frequency, at 9.639 Hz ± 0.119 Hz for Class I signals and 14.035 Hz ± 0.255 Hz for Class II signals.
C. Establish the validity of received signals on the basis of frequency and length of time received. A signal shall be considered valid only when received for more than 0.50–second. No combination of Class I signals shall be recognized as a Class II signal regardless of the number of signals being received, up to a maximum of 10 signals. Once a valid signal has been recognized, the effect shall be held by the module in the event of temporary loss of the signal for a period adjustable from 4.5 seconds to 11 seconds in at least 2 steps at 5 seconds ± 0.5 second and 10 seconds ± 0.5 second.
D. Provide an output for each channel that will result in a "low" or grounded condition of the appropriate input of a Model 170 or 2070 controller unit. For Class I signals the output shall be a 6.25 Hz ± 0.1 percent, rectangular waveform with a 50 percent duty cycle. For Class II signals the output shall be steady.

Each discriminator module shall receive electric power from the controller cabinet at either 24 V (dc) or 120 V (ac).

Each channel together with the channel's associated detectors shall draw not more than 100 mA at 24 V (dc) or more than 100 mA at 120 V (ac). Electric power, one detector input for each channel and one output for each channel shall terminate at the printed circuit board edge connector pins listed below:

BOARD EDGE CONNECTOR PIN ASSIGNMENT

A	DC ground		
B	+24 V (dc)	P	(NC)
C	(NC)		
D	Detector input, Channel A	R	(NC)
E	+24V (dc) to detectors	S	(NC)
F	Channel A output (C)	T	(NC)
		U	(NC)
H	Channel A output (E)	V	(NC)
J	Detector input, Channel B	W	Channel B Output (C)
K	DC Ground to detectors	X	Channel B Output (E)
L	Chassis ground	Y	(NC)
M	AC-	Z	(NC)
N	AC+		

(C) Collector, Slotted for Keying
(E) Emitter, Slotted for Keying
(NC) Not connected, cannot be used by manufacturer for any purpose.

Two auxiliary inputs for each channel shall enter each module through the front panel connector. Pin assignment for the connector shall be as follows:

A. Auxiliary detector 1 input, Channel A
B. Auxiliary detector 2 input, Channel A
C Auxiliary detector 1 input, Channel B
D. Auxiliary detector 2 input, Channel B

Each channel output shall be an optically isolated NPN open collector transistor capable of sinking 50 mA at 30 V (ac) and shall be compatible with the Model 170 controller unit inputs.

Each discriminator module shall be provided with means of preventing transients received by the detector from affecting the Model 170 or 2070 controller assembly.

Each discriminator module shall have a single connector board and shall occupy one slot width of the input file. The front panel of each module shall have a handle to facilitate withdrawal and the following controls and indicators for each channel:

A. Three separate range adjustments each for both Class I and Class II signals.
B. A 3-position, center-off, momentary contact switch, one position (down) labeled for test operation of Class I signals, and one position (up) labeled for test operation of Class II signals.
C. A "signal" indication and a "call" indication each for Class I and for Class II signals. The "signal" indication denotes that a signal above the threshold level has been received. A "call" indication denotes that a steady, validly coded signal has been received. These 2 indications may be accomplished with a single indication lamp; "signal" being denoted by a flashing indication and "call" with a steady indication.

In addition, the front panel shall be provided with a single circular, bayonet-captured, multi-pin connector for 2 auxiliary detector inputs for each channel. Connector shall be a mechanical configuration conforming to the requirements in Military Specification MIL-C-26482 with 10-4 insert arrangement, such as Burndy Trim Trio Bantamate Series, consisting of the following:

A. Wall mounting receptacle, G0B10-4PNE with SM20M-1S6 gold plated pins.
B. Plug, G6L10-4SNE with SC20M-1S6 gold plated sockets, cable clamp and strain relief that shall provide for a right angle turn within 65 mm maximum from the front panel surface of the discriminator module.

Cabinet Wiring

The Model 332 cabinet has provisions for connections between the optical detectors, the discriminator module and the Model 170 0r 2070 controller unit.

Wiring for a Model 332 cabinet shall conform to the following:

A. Slots 12 and 13 of input file "J" have each been wired to accept a 2-channel module.

B. Field wiring for the primary detectors, except 24-V (dc) power, shall terminate on either terminal board TB-9 in the controller cabinet or on the rear of input file "J," depending on cabinet configuration. Where TB-9 is used, position assignments shall be as follows:

Position	Assignment
4	Channel A detector input, 1st module (Slot J-12)
5	Channel B detector input, 1st module (Slot J-12)
7	Channel A detector input, 2nd module (Slot J-13)
8	Channel B detector input, 2nd module (Slot J-13)

The 24-V (dc) cabinet power will be available at Position 1 of terminal board TB-1 in the controller cabinet.

Field wiring for the auxiliary detectors shall terminate on terminal board TB-O in the controller cabinet. Position assignments are as follows:

FOR MODULE 1 (J-12)		FOR MODULE 2 (J-13)	
Position	Assignment	Position	Assignment
1	+24V (dc) from (J-12E)	7	+24V (dc) from (J-13E)
2	Detector ground From (J-12K)	8	Detector ground from (J-13K)
3	Channel A auxiliary detector input 1	9	Channel A auxiliary detector input 1
4	Channel A auxiliary detector input 2	10	Channel A auxiliary detector input 2
5	Channel B auxiliary detector input 1	11	Channel B auxiliary detector input 1
6	Channel B auxiliary detector input 2	12	Channel B auxiliary detector input 2

SYSTEM OPERATION

The Contractor shall demonstrate that the components of each system are compatible and will perform satisfactorily as a system. Satisfactory performance shall be determined using the following test procedure during the functional test period:

A. Each system to be used for testing shall consist of an optical emitter assembly, an optical detector, an optical detector cable and a discriminator module.
B. The discriminator modules shall be installed in the proper input file slot of the Model 170 or 2070 controller assembly.
C. Two tests shall be conducted; one using a Class I signal emitter and a distance of 300 m between the emitter and the detector, the other using a Class II signal emitter and a distance of 550 m between the emitter and the detector. Range adjustments on the module shall be set to "Maximum" for each test.
D. Each test shall be conducted for a period of one hour, during which the emitter shall be operated for 30 cycles, each consisting of a one minute "on" interval and a one minute "off" interval. During the total test period the emitter signal shall cause the proper response from the Model 170 or 2070 controller unit during each "on" interval and there shall be no improper operation of either the Model 170/2070 controller unit or the monitor during each "off" interval.

10-3.24 PEDESTRIAN PUSH BUTTONS

At the option of the Contractor, pedestrian push button housings may be the plastic type.

10-3.25 LUMINAIRES

Ballasts shall be the lag or lead regulator type.

10-3.26 SOFFIT AND WALL LUMINAIRES

No. 7 pull boxes adjacent to soffit luminaires will be required only at the locations shown on the plans.

10-3.27 PEDESTRIAN OVERCROSSING FIXTURES

Fluorescent lighting fixtures for installation in the top railing of a pedestrian overcrossing chain link sidewalk railing shall conform to the details shown on the plans and these special provisions.

If the design of the fixtures deviates in any way from the details shown on the plans, the design shall be submitted to the Engineer for review before fabrication of the fixtures. If deemed necessary by the Engineer, one complete prototype fixture shall be delivered to the Engineer for review at least 30 days before fabrication of the fixtures to be used in the work. The prototype fixture will be returned to the Contractor, and if permitted by the Engineer, the fixture may be installed in the work.

The shell of the fixture shall consist of a top section and a door section of extruded 6063-T5 aluminum alloy (each with a nominal 3-mm wall thickness), 2 cast-end sections of 319 aluminum alloy, and an internal wireway cover of 505-H32 aluminum alloy, as detailed on the plans.

The top section and the door section shall be joined together on one side by a continuous hinge formed as part of the 2 extrusions and shall overlay to permit locking on the other side. The hinge shall be treated with a suitable silicone grease that will prevent the entrance of water by capillary action.

Fasteners requiring a special socket wrench, as detailed on the plans, shall be provided on the overlap to secure the door section in the closed position. Two special socket wrenches that operate the fasteners shall be furnished to the Engineer.

The top section of the shell shall have a fin with 5-mm holes spaced uniformly on 300-mm centers to permit the use of 3.76-mm (9-gage) tie wires to support the chain link fence fabric.

The end sections shall fit on the ends of the fixture and shall be welded to the top section only. Each end section shall have an open extension with an outside diameter equal to that of Size 35, Type 1, conduit. A 75-mm sleeve shall be provided with each end section for securing the fixture to the top rail as shown on the plans.

The wireway cover (with 5-mm hemmed ends up) complete with terminal blocks and circuit conductors shall be inserted before welding the end sections and shall provide clearance at both ends for conductors. The cover shall be fastened by at least two 6-mm, No. 4 self-threading sheet metal screws with binding head and blunt point. Blind rivets of equivalent strength may be substituted.

The lens units in the door section shall be formed of 38-mm methyl methacrylate rod, cut and fire glazed to provide a clear finish or of cast units providing equivalent tolerances and finish. Units shall conform to the dimensions shown on the plans.

The lenses shall be secured to the door section with an extruded lens retainer of 6063-T5 aluminum alloy conforming to the lens shape. The lens retainers shall fit the full length of the lens on both sides. Lens retainers which are continuous for the full length of the 3 lenses will be permitted. "Zee" bars of 5052-H32 or 5005-H14 aluminum alloy, 1.6 mm, minimum thickness, may be substituted for the extruded lens retainer, if approved by the Engineer.

One or more bronze sash chains or other satisfactory devices shall be provided to prevent the door from opening to such an extent that the hinge will be damaged.

Each fixture shall contain an F48T12/CW, rapid start fluorescent lamp with recessed, double-contact bases installed on the back side of the door directly behind the lenses.

Lampholders shall be listed by the UL for outdoor use, shall be provided with heat resistant, circular cross section, neoprene sealing gasket, silver-coated contacts and waterproofed lead entrance for use with a 1500-mA, rapid start, fluorescent lamp. One lampholder for each lamp shall be of the spring-loaded type.

The distance between the faces of the lampholder for each lamp shall be designed to provide a compression of at least 2.5 mm on the spring type lampholder when the lamp is in place. The lamp shall have positive mechanical and electrical contact when the lamp is in place. The socket on the spring type lampholder shall have sufficient travel to permit installation of the lamp. Springs shall not be a part of the current carrying circuit.

The ballast shall be 34.3 mm long (maximum) and shall be the high power factor type with weatherproof leads for operation of one 1220-mm rapid-start lamp. Ballasts shall be listed by the UL for outdoor operation on 110-V (ac) to 125-V (ac), 60 Hz circuits and shall be rated at 1500 mA.

Circuit conductors entering the fixture shall be terminated on molded, phenolic, barrier-type, 3-pole terminal blocks rated at 15 A, 600 V (ac) and shall have integral-type white waterproof marking strips labeled "Line 1", "Neutral" and "Line 2". Current carrying parts of the terminal blocks shall be insulated from the fixture with integral plugs or strips to provide an insulating value in excess of the line to ground flash-over voltage. The terminal blocks shall be attached to the wireway cover in the top section. If the Contractor elects to use sectionalized terminal blocks, each section shall be provided with an integral barrier on each side and shall be capable of rigid mounting and alignment.

The electrical system of the pedestrian overcrossing shall be effectively grounded by a No. 8 copper wire installed in the conduit from fixture to fixture, from the end fixture to conduit fitting on the end post and from conduit fitting on the end post to the grounding bushing in the nearest pull box.

The ground wire shall be secured to the inside of the telescoping sleeve end casting where conductors are carried and to the inside of the Type LB conduit fitting on the end post by means of a connecting lug and a No. 8, self-threading, pan-screw.

The lamp, with lampholders, ballast and fixture wires, shall be attached to the door section. The terminal blocks shall be attached to the top section or wireway cover.

Three No. 10, solid copper circuit conductors shall be installed between terminal blocks as part of each completed fixture.

Conductors from ballast to lampholders shall be No. 16 minimum size, stranded copper wire.

Conductors in the fixture, except ballast leads and entrance line conductors, shall be UL listed appliance wiring material (AWM).

Splicing of lampholder conductors to secondary ballast leads shall be done by use of mechanically secure connectors.

Sufficient slack shall be provided in the conductors between the ballast and the terminal blocks to allow the fixture door to be fully opened.

Exposed surfaces of the fixture shall be clean, uniform in appearance and free from defects such as improper fit, dents, deep scratches and abrasions, burrs, roughness, off-square ends, holes off center or jagged, surface irregularities and other significant defects.

Screws for attaching components to the fixture shell such as lens retainers, "Zee" bars, ballast and lampholders shall be tapped into the shell from inside only with the ends of screws ground even with the outside surface of the fixture. No screwheads, nuts or other fasteners shall be removable from the outside.

Defective parts of the fixture, as determined by the Engineer before or after the fixture is installed, shall be removed and replaced at the Contractor's expense.

The fixture shall be completely fabricated and assembled in the shop and shall be ready for installation before shipment to the project.

10-3.28 SIGN LIGHTING FIXTURES – INDUCTION

Induction sign lighting fixtures shall conform to the provisions for mercury sign lighting fixtures in Section 86-6.05, "Sign Lighting Fixtures-Mercury Light," of the Standard Specifications and these special provisions.

Each fixture shall consist of a housing with door, a reflector, refractor or a lens, a lamp, a power coupler, a high frequency generator and a fuse block.

Fixtures shall have a minimum average rating of 60 000 hours. Fixtures shall be for a wattage of 87 W, 120/240 V (ac). The power factor of the fixtures shall be greater than 90 percent and the total harmonic distortion shall be less than 10 percent. Fixtures shall be Underwriter's Laboratories (UL) approved for wet locations and be Federal Communications Commission (FCC) Class A listed.

The mass of the fixture shall not exceed 20 kg. The manufacturer's brand name, trademark, model number, serial number and date of manufacture shall be located on the packaged assembly and permanently marked on the outside and inside of the housing.

MATERIALS

Mounting Assembly

The mounting assembly may be either cast aluminum, hot-dip galvanized steel plate or steel plate that has been galvanized and finished with a polymeric coating system or the same finish that is used for the housing.

Housing

Housings shall have a door designed to hold a refractor or lens. Housing doors shall be designed to be opened without the use of tools. Housings and doors shall have a powder coat or polyester paint finish of a gray color resembling unfinished fabricated aluminum.

Reflector

Reflectors shall be designed to be removed as a unit that includes the lamp and power coupler.

Refractor

Refractors or lenses shall have smooth exteriors. Lenses shall be flat or convex. Convex lenses shall be made from heat resistant, high-impact resistant, tempered glass.

Convex lenses shall be designed or shielded so that no fixture luminance is visible when the fixture is approached directly from the rear and the viewing level is the bottom of the fixture. When a shield is used it shall be an integral part of the door casting.

Lamp

Each fixture shall be furnished with a 85-W induction lamp. Interior lamp walls shall be fluorescent phosphor coated. Lamp light output shall be at least 70 percent at 60 000 hours. Lamps shall have a minimum color-rendering index of 80. Lamps shall be rated at a color temperature of 4 000°C. Lamps shall be removable without the use of tools.

Power Coupler

Power couplers shall consist of a construction base with antenna, heat sink and electrical connection cable.

The power coupler shall be designed so that it can be removed with common hand tools.

High Frequency Generator

High frequency generators shall start and operate lamps at an ambient temperature of -25°C or greater for the rated life of the lamp.

Generator output frequency shall be 2.65 MHz +/- 10 percent. The generator radio frequency interference shall meet the requirements of the Federal Communications Commission Title 47, Part 18, regulations concerning harmful interference.

High frequency generators shall operate continuously at ambient air temperatures from -25°C to 25°C without reduction in generator life. High frequency generators shall have a design life of at least 100 000 hours at 55°C.

High frequency generators shall be capable of being replaced with common hand tools. Conductor terminals shall be identified as to the component terminal to which they connect.

High frequency generators shall be mounted to use the fixture upon which they are mounted as a heat sink.

A Certificate of Compliance conforming to the provisions in Section 6-1.07, "Certificates of Compliance," of the Standard Specifications, and a copy of the high frequency generator test methods and results shall be submitted by the manufacturer with each lot of fixtures. The certificate shall state that the high frequency generators meet the requirements of this section and the generator specifications of the lamp manufacturer.

10-3.29 INTERNALLY ILLUMINATED SIGNS

The "METER ON" sign on a Type 1 standard shall be a Type A pedestrian signal modified so that the reflector shall be a single chamber. Light Emitting Diode (LED) modules for meter-on signs will be Contractor-furnished in conformance with the provisions in "Light Emitting Diode (LED) Meter On Signal Modules" of these specials provisions.

The message shall be white "METER ON" as shown on the plans. White color shall be in conformance with the provisions in Section 86-4.06, "Pedestrian Signal Faces," of the Standard Specifications.

Lenses shall be 4.8-mm, minimum thickness, clear acrylic or polycarbonate plastic or 3-mm nominal thickness glass fiber reinforced plastic, with molded, one piece, neoprene gasket. Message lettering for "METER" shall be "Series C," 113 mm high, with uniform 13-mm stroke, and for "ON" shall be "Series C," 150 mm high, with uniform 25-mm stroke. Letters shall be clear, transparent or translucent, with black opaque background silk screened on to the second surface of the lens.

10-3.30 LIGHT EMITTING DIODE (LED) METER ON SIGNAL MODULES

DEFINITION

All Meter-On signs on this project This specification is for the purchase of LED Traffic Signal Modules (herein referred to as modules) in the following configurations: Meter On Signal shall utilize light emitting diode signal modules.

All devices must meet the general specifications of the Transportation Electrical Equipment Specifications (TEES), Chapter 1-General Specifications, as well as the following specification. Incase of conflict, this specification shall govern over the TEES, Chapter 1 in lieu of incandescent lamps.

GLOSSARY

Wherever the following terms or abbreviations are used, the intent and meaning shall be interpreted as follows:

AlInGaP	Aluminum Indium Gallium Phosphide Technology and material used in the production of the LED.
Cd	Candela. Unit of luminous intensity measurement.
Chromaticity	The property of color of light
Conflict monitor	Model 210. A device used to prevent conflicting green phases in conjunction with a Model 170 controller. (See TEES)
Controller unit	Model 170 Traffic Signal Controller that is standard equipment on Caltrans maintained signalized intersections. (See TEES)
ITE	Institute of Transportation Engineers
LED	Light Emitting Diode.
Load switch	Series of devices used to switch power to signal indicators
MUTCD	Manual on Uniform Traffic Control Devices
METS	Material Engineering and Testing Services of the Translab.
NEMA	National Electrical Manufacturers Association
Power factor	The ratio of the real power component to the total (complex) power component.
PTCSH	Pedestrian Traffic Control Signal Head
Rated power	The power consumption that the module was designed and tested for at ambient temperature (25°C). See Design Qualification Testing.
TEES	Traffic Electrical Equipment Specifications. A package of standard specifications for traffic electrical equipment to be used on State Highways. This document is compiled by Caltrans Traffic Operations Program.
THD	Total Harmonic Distortion. The amount of higher frequency power on the power line
Type 1 module	LED module that is designed to be mounted in the place of the existing lens of a traffic signal.
VTCSH	Vehicle Traffic Control Signal Heads.

GENERAL

Each module shall consist of an assembly that utilizes LEDs as the light source in lieu of an incandescent lamp for use in traffic signal sections.

The LEDs shall utilize appropriate technology to achieve the required color and shall be the ultra bright type rated for 100,000 hours of continuous operation from -40°C to +74°C.

The modules shall be rated for a minimum useful life of 48 months. All modules shall meet all parameters of this specification during this period.

The individual LEDs shall be wired such that a catastrophic loss or the failure of one LED will result in the loss of not more than 5 percent of the signal module light output.

ELECTRICAL

Power Consumption

Maximum power consumption requirements for the are as follows (in Watts):

	25°C	74°C
"Meter On"	15.0	17.0

LED modules will have EPA Energy Star compliance ratings, if applicable to that shape, size and color.

Operation Voltage

The modules shall operate from a 60 Hz ±3 Hz AC line over a voltage ranging from 95 volts to 135 volts. The fluctuations of line voltage shall have no visible effect on the luminous intensity of the indications.

Operating voltage of the modules shall be 120 V(ac). All parameters shall measured at this voltage.

Power Factor

The LED signal module shall have a power factor of 0.90 or greater.

THD

Total harmonic distortion (current and voltage) induced into an AC power line by an LED signal module shall not exceed 20 percent.

Surge Suppression

The signal module on-board circuitry shall include voltage surge protection to withstand high-repetition noise transients as stated in Section 2.1.6 of NEMA Standard TS-2, 1992.

The LED circuitry shall prevent perceptible flicker to the unaided eye over the voltage range specified above.

All wiring and terminal blocks shall meet the requirements of Section 13.02 of the ITE Publication: Equipment and Material Standards, Chapter 2 (Vehicle Traffic Control Signal Heads).

Compatibility

The modules shall be operationally compatible with currently used controller assemblies (solid state load switches, flashers, and conflict monitors). Review TEES Chapters 3 and 6 for specifications on these devices.

When a current of 20 mA AC (or less) is applied to the unit, the voltage read across the two leads shall be 15 V(ac) or less.

The modules and associated on-board circuitry must meet Class an emission limits referred in Federal Communications Commission (FCC) Title 47, SubPart B, Section 15 regulations concerning the emission of electronic noise.

Environmental Requirements

The LED signal module shall be rated for use in the operating temperature range of -40°C to +74°C. The modules shall meet all specifications throughout this range.

The LED signal module shall be protected against dust and moisture intrusion per the requirements of NEMA Standard 250-1991 for Type-4 enclosures to protect all internal components.

Construction

The LED signal module shall be a single, self-contained device, not requiring on-site assembly for installation into an existing traffic signal housing. The power supply for the module shall be integral to the unit.

The circuit board and power supply shall be contained inside the module. Circuit boards shall conform to Chapter 1, Section 6 of the "Transportation Electrical Equipment Specifications".

The assembly and manufacturing process for the LED signal assembly shall be designed to assure all internal components are adequately supported to withstand mechanical shock and vibration from high winds and other sources.

Materials

Material used for the lens and signal module construction shall conform to ASTM specifications for the materials.

Enclosures containing either the power supply or electronic components of the signal module shall be made of UL94VO flame retardant materials. The lens of the signal module is excluded from this requirement.

Module Identification

Each module shall have the manufacturer's name, trademark, model number, serial number, date of manufacture (month-year), and lot number as identification permanently marked on the back of the module.

The following operating characteristics shall be permanently marked on the back of the module: rated voltage and rated power in Watts and Volt-Ampere.

If a specific mounting orientation is required, each module shall have prominent and permanent marking(s) for correct indexing and orientation within a signal housing. The markings shall consist of an up arrow, or the word "UP" or "TOP".

METER ON SIGNAL

General

Meter On Signal face modules shall be designed to mount behind or replace the existing face plate of existing Type "A" housing.

The design of the modules shall require a specific mounting orientation.

Photometric Requirement

Each module shall provide an average luminous intensity of at least 5,300 candela/m^2 throughout the useful life over the operating temperature range.

The uniformity ratio of an illuminated symbol shall not exceed 4 to 1 between the highest luminance area and the lowest luminance area in the module.

The color output of the module shall conform to the requirements of Section 5.3 in the ITE Publication: Equipment and Material Standards, Chapter 3 (Pedestrian Traffic Control Signal Indications).

Meter On shall be lunar white.
x: not less than 0.270, nor greater than 0.330
y: not less than 1.055(x) - 0.0128, nor greater than 1.055(x) + 0.0072

Physical and Mechanical Requirements

The module shall be designed to be used in the pedestrian signal section as retrofit replacement for existing signal lamps and shall not require special tools for installation.

The module shall fit into existing pedestrian signal section housings built to the PTCSH specifications without modification to the housing.

The height of each symbol on the module shall be not less than 250 mm and the width of each symbol on the module shall not be less than 165 mm.

Construction

The modules shall be a single, self-contained device, not requiring on-site assembly for installation into an existing Type "A" housing.

Message lettering for “METER” shall be “Series C,” 113 mm high, with uniform 13 mm stroke, and for “ON” shall be “Series C,” 150 mm high, with uniform 25 mm stroke.

QUALITY ASSURANCE

The modules shall be manufactured in accordance with a manufacturer quality assurance (QA) program. The QA program shall include two types of quality assurance: (1) design quality assurance and (2) production quality assurance. The production quality assurance shall include statistically controlled routine tests to ensure minimum performance levels of The modules built to meet this specification, and a documented process of how problems are to be resolved.

QA process and test results documentation shall be kept on file for a minimum period of seven years.

LED signal module designs not satisfying design qualification testing and the production quality assurance testing performance requirements described below shall not be labeled, advertised, or sold as conforming to this specification.

Design Qualification Testing

Design Qualification Testing shall be performed by the manufacturer or an independent testing lab hired by the manufacturer on new LED module designs, and when a major design change has been implemented on an existing design.

A major design change is defined as a design change (electrical or physical) which changes any of the performance characteristics of the module, results in a different circuit configuration for the power supply, or changes the layout of the individual LED's in the module.

A quantity of two units for each design shall be submitted for Design Qualification Testing.

Test units shall be submitted to Caltrans after the manufacturer's testing is complete.

Manufacturer's testing data shall be submitted with test units for Caltrans verification of Design Qualification Testing data.

Burn In

The sample modules shall be energized for a minimum of 24 hours, at 100 percent on-time duty cycle, at a temperature of +74°C before performing any design qualification testing.

Any failure of the module, which renders the unit non-compliant with the specification after burn-in, shall be cause for rejection.

For Design Qualification Testing, all specifications will be measured including, but not limited to:

1. Rated Initial Luminous Intensity.
   Measured over the operating temperature range.
2. Chromaticity (Color).
   Measured over the operating temperature range.
3. Electrical.
   All specified parameters shall be measured and used for quality comparison of production quality assurance on production modules. (rated power, etc)
4. Equipment Compatibility.
   Modules shall be tested for compatibility with the controller unit, conflict monitor, and load switch. Each signal module shall be connected to the output of a standard load switch connected to an AC voltage supply between the values of 95 and 135 V(ac) with the input to the load switch in the "off" position. The AC voltage developed across

each LED signal module so connected shall not exceed 10 Vrms as the input AC voltage is varied from 95 Vrms to 135 Vrms.

5. Mechanical vibration testing shall be as per MIL-STD-883, Test Method 2007, using 3 four minute cycles along each x, y, and z-axis, at a force of 2.5 Gs, with a frequency sweep from 2 Hz to 120 Hz. The loosening of the lens, of any internal components, or other physical damage shall be cause for rejection.
6. Temperature cycling shall be performed as per MIL-STD-883, Test method 1010. The temperature range shall be per "Environmental Requirements". A minimum of 20 cycles shall be performed with a 30-minute transfer time between temperature extremes and a 30-minute dwell time at each temperature. Module(s) being tested shall be energized and functioning throughout the duration of the test. Failure of a module to function properly or any evidence of cracking of the module lens or housing after temperature cycling shall be cause for rejection.
7. Moisture resistance testing shall be performed on all modules mounted in a standard type "A" pedestrian housing per NEMA Standard 250-1991 for Type 4 enclosures. Any evidence of internal moisture after testing shall be cause for rejection.

Production Quality Control Testing

The following Production Quality Assurance tests shall be performed on each new module prior to shipment. Failure to meet requirements of any of these tests shall be cause for rejection. Test results shall be retained by the manufacturer for seven years.

Burn-in period shall consist of each signal module being energized at rated voltage for a 30-minute stabilization period before the measurement is made.

Each module shall be tested for rated initial intensity after burn-in.

A single point measurement, with a correlation to the intensity requirements of Section 1.04 of the VTCSH for circular modules, may be used.

The ambient temperature for this measurement shall be +25°C.

Each module not meeting minimum luminous intensity requirements of 5300 cd/m2 for Meter On Symbol shall be cause for rejection.

Each module shall be tested for required power factor after burn-in.

Each module shall be measured for current flow in amperes after burn-in. The measured current values shall be compared against rated values resulting from design qualification measurements under "Design Qualification Testing". The current flow shall not exceed the rated value.

Each module shall be visually inspected for any exterior physical damage or assembly anomalies. Careful attention shall be paid to the surface of the lens to ensure there are no scratches (abrasions), cracks, chips, discoloration, or other defects. Any such defect shall be cause for rejection.

Caltrans Quality Assurance Testing (random sample testing)

Caltrans may perform random sample testing on all shipments.

Random sample testing should be completed within than 30 days after delivery to the specified location on the purchase order.

Meter On Signal modules shall be tested according to California Test No. 606 and as described herein.

All optical testing shall be performed with the module mounted in a standard traffic signal section or in a standard Type "A" Pedestrian Housing, but without a visor or hood attached to the section or housing.

The number of units tested (sample size) shall be determined by the quantity of each model in the shipment. The sample size shall conform to ANSI/ASQC Z1.4. The Caltrans METS shall determine the sampling parameters to be used for the random sample testing.

All parameters of the specification may be tested on the shipment sample.

Acceptance/Rejection of the shipment shall conform to ANSI/ASQC Z1.4 for random sampled shipments.

WARRANTY

The manufacturer shall provide a written warranty against defects in materials and workmanship for the modules for a minimum period of 60 months after acceptance of the modules. Replacement modules shall be provided promptly after receipt of modules that have failed at no cost to the State. All warranty documentation shall be given to the TransLab prior to random sample testing.

LED METER ON SIGN DIMENSIONS

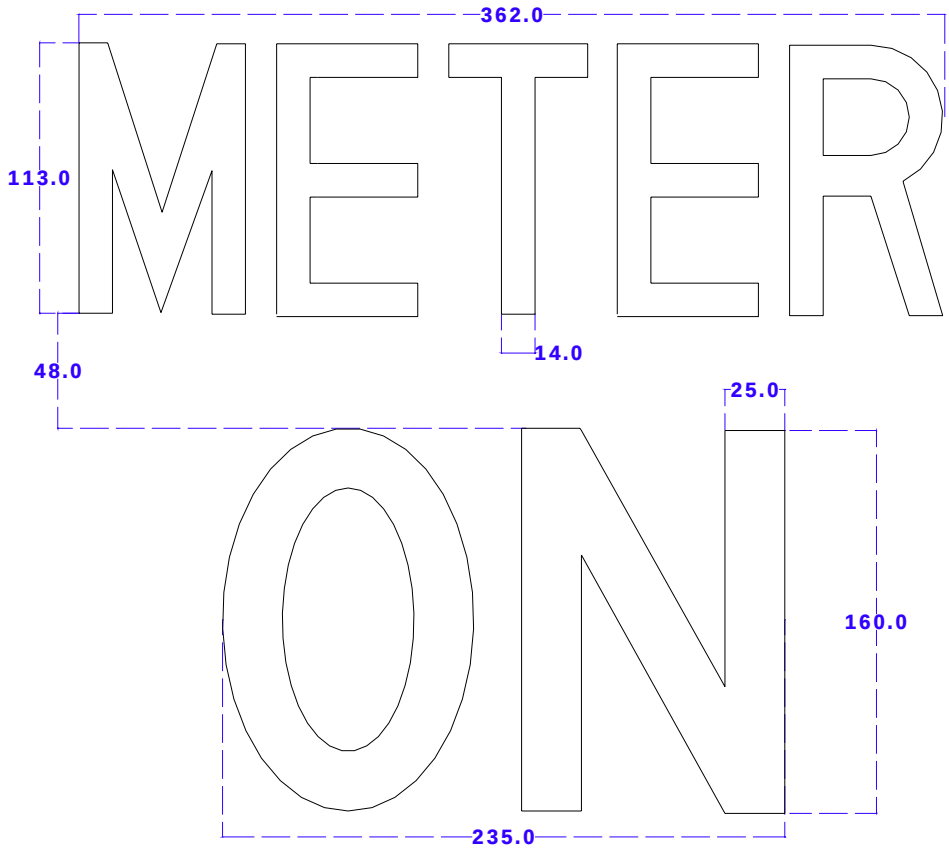

10-3.31 INTERNALLY ILLUMINATED STREET NAME SIGNS

Internally illuminated street name signs shall be Type A.

10-3.32 PHOTOELECTRIC CONTROLS

Contactors shall be the mechanical armature type designed for lighting loads.

10-3.33 MODIFY CHANGEABLE MESSAGE SIGN SYSTEM

Modifying the Model 500 changeable message sign (CMS) systems consists of relocating the existing Model 170 controller assembly in a completely wired Type 1 or similar cabinet and the required wiring and auxiliary equipment required to control the CMS shown on the plans and in conformance with these special provisions.

The existing Model 500 changeable message sign, structure and sign assembly shall remain in the same location.

The controller cabinet foundation shall be constructed as shown on the plans for Model 334 cabinets (including furnishing and installing anchor bolts), the controller cabinet shall be installed on the foundation, and the field wiring connections shall be made to the terminal blocks in the sign assembly and in the controller cabinet.

Field conductors No. 12 and smaller shall terminate with spade terminals. Field conductors No. 10 and larger shall terminate in spade or ring terminals.

The location of the foundation for each controller cabinet will be determined by the Engineer.

10-3.34 MODIFY CHANGEABLE MESSAGE SIGN STATION

The changeable message sign (CMS) station shall consist of installing the following equipment, as shown on the plans and as directed by the Engineer:

1. State-furnished Cable harnesses 4 and 5.
2. One relocated controller cabinet.
3. Relocated Dial-up Modem.

10-3.35 CAMERA UNIT

Each camera unit shall consist of a camera, lens, environmental housing and camera unit cable assembly. The camera, lens and environmental housing, combined, shall not weigh more than 6.8 kg. Each camera unit shall be interchangeable with the existing camera units already installed on various traffic operations system (TOS) projects without changes or adjustments to either the system or the camera unit.

Each camera unit shall be assembled, inspected, and tested in accordance with these special provisions prior to delivery to the job site. Installation, operations and maintenance manuals shall also be submitted at the time of delivery.

Applicable Documents - The following documents of the U.S. Military Specification (MIL-SPEC), Underwriters' Laboratory, Inc. (UL), Electronics Industries Association (EIA) Standards, and other Standards form parts of the specification to the extent specified in these standards. In the event of a conflict between the content of this section and the content of the specification, the standards defined in this section shall supersede.

Military Specification Documents	
MIL-I-45208A	Inspection System Requirements, Dec. 16, 1963
MIL-C-45662	Calibration System Requirements, June 10, 1980
MIL-STD-416A	Electromagnetic Interface Characteristics Requirements for Equipment, Subsystems & Systems, Aug. 1, 1968
MIL-E-5400T	Electronic Equipment, Airborne General Specification
MIL-STD-810	Environmental Test Methods, 19 July 1983
MIL-C-5541	Chemical Conversion Coatings on Aluminum Alloys, June 3, 1970

Underwriters' Laboratory, Inc. and other documents	
UL-796	Printed Circuit Boards
EIA-170A	Electrical Performance Standards Color Television Studio Facilities
EIA RS-330	Electrical Performance Standards for Closed Circuit Television (CCTV) Camera 525/60 Interlaced

CAMERA

Approved Camera - The cameras listed below have been approved by the Engineer. Further information such as the source of the cameras can be provided upon demand. Any camera submitted by the Contractor that is not one of the approved cameras listed below shall be stringently compared to the specifications set forth in these special provisions before it is approved by the Engineer.

Approved Cameras:

A. Cohu 8240
B. Sony SSC-C374
C. Burle/Philips TC293C-Z0P2X596

A. General -
   1. Each camera shall be self-contained and designed for continuous unattended 24-hour operation.
   2. Camera performance shall meet or exceed EIA-170A standards.
   3. Each camera shall have automatic sensitivity and black level control so that it operates without further adjustment when illumination ranges from the minimum specified herein to that of full daylight.
   4. Each active electronic device within the camera shall be solid-state.
   5. Each camera shall have a switch selectable electronic shutter. The shutter speed shall range from 1/60 of a second (off) to 1/10,000 of a second in 8 steps. The control of the electronic shutter rate shall be accessible through a side panel opening. Remote on/off control of the shutter shall be accomplished via an output connector on the rear of the environmental housing.

B. Light sensitivity - At a scene with 50 percent light reflectivity and with light level on the scene measured to be 10 lux and greater, each camera with its 10:1 zoom lens shall generate a picture on the monitor specified in these special provisions which resolves all 10 shades of gray on the EIA Television Test Chart. Not every camera shall be required to resolve the same gray scale when the light level on the same scene is measured to be less than one lux.

C. Electrical Power - Each camera shall operate when the applied voltage is between 95 to 130 VAC, 60 Hz ±0.3 Hz, single phase. The power consumption of camera shall not exceed 10 W. All camera circuitry shall be powered by a regulated, over-voltage protected DC power supply contained in the camera.

D. Synchronization -
   1. Each camera shall generate synchronization signals by means of a single integrated circuit.
   2. Each camera shall operate with the internal EIA-170A crystal as the sync reference source with the field rate of 59.94 Hz.
   3. Each camera shall have the capability of synchronizing to an external input source.
   4. The synchronization signal at the video output shall conform to EIA-170A.

E. Scanning - Each camera's mode of scanning shall be two-to-one interlaced at 525 lines, 60 fields per second, as specified by EIA-170A.

F. Video Processing -
   1. The video output level shall be maintained to within 3 dB for changes in scene brightness of 0.17 to 109 600 cd/m^2 using a motorized iris lens having a transmission range of F/1.2 to F/1200.
   2. Each camera shall have a black-level control system.
   3. Each camera shall have an automatic white (color) balance control to maintain proper color rendition by automatically referencing to white areas of the scene. Manual control of the white balance shall be accessible through side panel or remotely controlled via the rear connector on the environmental enclosure.
   4. Automatic gain control (AGC). The switch selectable fixed gain response shall maintain the output video level to 90 percent video when the light level on the image sensor falls too low to maintain full video output. The video out will be maintained at 90 percent peak-average setting to optimize video output under varying lighting conditions. The controls for the on/off and peak average adjustments shall be accessible through the side panel of the camera.
   5. One 75 Ω (±1 percent) source-terminated, single-ended video output jack shall be provided.
   6. An adjustable white clipper shall be provided to limit highlight brightness.
   7. The video output level shall be 1.0 V peak-to-peak composite (0.7 V video, 0.3 V sync) signal, polarity black negative, across a 75 Ω load impedance.
   8. The minimum signal-to-noise ratio shall be 50 dB at 25°C.

G. Imager -
   1. Each camera shall be designed to use a 12.7 or 16.9 mm format solid-state, color, interline transfer charged-coupled device (CCD) imager.
   2. The imager shall have a minimum resolution of 768 horizontal by 493 vertical active picture elements.
   3. When provided with 6.89 lux of highlight illumination on the environmental housing window, the camera shall provide the following resolution with AGC off:
      a. Horizontal center resolution shall be 460 TV lines minimum.
      b. Vertical resolution shall be 350 TV lines minimum in the center and all corners simultaneously.

H. Mechanical -
   1. All camera circuitry shall be on a printed circuit board which shall be removable and replaceable using no more than common hand tools.
   2. Test points and adjustment identifications shall be etched or silk-screened on the boards.
   3. Each camera shall be self-supporting and operable when removed from the environmental housing and shall have a lens adapter ring which accommodates a standard 16 mm C-mount. A back focal distance adjustment shall be provided.
   4. Each camera shall utilize the rigidity of the environmental housing for strength against shock and vibration.

I. Environmental Operation -
   1. Each camera within its environmental housing shall withstand the following requirements:
      a. Operate over an ambient temperature range on -10°C to +50°C with the use of heaters.
      b. Peak random vibration of 5 g from 60 to 1000 Hz, with camera in operation.
      c. Shock up to 15 g in all axes under non-operating conditions.
      d. Exposure to sand, dust, fungus, and salt atmosphere as per MIL-E-5400T paragraphs 3.2.24.7, 3.2.24.8, 3.2.24.9, and 3.2.24.10.
      e. Up to 100 percent relative humidity as per MIL-E-5400T, paragraph 3.2.24.2.

J. Picture Quality -
   1. The quality of the picture shall be such that most objects in low light levels can be distinguished without excess interference from undesirable picture attributes.

2. Undesirable picture attributes include blooming, transfer smear, vertical register shifting.

LENS

A. General -
1. Each lens shall be fully compatible with the camera provided.
2. Each lens shall have a maximum aperture of no less than F/1.2, and a minimum range of F/1.2 to F/1200.
3. Each lens shall be a 16 mm C-mount.
4. Each lens shall have a minimum zoom range of 10 to 1. The lens focal length for a 16.9-mm CCD camera shall be shall be 10-100 mm, 10.5-105 mm or 11-110 mm. The lens focal length for a 12.7 mm CCD camera shall be shall be 8-80 mm. A 1.5-X extender shall be included with the lens.
5. Each lens shall be equipped with a motorized zoom and focus control.
6. Each lens shall have an automatic, motor-driven iris with manual override. The iris shall be controlled directly through the camera in automatic mode and from the camera control unit in the manual mode. The automatic iris shall provide continuous aperture adjustments of the lens as determined by the amount of light reaching the camera imager. The power supply and electronics for iris motor shall be contained within the environmental housing.
7. Each lens shall be fitted with an intra-spot neutral density filter.
8. Each lens must be able to respond to the following inputs from ~~existing~~ camera control unit (CCU) for lens control:

Focus near	+9.0VDC @ 100 mA
Focus far	-9.0VDC @ 100 mA
Zoom in	+9.0VDC @ 100 mA
Zoom out	-9.0VDC @ 100 mA
Iris closed	+9.0VDC @ 100 mA
Iris open	-9.0VDC @ 100 mA

9. The travel time for the upper limit stop to the lower limit stop for zoom and focus shall be from 5 seconds minimum to 10 seconds maximum.
10. Each lens shall have the capability of at least 10 pre-positioning positions.

B. Environmental Operation –
1. Each lens within its pressurized environmental enclosure shall withstand the following requirements:
2. Operate over an ambient temperature range on -10°C to +50°C with the use of heaters.
3. Peak random vibration of 5 g from 60 to 1000 Hz, with lens in operation.
4. Shock up to 15 g in all axes under non-operating conditions.
5. Exposure to sand, dust, fungus, and salt atmosphere as per MIL-E-5400T paragraphs 3.2.24.7, 3.2.24.8, 3.2.24.9, and 3.2.24.10.
6. Up to 100 percent relative humidity as per MIL-E-5400T, paragraph 2.24.2.

ENVIRONMENTAL HOUSING

A. General -
1. Each camera and lens shall be mounted in a sealed, cylindrical, environmental housing which shall not exceed 165 mm in diameter and 560 mm in length.
2. The housing shall be fabricated of seamless aluminum tubing Type 6061-T6 and shall be finished with heat reflecting, weather resisting enamel. The rear plate shall be fabricated of Type 6061-T6 aluminum.
3. The front of the housing shall be closed with a clear optically flat glass or Lexan window.
4. The housing shall include a sun shroud which shall be strapped to the housing bindings in such a manner as to minimize heat conduction by maintaining air space between shroud and housing. The shroud shall shield the entire top portion of the housing from the sun, and shall extend a minimum of 76 mm in front of the housing's glass plate.
5. The housing shall not interfere with the widest viewing angle of the lens.
6. The housing shall include a thermostatically controlled heating pad rated at 115 VAC, 100 W maximum.
7. The backplate, which is an integral part of the housing, shall have a nameplate attached bearing the manufacturer's camera assembly model number and serial number.
8. Camera connector -
9. The camera connector shall be designed to MIL-C-28462 Series 1 specifications with solder contacts. It shall be PT-07C-20-39 P, the male counterpart to PT-06A-20-39 S SR.

10. The connector shall be made of the same shell material and pin arrangement as the PT-06A-20-39 S SR connector on the end of the wiring harness.
11. The pinout of the connector shall be as shown on the plans.
12. Each camera connector shall be mounted on the rear plate with an airtight connection and a watertight seal for each conductor on its connecting cable.
    a. Each camera shall be designed for operating with the housing purged of air and filled with dry nitrogen to 35 kPa.
13. Valves -
    a. The housing shall have two valves, both on the rear end plate of the housing.
    b. One valve shall be a standard Schrader valve. It shall have a tube running from the valve to the front end of the housing.
    c. The other valve shall be an air escape/pressure relief valve preset to 140 kPa.
    d. The two valves shall be arranged such that filling with dry nitrogen from the Schrader valve will force gas to flow from front end of the housing to the rear end and vent through the air escape valve.
    e. The leakage rate with both valves closed and the housing pressurized to 70 kPa, shall leak less than 7 kPa per year, and less than 0.7 kPa per month.
14. The enclosure shall be factory pressurized to 35 kPa with dry nitrogen.
15. The notation "CAUTION PRESSURIZED" shall be printed on the rear plate of the enclosed.
16. A safety pressure release bolt shall be incorporated such that the enclosure may not be opened without first releasing the internal pressure.
17. A low-pressure (LP) sensor with related circuitry shall be provided to send an LP alarm (dry contact closure) via the camera connector. The LP sensor threshold shall be preset to activate the LP alarm at 14 kPa.
18. Two units of desiccant shall be placed inside the housing but will not obstruct the camera view or operation.
19. A humidity level indicator strip with discrete indications for 10, 20 and 30 percent humidity, shall be installed inside the housing in a position that allows inspection, while facing directly, through the window without obstructing the view of the camera at the widest viewing angle of the lens.

B. Mounting Base -
    1. A mounting base shall surround the enclosure to provide a tamper-resistant attachment of the environmental housing to the pan/tilt unit and securely hold the housing in either an upright or inverted position. The combined height of camera housing and mounting base shall be less than 254 mm. The mounting base attachment shall be as shown on the plans.
    2. All fasteners and nuts used in attaching the mounting base to the environmental housing shall be of grade 18-8 stainless steel.
    3. Each camera unit shall be provided with three stainless steel hex head bolts to secure the camera unit to the pan/tilt unit.

CAMERA UNIT CABLE ASSEMBLY

A. General - Each camera unit cable assembly shall consist of box mounting socket connector and a wiring harness.
B. Box Mounting Socket Connector -
    1. Each box mounting socket connector shall be MS-3102E-28-21S-F80.
    2. One full set of crimp contacts shall be provided with each box mounting socket connector.
    3. The pinout of the connector shall be as shown on the plans.
    4. Wiring Harness -

        The camera unit cable assembly wiring harness shall be 3 m long and shall be COHU AC27E or other cable approved by the Engineer. The coaxial cables' impedance shall be 75 Ω. One end of each wiring harness shall be type PT06A-20-39S (SR) and shall mate with the camera connector. It shall have a 90-degree end bell, Bendix 10-25997-203 or equal, for strain relief. The end bell shall be positioned such that the opening is 180 degrees from the main key on the connector. The other end of each wiring harness shall be type MS-3106E-28-21P and shall mate with the box mounting socket connector.
        a. All connectors shall be potted with an appropriate potting compound for environmental sealing.
        b. All connectors' pinout shall be as shown on the plans.

10-3.36 PAN/TILT UNIT

GENERAL

A. Each pan/tilt unit, with camera unit attached, shall pan 355 degrees minimum in either direction, and tilt 60 degrees minimum from horizontal position to either up or down positions.
B. Each pan/tilt unit shall be capable of minimum ten preset positions for each pan and tilt operation.

ELECTRICAL

A. Each pan/tilt unit shall operate with input voltage of 115 V, 60 Hz ±0.3 Hz.
B. Each pan/tilt unit shall not exceed 200 W power consumption.
C. The motors shall be impedance overload protected, two phase induction type, rated for continuous duty and shall be instantaneous reversing.
D. The limit switches shall be rated 5 A, 10 million cycles and with external adjustments.
E. Each pan/tilt unit shall be provided with box-mounting type connector.
F. One mating connector with full set of crimp contacts and strain relief shall be provided with the box-mounting connector.

MECHANICAL

A. The maximum load shall be 45 kg at 127 mm from tilt table to center of gravity in both upright and inverted position.
B. Each pan/tilt unit shall have maximum dimensions of 400 mm high, 355 mm wide and 230 mm deep.
C. Each pan/tilt unit shall not exceed the maximum weight of 27 kg.
D. Each pan/tilt unit shall be constructed in aluminum casting and plate. All internal parts shall be corrosion protected.
E. Each pan/tilt shall have textured semi-gloss beige enamel finish.
F. All bearings shall be heavy duty ball or roller bearing.
G. All gears shall be hardened steel.
H. All gasket seals shall be designed for all weather protection.
I. Each pan/tilt unit shall have a mounting hole pattern as shown on the plans.
J. Each pan/tilt unit shall have a minimum pan torque rating of 34 N·m and an instantaneous minimum tilt torque of 68 N·m.
K. The pan speed at no load shall be 6 to 8 degrees per second, nominal.
L. The tilt speed at no load shall be 3 to 4 degrees per second, nominal.

ENVIRONMENTAL

A. Ambient operating temperature shall be from -10°C to 50°C.
B. It shall be able to withstand vibration of 760 µm total excursion from 5 to 30 Hz and a peak random vibration of 5 g from 30 to 1000 Hz.
C. It shall be able to withstand shock up to 15 g in all axes under non-operating conditions, conforming to MIL-E-5400R, Para. 3.2.24.6.
D. It shall be able to operate in atmospheres up to 95 percent relative humidity, conforming to MIL-E-5400R, Para 3.2.24.4.
E. It shall be able to withstand exposure to sand, dust, fungus, and salt atmosphere, conforming to MIL-E-5400R, Para 3.2.24.7, 3.2.24.8 and 3.2.24.9.

PAN AND TILT MOUNTING

The nuts and bolts securing the pan and tilt unit to the camera platform shall be hex head and made of stainless steel. Before each bolt is fastened, a locking type coating shall be applied to the threads. The coating shall lock the bolts and nuts in place making it impossible to turn bolt or nut without tools. This coating shall last and be effective through at least 10 insertions and withdrawals of the bolt or nut.

10-3.37 CAMERA JUNCTION BOX

The camera junction box (JCB) shall be constructed as shown on the plans and described in these special provisions. All seams shall be continuously welded. All JCB mounting Hex head stainless steel nuts and bolts shall be 6 mm ∅-20 x 25 mm. Steel surfaces on which JCB is to be mounted shall be drilled and tapped 6 mm ∅-20 thread. Each JCB shall be fabricated from 14 gauge sheet steel. Two 8-32 threaded studs for terminal strip mounting shall be welded on the bottom of the box as shown on the plans. After fabrication the JCB shall be hot-dip galvanized.

A twenty position terminal block with No. 8 lugs and cover shall be mounted on the bottom of the box. Permanent terminal position markings shall be used. A laminated wiring schematic shall be permanently attached to the inside of box cover showing wiring from the camera unit box mounting connector to the terminal block.

10-3.38 CAMERA CONTROL UNIT

GENERAL

Each part of each camera control unit (CCU) shall be electrically and physically interchangeable with the like part in any other CCU furnished under this contract.

MECHANICAL

A. Each CCU shall mount in 133 mm of EIA-310 rack space with a maximum depth of 356 mm.
B. The front panel shall be white gloss color Number 17886 as per Federal Standard Color Chart 595B.
C. The front and rear panel lettering shall be black color Number 17986 as per Federal Standard Color Chart 595B.
D. A high-impedance panel jack BNC (Bayonet Nut connector) connector shall be installed on the front panel as shown on the plans. This connector shall provide video input to a test monitor without affecting the remainder of the CCTV system. This connector shall be directly connected to the video input on the rear panel.
E. A glass type, size 6.35 mm x 31.75 mm (AG) slow blow fuse shall be installed on the front panel. The fuse shall be replaceable from the outside of the front panel.
F. Switches shall protrude no more than 25 mm from the front panel and shall be mounted as shown on the plans.
G. The rear panel connectors shall be mounted as shown on the plans and shall meet the following requirements:

1. Connectors C1-C3 shall be of the following type or equivalent:

C1	AMP 206430-1
C2	AMP 206043-1
C3	AMP 206306-1

2. The pin and socket contacts for connectors C1-C3 shall be constructed with brass contact body material and with stainless steel spring that are sub-plated with 1.27 µm nickel and plated with 0.762 µm gold. Pin diameter shall be 1.575 mm. Contact size shall be 16.
3. Each C1, C2 and C3 connector shall use the AMP No. 601105-1 or No. 91002-1 contact insertion and the AMP No. 305183 contact extraction tool.
4. One mating connector with a full set crimp contacts and strain relief shall be supplied with connectors C1, C2 and C3.
5. The connectors C4 and C5 shall be a DB-25 socket connector.

H. Serial cable assemblies (SCA1 and SCA2) with length of 3 m shall be provided to mate with C4 and C5, respectively.
I. Pin and socket contacts for DB-25 connectors shall be copper alloy body; finished with 0.762 µm gold over 1.27 µm nickel.
J. The rear and front panel BNC connectors shall be of copper material with bright nickel (tarnish resistant) finish for the body and silver finish for the contact.
K. Each printed circuit board shall be vertically installed.
L. Each LED shall be equal to Hewlett Packard High Intensity Red Untinted, Non-diffused LED (Part Number HLMP-D105). Each LED shall be mounted as shown on the plans.
M. A front panel on/off switch shall turn the CCU on/off and shall also control AC power to the rear panel power output connector (C1). The indicator used for AC power shall be green when energized.
N. One coaxial cable labeled "AVO" (Analog Video Output) terminated with BNC plug connectors on each end shall be provided. This cable shall be RG-59/U with overall length of one meter.

ELECTRICAL

A. Each CCU shall have auto-iris override.
B. Each CCU shall have circuitry to detect the absence and presence of video sync on its video input. Each CCU shall also have circuitry to monitor the low-pressure alarm contact closure from the camera unit. A local/remote control switch shall be provided to override the lens and pan/tilt controls through C4 when the switch is in local mode. When in local mode, the local control alarm shall be active. Alarm status shall be constantly monitored and updated. Upon receipt of a "status query" message, the CCU shall send alarm status message with data as follows:

"0"	None of the alarms active.
"1"	Local Control (LC) alarm active.
"2"	Low Pressure (LP) alarm active.
"3"	LP/LC alarms active.
"4"	Video Sync Absence (VSA) alarm active.
"5"	VSA/LC alarms active.
"6"	VSA/LP alarms active.
"7"	VSA/LP/LC alarms active.

The front panel alarm light shall be lit if any the alarms are active.

C. Each CCU shall have circuitry for a source character generator. The source character generator shall display 16 alphanumeric characters superimposed on the video image. Each character shall be 28 TV lines high and shall be derived from a standard 5 x 7 dot matrix. The programmed characters shall be stored in a non-volatile memory. Upon receipt of "Set ID" message, the CCU shall position from the camera ID in the video image as follows:

"1"	Upper 15% limit of the left viewing area
"2"	Upper 15% limit of the right viewing area
"3"	Lower 15% limit of the left side viewing area
"4"	Lower 15% limit of the right side viewing area

The characters shall be superimposed on the video signal using non-additive mixing techniques.

D. Each CCU shall be designed to prevent simultaneous operation of pan right/left, tilt up/down, zoom in/out, focus near/far or iris open/close.

E. Each CCU shall have power supply(ies) for camera zoom, focus, motors, control and interface circuits. The voltage for zoom, focus and iris shall be selectable internally by one jumper for 12.0 VDC, 9.0 VDC or 5.0 VDC at 100 mA. The CCU shall be pre-configured with the voltage jumper select set to 9.0 VDC. The operation of zoom, focus and iris shall be as follows:

Zoom in	+VDC
Zoom out	-VDC
Focus near	+VDC
Focus far	-VDC
Iris close	+VDC
Iris open	-VDC

F. The maximum power consumption for the CCU shall not exceed 450 W. Power consumption of equipment attached to pin 1 of connector C1 shall not exceed 100 W. Power consumption of equipment attached to pin 12 of connector C2 shall not exceed 200 W.

G. Each CCU shall have eight independently operating 24 VDC relays (options 1 to 8). Each relay shall be single pole, double throw (SPDT), with contacts rated 1.25 A at 120 VAC.

H. Each CCU shall be capable of a minimum of ten presets and capable of controlling camera units and pan/tilt units equipped with pre-positioning feedback potentiometers. Each CCU shall have circuitry to filter out any electrical noise interference on each of the pre-positioning feedback voltage signal for the camera unit and pan/tilt unit.

I. A system reset switch shall be a momentary-pushbutton type and be mounted on the front panel to function as external reset input to the microprocessor. System reset shall not cause existing pan/tilt and lens positions to change. System reset shall be executed without requiring the operator to hold the momentary-pushbutton for more than one second.

J. The front panel of the camera control unit shall have LEDs and switches to provide the following control functions as shown on the plans.

Function	Hardware	Indicator
Zoom (In/Off/Out)	(ON)-OFF-(ON)	2 LED
Focus (Near/Off/Far)	(ON)-OFF-(ON)	2 LED
Pan (Left/Off/Right)	(ON)-OFF-(ON)	2 LED
Tilt (Up/Off/Down)	(ON)-OFF-(ON)	2 LED
Iris (Open/Off/Close)	(ON)-OFF-(ON)	2 LED
Iris override (Manual/Auto)	ON-OFF	1 LED
Option 1 (On/Off)	ON-OFF	1 LED
Option 2 (On/Off)	ON-OFF	1 LED
Option 3 (On/Off)	ON-OFF	1 LED
Option 4 (On/Off)	ON-OFF	1 LED
Option 5 (On/Off)	ON-OFF	1 LED
Option 6 (On/Off)	ON-OFF	1 LED
Option 7 (On/Off)	ON-OFF	1 LED
Option 8 (On/Off)	ON-OFF	1 LED
Alarm (On/Off)	ON-OFF	1 LED
Control (Local/Remote)	ON-OFF	
Reset	(ON)-OFF (momentary pushbutton)	

K.

CCU connector assignments	
C1	4 contact connector
C2	14 contact connector
C3	37 contact connector
C4, C5	DB-25 connectors

C1 -- AC Power	
Position	Function
1	AC +
2	AC -
3	Equipment Ground
4	NA

C2 -- Pan/Tilt			
Pos.	Function	Pos.	Function
1	Pan right	8	Pan feedback
2	Pan left	9	Tilt feedback
3	AC-	10	Preset -VDC
4	Tilt up	11	NA
5	Tilt down	12	AC+
6	AC-	13	AC-
7	Preset +VDC	14	Ground

C3 -- Camera			
Pos.	Function	Pos.	Function
1	Zoom	20	Option 3 N.O.
2	Z/F/I Common	21	Option 3 Common
3	Focus	22	Option 3 N.C.
4	Iris	23	Option 4 N.O.
5	Iris Override Common	24	Option 4 Common
6	Iris Override	25	Option 4 N.C.
7	Preset +VDC	26	Option 5 N.O.
8	Zoom Preset feedback	27	Option 5 Common
9	Focus Preset feedback	28	Option 5 N.C.
10	Preset -VDC	29	Option 6 N.O.
11	LP alarm	30	Option 6 Common
12	LP alarm	31	Option 6 N.C.
13	NA	32	Option 7 N.O.
14	Option 1 N.O.	33	Option 7 Common
15	Option 1 Common	34	Option 7 N.C.
16	Option 1 N.C.	35	Option 8 N.O.
17	Option 2 N.O.	36	Option 8 Common
18	Option 2 Common	37	Option 8 N.C.
19	Option 2 N.C.		

Note:
N.O. = Normally open
N.C. = Normally closed
NA = Not Available

C4, C5 -- Serial communication ports to and from external device.			
Pos.	Function	Pos.	Function
1	NA	14	NA
2	Transmit Data	15	NA
3	Receive Data	16	NA
4	NA	17	NA
5	NA	18	NA
6	NA	19	NA
7	Signal Ground	20	NA
8	NA	21	NA
9	NA	22	NA
10	NA	23	NA
11	NA	24	NA
12	NA	25	NA
13	NA		

Serial cables			
SCA1		SCA2	
DB-25 Pin	DB-25 Pin	DB-25 Pin	DB-25 Socket
2	2	2	2
3	3	3	3
7	7	7	7

ENVIRONMENTAL

A. Each CCU shall operate in an ambient temperature environment of -10°C to 50°C.
B. Each CCU shall conform to MIL-STD-810D-516.1 and MIL-STD-810D-514.1 shock and vibration test.

CCU MESSAGES

A. Each CCU shall communicate through the C4 serial port with the following communication message codes:

DIREC-TION	MESSAGE	CHARACTER		DATA
		1ST CODE	2ND CODE	
Transmit	Alarm status	A	space	"0"-"7"
Receive	Status query	Q	space	NONE
Receive	Pan stop	p	space	NONE
Receive	Tilt stop	t	space	NONE
Receive	Zoom stop	z	space	NONE
Receive	Focus stop	f	space	NONE
Receive	Iris stop	i	space	NONE
Receive	Pan left	L	space	NONE
Receive	Pan right	R	space	NONE
Receive	Tilt up	U	space	NONE
Receive	Tilt down	D	space	NONE
Receive	Zoom in	I	space	NONE
Receive	Zoom out	O	space	NONE
Receive	Focus near	N	space	NONE
Receive	Focus Far	F	space	NONE
Receive	Iris open	J	space	NONE
Receive	Iris close	K	space	NONE
Receive	Iris manual	M	space	NONE
Receive	Iris auto	m	space	NONE
Receive	Set ID word	C	"1"-"4"	16-ASCII char.
Receive	Home position 0-9	H	"0"-"9"	NONE
Receive	Home position program 0-9	P	"0"-"9"	NONE
Receive	Option on 1-8	S	"1"-"8"	NONE
Receive	Option off 1-8	s	"1"-"8"	NONE
Receive	Enter Echo mode	E	space	NONE
Receive	Exit Echo mode	^]C	This sequence is not in a communication packet	

B. After receiving the "enter echo" command the CCU shall pass all characters from C5 to C4 and C4 to C5. The CCU shall disable all camera movement.
C. When the "exit echo" mode sequence is received on C4, the CCU shall return to normal operation.

SERIAL COMMUNICATION PROTOCOL

A. The communication protocol shall consist of 8 data bits, 1 stop bit and no parity.
B. Communication handshaking shall use XON/XOFF.
C. The communication packet shall contain the following items: ADDRESS, CODE, DATA, CHECKSUM, CR. The packet is sent as a string of ASCII printable characters. The ADDRESS, which has its $80 bit set in order to signal the start of the packet. The CHECKSUM is generated by Exclusive-ORing the ADDRESS, CODE, and DATA. The communication byte count shall be as follows:

ADDRESS	1
CODE	2
DATA	≥0
CHECKSUM	2
CR	1

D. The receiver will compute the CHECKSUM. If the computed CHECKSUM is correct the receiver will send ACK, otherwise the receiver will send NAK.

10-3.39 VIDEO ENCODER UNIT

GENERAL

A. A prototype of the video encoder unit (VEU) is not acceptable.
B. All equipment shall be off the shelf production units.
C. All equipment shall be new and not previously used.
D. The Contractor shall provide a manual per each unit ordered.

ACCEPTABLE EQUIPMENT

The VEU shall be compatible and interoperable with the existing video decoder unit (VDU), Enerdyne Technologies Model DEC1000R5. No other VEU/VDU pairs shall be different or deviate from other pairs.

QUALIFYING SPECIFICATIONS

A. Video encoding --
1. The VEU shall replicate the adaptive digital video standard (ADVS) for digital compression and transmission of video images.
2. The VEU shall implement frame sensitive algorithms, joint photographic experts group (JPEG) to perform frame updating. Motion sensitive algorithms motion picture experts group (MPEG) shall not be allowed.
3. The VEU shall be compatible with integrated services digital network (ISDN) basic rate interface at 128 kbps and shall comply with bandwidth on demand interoperability group (BONDING) protocol.
4. The VEU shall be compatible with Switched-56 digital service at 56 kbps.
5. The VEU shall be compatible with advanced digital network (ADN) service at 56 kbps.
6. The VEU shall be compatible with T1 service at 1.544 Mbps.

B. Physical -- The physical size of the VEU shall be as follows:

Weight	9 kg, maximum
Height	135 mm, maximum
Width	483 mm, maximum
Depth	300 mm, maximum

C. Mounting --
1. The VEU shall be mountable in a standard EIA-310 equipment rack.
2. Each VEU shall be designed and mounted in such a way that it is easily accessible for maintenance.

D. Primary power input and output requirements --
1. All electrical power distribution, service and wiring components shall be UL listed or equivalent and meet the requirements of the national electric code as well as these special provisions.
2. Power input shall be 100 to 130 VAC at 60 Hz ±3 Hz.
3. Maximum power requirement shall be 25 W at 120 VAC.

E. Local control facilities --
1. Local operator control of all essential features of the VEU shall be accomplished by the use of necessary discrete front panel controls and/or switches. Each VEU shall have a front panel status display.
2. The VEU shall store operator set default parameters in EEPROM to retain system configuration after loss of power. These parameters shall be loaded into volatile RAM during operation where they may be modified by operator set operational parameters.
3. The VEU shall have a front panel status display.

F. Remote control facilities --
1. The control/status ports shall be EIA-232 with selectable data rates of 1200 to 9600 bps and the connector shall be a DB-25 type.
2. The control/status ports shall provide telephone dialing, remote and local diagnostics testing, and system configuration.
3. The control/status port shall provide selection of any of the video inputs.
4. The control/status port shall provide in-band dialing for all interfaces using the AT and/or V.25 bis command set.
5. The control/status port of the VEU shall override in-band control of the VEU via the VDU.
6. The control/status port shall provide selection of all network interface data rates and/or services.
7. The control/status port shall provide user selectable video resolution. Minimum resolution settings shall be 560 (high), 280 (standard), and 140 (low) pixels per line.
8. The control/status port shall provide user selection of 480 lines interlaced (frame mode) or 240 lines non-interlaced (field mode).
9. The control/status port shall provide user selection of the compression algorithm quantization levels (Q-factor).
10. The control/status port shall provide cropping of the encoded video image at minimum of 104 percent (overscan), 100 percent, 85 percent, and 63 percent.
11. The control/status port shall provide control over image attributes including, but not limited to, color hue, tint, and saturation. Section of monochrome or color of the VEU digitized video stream shall also be possible.

G. Video interface requirements --
1. The VEU shall be capable of both color and black/white video operation without modification to the hardware. Minimum motion video resolution shall be 560 pixels x 240 lines for the 525 lines, National Television Systems Committee (NTSC) standard, 60 Hz, composite input. Motion handling capability shall be up to 30 frames per second.
2. The video interface formats shall be the following:

G. Composite	G. 525 line NTSC 60 Hz
G. Component	G. Y/C: Luminance / Chrominance

3. The video input for the VEU shall be compatible with EIA-170 at 75 Ω impedance with Bayonet Nut Connector (BNC) type connectors and shall be provided as a minimum the following:

G. 3 video inputs composite
G. 3 video input Y/C

4. All video inputs shall be software selectable from the front panel on the VEU and from the control/status port.

H. Network interface requirements --
1. The VEU shall have hardware and software selectable network bit rates with the following as a minimum: 56 kbps, 64 kbps, 112 kbps, 128 kbps, 384 kbps, 768 kbps and 1.544 Mbps (T1).
2. The VEU shall have three network interfaces: EIA-530A, DS-1 (T1 service), and V.35.
3. The VEU shall transmit compressed and digitized video at a minimum of 95 percent of the available channel bandwidth, whenever bandwidth is not used by telephone, camera controls and or remote diagnostics.

I. Diagnostic and alarm requirements --
1. The VEU shall have self-diagnostic features display on the front panel.
2. The VEU shall blank video on loss of video input.
3. The VEU shall regain video lost due to excessive temperature when the temperature has reduced to 69°C.

J. Telephone interface --
1. The VEU shall provide an RJ11 telephone jack for voice communication.
2. The VEU shall provide 16 kbps bandwidth for telephony within the bandwidth allocated for video only when bandwidth is needed for telephone.

K. Camera control interface --
1. The camera control interface shall provide a half-duplex clear channel for camera control and status user data with the following requirements:

1.	The port shall communicate at a user selectable data rate from 1200 to 9600 bps, asynchronous.
2.	The port shall be EIA-232, and the connector shall be a DB-25 type.

2. The VEU shall provide bandwidth for camera control within the bandwidth allocated for video only when bandwidth is needed for camera control/status data transmission.

L. Environmental --
   1. Minimum operating temperature range shall be from -40°C to 70°C ambient, with guaranteed start up at -10°C. An environmental housing with air conditioning will not be allowed.
   2. Operating humidity shall be from 0 to 95 percent, non-condensing.

ACCESSORY ITEM

The following VEU equipment accessory items shall be supplied by the Contractor as specified in these special provisions:

A. Service and Operations manual describing the video VEU as ordered and in accordance with these special provisions.
B. EIA-530A cable assembly shall be provided to connect the VEU to the integrated services digital network terminal adapter (ISDN TA) unit with basic rate interface that is specified elsewhere in these special provisions.

10-3.40 CAMERA STATION

GENERAL

The Contractor shall furnish and install the following closed circuit television (CCTV) equipment at each camera station as described in these special provisions and as shown on the plans:

A. One camera unit.
B. One pan/tilt unit.
C. One CCTV pole.
D. One camera junction box (JCB).
E. One camera control unit (CCU).
F. One video encoder unit (VEU).
G. One integrated services digital network terminal adapter (ISDN TA).
H. Connectors and fittings as required.
I. Cable and conductors as required.

CABLES AND CONNECTORS

The camera unit cable assembly box mounting connector shall be mounted on one side of the JCB and shall be prewired to the 20 position terminal block as shown on the plans. The video signal pins of the camera unit cable assembly box mounting connector shall be terminated to a Bayonet Nut Connector (BNC) jack connector via Type RG-59/U coaxial cable stub.

The television control cable (TVC) and television power conductors (TVP) shall be wired to the 20 position terminal block as shown on the plans. The television control power cable (TVCP) cable shall go through but does not terminate inside the JCB. A watertight strain-relief box connector shall installed at the JCB hole for the TVCP cable.

INSTALLATION OF CAMERA STATION

The work to be done at each camera station, as shown on the plans, as a minimum, shall consist of the following:

A. Attach pan/tilt unit to the mounting plate.
B. Attach camera unit to the pan/tilt unit.
C. Install JCB junction box.
D. Terminate TVC and TVP inside JCB junction box.
E. Terminate television video cable (TVL) inside JCB junction box with a BNC plug connector.
F. Install camera unit cable assembly wiring harness (Type JC).
G. Terminate TVCP with pan/tilt mating connector.
H. Connect TVCP to the pan/tilt unit.
I. Terminate TVL inside controller cabinet with BNC plug connector.

J. Terminate TVP, TVCP and TVC with CCU mating connectors C1, C2 and C3, respectively.
K. Adjust limit stops of the pan/tilt unit as directed by the Engineer.
L. Adjust camera unit to provide the optimum picture for the full range of daylight and night time conditions as directed by the Engineer.

CAMERA UNIT MOUNTING

The camera unit shall be secured to the pan/tilt unit using the stainless steel bolts provided with the camera unit. Before each bolt is fastened, a locking type coating shall be applied to the threads. The coating shall lock the bolt and nut in place, making it impossible to turn the bolt or nut without tools. This coating shall last through and be effective through at least ten insertions and withdrawals of the bolt or nut.

The work to be done between the camera mount and the controller cabinet, as shown on the plans, as a minimum, shall consist of the following:

A. Install conduits and pull boxes as required up to the controller cabinet.
B. Install and terminate TVL, TVC, TVCP, and TVP as shown on the plans.

The work to be done at each CCTV controller cabinet, as shown on the plans, as a minimum, shall consist of the following:

A. Install CCU.
B. Connect TVC, TVCP, TVP and TVL to CCU via their respective connectors.
C. Install VEU.
D. Install ISDN TA.
E. Connect CCU to VEU.
F. Connect ISDN TA to VEU.
G. Install 8-position connecting block.
H. Connect ISDN TA to the 8-position connecting block.

The Contractor shall furnish all materials necessary to provide a complete and functional camera station in accordance with these special provisions. Miscellaneous equipment, and materials not mentioned but necessary to provide a complete and fully operational camera station shall be furnished by the Contractor as incidental to the work for which no additional compensation will be allowed therefor.

All items furnished under this contract shall be new and shall be the latest version.

The Contractor shall be responsible for demonstrating proper operation of the camera station using test software and diagnostics which shall be provided to the Engineer as incidental items at no additional cost. Testing procedures are described elsewhere in these special provisions.

CAMERA STATION TESTING

Prior to removal or relocation of existing CCTV equipment including cables, pole, camera, pan and tilt unit, controller cabinet, etc., the camera station will be tested in the field by the Engineer in the presence of the Contractor. Existing equipment that fail during this test period will be replaced or repaired by the State or, if directed by the Engineer, by the Contractor , and such work will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications. The Contractor shall notify the Engineer in writing fifteen days prior to the scheduled testing.

Upon completion of work, each camera station shall be subjected to post-installation tests as outlined herein. All testing shall be performed by the District Electrical Systems Branch personnel, arranged by the Engineer and in the presence of the Contractor. The Contractor shall notify the Engineer in writing fifteen days prior to the scheduled testing. Upon receipt of the notification, the Engineer shall contact the Electrical Systems Branch at (510) 286-6142. The Contractor shall provide all necessary equipment required to access the CCTV equipment for testing.

The testing shall consist of five consecutive days of continuous satisfactory operation of each camera station. If any material and equipment furnished and installed by the Contractor in this project is found defective or otherwise unsuitable, or the workmanship does not conform with the accepted standards, the Contractor shall replace such defective material and equipment at no cost to the State.

Rejected material or equipment may be offered again by the Contractor for consideration provided all non-compliance has been corrected and pretested by the Contractor. After all defects have been corrected, the camera station shall be re-tested until five consecutive days of continuous satisfactory operation is obtained.

The post-installation tests shall consist of, but not be limited to, inspection and functional testing in accordance with these special provisions.

Inspection shall consist of, but not be limited to, verification of correct wiring terminations, correct cable interconnections, good workmanship and compliance with these special provisions.

Functional testing shall include, but not be limited to, the following:

A. Verification of all local mode CCTV operations using the CCU front panel controls.
B. Verify video signal output from CCU with a National Television Systems Committee (NTSC) monitor.
C. Verify the correct operation of the auto/manual iris and power zoom .
D. Verify the correct operation of the pan/tilt unit. The pan/tilt unit shall be functionally tested over 355 degrees in the horizontal plane and ±60 degrees in the vertical plane. The pan/tilt unit limit stops shall then be adjusted to optimize the camera viewing coverage of the freeway as directed by the Engineer.
E. Verify the correct operation of the preset positions.

10-3.41 CAMERA POLES

Camera poles shall conform to the provisions in Section 86-2.04, "Standards, Steel Pedestals and Posts," of the Standard Specifications.

10-3.42 GENERAL PACKET RADIO SYSTEM WIRELESS MODEM ASSEMBLY

The General Packet Radio System (GPRS) Wireless Modem Assembly shall be configured with the following major components:

A. Modem
B. Power supply
C. Modem mounting bracket and hardware
D. Serial communication cable
E. Antenna

MODEM

All modems shall be configurable remotely through the wireless network and through the modem serial port. The contractor shall configure all modems prior to acceptance. The contractor shall provide the Engineer with the modem serial and SIM numbers 30 days prior to requiring the PDP context. The Engineer will make available the PDP context comprising the IP (assigned) and APN (obtained from service provider) and configuration parameters (if different from those listed below) after the serial and SIM numbers are provided to the Engineer by the Contractor. All modems shall be complete with all cables, conductors, hardware, antenna and other equipment as required to make the system completely operational. Location and mounting of the equipment shall be directed by the Engineer and details shown on the plans. The modems shall be fully compliant with PCCA STD-101.

Environmental Requirements

The operating temperature range of the modem shall range from -30°C to +70°C, with humidity from 5 percent to 95 percent (non-condensing) and have transmissions at 10 percent duty cycle above 60°C.

Physical Characteristics

The modem shall weigh less than 1 kg and shall have overall dimensions of less than 180 mm × 90 mm × 30 mm. The housing shall be constructed of anodized aluminum.

The modem shall have the following status indicators:

A. Power (on).
B. Channel acquired.
C. Link status.
D. Network registration.
E. Received signal strength indicator.
F. Transmit and receive data.
G. Block errors.

Operational Parameters

The modem shall operate in a dynamic IP addressing environment of GPRS Networks at 1900/850 MHz and meet the following operational parameters:

Transmit power at antenna port	1.0 W for 1900 MHz 0.8 W for 850 MHz
Transmit frequency	1850-1910 MHz and 824-849 MHz
Receiver frequency	1930-1990 MHz and 869-894 MHz
Receiver sensitivity	-107 dBm (2.439 % bit error rate)
Input voltage	10 VDC to 28 VDC
Input current	40 mA to 200 mA

Application Interfaces

The modem shall have the following standard interfaces:

A. The AT command serial character stream uses TCP/IP.
B. Host communicates with modem using either UDP or TCP packet modes.
C. Computer terminal platform using Windows 98/2000/NT and Dial-Up Networking communicates with the modem using PPP.

Features

A. The modem shall have the following features:
B. 53.6 kbps raw data transfer rate minimum.
C. Full duplex transceiver.
D. 1900/850 MHz dual band networking.
E. Integrated TCP/IP protocol stack with UDP.
F. Security such to prevent unauthorized access.
G. Includes a DC power cable at least 1 meter in length with a connector compatible with the modem power connector.
H. Packet buffering and forwarding feature that provides discipline to the output of the serial port. The packet forwarding time interval shall be configurable from a rate of 0 (undisciplined) to 400ms in increments of 100ms or less.
I. Choice of "Friends Only" access mode.

Configuration parameters

The modem shall be configured with the following parameters (using the default AT command mode):

Command	Current Value and Description
ADBGP=n(?)	n=0
AIP=n(?)	n=1: Allow any incoming IP to connect when UDP auto answer is enabled.
DAE=n(?)	n=0: Enable +++AT escape sequence detection.
E=n(?)	n=1: Toggle AT command echo On.
FM=n(?)	n=0: Disable Friends mode.
HOR=n(?)	n=0: No response codes when UDP session is initiated.
I0?	#####GPRS: Returns the product name.
I1?	###########: Returns firmware version, hardware ID, and copyright.
I2?	###########: Returns firmware version and relevant hardware ID.
I3?	##########: Returns the OEM Modem's unique ID.
MD=nn(?)	nn=00: normal (AT command) mode.
MVLEN=n(?)	n=0: Modbus-Variant length
MVMSK=nn(?)	nn=00:Modbus-Variant ID Mask
MVOFF=n(?)	n=0:Modbus-Variant offset
MVTYP=n(?)	n=0: Modbus –Variant Type
Q=n(?)	n=1: Quiet-mode On
RKEY=n(?)	n=0: Disable Transceiver Keying
S0=n(?)	n=1: On, TCP Auto Answer Mode
S7=nn(?)	nn=30: TCP Establishment Timeout in seconds
S23=<speed>,<databits>,<parity>,<stopbits>	9600,8,N,1: Serial line parameters are set
S50=n(?)	n=1: Data Forwarding Timeout in tenths of seconds
S51=n(?)	n=0: No Data Forwarding character
S53=d/[ppppp](?)	T/12345: Destination IP address,port and method
S60=n(?)	n=1: Telnet echo mode, Local echo(Default)
S82=n(?)	n=2: Enable UDP auto answer mode
S83=n(?)	n=10: UDP auto answer timeout in seconds
S110=d.d.d.d/[ppppp](?)	192.168.36.24/12345: IP address and port for GPRS modems
S211=n(?)	n=1: Ignore DTR.
S221=n(?)	n=1: Delay Connect Response in seconds.
TCPS=n(?)	n=0: TCP connection timeout in minutes.
TCPT=n(?)	n=6: TCP inactive timeout in minutes.

V=n(?)	n=1: Command Response Mode, Verbose(default)
&C=n(?)	n=1: Assert DCD when in a data mode.
&D=n(?)	n=0: Ignore DTR
&S=n(?)	n=1: Assert DSR when in a data mode.
*CTSE=n(?)	n=0: Clear To Send Enable, Disabled (default)
*DATE=[mm/dd/yyyy],[hh:mm:ss](?)	Sets the date and time, hours specified in 24-hours format.
*DATZ=n(?)	n=0: Normal Reset (default) on ATZ.
*DEVICEID=n(?)	Queries the 64-bit Device ID that is used by the modem to identify itself to the server.
*DNS1=d.d.d.d(?)	209.183.48.10: Sets the DNS addresses to be returned during the PPP negotiations.
*DNS2=d.d.d.d(?)	209.183.48.11: Sets the DNS addresses to be returned during the PPP negotiations.
*DPORT=n(?)	12345: Sets the modem's Device Port.
*DU=n(?)	n=0: dial command always uses UDP.
*ENQ=n(?)	n=0: Outputs an ENQ after the TCP CONNECT delay, Disabled (default).
*HOSTPRIVMODE=n(?)	n=0: public IP to be used when the Host initiates a PPP connection to the modem.
*HOSTPRIVIP=d.d.d.d(?)	0.0.0.0: private IP address if *HOSTPRIVMODE=1
*IPMANAGER1=d.d.d.d(?)	155.173.38.215: IP addresses to send IP change notifications to.
*IPMANAGER2=d.d.d.d(?)	155.173.38.210: Second IP address to send IP notifications to.
*IPMGRKEY1=[key](?)	0000000000: Sets the 128-bit key to use to authenticate the IP update notifications. If the key's value is all zeros, a default key will be used, with IPMANAGER1.
*IPMGRKEY2=[key](?)	0000000000: Sets the 128-bit key to use to authenticate the IP update notifications. If the key's value is all zeroes, default key will be used with IPMANAGER2.
*IPMGRUPDATE1=n(?)	xx: Sets the number of minutes to periodically send an IP update to IPMANAGER1.
*IPMGRUPDATE2=n(?)	xx: Sets the number of minutes to periodically send an IP update to IPMANAGER2.
*MODEMNAME=[name](?)	Name of the modem(up to 20 characters long) to use when performing IP change notices to IPManager. This name should not be a fully qualified domain name, but simply the first portion.
*MSCIUPDADDR=[name/port](?)	Modem Status Update Address-where Name/Port is the domain name and port of the machine where the modem status updates will be sent.
*MSCIUPDPERIOD=n(?)	Modem status update period- where n is in minutes.
*NETCHAN?	Returns the current active channel number.
*NETIP?	Queries the current public(network) IP address of the modem. Note: This could be 0.0.0.0 if there is no current network IP.
*NETPHONE?	Queries the device's phone number, if applicable.
*NETPW=pw(?)	The password that is used to login to wireless network.
*NETRSSI?	Returns the current RSSI of the modem as a negative dBm value.

*NETSTATE?	Queries the current network state.
*NETUID=[uid](?)	The login that is used to login to the network,when required
*TPORT=ppppp(?)	Sets or queries the port used for the AT Telnet server. Valid values are 0-65535.
*UALL=n(?)	n=0: No(default).If there is no UDP session active, an incoming UDP packet will be treated according to the UDP auto answer and AIP settings.
*UDPLAST=n(?)	n=0. Does not change S53 setting.(default). If enabled,sets S53 to the last accepted IP address through UDP auto answer.

System Compliance

The modem and associated firmware, software, hardware, protocol, and other features shall be fully and completely compatible with the existing GPRS network currently in use. The existing GPRS network utilizes the AT&T Wireless (now Cingular) cellular system (band compatible with this modem), the AirLink Raven GPRS modem, and the AirLink Gateway. The Contractor shall demonstrate the compatibility to the Engineer by actual installation demonstration or by other means approved by the Engineer.

Installation

The installation of the modem shall be according to the plans, the manufacturer's instructions, and adjusted per field conditions with the Engineers approval.

Certificate of Compliance

The Contractor shall provide the Engineer with a Certificate of Compliance from the manufacturer in accordance with the provisions of Section 6-1.07, "Certificates of Compliance" of the Standard Specifications for all of the modems furnished for the project.

Warranty

The manufacturer shall provide a written warranty against defects in materials and workmanship for modems for a period of 12 months after installation for parts and labor. Replacement modems shall be provided within 5 days after receipt of failed modem at no cost to the State, except the cost of shipping the failed modem. All warranty documentation shall be given to the Engineer prior to installation. Replacement modems shall be delivered to Caltrans Maintenance Electrical Shop at 30 Rickard Street, San Francisco, CA 94134.

The software warranty shall be for one (1) year, including upgrades and feature enhancements.

POWER SUPPLY

The power supply shall be vertically mountable on a 483-mm standard rack rail using existing mounting hardware. An existing mounting hardware sample is available upon request; the Contractor may pick it up at 111 Grand Avenue, Oakland. The Contractor shall return the sample if it is not used in the installation. The power supply shall have provision to attach the modem power cable securely without the need for modifying the modem power cable.

The power supply shall meet the following requirements:

Power Cord	Standard 120 V(ac), 3 prong cord, at least 1 meter in length (may be added by Contractor)
Type	Switching mode type
Power Rated	40 W minimum with no minimum load required
Operating Temperature Range	From -30°C to +70°C
Operating Humidity Range	From 5 percent to 95 percent non-condensing
Input Voltage	From 85 V (ac) to 264 V (ac) or 120 V (dç) to 370 V (dc)
Input Frequency	From 47 Hz to 63 Hz
Inrush Current	Cold start, 25 A at 115 V
Output Voltage	12 V (dc), adjustable over a ±10 percent range
Overload Protection	From 105 percent to 150 percent in output pulsing mode
Over Voltage Protection	From 115 percent to 135 percent of output voltage
Setup, Rise, Hold Up Time	800 ms, 50 ms,15 ms at 115 V (ac)
Withstand Voltage	I/P-0/P:3 kV, I/P-FG:1.5 kV, for 60 seconds
Working Temperature*	70°C@30%
Safety Standards	UL 1012, TUV EN60950
EMC Standards	EN55022 Class B, EN61000-4-2, 3, 4, 5 and EN61000-3-2, 3

- Note: A substitute may be proposed by the Contractor which meets the 70°C environmental rating at a lower load percentage as long as the temperature rating is maintained at the maximum modem load and all other electrical specifications are met.

Certificate of Compliance

The Contractor shall provide the Engineer with a Certificate of Compliance from the manufacturer in accordance with the provisions of Section 6-1.07, "Certificates of Compliance" of the Standard Specifications for all of the power supplies furnished for the project.

Warranty

The manufacturer shall provide a written warranty against defects in materials and workmanship for power supplies for a period of 12 months after installation for parts and labor. Replacement power supplies shall be provided within 5 days after receipt of failed power supply at no cost to the State, except the cost of shipping the failed power supply. All warranty documentation shall be given to the Engineer prior to installation. Replacement power supplies shall be delivered to Caltrans Maintenance Electrical Shop at 30 Rickard Street, San Francisco, CA 94134.

MODEM MOUNTING BRACKET AND HARDWARE

The mounting bracket and hardware shall be stainless steel. The mounting bracket shall securely hold the modem in a vertical attitude with all cables and conductors installed. The mounting bracket shall contain the modem using a method that allows the removal of the modem without tools or without removing the bracket from its attachment to the cabinet frame.

D SERIAL COMMUNICATION CABLE

Where the modem is designed to interface with a Model 170E controller, the Contractor shall provide a communication cable known as the C2 cable. The C2 cable shall interface the Model 170E controller C2 connector and the GPRS modem and include all conductors and connectors required for that purpose. The GPRS modem connector shall meet EIA RS-232 standard using a DB-9 connector. The Model 170E controller end connector shall comply with AMP 201360-2-ND or equivalent. All pins in both connectors shall be gold plated. The cable shall have four No. 20 AWG conductors with (UL) Type CM shielded or AWM 2464 80C 300 Volts – C (UL) CMG. The cable shall be at least 1 meter long. The cable wiring shall comply with the following:

A. AMP 201360-2-ND -L to DB9-P - 2
B. AMP 201360-2-ND -K to DB9-P - 3
C. AMP 201360-2-ND -N to DB9-P - 5
D. AMP 201360-2-ND -D to AMP 201360-2-ND - H
E. AMP 201360-2-ND -J to AMP 201360-2-ND - M

ANTENNA

The antenna shall be the low profile type, and shall adhere to the cabinet using a factory installed double-sided waterproof acrylic foam adhesive. The coax cable shall be at least 1 meter in length and shall have a 50 Ω TNC connector on the modem end. In addition, the antenna shall meet the following requirements:

VSWR (at resonant point)	2:1 or less
Frequency	1850-1990 MHz and 824-894 MHz
Nominal Impedance	50 Ω
Gain	2 dB
Radiation Pattern	Omni-directional
Polarization	Vertical
Ground Plane Required	Yes, see note below

Ground plane requirements: The antenna shall require a reflective ground plane to function properly. The required ground plane shall extend beyond the antenna at least 20 cm in all directions.

10-3.43 INTEGRATED SERVICES DIGITAL NETWORK TERMINAL ADAPTER UNIT

General

a. Each integrated services digital network terminal adapter (ISDN TA) unit shall provide an interface between data terminal equipment (DTE) such as the video encoder unit (VEU) or video decoder unit (VDU) and ISDN.
b. Each ISDN TA unit shall include an internal network termination Type 1 device (NT1) interface and include Terminal Adapter functionality. No external NT1 shall be allowed.
c. A prototype unit is not acceptable.
d. Each ISDN TA unit shall be of the current standard production units.
e. Each ISDN TA unit shall be new and not previously used.
f. The Contractor shall provide a manual for each unit supplied.

Qualifying specifications

a. Operation --

i. Each ISDN TA shall support ISDN basic rate interface (BRI) service and shall provide three digital channels capable of simultaneous data and voice transmission via a standard telephone line. The three channels shall include two Bearer (B) channels at 64 kbps and one Data (D) channel at 16 kbps (2B+D).
ii. Leased operation shall support 1B (64 kbps) or 2B (128 kbps) clear channel synchronous configurations.
iii. At data rates over 64 kbps, the BONDING delay equalization protocol shall synchronize data over the two B channels.

b. Data rates --

i. Synchronous: 2.4, 4.8, 9.6, 19.2, 38.4, 48, 56, 64, 112, 128 kbps; selectable.
ii. Asynchronous: 0.3, 1.2, 2.4, 4.8, 9.6, 19.2, 38.4, 57.6, 115.2 kbps; selectable.

c. Interoperability -- The ISDN TA unit shall support communications with public switched 56 kbps services and switched 56 kbps channel service unit/data service unit (CSU/DSU) as well as other ISDN TA, ISDN terminal equipment, and BONDING compatible inverse multiplexers.
d. D-Channel switch compatibility -- AT&T 5ESS, NTI DMS-100, National ISDN-1.
e. Dialing --Dialing shall be supported in the following ways:

i. Manually from a front panel keypad.
ii. Automatically from up to ten stored numbers.
iii. Automatically through an RS-366 parallel dial port.
iv. Dialing over the DTE interface using the asynchronous AT command set.
v. V.25 bis in-band dialing over the DTE interface using V.25 bis commands.

f. DTE interface -- The ISDN TA shall provide both EIA-530A and V.35 interfaces. The interface to be used shall be selectable. A three meter male/female EIA-530 interface cable shall be provided with each ISDN TA.

g. Network interface -- Network termination shall be designed into the ISDN unit thereby eliminating the need for an external NT1. Connection to the network shall be made by a telephone company provided 2-wire and/or 4-wire 2B1Q U-interface which is connected directly to an eight-pin RJ45 modular jack on the rear panel of the ISDN TA unit. The ISDN TA unit shall provide two RJ45 modular jacks, where one jack shall be designated for dial-up ISDN and the other jack designated for leased ISDN. The dial-up ISDN and leased ISDN operational modes maybe integrated on a single RJ45 jack if the operational modes are user selectable.

h. Local control facilities --Local operator control of all essential features of the ISDN TA unit shall be accomplished by the use of necessary discrete front panel controls.

i. Remote control facilities -- Remote configuration and control of the ISDN TA unit shall be possible using the AT command set in-band over the DTE interface. Remote call setup and termination shall also be possible using V.25 bis in-band dialing.

j. Diagnostics requirements -- Each ISDN TA unit shall be able to perform a variety of tests that allow problems to be identified and isolated. Testing shall be supported manually from the front panel, or in-band from either the network provider or distant end unit. Internal error checking shall be available for both the local and a remote activated digital loopback.

k. Physical --

i. Each ISDN TA unit shall be secured and mounted on a shelf assembly.
ii. Each shelf assembly shall provide for a minimum of four mounting screws in order to mount the shelf assembly in 89 mm (2 rack units) of EIA-310 rack space.

l. Electrical --

i. Power input voltage shall be 115 VAC ±10 percent, 60 Hz.
ii. Power dissipation shall not be greater than 8 W.

m. Environmental --

i. Operating temperature: 0°C to 50°C, minimum.
ii. Storage temperature: -20°C to 70°C, minimum.
iii. Relative humidity: 0 to 95 percent, non-condensing.

10-3.44 SERVICE MANUAL REQUIREMENTS

The Contractor shall provide to the Engineer a minimum of ten copies of service manuals for the camera unit, pan/tilt unit, camera control unit (CCU), video encoder unit (VEU), video decoder unit (VDU) and integrated services digital network terminal adapter (ISDN TA) unit under this special provisions. Each manual shall contain the following sections and sub-sections.

GENERAL

A. A list of applicable subassemblies that comprise the specified equipment.
B. Overall description of the equipment design features (including all enhance features if applicable), performance, and applications.
C. Equipment specifications summary.
D. Equipment installation instructions.

THEORY OF OPERATION

A. Theory of operation of the standard equipment, with unique or unusual circuitry described in detail.
B. Theory of operation reflecting any modifications to the standard equipment.

MAINTENANCE

A. Recommended test equipment and fixtures, or minimum operational and performance requirements for appropriate test equipment.
B. Trouble shooting information and charts.
C. Removal and installation procedures for replacing assemblies and subassemblies, if not obvious or if improper sequencing of steps may result in component damage.

REPLACEMENT PARTS

A. Each manual shall contain an equipment replacement parts list including electrical parts, mechanical parts and assemblies.
B. All semiconductors shall be identified by the supplier's numbers and by JEDEC numbers if applicable.

DIAGRAM

A. Schematic diagrams(s) identifying all circuit components and showing normal test voltages and levels.
B. An overall functional block diagram.
C. Detailed interconnecting diagram(s) showing wiring between modules, circuit boards and major components.
D. Pictorial circuit board layout diagram(s) showing both component placement and printed wiring detail.
E. Diagram(s) showing location of circuit boards and other subassemblies.
F. Exploded view diagram(s) of complex mechanical assemblies.

PHYSICAL REQUIREMENTS

A. All pages, including latest revisions, shall be securely fastened together between protective covers (loose-leaf ring binding is acceptable).
B. No page shall be subject to fading from exposure to any normal source of ambient lighting (ozalid reproduced pages are not acceptable).

10-3.45 TRAFFIC OPERATIONS SYSTEM EQUIPMENT TESTING

Prior to shipping to the project, the Contractor shall submit the following items to the State of California, Department of Transportation Laboratory, 5900 Folsom Blvd., Sacramento, CA 95819 for acceptance testing:

A. Camera unit
B. Pan/tilt unit
C. Camera control unit (CCU)
D. Video encoder unit (VEU)
E. Integrated services digital network terminal adapter (ISDN TA)

Approximately 30 days will be required for the testing. The Contractor will be notified upon completion of the testing and shall arrange for delivery of the equipment to a storage location designated by the Contractor. The costs of such testing and the transportation to and from the Laboratory shall be borne by the Contractor.

In addition to the above items, the Contractor shall submit all additional equipment listed elsewhere in these special provisions to the Laboratory for acceptance testing.

Approximately 30 days will be required for the testing. Additional equipment shall be accepted by the State and will not be returned to the Contractor upon satisfactory completion of testing.

10-3.46 REMOVING, REINSTALLING OR SALVAGING ELECTRICAL EQUIPMENT

Salvaged electrical materials shall be hauled to the California Department of Transportation Signal Maintenance Center, 30 Rickard Street, San Francisco, California 94134, (415) 330-6509 and stockpiled.

The Contractor shall provide the equipment, as necessary, to safely unload and stockpile the material. A minimum of 2 working days' notice shall be given prior to delivery.

10-3.47 DISPOSING OF ELECTRICAL EQUIPMENT

Ballasts and transformers and mercury lamps shall be disposed of in conformance with California Department of Health Services Regulations set forth in Title 22, Division 4, Chapter 30, of the California Code of Regulations.

Ballasts and transformers that contain polychlorinated biphenyl (PCB) are designated as extremely hazardous wastes and mercury lamps are designated as hazardous wastes under Title 22, Chapter 30, Article 9, Section 66680, of the California Code of Regulations.

The following electrical materials on the project are known to contain polychlorinated biphenyl (PCB):

A. Ballasts

When 25 or more mercury lamps, in combination, are to be disposed of, the lamps shall be treated as recyclable hazardous waste and shall be recycled within the State of California in conformance with Title 22, Chapter 30, Article 12, of the California Code of Regulations by a currently certified recycler such as, but not limited to, the following:

A. Exceltrans Inc., P.O. Box 866, Benicia, CA 94510, Telephone (707) 745-8907.
B. Roberts Enterprises, 2021 South Myrtle Avenue, Monrovia, CA 91016, Telephone (818) 303-2053.

The recyclable hazardous waste shall be packaged and then shipped via a currently certified hauler in conformance with Title 22, Chapter 30, Article 12, of the California Code of Regulations and other applicable local, State, and Federal regulations.

The Engineer shall be furnished with a statement noting which certified hauler and which certified recycler is proposed for utilization, together with a copy of the recycler's interim status document or a copy of the variance letter from the Department of Health Services. The statement shall be furnished within 15 calendar days after the contract has been approved by the Attorney General.

The State assumes generator responsibility for these wastes. The Engineer will prepare the Hazardous Waste Manifest for Shipment.

Full compensation for hauling, stockpiling, and disposing of mercury lamps shall be considered as included in the contract price paid for the electrical item involved and no additional compensation will be allowed therefor.

After removal, handling and disposing of electrical material containing polychlorinated biphenyl (PCB) will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications.

10-3.48 PAYMENT

The contract lump sum price or prices paid for signal and lighting shall include highway lighting at intersections in connection with signals only.

Other roadway lighting on the project shall be considered as included in the contract lump sum price paid for lighting and sign illumination, or lighting (City).

Full compensation for providing electrical service to State irrigation controllers ICC-A, B, A1, B1, I1 and H1 shall be considered as included in the contract lump sum price paid for lighting and sign illumination.

Full compensation for providing electrical service to State irrigation controller ICC-D1 shall be considered as included in the lump sum price paid for traffic operations system (Location 9).

The contract lump sum prices paid for providing electrical service to City irrigation controllers ICC–C1, E1, F1 and G1 shall be considered as included in the contract lump sum prices paid for Electric Service (Irrigation) City Locations 1, 2, 3 and 4 and no separate payments will be made therefor.

Full compensation for hauling and stockpiling electrical materials shall be considered as included in the contract price paid for the item requiring the material to be salvaged and no additional compensation will be allowed therefor.

Full compensation for providing the flashing beacon shall be considered to be included in the contract lump sum price paid for signal and lighting (State Location 2) and no separate payments will be made therefor.

The contract lump sum price for providing and installing all the equipment for "Fiber Optic System" shall include all the empty conduit and pull boxes for the main conduit run and all the drops for future fiber optic cables as shown on the plans

The contract lump sum price paid for traffic operations system for each locations shall include full compensation for furnishing all labor, materials (except items covered by other bid items), tools, equipment, and incidentals, and for doing all the work involved in installing traffic operations system, complete in place, including all the foundations (except for the changeable message sign), poles, manuals and testing, as shown on the plans, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

The contract unit price paid for each of the following items shall include full compensation for furnishing all materials, tools, equipment, and incidentals, as shown on the plans, as specified in these special provisions, and as directed by the Engineer:

1. Camera unit
2. Pan/tilt unit
3. Camera control unit (CCU)
4. Video encoder unit (VEU)
5. Integrated services digital network terminal adapter (ISDN TA)
6. General packet radio system wireless modem assembly

The contract lump sum price paid for Emergency Vehicle Detection System (City Location 1) and Emergency Vehicle Detection System (City Location 2) shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in installing emergency vehicle detection system, complete in place, including all the components, manuals and testing, as shown on the plans, as specified in the Standard Specifications, these special provisions, and as directed by the Engineer.

SECTION 10-4. HIGH SPEED WEIGH IN MOTION SYSTEM

10-4.01 DESCRIPTION

High speed weigh in motion system shall conform to the provisions in Section 86, "Signals, Lighting and Electrical Systems," of the Standard Specifications, details shown on the plans and these special provisions.

The High Speed Weigh-In-Motion System (hereafter "WIM system") shall include equipment and software for collecting, processing, storing, transmitting (to a host computer) and manipulating information related to the counting, classifying, and speed monitoring of all vehicles and the weighing of trucks and buses.

Weigh-In-Motion System is to be performed near "US101" line Sta 143+100.

10-4.02 CERTIFICATES OF COMPLIANCE

The Contractor shall provide the Engineer a Certificate of Compliance from the manufacturers in accordance with the provisions of Section 6-1.07, "Certificates of Compliance" of the Standard Specifications for the following items used:

A. Controller Cabinets
B. Weigh-In-Motion Equipment

10-4.03 CONDUIT

Conduit to be installed underground and in a foundation shall be Type 1 or Type 3 unless otherwise specified.

Conduit sizes shown on the plans and specified in the Standard Specifications and these special provisions are referenced to metallic type conduit. When rigid non-metallic conduit is required or allowed, the nominal equivalent industry size shall be used as shown in the following table:

Size Designation for Metallic Type Conduit	Equivalent Size for Rigid Non-metallic Conduit
21	20
27	25
41	40
53	50
63	65
78	75
103	100

When a standard coupling cannot be used for coupling metal type conduit, a UL listed threaded union coupling, as specified in the third paragraph in Section 86-2.05C, "Installation," of the Standard Specifications, or a concrete-tight split coupling or concrete-tight set screw coupling shall be used.

When rigid non-metallic conduit is placed in a trench (not in pavement or under portland cement concrete sidewalk), after the bedding material is placed and the conduit is installed, the trench shall be backfilled with commercial quality concrete, containing not less than 250 kg of portland cement per cubic meter, to not less than 100 mm above the conduit before additional backfill material is placed.

After conductors have been installed, the ends of conduits terminating in pull boxes, and in service and controller cabinets shall be sealed with an approved type of sealing compound.

TRENCHING INSTALLATION OF CONDUIT—

Installation of size 78 conduit and 50 mm plastic pipe from the weigh-in-motion scales, between the edge of travel way and the edge of shoulder, shall be installed by the "Trenching in Pavement Method," described in said Section 86-2.05C of the Standard Specifications and these special provisions.

The size 78 conduit shall be Type 1

The trench shall not exceed 203 mm in width.

Concrete backfill shall be placed to the pavement surface except, when the trench is in the asphalt concrete pavement, the top 51 mm of the trench shall be backfilled with asphalt concrete produced from commercial paving asphalt and aggregates.

All excavated areas in the pavement shall be backfilled, except for the top 51 mm, by the end of each work period.

10-4.04 PULL BOXES

Grout shall be placed in bottom of pull boxes, and between pull box and extensions.

A pull box marker shall be placed at each pull box not in a concrete surface, Asphalt Concrete surface, or where the pull box is not adjacent to a standard. Markers shall comply with Class 1, Flexible Post Delineators as shown on Standard Plan Sheet A73C. In the reflectorized portion there shall be placed the letters "PB".

Full compensation for furnishing and installing pull box markers and applying "PB" markings shall be considered as included in the contract lump sum price paid for the weigh in motion system and no separate payment will be made therefor.

10-4.05 CONDUCTORS AND WIRING

Splices shall be insulated by "Method B". Splices shall be made with "C" shaped compression connectors and soldered. Splices of loop wires to the DLCs shall be as recommended by the WIM vendor.

TELEPHONE CABLE.--Telephone cable shall consist of four No. 18 conductors with braided copper shield and an outside jacket. Each conductor shall have a minimum of 16 tinned copper strands. Individual conductor insulation shall be rubber or thermoplastic, rated for 600 V and color coded black, white, red and green. Jacket shall be neoprene, polyethylene or polyvinyl chloride with a nominal thickness of 0.09-mm. Outside diameter of jacket shall not exceed 8.9 mm.

Splices shall be made only where shown on the plans or as directed by the Engineer.

10-4.06 HIGH SPEED WEIGH IN MOTION CONTROLLER CABINET

The controller cabinet for the high speed weigh in motion system shall conform to the requirement in "Traffic Signal Control Equipment Specifications," (TSCES) and addenda thereto issued by the State of California, Department of Transportation.

The cabinet shall consist of a housing 1A or B with mounting cage 1, and equipment as shown on the plans in accordance with Chapter 6, "Specifications for Cabinet Models 332, 334 and 336," of the TSCES.

The first sentence of Chapter 6, Section 3, Paragraph 6.3.4 of the TSCES is amended to read:

> Two steel supporting angles extending from the front to the back rails shall be supplied to support each shelf. The shelves shall be as shown on the plans, and shall be the width of the mounting cage and 18-inches deep. Each shelf shall be attached to the top of two supporting angles with four screws. The front of the shelf shall abut against the front member of the mounting cage.

The police panel specified in Chapter 6, Section 2, Subsection 6.2.6, "Police Panel," of the TSCES may be omitted.

The Contractor shall construct controller cabinet foundation as shown on Standard Plan ES-4B for Model 334 cabinet (including furnishing and installing anchor bolts), shall install the controller cabinet on said foundation, and shall make all field wiring connections to the terminal blocks in the controller cabinet. The equipment to foundation seam shall be effectively sealed to prevent insect entry.

10-4.07 DETECTORS

Loop detector sensor units shall be furnished as part of the central unit.

Loop wire shall be Type 2. Loop turns shall follow WIM vendor specifications.

Loop detector lead-in cable shall be Type B.

Slot cutting for inductive detector loops shall not be performed until after the concrete pavement has been ground, straightedged and brought into tolerance as provided in these special provisions.

Slots in portland cement concrete shall be filled with elastomeric sealant or hot-melt rubberized asphalt sealant, or shall be filled with epoxy sealant conforming to the requirements in Section 95-2.09, "Epoxy Sealant for Inductive Loops (State Specification 8040-31D-06)," of the Standard Specifications.

10-4.08 CONCRETE REMOVAL (WIM SCALE FRAME)

Neither sawcutting nor the removal of concrete for WIM scale frames shall be performed until after the concrete pavement has been ground, straightedged and brought into tolerance as provided in these special provisions.

The outlines of excavations in the pavement for WIM scale frames shall be cut on a neat line to a minimum depth of 50 mm with a power-driven concrete saw before any material is removed. Residue resulting from cutting operations shall not be permitted to flow across shoulders or lanes occupied by public traffic. Residue shall be removed from the pavement surface before any such material flows off said surface, and shall be disposed of in accordance with Section 7-1.13, "Disposal of Materials Outside the Highway Right of Way," of the Standard Specifications.

Layout of scale frames to be drawn and cut under WIM vendor supervision.

If scale frames and weigh pads are not installed by the end of each working day, such excavations shall be backfilled with temporary asphalt concrete to conform to the grade of the adjacent concrete pavement prior to opening lanes to public traffic.

10-4.09 ON-SITE EQUIPMENT

The WIM system shall provide for single threshold weighing, and operate over a speed range of 8 km/h (5 mph) to 161 km/h (100 mph). Single threshold weighing shall consist of a scale or scales in each lane of travel. The entire lane width of 3.6 m shall be covered by the weigh sensors. The WIM system shall consist of the minimum following components:

1. Wheel scale or scales, scale lead-in-cable as required, frames and mounting hardware for each lane to be instrumented. The scales shall report weigh data for each wheel track (right axle weight and left axle weight). Such wheel data shall be uniform across any section of the scale. Installation of scales shall conform to the details shown on the plans. A representative of the WIM manufacturer shall be on site during the installation of the WIM scale frames and scales.
2. Two inductive loop detectors per lane for measuring speed and vehicle length. Inductive detector loops and lead-in cable are provided for elsewhere in these special provisions.
3. A central unit shall be installed in the controller cabinet. The central unit shall include all the equipment and software necessary to calculate, store and transmit to a host computer all data specified in these special provisions. A DC battery backup system shall provide uninterrupted power to the central unit during AC power outages for a minimum of one hour. The modem to be installed in the controller cabinet shall be compatible with the host computer modems described under "High Speed WIM System Application Software" elsewhere in these special provisions. The user shall have the capability to enter a site designation code up to three characters.
4. Axle sensors containing piezo-electric material and screened transmission cable.
   The embedded axle sensors shall be electrically screened so as not to generate electrical noise. Sensors shall be self powered, provide steady output signal over the complete active zone, and shall be capable of operation throughout a temperature of -40˚C. to +80˚C.
   Axle sensors, sealant and screened transmission cable shall be installed according to the manufacturer's specifications.
   Splices will not be allowed in the transmission cable except where shown on the plans.
5. A battery powered portable personal computer (PC) adequate to connect to the central unit for system testing, adjustments, programming, on-site direct data downloading, and off-site downloading and testing of the Weigh-In-Motion system with software and cables to facilitate these functions. The portable PC shall have, as a minimum, a Pentium 4, 3.2 GHz processor, active matrix color display, 512 megabytes RAM, one built-in 3.5-inch floppy disk drive with a minimum capacity of 1.44 megabytes, DVD-RW disk drive, one 60 gigabyte or larger internal hard disk drive, and an internal V-90 modem.
6. All necessary interconnecting cables and miscellaneous materials required to make the system operational via direct connection and via phone line.

Any proposed deviations in the equipment specified herein or proposed deviations in the configurations of wheel scales, axle sensors, or inductive detector loops shown on the plans shall be submitted to the Engineer. Permission by the Engineer to use alternative equipment and/or configurations shall not relieve the Contractor from meeting the WIM system functional requirements set forth in these special provisions. Full compensation for any additional costs resulting from deviations or substitutions of equipment shall be considered as included in the contract price paid for the work involved and no additional compensation will be allowed therefor.

10-4.10 FUNCTIONAL REQUIREMENTS

1. The WIM system shall be able to accommodate vehicles and vehicle combinations with up to nine axles and shall automatically determine for each vehicle, by lane of travel:

A. Weight of each axle:

Accuracy:	MEAN	STD. DEV.
single axle	±5%	8%
tandem axle	±5%	6%
gross weight	±5%	5%

B. Axle spacing, vehicle length, and speed:

Accuracy:	MEAN	STD. DEV.
Axle spacing	±6" (±0.152 m)	12" (0.305 m)
Vehicle length	±12" (±0.305 m)	18" (0.457 m)
Speed	±1 mph (±1.61 km/h)	2 mph (3.22 km/h)

The WIM system shall provide for calibration features such that the required accuracies can be met at all speeds within the operating speed range set forth under "On Site Equipment" elsewhere in these Special Provisions.

Accuracy requirement testing shall be performed using one or more test trucks deemed by the Engineer to be representative of the truck traffic through the WIM system site. Each test truck shall be loaded at a minimum of 90 percent of its legal operating weight.

Conformance to accuracy requirements will be based upon a minimum of two test truck measurements at each 8km/h increment between the typical minimum and maximum operating speeds of the truck traffic through the WIM system site.

C. Vehicle classification:

The WIM system shall provide for a minimum of 15 vehicle classifications. Class 1 through Class 13 shall be used according to Federal Highway Administration's (FHWA) Scheme "F" (as shown in Section 4, Chapter 3 of the FHWA Traffic Monitoring Guide). Class 14 will identify special vehicles as determined by the user. Class 15 will identify any vehicle which does not conform to the classification criteria for Classes 1 through 14. Classification criteria for Classes 1 through 14 shall be programmable by the user.

The WIM system shall provide sufficient flexibility in programming parameters including number of axles, axle spacings, and weights (gross, or axle and gross) for each of these classes so that accurate classifying is achievable.

D. Invalid measurements:

An "invalid measurement" code shall be assigned to any vehicle meeting the front axle weight threshold (discussed below) when (1) the left and right wheel weights of any axle have a difference of 40 percent or more; and (2) either of the wheel weights of such axle exceeds 2.0 kip (907 kg). Both the 40 percent and 2.0 kip (907 kg) values shall be programmable by the operator. Any vehicle assigned an "invalid measurement" code shall not be considered a "Weighed Vehicle" but shall be classified and counted and all vehicle data shall be stored in the vehicle record.

E. Determination of weight violations:

For any vehicle meeting the front axle weight threshold (discussed below), the WIM system shall determine which, if any, axle(s) or axle grouping(s) exceed the weight limits set forth in the "Weight Violation Table" contained in these special provisions. Any vehicle with one or more weight violations will be coded as to such a violation or combination of violations. The weight limitations set forth in the "Weight Violation Table" shall be the default settings. Such weights shall be programmable by the user.

2. The central unit of the WIM system shall calculate and temporarily store all specified data on a storage medium. The on-site data storage device shall have the capacity to store a minimum of seven days of vehicle count data and individual vehicle records. The storage device shall be completely solid state with no mechanical components and shall be a type that is not susceptible to loss of accumulated data should electrical power be interrupted. The central unit shall continue to calculate and store data for all vehicles passing through the system during periods of access, both on-site by portable PC and remotely by the host computer for purposes of programming, real-time view, and downloading of data.

The central unit shall store the following data:

A. Hourly vehicle counts by class and by speed range for each 24 hour period (Class/Count summary).

B. Individual vehicle records for all vehicles with a front axle weight greater than 3.5 kip (1590 kg) (hereafter referred to as "truck records"). The front axle weight threshold for truck records shall be programmable by the operator with 3.5 kip (1590 kg) as a default setting. Each truck record shall include, as a minimum, the following data:

1. Time and Date.
2. Lane Number.
3. Vehicle Number.
4. Speed.
5. Vehicle Classification.
6. Weight in kips of each wheel or dual set of wheels by left and right side and by axle number.
7. Spacings in feet between each sequentially numbered axle.
8. Overall length of each vehicle or combination of vehicles in feet.
9. Code for weight violation(s).
10. Code for invalid measurement(s).

3. Data shall be calculated and formatted such that all data can be accessed and all required reports can be generated by use of the high speed WIM system application software.

4. All equipment, with exception of the central unit's modem, shall operate properly within an atmospheric temperature range of -29°C and50°C.

5. The central unit's modem shall be fully compatible with the host computer modem and shall conform to the following:

A. The modem shall operate properly within a temperature range of 0°C and 50°C and shall not be subject to damage by temperatures within a range of -40°C and 70°C.

B. The modem shall include the following features:

1. Compatibility with CCITT and Bell modulation standards from 300 bps to 14,400bps.
2. Data compression through CCITT V.42bis and MNP 5.
3. Error control through CCITT V.42 (including MNP 2-4).
4. Capability of processing 14,400, 9600, 4800, 2400, or 1200 bps of serial asynchronous digital data for transmission over the 2 - wire public switched telephone network (PSTN).

10-4.11 HIGH SPEED WIM SYSTEM APPLICATION SOFTWARE

An application program, hereafter referred to as the "system program", which can be run on the host computer shall be furnished as part of the high speed WIM system. The host computer will be furnished by others and will consist of:

A. Personal Computer with an Intel Pentium 4, Xeon processor or equivalent at 2.0 GHz or faster.
B. Windows XP (Service Pack 2) or equivalent operating system.
C. Minimum of 512 mega Bytes Error Correction Code (ECC) Random Access Memory (RAM).
D. Internal disk system with 200 Gigabytes storage, one 1.44–megabyte 90 mm (3.5-inch) floppy disk drive and one DVD ROM/CD-RW or equivalent.
E. One Ethernet Network Interface Card (NIC), 1000/100 Mbit or equivalent.
F. Fax/modem, V-90 or equivalent.
G. Uninterruptible power supply (minimum battery backup time of 15 minutes).
H. A 430 mm minimum, color monitor capable of at least 1,024 x 768 pixels.
I. A laser printer capable of a minimum resolution of 12 dots per millimeter x 12 dots per millimeter and a parallel port interface.

The system program shall provide communications between the host computer and the on-site central unit and shall process downloaded data to generate the specified reports and the specified ASCII files. Although referred to herein as a single software program, communications functions and data processing functions may be provided as two separate programs as long as all functional requirements are met. The system program shall be "user friendly", hierarchical menu driven and shall perform the following applications:

1. **Communications:**

The communications portion of the system program shall include the following applications:

A. Real time view:

The real time view application shall provide for on-line monitoring of traffic. The display on the host computer shall depict the axle configuration of each vehicle passing through the site. The contents and format for the real time display shall be similar to the sample display contained in these special provisions. The user shall have the option of displaying either all traffic or only vehicle classifications 4 through 15 as well as the option of displaying a selected individual lane or all lanes.

Printing of the real time data on the host computer printer shall be facilitated by means of an on/off toggle key from the keyboard.

B. System data programming:

The system data programming application shall provide for on-line modification to the central unit's software parameters, such as speed and weight calibration factors, vehicle classification parameters, weight violation table parameters, and front axle weight threshold.

C. Manual downloading:

The manual downloading application shall provide for the downloading of selected daily data files from the storage medium of the central unit to the storage medium of the host computer. The program shall provide for a listing of the daily data files stored in the central unit and shall provide for user selection of the file or files to be downloaded from such a listing. The program shall provide for the downloading of the current day's data stored as of the time of downloading.

D. Automatic downloading:

The automatic downloading application shall provide for unattended downloading of daily data files stored in the central unit's storage medium to the storage medium of the host computer. The program shall provide the following:

i. User's input for the date and time that unattended downloading is to begin.
ii. Downloading of all daily files not previously downloaded by the automatic downloading application.
iii. At least three attempts to make telephone connection with the central unit.
iv. At least three attempts to download files from the central unit before aborting download.
v. Discontinuation of telephone connection after downloading of files from the central unit (or after an abort) and returning the host computer to a standby mode.

E. History file:

The history file application shall create a daily file which chronologically records events occurring during manual and automatic downloading sessions. Such events shall include, but not be limited to, modem result messages, start and end time of each file download and any pertinent messages generated by the program. The program shall provide for either:

i. The history file shall be in the form of an ASCII text file which can be viewed or sent to the printer or,
ii. A menu selection which shall provide for a listing of available history files and user selection of a file to be sent to the printer in the form of a report.

The communications portion of the system program shall meet the following functional requirements:

A. Host computer's modem configuration:

The program shall initialize the host computer's modem so that all necessary operating characteristics are set.

B. Baud rate:

The program will provide for operation at a minimum rate of 9600 baud.

C. Error control:

The program shall not in any way disable the modems' error-checking features which prevent phone-line noise from corrupting data during file downloading.

D. File downloading monitoring:

The program shall display a window that allows the user to monitor the progress of file downloading. The program shall also provide for the abort of a file download.

2. **Report Preparation:**

The report preparation application shall generate specified reports using the downloaded data. Such reports shall be sent to the host computer printer. The program shall prepare the following reports:

A. From vehicle class/count summary file:

1. Distribution of class and speed counts by lane.
2. Distribution of vehicle counts by hour of day by lane.
3. Distribution of vehicle classifications by hour of day.
4. Distribution of vehicle classifications by day of month.
5. Distribution of vehicles by speed by hour of day.

B. From individual truck records file:

1. Distribution of truck record data by lane.
2. Distribution of weight violations and invalid measurements for vehicle classification 4 through 15.
3. Distribution of weight violations by hour of day for vehicle classifications 4 through 14.
4. Distribution of overweight vehicles by hour of day for vehicle classifications 4 through 14.
5. Distribution of gross weights for vehicle classifications 4 through 14.
6. Distribution of 18 kip equivalent single axle loadings (ESALS) by hour of day for vehicle classifications 4 through 14. Program provides for user input of:

a. Pavement type:

(1) flexible pavement and structural number; or,
(2) rigid pavement and slab thickness.

b. Vehicle status:

(1) "all" weighed vehicles (default); or,
(2) "legal only" weighed vehicles; or,
(3) "overweight only" weighed vehicles.

vii. Distribution of trucks by day of month for classifications 4 through 15.

The reports shall include all information contained in and formatted similar to the sample reports contained in these special provisions. The reports shall be printed in condensed print when necessary to fit on 215 mm x 279 mm sheets.

Determination of 8165 kg equivalent single axle loads shall be in accordance with the "Axle Load Equivalency Factor" tables contained in these special provisions.

The program shall provide for the generation of reports in the following two modes:

A. Manual mode:

For daily reports the program shall provide for user selection of the date and the specific report. For monthly reports, the program shall provide for user selection of the month/year and the specific report. The selected monthly report shall include the data from all downloaded daily data files resident with the system program on a directory or subdirectory of the host computer's storage medium. The program shall also provide for user selection of the lane or lanes to be covered by the

specific report (not applicable to the "Distribution of Class and Speed Counts by Lane", the "Distribution of Vehicle Counts by Hour of Day by Lane" and the "Distribution of Truck Record Data by Lane" reports").

The default shall be "all lanes." The printed report shall note which lanes are represented.

B. Automatic mode:

The program shall provide for user designation of one or a combination of the specific daily reports for automatic processing. User selection of lane or lanes is not required (the "all lanes" default may be used). User selection of vehicle status for the 18 kip ESAL report is not required (the "all" weighed vehicles default may be used). Such designations shall be effected by means of either:

i. An ASCII text file, which can be revised with text editor or word processor, supplied with a "Sample" designation; or,

ii. A menu selection which shall provide for user input of designation.

Upon selection of automatic mode of report preparation by the user, the program shall send to the printer all pre-designated reports for all downloaded daily data files resident with the system program on a directory or subdirectory of the host computer's storage medium.

The designated reports shall remain in effect for subsequent automatic mode sessions unless report designation is revised by the user.

TRUCK RECORD BATCH PRINT

The truck record batch print application shall provide for the display of, and on/off printer toggle of, individual truck records. The program shall provide for a listing of the daily truck record files available on the storage medium of the host computer and the user's selection of one of those files. The program shall also provide for the user's selection of the vehicle class or classes for which individual truck records will be displayed or printed as well as the starting hour of day.

The user shall have the following options in viewing and printing the individual truck records:

A. Scroll and print continuously all records for the selected class(es); user has capability to stop/resume scrolling or terminate program.

B. Scroll each record one at a time; user has capability to:

1. Print displayed record and display next record.
2. Display next record.
3. Terminate program.

Example of the truck record batch print is included in these special provisions.

ASCII EXPORT UTILITY

The ASCII export utility application shall allow the user to generate specified ASCII files using downloaded files. The user will have the choice of:

A. From vehicle class/count summary file:

1. ASCII classification file.
2. ASCII speed file.

B. From individual truck record file:

1. ASCII truck record file.

The file formats for these files are contained in these special provisions.

The ASCII truck record file shall include every truck record contained in the individual truck records file and all truck record fields. Such fields shall be comma delimited and padded with blanks to complete the fixed logical record length.

TMG FILES UTILITY

The TMG files utility shall allow the user to generate ASCII files conforming to the instructions contained in Section 6 of the FHWA Traffic Monitoring Guide using downloaded files.

10-4.12 DATA FILES

Notwithstanding the method of data manipulation and formatting used by the central unit, data files shall conform to the following:

1. Individual daily data files shall be created and stored in the storage medium of the central unit. Each daily data file shall include data for each 00:00 hour through a 24:00 hour period and shall have a file name which uniquely identifies the file as to site designation, date, and file contents (i.e. class/count summary data, individual truck record data, or both).
2. The daily data files shall be created at the start of each day, data for each vehicle shall be filed within one hour of the vehicle's passing through the site, and the current day's files shall be accommodative to downloading at any time during the day. Data file structure shall be accommodative to efficient use of storage medium space and rapid downloading via modem to the host computers.
3. Daily files containing class/count summary data and individual truck records data may be created in the storage medium of the central unit as two separate daily files or as one daily file. However, if one daily file is created and downloaded as such, the system program shall create two separate daily files, each with a file name which uniquely identifies it as to site, date, and whether it is a vehicle class/count summary file or an individual truck records file.

10-4.13 ACCEPTANCE TEST

The Contractor shall demonstrate that the high speed WIM system is available for use by the Department of Transportation by successfully completing the acceptance test for each lane of data collection.

The acceptance test shall consist of the following:

1. Continuous operation of the high speed WIM system on-site equipment for 72 consecutive hours. Failure of the system to record and store data meeting the requirements set forth in these special provisions for an accumulated time exceeding 3 hours during the 72 hour period shall be cause for the acceptance test to be repeated.
2. Testing of the high speed WIM system application software during the above noted 72 hours period and the full working day following the 72 hour period. Failure of the software to perform any application meeting the requirements set forth in these special provisions shall be cause for the acceptance test to be repeated.

Unavailability shall be the failure of the system to pass the acceptance test. Failure of the host computer or its peripheral equipment or of a communication line not furnished by the Contractor to transmit data may be considered not to render the system unavailable, provided that the Contractor demonstrates to the satisfaction of the Engineer that the failure is not caused by any of the Contractor furnished equipment.

10-4.14 MAINTENANCE AND OPERATIONS MANUALS

The Contractor shall furnish a maintenance manual for the central unit, including vehicle detector sensor units, and an operation manual for the system. The maintenance manual and operation manual may be combined into one manual. The manual(s) shall include, but need not be limited to, the following items:

1. Specifications.
2. Design characteristics.
3. General operation theory.
4. Function of all controls.
5. Trouble shooting procedure (diagnostic routine).
6. Block circuit diagram.
7. Geographical layout of components.
8. Schematic diagrams.
9. List of component parts with stock numbers.
10. Documentation for application software.

10-4.15 WARRANTY

The wheel scales, lead-in cables, frames and mounting hardware provided shall include the manufacturer’s or supplier’s 5 year warranty. All other equipment specified under on-site equipment of these special provisions shall include the manufacturers or suppliers two year warranty.

Such warranty periods shall begin upon completion of the acceptance test of the weigh-in-motion system and shall include all parts and all installation costs, including traffic control if necessary, to make the repairs.

10-4.16 PAYMENT

The contract lump sum price paid for Weigh-In-Motion shall include full compensation for furnishing all labor, materials, tools, equipment, incidentals and for doing all the work involved in installing the High Speed Weigh-In-Motion System, complete in place, as specified in the Standard Specifications and these special provisions and as directed by the Engineer.

SECTION 10-5. DOMESTIC SANITARY SEWER

10-5.01 SANITARY SEWER

MATERIAL

High Density Polyethylene Pipe and Liner

High Density Polyethylene (PE) pipe and fittings shall be HDPE SDR 17 unless otherwise noted on the plans and shall conform to the provisions in section 207-19 "Polyethylene (PE) Solid Wall Pipe and Liner," of the standard specifications.

Polyethylene (PE) pipe shall be Type III, Class C, Category 5, P34 material as described in ASTM D-1248, as manufactured by Quail Pipe Manufacturers/Fusion Seal Corporation, Inc. or approved equal. Their address is 3562 Market Street, St. Louis, MO, 63103. Their Phone number is (314) 533-3030. Minimum cell classification values of the pipe material shall be 3 4 5 4 3 4 C as referenced in ASTM D 3350-84. The fittings used under this specification shall be modeled from a PE compound having a cell classification equal to or exceeding the compound used in the pipe. To ensure compatibility of PE materials, all fittings supplied under this specification shall be of the same manufacturer as the pipe. The PE shall be co-extruded with a black exterior and a white (or off-white) interior. Fittings may be black both externally and internally.

Fittings

All wye branches and other fittings shall be of the same material and shall meet the same requirements as the pipe on which they are used. All wye branches shall be 45 degree angle and shall be capped.

Joints

Polyethylene (PE) Sewer Pipe -

A. All joints shall be integral wall bell and spigot configuration, factory formed. All rubber rings shall conform to ASTM F-477.
B. Reducing wyes for service laterals shall be in line bell and spigot type, factory molded.
C. Assembly of all joints shall conform to ASTM P3212.
D. Saddle fittings for lateral connection will be permitted; solvent welded.
E. Manhole connections shall be by rubber ring water stop installed on pipe and cast in center of manhole wall or 100 mm from outside face of manhole base. Pipe section on water stop at manhole shall have bell flush with outside of manhole or no more than 250 mm outside manhole.

Deflection Test for PE Sewer Pipe

The Contractor shall furnish all equipment needed to complete this test. Deflection test shall be conducted after the placement and densification of backfill.

Table of Allowable Deflections for PE		
Pipe Size & Type	Base I.D.	Minimum Allowable I.D.
150 mm HDPE		
300 mm HDPE		
380 mm HDPE		
450 mm HDPE		
675 mm HDPE		
900 mm HDPE		

At the Contractor's expense, all locations with deflection greater than allowable shall be excavated, repaired or replaced, backfilled, and retested.

Manhole Frames and Covers

Manholes shall be sound water-tight structures as shown on the plans. They shall be constructed with eccentric cone sections, as shown on the plans, conforming to ASTM C-478.

Manhole frame and cover shall be centered on mainline. Sanitary sewer manholes shall have the words "SANITARY SEWER" casted in the manhole cover at the location shown.

Cast iron manhole frames and covers shall be manufactured, tested and otherwise furnished in accordance with the Standard Specifications for Gray Iron Castings ASTM Serial Designation A-48-60. The contact surfaces of frames and covers shall be machined so as to produce contact around the entire seat.

Markers

Markers for wye branches on ends of house sewer laterals at property lines shall be ferrous metal stakes not less than 600 mm long and being a flat or crimped bar not less than 6.35 mm thick by 25 mm wide.

INSTALLATION OF PIPE

Handling of Pipe

The pie shall at all times during loading, unloading, moving and laying operation, be handled with care. Only methods of handling as approved by the Engineer shall be used in these operations. When using mechanical equipment, extreme care shall be used to avoid damage or scarring by placing of hooks, chains or other devices on the ends of the pipe.

Cleaning of Pipe

The inside of all couplings and the matched ends of all pipe to be coupled, and the inside of all pipe shall be free of dirt, grease or other deleterious material. The open ends of all pipe previously laid shall be adequately plugged whenever pipe laying operations are completed at the end of each work day or suspended for any reason.

Grade and Alignment

All pipe shall be laid true to the line and grade shown on the plans. The methods used to transfer the grades from the control points established by the Engineer to the point of pipe laying in the trench shall be subject to the approval of the Engineer. The pipe shall not deviate from the established line for straight pipe alignment to the extent that a light placed in a lamphole or manhole cannot be clearly seen from the next adjacent manhole. For lines with curved alignment the deviation from the established line as determined by the Engineer before backfilling shall not exceed one-fourth (1/4) of the inside diameter of the pipe. the deviation from the established grade of the pipe shall not at any place exceed 6.35 mm in any one length of pipe or at any point on the line.

Pipe Joints (Wedge Lock or Equal)

Before jointing each pipe shall be cleaned of all deleterious substances. The spigot shall be firmly pressed against the seat of the bell of the preceding pipe. The polyethylene (PE) pipe and joint shall be protected against damage during the jointing operation.

Service Connections

The locations of all sewer services extended to the lot shall be marked by placing a 50 mm x 50 mm redwood stake extending from the end of the sewer service to the ground surface at the time of backfilling. Said end of service shall extend a maximum of 1.37 m and a minimum of 1.22 m beyond the rear edge of the sidewalk in streets having sidewalks adjacent to the curb and shall have a maximum of 305 mm and a minimum of 0.305 m beyond the rear edge of the curb for sidewalks that are separated from the curb by a planter strip.

The location of every service shall be marked with an "S" directly above the service in the curb, the "S" to be 38 mm in height and 6.35 mm in depth.

A cleanout shall be installed on the sewer service at the rear edge of sidewalk or within the planter strip, as applicable. Cleanout shall be constructed as shown on the plans (see Standard Drawings for installation details). Said cleanout shall consist of a combination wye and eighth bend riser, and cleanout with plug.

The location of every house sewer as measured from the next manhole downstream shall be made of record and such records delivered to the Engineer.

Infiltration Allowance

Where groundwater conditions prevail, the allowable infiltration shall not exceed 9.26 liters per millimeter of diameter, per kilometer of pipe, per 24 hours. The rate of infiltration shall be determined after the pipe has been installed and after the groundwater has returned to its normal position.

TESTING

Before sewer lines are accepted, they shall be cleaned with Wayne Sewer Cleaning Ball, or approved equal, and all stoppage of foreign matter shall be removed by the Contractor.

Upon completion of cleaning, sewer lines shall be tested by either of the methods as outlined below.

Water Test

The section or sections of the pipe to be tested shall be selected by the Engineer. If, in any section tested, the leakage exceeds 37.04 liters per millimeter of diameter, per kilometer of pipe, per 24 hours, all pipe shall be tested and leakage corrected at the expense of the Contractor.

The leakage test shall consist of plugging off the particular section between manholes and filling the section with water to a point in the upper manhole 1.22 m above the invert grade at the midpoint of the section being tested. After the water has stood four (4) hours, the water level will be recorded by the Engineer. After an additional two (2) hours, the water level will again be checked by the Engineer, who will calculated the leakage.

Branch sewers shall be plugged at their upper end if the test head would cause them to overflow.

Upon completion of the test, the stoppers in the sewer shall be removed.

Air Test

The section of pipe to be tested shall be isolated by completely blocking all outlets in the section under test. Careful attention must be given to the bracing of all plugs, as the line will be under pressure. One of the plugs used at the manhole must be equipped for an air inlet to fill the line from the air compressor. The air compressor which feeds air into the pipe section must be equipped to control the air entry rate and to prevent the pressure from exceeding 34.5 kPa. The air compressor shall be fitted with a blow-off valve set to operate a 34.5 kPa to prevent an increase in pressure which would be hazardous to the pipe line.

After the pipe has been wetted, the air shall be allowed to slowly fill the pipe line until a constant pressure of 27.6 kPa is maintained. At this point, the air compressor shall be controlled so that the internal pressure in the line is maintained between 27.6 and 24.1 kPa for at least two (2) minutes to permit the temperature of the entering air to equalize with the temperature of the pipe exposed fittings shall be checked for tightness with a soap solution. If leakage is found at such points, the pressure in the line should be released, and the plugs tightened to stop the leakage. If it is necessary to bleed off the air to repair a faulty plug, a new two-minute interval must be allowed when the line has been refilled.

When the temperature of the air has reached equilibrium with that of the pipe wall, the air source shall be disconnected. Before disconnecting the air supply, the pressure shall be at 27.6 kPa. The gage is then watched until the air pressure reaches 24.1 kPa. When the pressure has reached 24.1 kPa, a stop watch will be started and stopped when the pressure has reached 17.2 kPa. The time required, as shown on the watch, for the loss of 6.9 kPa at an average pressure of 20.7 kPa, is used to calculate the rate of air loss.

The pipe line may be considered to have passed the air loss test successfully if the loss of air is not greater than a rate of 0.0009 cubic meters per minute per square meter of internal pipe surface. For any reach of sewer being tested, the line is also acceptable when the loss of air is greater than 0.0009 cubic meters per minute per square meter of internal pipe surface, but the total rate of air loss from the entire section does not exceed 0.06 cubic meters per minute.

The Contractor shall furnish all equipment needed to complete this test. The cost for the air test shall be included in the unit price bid for the sewer pipe.

BACKFILLING

Backfill Over Pipes.

No backfilling shall be done prior to the approval of the Engineer. Partial backfilling shall be done by hand, using extreme care not to disturb the line or grade of the pipe. The material for this initial backfill shall be selected from the finest earth in excavated materials. The initial backfill shall be placed and thoroughly tamped equally on both sides of the pipe in equal depths, as approved by the Engineer to a relative compaction equal to that of the undisturbed soil adjacent to the areas to be backfilled to a point 305 mm above the top of the pipe.

The backfill from a point 915 mm below subgrade to subgrade shall be placed in accordance with Section 19-3.06, of the Standard Specifications and the relative compaction shall not be less than 95%, but the lifts may be greater than 200 mm, provided that compaction methods proposed by the Contractor are approved by the Engineer.

In deep trenches, the backfill form a point 305 mm above the top of the pipe to a point 915 mm below subgrade may be placed and compacted by flooding or jetting with water in layers not exceeding 610 mm in depth. The material comprising this backfill shall have the same relative compaction as the disturbed soil adjacent to the areas to be backfilled.

Structures

Backfill around manholes, and other structures shall be a homogeneous mass of material uniformly distributed around all part of the structures. The bottom portion of the backfill shall be placed and thoroughly tamped equally on all sides of the structures in equal depths, as approved by the Engineer, or flooded with water in layers not exceeding 610 mm, to a point 915 mm below subgrade. This material comprising the backfill of the bottom portion shall be of a relative compaction equal to that of the undisturbed soil adjacent to the areas to be backfilled. The backfill from a point 915 mm below subgrade shall be placed in accordance with Section 19-3.06, of the Standard Specifications and the relative compaction shall not be less than 95%, but the lifts may be greater than 200 mm, provided that compaction methods proposed by the Contractor are approved by the Engineer.

Unstable Material

When native material, in the opinion of the Engineer, is unsuitable for the use as backfill, it shall be disposed of as directed by the Engineer and suitable imported material approved by the Engineer shall be furnished by the Contractor for the backfill.

MEASUREMENT

The lengths of sewer pipe to be paid for by the meter will be the slope length designated by the Engineer. Pipe placed in excess of the length designated will not be paid for, unless pipes are cut to fit a structure. When pipes are cut to fit a structure, the quantity to be paid for will be the length of pipe placed before cutting, measured in 600 mm increments.

PAYMENT

Sewer pipe will be paid for at the contract price per meter for the various sizes of sewer pipe as designated in the Engineer's estimate

The contract price paid per meter for sewer shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all work involved in furnishing and installing or constructing sewer pipe, complete in place, including structure excavation, pipe bedding, structure backfill, diversion as required, testing and connecting new pipe to existing or new facilities including concrete collars and reinforcement as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

The contract prices paid per meter for sewer manhole shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in constructing sewer manholes, complete in place, including structure excavation, structure backfill, concrete collars, frames and covers, manhole base, testing, precast adjusting rings and precast cones, as shown on the plans, as specified in these specifications and the special provisions, and as directed by the Engineer.

SECTION 10-6. DOMESTIC WATER

10-6.01 DOMESTIC WATER FACILITIES

This work consists of furnishing and placing polyvinyl chloride pressure water pipe, underground casing, fittings, valves, thrust blocks, and service lines, all as shown on the plans or as directed by the Engineer, and as specified in the Standard Specifications, plans and the special provisions.

Unless otherwise permitted by the Engineer, the Contractor shall conduct his operations in a manner which will permit continuous operation of all utility facilities. It shall be the responsibility of the Contractor to verify the exact location and depth of all utilities. This verification shall be done far enough ahead of the pipe laying operation to ensure that the planned line and grade will clear any obstructions. Before the pipe laying operation gets within 200' of any tie-in to an existing water main, the location of that tie-in shall be exposed to verify that planned line and grade are adequate to make the connection.

Any changes required in line or grade of the new pipe lines, due to interferences with existing utilities or other obstructions, shall be performed by the Contractor and shall have prior approval of the Engineer. If the Contractor fails to adequately verify the location of utilities or tie-ins, and such failure necessitates additional fittings and/or the removal of previously laid pipe, to adjust the line and grade; then the cost of such changes shall be borne entirely by the Contractor.

All water services shall be maintained, and if broken or damaged by the Contractor, shall be promptly repaired or replaced. Cost of replacing services cut and temporary services, shall be included in the Contractor's work without extra cost to the State.

MATERIALS

General

Materials and workmanship shall conform to the current requirements and provisions of the American National Standards Institute, the American Public Health Association, the American Society for Testing and Materials, and the American Water Works Association. Prior to ordering any materials, and as a part of the cost breakdown submittal, the Contractor shall supply the Engineer with copies of all specifications from the above associations used in acquiring the materials needed for this work.

Water pipe

The buried water distribution system shall be constructed of polyvinyl chloride pressure pipe. Polyvinyl chloride (PVC) pressure pipe shall conform to the requirements of AWWA specification C900, class 200. Pipe shall have integral bell gasketed joints. Elastomeric gaskets shall conform to the requirements of ASTM F477. Installation of pipe shall conform to manufacturer installation guide unless otherwise stated by these specifications.

Polyvinyl chloride pressure pipe (AWWA C900) shall have outside diameters (O.D.) conforming with cast iron pipe (CI) and shall meet ASTM D2241 (for maximum and minimum out-of-roundness) before installation.

Fittings for Water Pipe

Bends, elbows, tees, crosses and special fittings shall be of cast iron, match the make of pipe used and be as specified by the manufacturer for use with class 150 or 200 pipe. Fittings shall be of the long pattern and conform to AWWA Specification C-110 and ANSI Specification A21.10. All fittings shall have rubber ring joints and shall meet AWWA Specification C-lll for mechanical joints. All fittings shall be fusion epoxy coated and furnished with stainless steel trim. Fusion coating shall be accomplished by using a 12 mil coating of dry powder epoxy resin applied by use of the fluidized bed process. All spray-type applications of fusion coating are not acceptable. Supplier shall provide certification that coating was done by fluidized bed process. Stainless steel trim consists of all bolts, nuts, and test plugs as required. The trim shall be installed as required during the fusion coating process. All stainless steel shall have a minimum grade of type 304.

Prior to fusion coating all fittings and valves, the rubber ring grooves shall be masked to prevent excessive fusion coating mil thickness buildup. After fitting dries, the grooves shall be hand coated.

Grooved joint couplings and fittings when used below grade shall conform to the requirements for above grade pipe and shall be fusion epoxy coated and have stainless steel bolts.

Tracer wire installed with the pipe shall be AWG8 TW or THW insulated copper wire.

Steel Casing. The buried Pipe runs under the highway shall be in a 610 mm steel casing. The exterior of the casing shall be fusion coated. Fusion coating shall be accomplished by using a 12 mil coating of dry powder epoxy resin applied by use of the fluidized bed process. All spray-type applications of fusion coating are not acceptable. Supplier shall provide certification that coating was done by fluidized bed process. The use of anode protection would need to be approved by the City Engineer.

The 305 mm PVC pipe shall be fitted with skids before inserted it into the casing. Once completed, both ends of the casing shall be sealed with a rubber hub type material to prevent water from migrating through the casing. The inside of the casing is jet filled with sand.

VALVES

Main line valves and fittings shall be installed as indicated on the Plans. Changes from the plans in valve and fitting locations may be necessary due to unanticipated field conditions and shall be made as directed by the Engineer. The Contractor shall, as early as possible, call to the Engineer's attention any problem that may require a change from the plans. Gate valves and butterfly valves with operators shall be of a type intended for use with a buried domestic water service system and shall conform to the following specifications.

Where a valve is located adjacent to a tee, it shall be joined to the tee by means of a flanged connection. Joints in fitting and adapter shall be of the type with a seal ring groove for positively holding the rubber joint in place against the water pressure and shall be similar to the joint used for asbestos cement pipe.

Gate valves shall be used up to 200 mm in size. Butterfly valves shall be used in larger sizes than an 200 mm application.

Gate valves shall be Mueller, or approved equal, conforming to the requirements of AWWA Specification C-509 with iron body, bronze mounted, modified wedge disc and seat, nonrising stem, designed for 1379 kPa cold water working pressure. Stem shall be fitted with a brass square wrench operating nut unless specified otherwise. Valves shall open counter-clockwise

Butterfly valves shall be Dresser, or approved equal, conforming to the requirements of AWWA Specification C-504 with iron body, stainless steel body seat, teflon bearings, designed for 1035 - 1380 kPa cold water working pressure. Stem

shall be fitted with an underground operator and brass square operating nut unless specified otherwise. Valves shall open counter-clockwise.

Butterfly valves shall meet or exceed the latest revisions of AWWA C-504 with a design working pressure of 1035 kPa. Operators for butterfly valves shall be Class 150.

Tapping sleeves for A.C. and cast iron water mains shall be full body shell, with full body gasket or split sleeve, end and side gasket seal. Inlet flange and tapping gate valve flanges shall be Class 125 flange.

All stem seals, gate valves and butterfly valves, shall be O-rings only.

Wrench nuts shall be made of top grade cast iron, fitting the top of the valve stem and secured by nut or key. Wrench nuts shall be 49.213 mm square at the top and 50.8 mm square at the bottom.

Valves requiring operating wrenches exceeding 1.8 m length shall have extension and guides installed within valve boxes.

The open direction shall be left (counter-clockwise) and the closed direction right (clockwise).

Air release valves shall be APCO Model 143C Combination Air Release Valves or approved equal. The valve shall have a 25 mm minimum large orifice and 2 mm minimum small orifice. The valve shall be of the lever frame type. The valve shall have 25 mm NPT threaded inlet and outlet. The valve shall permit large volume of air to pass while the line is filling or draining and continuous venting of the air pockets while the line is in service. The valve will include both of these functions in a single valve body.

All valves shall be fusion epoxy coated with stainless steel trim. The coating and trim requirements are the same as described in Section 73.13B, Fittings for Water Pipe.

VALVE BOXES

Valve boxes and covers shall conform to the details shown on the plans.

All boxes in the traveled way shall have a concrete collar 152mm in depth and 457 mm in width. The collar shall be down approximately 51 mm from finished grade in asphalt areas.

Valve boxes shall be of the two part adjustable type with the letters "WATER" cast into the iron cover. The make and model shall be Christy No.G5, Brooks No. 3-RT or equal. Extension to be one piece or as specifically approved. All steel lids shall be epoxy sand coated in pedestrian and driveway areas. The Contractor shall replace any valve or meter boxes broken by his operations.

GASKETS

Gaskets for flanged joints shall be full circle 1.588 mm thick asbestos composition gaskets.

THRUST BLOCKS

Concrete thrust blocks shall be provided for all bends, tees, deadends, hydrants and other points shown on the plans or as required and shall be constructed in accordance with the details shown on the plans. The thrust blocks shall be constructed of Class B concrete as specified in Section 90 "Portland Cement Concrete" of the Standard Specifications with one and 38 mm max. size aggregate.

INSTALLATION

Installation of Water Mains

The Contractor shall, unless specified otherwise, furnish all material, equipment, tools and labor necessary to do the work required, and unload, haul and distribute all pipe, castings, fittings, valves, hydrants and accessories. The Contractor shall inform the Engineer, who will contact the utility at least two (2) weeks before any work regarding the installation, testing, isolation, dewatering and connection of any water line. The Contractor shall also remove pavement as stipulated; excavate trenches and pits to the required dimensions; excavate bell holes; remove all pipe, castings, fittings, valves, thrust blocks, hydrants and accessories required to place new lines as shown in the plans; construct and maintain all bridges for traffic control, sheet, brace, and support the adjoining ground or structures where necessary; handle all drainage or ground water; provide barricades, guards, and warning lights, lay and test the pipe, castings, fittings, valves, hydrants, and accessories; backfill and consolidate the trenches and pits; restore the roadway surface unless otherwise stipulated; remove surplus excavated material; clean the site of the work; and maintain the street or other surface over the trenches as specified. All connections to existing lines shall be flanged by fittings with isolation plates.

Excavation

Trench excavation shall conform to the details shown on the plans and these special provisions.

All excavation shall be unclassified. Earth shall be removed as required for properly constructing the water system to the lines and grades as shown on the Plan with due consideration for the space required for the removal of such materials which are unsuitable for pipe bedding.

Trenches may be excavated either by hand, or by machine and shall be cut with sides substantially vertical. Trenches shall be excavated with sufficient width to provide adequate room for working therein. Such space shall be a minimum clear distance of 152 mm and a maximum of 305 mm on each side of the pipe barrel when the pipe is properly placed and aligned in conformity with the Plans.

Caution Shall be used in breaking the pavement. Damage to pavement outside the trench section shall be repaired by the Contractor at no expense to the City. Motorized pavement breaker will be permitted.

Bell holes or depressions shall be dug by hand at the proper locations, of sufficient size to permit making up the joints, but not larger than actually required.

Trenches shall be excavated to a depth of approximately 100 mm below the grade for the bottom of the pipe barrel and then filled with sand to the proper elevation to provide an even bed for the pipe. When the trench bottom is found to consist of mud, quicksand, or other unstable material, the trench bottoms shall be made firm and solid by removing said unstable material to a maximum of one foot below grade, lining the excavation with a "filter fabric for edge drains" as specified in Section 88-1.03, "Filter Fabric," of the Standard Specifications, and replacing same in an approved manner and to the satisfaction of the Engineer. When the trench has been inadvertently excavated below the designated grade for the sand bed, the bottom of the trench shall be refilled with approved material, well compacted into place in an approved manner and to the satisfaction of the Engineer.

Excavated material may be piled neatly along the side of the trench in such a manner as to be of as little inconvenience as possible to the public traffic or to the occupants of adjacent properties and shall not interfere with surface drainage.

The Engineer shall have the right to limit the amount of trench which is opened or partially opened at any one time; and also to limit the amount of trench left without backfill at any one time. In no case shall the length of open trench exceed 152 m at any one time, from the point of removing existing pavement to the point of flush backfill.

The Contractor shall take such measures as may be required and shall furnish, install and operate such pumps and other devices as may be required or necessary, to remove any seepage, storm water or sewage that may be found or may accumulate in the excavations during the progress of the work. The Contractor shall keep all excavations entirely free from water at all times during the construction of the work.

Trench excavation shall be backfilled or covered and protected before leaving the work site at the end of the day unless otherwise authorized by the Engineer. Temporary paving shall be placed over any backfilled trench. Loose stone in the work area caused by construction, shall be controlled by sweeping if deemed necessary by the Engineer.

Dust shall be prevented from rising off the ground or pavement at all times by watering or other means.

All excess material shall be hauled off site and properly disposed of.

Pipe Laying

All pipe, valves and fittings shall be carefully handled during hauling, unloading and placing operations, so as to avoid breakage or damage to same, or to the coatings and linings. Any cracked or broken units shall be permanently removed from the site of the work., discarded and replaced with sound material. Any damage to coating or linings shall be repaired to the satisfaction of the Engineer. Extreme care shall be exercised in the use of any mechanical devices used in laying the pipe to avoid scarring or other damage

All pipes shall be laid on a sand bed, as specified herein, and furnish a true and firm bearing on the pipe, throughout its entire length. Adjustment of the pipe to line and grade shall be made by scraping away or filling in the tamping sand under the body of the pipe throughout its entire length and not by blocking or wedging.

Bell holes shall be provided under the bell of each pipe length, of sufficient size to permit making up the particular type of joint being used.

Pipes shall be laid accurately in conformity with the prescribed lines and grades. Each length shall be joined to the preceding section as herein specified and after said jointing procedure has been completed, there shall be no movement of the pipe whatsoever in subsequent operations.

All trenches shall be of sufficient depth to provide a minimum cover of 910 mm, measured from top of the pipe to the finish grade level. Greater depths of cover shall be provided when so indicated on the plans or herein specified. Cover of less than 910 mm may be allowed with Engineer's approval, where the Engineer determines that it is not practical to go under an obstruction.

Where potential conflict with underground pipes over other obstacles is anticipated, the Contractor shall expose such obstacle and determine appropriate vertical alignment for the new piping without excessive pipe deflection. Where necessary as approved by the Engineer, additional fittings may be allowed. Deflections shall be no greater than as recommended in the manufacturer's literature.

Before each new length of pipe is placed, the interior of the preceding or existing pipes and couplings shall be carefully cleaned of all dirt, debris, dust, grease, or other deleterious materials. Pipe ends shall be plugged water tight whenever pipe laying operations are suspended at the end of each work day, each night and during excavating or backfilling as necessary to keep the inside of pipe clean.

Tracer wire shall be installed with the pipe and shall be secured to the top of the pipe with polyethylene tape before the backfill is placed. The tracer wire shall be brought up in each valve box along the pipeline.

Pipe and coupling shall be installed and tested in accordance with the latest revision of AWWA Standard C-603 and C-900. On completion of the assembly of the coupling or fitting, the pipe ends within the coupling or fittings shall be permanently and positively separated to allow for deflection. After assembling the coupling or fitting, the rubber ring shall be checked with a suitable field gauge.

All connections to existing water mains shall be made at a time and in such a manner as to cause the least inconvenience to existing consumers. In joining asbestos cement pipe, a thin coating of non-toxic and water soluble lubricant shall be applied to the entering level and back to the first machined shoulder of the pipe to be couple. The rubber rings shall be set in the coupling grooves, and the couplings shall be placed between the pipe ends. The pipe shall be moved so that ends butt snugly against the rubber rings. A representative of the pipe manufacturer shall be present when the pipe laying commences in order to insure the proper installation of the pipe.

The City Water Department shall be notified at least 24 hours in advance of the time the Contractor plans to make his connection to the existing main. The Water Department will operate the necessary valves in the existing water system for the shutdown.

The Contractor will not be permitted to operate any valves in the existing system.

No shutdown will be permitted unless the tie-in area is exposed and all connection materials necessary for the connection are at the site.

Backfilling

No backfill shall be placed in trenches or excavations until the water lines, in the particular section involved, have been inspected and approved for backfilling by the Engineer.

Sand conforming to the requirements of Section 19-3.025B, "Sand Bedding," of the Standard Specifications and as specified herein, shall be used for backfilling around the pipe to an elevation of 305 mm above the top of the pipe. The sand shall be carefully packed under the hauches of the pipe and brought up simultaneously on both sides so as to prevent any displacement of the pipe from its true alignment or any undue strain on the pipe. The sand backfill shall be compacted by careful jetting to saturation only. No ponding of water above the surface of the sand will be permitted. The sand used for bedding and backfilling around water pipes shall be granular material free of clay and organic matter and suitable for proper compaction by jetting. The source and type of sand proposed for use shall be subject to the approval of the Engineer.

The remaining backfill may consist of an Engineer approved imported backfill material free from stones or lumps exceeding in greatest dimension and free from vegetable matter or other unsuitable material. This material shall conform with Section 19-3.06, "Structure Backfill," of the Standard Specifications. Imported backfill shall be placed in uniform layers not over 200 mm in thickness before compaction. Each layer shall be watered or dried as required to bring the soil as close as practicable to the optimum moisture content for proper compaction, and then compacted by means of a vibratory compactor or other suitable equipment as approved by the Engineer, to a relative compaction of ninety-five percent (95%) of that determined by California Test Method Number 216 or 231. Compaction tests will be taken periodically by the Engineer. All layers not meeting the specified compaction shall be recompacted and/or replaced and recompacted.

Prior to testing, the Engineer and Contractor shall agree upon a test location which is representative of an entire or major section thereof. A failing test at that location will result in the recompaction and/or replacement and recompaction of the entire section until compaction requirements are met. All subsequent tests at this location which indicate a failing compaction, will then be at the expense of the Contractor. Tests will be as close as possible to the time of final resurfacing of the trench.

Jetting of sand backfill may be used as an alternate method of backfilling. This procedure shall be as follows:

The backfill material shall be shoveled into the trench by hand until the top of the barrel of the pipe shall be covered for a height of not less than 305 mm. This layer backfill shall be thoroughly flooded with an excess amount of water, to the satisfaction of the Engineer.

After this first layer of backfill material has been thoroughly compacted, the next lift of backfill material and all additional lifts, each lift not to extend 200 mm in depth, shall be placed by hand shoveling or such other method as the Engineer may approval. Each lift of backfill shall be thoroughly flooded to the satisfaction of the Engineer. The surface of each lift of backfill shall be graded so as to provide for uniform saturation of the backfill material. The water used for compacting the backfill may be added while the material is being placed or after the lift has been placed to its full depth.

Each layer of backfill shall be compacted to a relative compaction of not less than 95 percent of that determined by California Test Number 216 or 231. Any material remaining after backfilling operations have been completed, shall be spread neatly on areas in the City Dump as directed by the Engineer. The cost of backfill used in the trench shall be considered as part of the cost of the pipe installation.

The Contractor shall do all excavating, loading, hauling, placing and compacting of the material in place.

All pipe damaged during construction operations shall be replaced by the Contractor at the Contractor's expense to the satisfaction of the Engineer.

Trench Resurfacing

Trenches in existing streets, except streets which are to be closed or abandoned, shall be resurfaced with the type of thickness of bases, surfacing or pavement shown on the plans.

The Contractor shall proceed immediately to resurface any part of any excavation upon notice from the Engineer without waiting for completion of the full length of line.

TESTING

General

Water shall be supplied by the City of Burlingame for the initial pressure, leakage and sterilization tests free of charge. If the new line fails any of these tests, the cost of water for all subsequent tests on that line will be charged to the Contractor. The Contractor will also be charged as a reduction to the contract for all labor and equipment costs involving additional inspections resulting from failing tests. Temporary plugs, caps, blocking, test connections and testing equipment shall be furnished by the Contractor.

Hydrostatic Test

All water pipe shall be subjected to a hydrostatic test equal to 1550 kPa or the maximum pressure plus 690 kPa, whichever is greater. The new pipe shall be tested to within 3 m of any connection to an existing pipe, valve or fitting. In no instance shall an existing pipe, valve or fitting be used as part of this test. Each section being tested shall be slowly filled with water, care being taken to expel all air from the pipes by such means as are necessary. Water shall be allowed to stand in the A.C. pipe from 48-72 hours before low pressure test is applied. P.V.C. pipe need not be seasoned prior to testing.

The required test pressure, as measured at the lowest elevation, shall be applied for not less than one hour. Any leakage discovered in consequence of the hydrostatic test shall be corrected and the test shall be repeated until satisfactory to the Engineer. Any cracked or defective pipes, fittings, valves, or hydrants shall be removed and replaced. Defective joints shall be repaired or replaced.

Leakage Test

Leakage test shall be conducted after the pressure tests have been satisfactorily completed. However, the leakage test may be done concurrently with the hydrostatic test if the combined testing procedure meets with the approval of the Engineer. The duration of each leakage test shall be at least two hours, and during the test the main shall be subjected to a hydrostatic pressure equal to the maximum operating pressure for the locality. Leakage is defined as the quantity of water to be supplied into the newly laid pipe, or any valved section thereof, necessary to maintain the specified leakage test pressure after the pipe has been filled with water and the air expelled. No piping installation will be accepted until the leakage is less than the number of gallons per hour as determined for the formula; L = 0.00014 ND x square root of P, in which L = the allowable leakage in gallons per hour; N is the number of joints in the length of pipeline tested; D is the nominal diameter of the pipe, in inches; and P is the average test pressure during the leakage test, in pounds per square inch gauge. Should any test of pipe laid disclose leakage greater than that specified above, the defective joints shall be located and repaired until the leakage is within the specified allowance without additional cost to the State.

INTERRUPTION OF SERVICE

No valve or other control on an existing system shall be operated for any purpose by the Contractor. If an existing and operating water system needs to be shut off, the Contractor shall inform the Engineer, who will contact the utility and only they will operate the system.

If an existing and operating water system needs to be shut off, no business or residence shall be without water service for any length of time. The Contractor shall inform the Engineer, so that the Engineer may contact the utility two (2) weeks prior to shutting down any water line. The utility will provide a temporary connection to provide water service to the affected customers.

DISINFECTING WATER MAINS

General

1. The interior of all pipe, fittings, and other accessories shall be kept as free as possible from dirt, foreign material and bacteria at all times. During pipe laying operations, when bacterial contamination of interior pipe surfaces is obvious or suspected by the Engineer, the Engineer may order said surfaces top be swabbed with an approved bactericidal solution.

Disinfecting chemicals and additives shall comply with the requirements of Title 22, Division 4, Chapter 18 as Regulated by the State of California, Department of Health Services.

2. Disinfection of water mains shall be insured before permission for their connection to the existing water distribution system will be granted.

3. Bacteriological samples used to disinfect shall be collected under the direction of an inspector approved by the Engineer, or the inspector's agent, by personnel trained in the proper techniques for obtaining bacteriological samples, and shall be analyzed by a laboratory certified by the California Department of Health Services. The Contractor shall be present to insure that all parties agree to the appropriateness of the sample locations.

Sterilization

Before being placed in service and before being connected to the existing water system, all new water lines shall be chlorinated. The chlorine may be applied by any one of the following methods: Liquid chlorine gas-water mixture; direct chlorine gas feed or calcium hypochlorite and water mixture. The chlorinating agent shall be applied at the beginning of a section adjacent to the feeder connection and shall be injected through a corporation stop, hydrant or other connection so located as to ensure complete treatment of the line.

Water from the existing distribution system or from other sources of supply shall be controlled so as to flow slowly into the newly laid pipeline during the application of the chlorine. The rate of chlorine mixture flow shall be in such proportion to the rate of water entering the pipe, that the chlorine dose applied to the water shall produce a residual of at least 25 ppm after 24 hours standing. It is recommended that a dosage of approximately 80 ppm be used to obtain this end result.

During the chlorinating process, all valves, hydrants and services shall be operated while the line is being filled with the chlorinating agent.

After the chlorinating agent has been in the line for a period of 24 hours and the amount of residual chlorine is not less than 25 ppm, the line shall be thoroughly flushed. Flushing shall be done by opening valves at the extremity of the line and at each of its branches; and shall be continued until the replacement water throughout the entire new system is proven, by test, to be comparable in quality to the water served to the public from the existing water supply system, and approved by the public health authority having jurisdiction. Only after such approval has been received shall the new pipeline be connected to the existing system.

The Contractor shall be responsible for obtaining the water samples after sterilization, having them tested in a laboratory approved by the Engineer and causing the results of these tests to be delivered to the Engineer. The cost of sterilization shall be included in the bid price for the pipe

Isolation of New Mains

All new water lines shall be completely isolated from any existing main until they have been tested and disinfected to the satisfaction of the Engineer. New mains may be filled from existing mains only by temporary tap thereto and through a State Department of Health approved backflow prevention unit so as to provide positive backflow prevention. When new main is properly disinfected and the isolation dam is removed from connection flange or other type connection is made, extreme care shall be exercised to prevent the entry of contamination. Connection fittings shall be thoroughly swabbed with an approved bactericide immediately prior to their installation. All connections are to be made at night and must be coordinated with the utility.

Flush the mains thoroughly at the end of the contact period. The orthotolidine test shall show no more chlorine in the water leaving the main than in the water entering the main.

The Engineer will collect a sample for bacteriological examination in a sterile bottle provided by the laboratory. On the label, give date, address, and the estimate number for the job. Where possible the sample should be taken from a service located near the end of the chlorination section, otherwise, it may be taken through the same blowoff used for flushing the heavily chlorinated water out of the main so that the blowoff is sterilized.

If the bacteriological tests are unsatisfactory, the main shall be resterilized using Method No. 2, and the sterilization repeated, if necessary, until satisfactory results are obtained.

METHOD NO. 1 – H.T.H. TABLET METHOD

This method is preferred for short jobs and for small diameter pipe of any kind. It cannot be used where trench water has entered the main. The main cannot be flushed prior to sterilization, so the method requires that the pipe be kept clean during installation.

Using an adhesive approved by the Engineer, fasten the required number of tablets (see Table 1) to the inside

tip of each length of pipe. The tablets may be fastened to the pipe before it is placed in the trench providing the top of the pipe is marked to insure that the tablets are on the top of the pipe after installation.

When using dresser or similar couplings, an additional tablet shall be crushed and placed in the annular space between the coupling and the pipe. Fill the pipe very slowly and proceed as outlined under "General" of these special provisions.

METHOD NO. 2 – H.T.H. SOLUTION WITH HAND PUMP METHOD

This method is general in scope and shall be used when it is necessary to rechlorinate an existing main. When this method is used on a main coupled with dresser or similar couplings, a pinch of H.T.H. powder shall be placed in each coupling as the main is laid.

Equipment required includes an ordinary hand test pump, solution hose, and a 19 L can to contain the chlorine solution.

Make up chlorine solution according to Table II. The quantity required is estimated from Table II. An excess volume should be prepared so as not to empty the container before the job is complete.

Connect pump to main. Use a corporation cock for this purpose and make connection at or ahead of the inlet end of the new line.

After flushing the line thoroughly adjust flow by timing the period required to fill a 19 L can.

Pump chlorine solution into the line at a rate of 3.8 L of solution in three minutes.

Continue pumping until orthotolidine tests on a sample taken from discharge end of line being treated shows a red color, or until the odor of chlorine is noticed.

After finishing application of chlorine, close valve or blow off. Disconnect and flush pump thoroughly with fresh water.

If the above procedure has to be varied because of some unusual condition, it will be necessary only to regulate the pump, control the water flow, or adjust the strength of the chlorine solution to give a dose of at least 50 PPM.

TABLE 1

NUMBER OF TABLETS REQUIRED FOR
MAIN STERILIZATION

Diameter of Pipe

Length of Section	50 mm	100 mm	150 mm	200 mm	250 mm	300 mm
3.9 m or Less	1	1	2	2	3	5
5.4 m	1	1	2	3	5	6
6 m	1	1	2	3	5	7
9 m	1	2	3	5	7	10
12 m	1	2	4	6	9	14

TABLE II

CHLORINE SOLUTION STRENGTH
HAND PUMP METHOD OF MAIN CHLORINATION

Amount of Chemical in 19 L of Solution

Discharge Rate L/min	H.T.H
37.9	0.11 kg
75.7	0.23 kg
132.5	0.34 kg
189.5	0.45 kg
283.9	0.68 kg
378.5	0.91 kg

Choose a suitable discharge rate and determine the time required to apply the chlorine from Table III.

Compute the Liters of solution required by multiplying this time by 1.26.

Use the above table to determine the strength of solution required. Example: If the estimate time from Table III is 35 minutes, 44.2 L will be required; and if the discharge rate is 189.3 L/min, the solution should contain 0.45 kg of H.T.H. in 19 L. Prepare 56.8 L of solution so as to be sure of having an adequate amount.

Operate the hand pump at a rate of 19 L in fifteen minutes, or 3.8 L in three minutes.

TABLE III

Time in Minutes to Apply Chlorine to 30.5 m of Pipe

Discharge Rate L/min	50 mm	100 mm	150 mm	200 mm	250 mm	300 mm
37.9	2	7	15	26	41	59
75.7		3	7	13	20	29
132.5		2	4	8	12	17
189.3			3	5	8	12
283.9			2	4	6	8
378.5				3	4	6

The above table is used to estimate the time required to apply chlorine. For example: 213.4 m of 200 mm main can be filled with chlorine solution in 35 minutes with a discharge rate of 189.3 L/min.

SHORING AND BRACING

Excavation shall be in compliance with the rules, orders and regulations of the State Division of Industrial Safety. If the Contractor desires to deviate from the safety orders, he shall submit data by a registered civil engineer to the State Division of Industrial Safety, justifying the alternate procedures to be used. Failure to comply with any of these rules, orders and regulations shall be sufficient cause for the Engineer to immediately suspend all work. Compensation for losses incurred by the Contractor by such an emergency suspension, shall not be allowed. During backfilling, the bottom of the shoring shall be kept above the level of the backfill at all times. Payment shall be made on the basis of the unit price bid per lineal foot of trench and shall include all necessary labor and materials for shoring, bracing, sloping, dewatering, and other work incidental thereto for trenches covered by the State Division of Industrial Safety.

FILTER FABRIC

Filter fabric will be used to stabilize sections of trench where mud, quicksand or other unstable conditions are found. Filter fabric will conform with the requirements for "Filter Fabric for Edge Drains," in Section 88-1.03 of the Standard Specifications.

When unstable trench conditions are found, the Contractor will call those sections of trench to the attention of the Engineer. Filter fabric will be used when so directed by the Engineer.

Payment will be made based on the linear feet of trench that are lined with fabric. The unit price for this bid item will not be adjusted for quantities required that are greater than or less than 2556 as described in Section 4-1.03, "Changes," of the Standard Specifications.

PIPE BORING AND JACKING

General.

The Contractor shall install the water line under the Highway 101 as indicated on the plans and as herein specified. The Contractor shall do all work necessary to prevent disturbance of the highway roadbed outside the limits of excavation necessary for proper construction.

Approval.

Jacking pit excavation, bracing, dewatering, backfill and equipment shall conform to the provisions in Section 5.02, "Plans and Working Drawings," and Section 19-3, "Structure Excavation and Backfill," of the Standard Specifications.

Jacking Under the Highway

The Contractor shall construct the water line between the limits indicated on the drawings in such a manner that there shall be no disturbance of the highway. Jacking operations shall be confined to the limits indicated on the drawings or as directed.

The jacking pit shall be of adequate size to accommodate the jacking head, frame, jacks, reaction blocks, added section of pipe, and other material and equipment, and to provide sufficient working space. The pit shall be excavated by suitable methods as specified for normal excavations.

The jacking head shall be of suitable bearing pieces to protect the pipe from damage due to the thrust from the jacks, and to transfer that thrust from the jacks to the pipe.

The jacking frame, upon which the pipe being jacked will rest, shall be of railroad rails or other suitable steel or wooden members set to the correct line and grade to act as guides for true alignment of the pipe. The jacks shall be of ample capacity to provide more than the anticipated jacking capacity necessary.

The reaction blocks shall be suitable to provide for resistance to, and distribution of, the reaction from the jacks.

It is extremely important that the jacking apparatus be strongly constructed, and set and maintained in proper relative position and alignment, in order to minimize forces which would tend to bend the pipe, cause it to deflect from true alignment, or displace the reaction blocks.

Excavating and Jacking Operations.

As approved, pipes shall be jointed before being subjected to the jacking process, after they have reached final position, or both, depending on the type of pipe and nature of the joint and jointing material.

In excavating from within the jacking pipe, the Contractor shall use extreme care to avoid the loss of material from outside the limits of the pipe in its final position. Excavation shall be carried ahead of the pipe only to the extent possible without the loss of material.

The Contractor shall do NO blasting in making excavations through jacked pipe.

Once jacking has been started, it shall be continued at frequent intervals until completion of the jacking operations in order to reduce the possibility of a so-called "struck" pipe, even though this may involve working outside the normal working hours, or outside the normal working days, all without any claim for additional compensation on account of such overtime work.

Care shall be taken during excavation and jacking operations to ensure that the jacked pipe remains true to line and grade. Variation from theoretical alignment and grade at the time of completion of jacking shall not exceed one percent of the distance from the jacking point.

Pipe Installation.

The pipe shall be installed in accordance with the plans, details, these specifications, and the pipe manufacturer's recommendations. The pipe shall be installed using casing insulators. Particular attention must be taken to follow the manufacturer's recommendations for blocking and strapping at the pipe joints. After the pipe is installed, the casing shall be filled with sand. Care shall be taken when filling the casing to prevent burning, gouging, or otherwise damaging the carrier pipe. The ends of the casing will be closed with casing seals secured with stainless steel straps.

Casing.

The casing pipe shall be steel pipe as specified by AWWA C200. Single weld butt joints will be acceptable and field welding shall conform with AWWA C206. The pipe shall have a minimum thickness of "i" and the inside diameter shall be at least 50 mm greater than the largest outside diameter of the carrier pipe, or as shown on the drawings. The casing shall be so installed as to prevent formation of waterway under the highway. It shall have been bearing throughout its length and slope to one end as shown on the drawings. The ends of the casing shall be sealed to protect against the entrance of foreign material which might prevent ready removal of the carrier pipe.

The casing pipe shall be lined and coated with a coal tar protective coating as specified by AWWA C203.

MEASUREMENT AND PAYMENT

Jacked 610 mm steel pipe with 305 mm PVC pipe shall be paid for by the meter and will be determined from the slope length designated by the Engineer. Pipe and casing placed in excess of the lengths designated will not be paid for.

The contract prices paid per meter for jacked 610 mm steel pipe with 305 mm PVC pipe shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in boring and jacking the casing and laying the water main, complete in place, including excavation, backfill, air relief valve, gate valve, and disposal of surplus material, removal of thrust blocks and all other appurtenances, wrapping, fitting, tees, testing, disinfecting, and flushing, and all other appurtenances, assemblies, blow-off valve, concrete thrust blocks, installing valve frames and covers, service saddles, tubing, fittings, as shown on the plans, as specified in the Standard Specifications and these special provisions, as directed by the Engineer.

PVC water pipes will be paid for at the contract price per meter for the various size of water pipe as designated in the Engineer’s estimate. PVC water pipe to be paid for by the meter will be determined from the slope length designated by the Engineer. Pipe placed in excess of the lengths designated will not be paid for.

The contract prices paid per meter for 300 mm PVC water pipe shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in laying the water main, complete in place, including structure excavation, structure backfill, air relief valve, gate valve, and disposal of surplus material, removal of thrust blocks and all other appurtenances, wrapping, fitting, tees, testing, disinfecting, and flushing, and all other appurtenances, assemblies, blow-off valve, concrete thrust blocks, installing valve frames and covers, service saddles, tubing,

fittings, as shown on the plans, as specified in the Standard Specifications and these special provisions, as directed by the Engineer.

SECTION 11. MODIFIED STANDARD SPECIFICATION SECTIONS

SECTION 11-1. QUALITY CONTROL / QUALITY ASSURANCE

Asphalt concrete shall conform to the provisions in this Section 11-1, "Quality Control / Quality Assurance," and the section entitled "Asphalt Concrete" in Section 10-1, "General," of these special provisions. Section 39, "Asphalt Concrete," of the Standard Specifications shall not apply to Type A and Type B asphalt concrete.

SECTION 39: ASPHALT CONCRETE

39-1 GENERAL

39-1.01 DESCRIPTION

This work shall consist of furnishing and mixing aggregate and asphalt binder at a central mixing plant, transporting, spreading and compacting the mixture, and furnishing and placing pavement reinforcing fabric, in conformance with this Section 11-1, "Quality Control / Quality Assurance," and with "Asphalt Concrete" in Section 10-1, "General," of these special provisions.

The Contractor shall be responsible for controlling the quality of the asphalt concrete product entering the work, including aggregate, asphalt binder, additives, and asphalt concrete mixture; for controlling the quality of the work performed, including mix design, and mixing, transporting, spreading, and compacting the asphalt concrete; for controlling the quality of the finished roadway surface; and for developing, implementing, and maintaining a quality control program. The Contractor shall be responsible for the inspection, sampling, and testing required to control the quality of the asphalt concrete and the work performed.

The inspection, sampling, and testing required to control the quality of the workmanship and the asphalt concrete shall conform to this Section 11-1. Sampling shall be in conformance with the requirements of this Section 11-1 and with California Test 125. Testing shall be performed using California Tests unless otherwise directed by the Engineer or this Section 11-1.

Asphalt concrete is designated as Type A or Type B. The type of asphalt concrete will be shown on the plans or specified in "Asphalt Concrete" in Section 10-1, "General," of these special provisions.

39-2 MATERIALS

39-2.01 ASPHALTS

Asphalt binder to be mixed with aggregate shall be steam-refined paving asphalt conforming to the provisions in Section 92, "Asphalts," of the Standard Specifications. The grade of asphalt binder shall be designated in "Asphalt Concrete" in Section 10-1, "General," of these special provisions.

Liquid asphalt for prime coat shall conform to the provisions in Section 93, "Liquid Asphalts," of the Standard Specifications and shall be the grade designated by the contract item or conform to the provisions in "Asphalt Concrete," in Section 10-1, "General," of these special provisions.

Asphalt emulsion for paint binder (tack coat) shall conform to the provisions in Section 94, "Asphaltic Emulsions," of the Standard Specifications for the rapid-setting or slow-setting type and grade approved by the Engineer.

Paving asphalt to be used as a binder for pavement reinforcing fabric shall be a steam-refined paving asphalt conforming to the provisions in Section 92, "Asphalts," of the Standard Specifications, and shall be Grade PG 70-10, unless otherwise ordered by the Engineer or designated in "Asphalt Concrete" in Section 10-1, "General," of these special provisions.

39-2.02 AGGREGATE

Aggregate and combined aggregate shall conform to the quality and gradation provisions in this Section 11-1, "Quality Control / Quality Assurance," for the asphalt concrete types and sizes conforming to the provisions in "Asphalt Concrete" in Section 10-1, "General," of these special provisions.

Aggregates shall be clean and free from decomposed or organic materials and other deleterious substances. Coarse aggregate is material retained on the 4.75-mm sieve, fine aggregate is material passing the 4.75-mm sieve, and supplemental fine aggregate is added fine material passing the 600-µm sieve, including, but not limited to, cement and stored fines from dust collectors.

The target value for the percent passing each designated sieve size for the aggregate blend used in the proposed asphalt concrete mix design shall fall within the "Target Value Limits" of the following table:

Table 39-1 - AGGREGATE GRADATION
Type A and Type B Asphalt Concrete
Percentage Passing

19-mm Maximum, Coarse		19-mm Maximum, Medium	
Sieve Sizes	Target Value Limits	Sieve Sizes	Target Value Limits
25-mm	100	25-mm	100
19-mm	90-100	19-mm	90-100
9.5-mm	60-75	9.5-mm	65-80
4.75-mm	45-50	4.75-mm	49-54
2.36-mm	32-36	2.36-mm	36-40
600-µm	15-18	600-µm	18-21
75-µm	3-7	75-µm	3-8

12.5-mm Maximum, Coarse		12.5-mm Maximum, Medium	
Sieve Sizes	Target Value Limits	Sieve Sizes	Target Value Limits
19-mm	100	19-mm	100
12.5-mm	95-100	12.5-mm	95-100
9.5-mm	75-90	9.5-mm	80-95
4.75-mm	55-61	4.75-mm	59-66
2.36-mm	40-45	2.36-mm	43-49
600-µm	20-25	600-µm	22-27
75-µm	3-7	75-µm	3-8

During asphalt concrete production, aggregate gradation shall be within the limits specified in Table 39-9, "Minimum Quality Control Requirements," of this Section 11-1. Conformance with the grading requirements shall be determined by California Test 202, modified by California Test 105, when there is a difference in specific gravity of 0.2 or more between the coarse and fine portions of the aggregate or between the blends of the different aggregates. The percent passing the 75-µm sieve shall be reported to the first decimal place (tenths).

The combined aggregate shall conform to the following quality requirements prior to the addition of the asphalt binder:

Table 39-2 - AGGREGATE QUALITY REQUIREMENTS

Quality	California Test	Asphalt Concrete	
		Type A	Type B
Percent of Crushed Particles	205		
Coarse Aggregate (Min.)		90%	25%
Fine Aggregate (Passing 4.75-mm, Retained on 2.36-mm) (Min.)		70%	20%
Los Angeles Rattler	211		
Loss at 100 Rev. (Max.)		12%	
Loss at 500 Rev. (Max.)		45%	50%
Sand Equivalent (Min.)[1]	217	47	42
Kc Factor (Max.)	303	1.7	1.7
Kf Factor (Max.)	303	1.7	1.7

Note:

1. Reported value shall be the average of 3 tests split from a single sample.

39-2.03 ASPHALT CONCRETE MIXTURE

The asphalt concrete mixture, composed of the proposed aggregate blend and the proposed asphalt binder content as determined by California Test 367, shall conform to the following requirements:

Table 39-3 - ASPHALT CONCRETE MIXTURE REQUIREMENTS

Design Parameters	California Test	Asphalt Concrete Type and Location			
		Coast and Valley		Desert (per Engineer)	
		Type A	Type B	Type A	Type B
Hveem Stabilometer Value (Min.)	367[1, 2]	37	35	37	35
Percent air voids (Mix Design)	367[1]	3-5[3]	3-5[3]	4-6[4]	4-6[4]
(Start-Up Production Evaluation)		Design Value ±1.0			
Swell [5] (mm) (Max)	305	0.76	0.76	0.76	0.76

Notes:

1. Reported value shall be the average of 3 tests from a single split sample.
2. If the range of stability for the 3 briquettes is more than 12 points, the briquettes shall be discarded and new samples shall be fabricated.
3. Modify California Test 367, paragraph C5, to "most nearly 4%."
4. Modify California Test 367, paragraph C5, to "most nearly 5%."
5. Measured at Mix Design only.

During production and placement, the asphalt concrete mixture shall conform to the requirements of Table 39-4, "Minimum Process Control Requirements," and Table 39-9, "Minimum Quality Control Requirements," of this Section 11-1. Changes in cold feed or hot bin proportions to conform to the aggregate grading requirements shall not be considered changes in the mix design.

Whenever asphalt concrete production has been suspended for longer than 30 days, the Contractor, on the first day of resumption of production, shall sample and test the asphalt concrete to demonstrate conformance with the requirements of Table 39-3, "Asphalt Concrete Mixture Requirements," Table 39-4, "Minimum Process Control Requirements," and Table 39-9, "Minimum Quality Control Requirements," of this Section 11-1.

The target value for asphalt content may be changed by as much as ± 0.2 percent during the production start-up evaluation specified in Section 39-10.02A, "Production Start-Up Evaluation," of this Section 11-1 or after production start-up evaluation and before the first day of regular production with the Engineer's approval. The Contractor shall demonstrate that asphalt concrete that has been produced through the plant using the modified target value for asphalt content is in conformance with this Section 11-1 by submitting test results for samples obtained from the first 500 tonnes of production. Stability and percent air voids shall be determined using 3 briquettes constructed from a single sample taken from 4 locations across the mat in conformance with the requirements of California Test 125.

Changes from one mix design to another shall not be made during the progress of the work, unless approved by the Engineer. Changes in asphalt content, other than those allowed during the start-up evaluation process, or in aggregate grading target values shall be considered to be a change in the asphalt concrete mixture and shall require a new mix design proposal. Changes in the asphalt content or aggregate grading target values approved by the Engineer will not be applied retroactively for acceptance or payment.

39-2.04 PAVEMENT REINFORCING FABRIC

Pavement reinforcing fabric shall conform to the provisions in Section 88, "Engineering Fabrics," of the Standard Specifications and these special provisions.

39-3 ASPHALT CONCRETE MIX DESIGN PROPOSAL AND REVIEW

39-3.01 CONTRACTOR MIX DESIGN PROPOSAL

The Contractor shall submit for the Engineer's review a proposed asphalt concrete mix design for each asphalt concrete mixture to be used at least 14 days prior to production of that asphalt concrete mixture. The asphalt concrete mix design shall be prepared by a laboratory (or laboratories) whose proficiency has been reviewed and qualified in conformance with the Department's Quality Assurance Program. Aggregate quality and asphalt concrete mix design test results shall be no more than one year old when production of the asphalt concrete mixture starts. For projects of more than one year's duration, asphalt concrete may be produced using the asphalt concrete mix design that was reviewed and accepted at the start of the project provided the asphalt concrete mixture continues to conform to the provisions of this Section 11-1, "Quality Control / Quality Assurance."

The Contractor shall submit a mix design letter that indicates the target values proposed for gradation, asphalt content, and percent air voids. This submittal shall include test results for aggregate and asphalt mixture quality; plots of the combined gradings showing the production tolerances; plots of unit weight, stability, and percent air voids versus asphalt content for the asphalt contents considered in the design process. In addition, this submittal shall include test results for

stability, percent air voids, and swell for 3 briquettes constructed using the submitted aggregate and asphalt blended at the proposed target values for each asphalt concrete mixture to be used.

The Contractor shall submit the following for each asphalt concrete mixture proposed:

A. Aggregate and mineral filler:

1. Target values for percent passing each sieve size for the aggregate blend;
2. Results of tests for aggregate quality requirements;
3. Source of each aggregate to be used including producer, location, and California Mine Identification number;
4. Percentage of each aggregate stockpile, cold feed or hot bin to be used;
5. Gradation of each aggregate stockpile, cold feed or hot bin to be used; and
6. Samples that are representative of the aggregate to be used. Minimum sample sizes shall be as follows:

60 kg of each coarse aggregate;
40 kg of each fine aggregate; and
5 kg of each supplemental fine aggregate.

B. Asphalt binder:

1. Asphalt binder source and target value;
2. Four one-liter samples of the asphalt binder;
3. Results of the asphalt binder quality tests conforming to the provisions in Section 92, "Asphalts," of the Standard Specifications; and
4. Material Safety Data Sheets.

C. Antistrip additives**,** when applicable:

1. A 5-kg sample of the dry additive or a one-liter sample of the liquid antistrip additive, including name of product, manufacturer, manufacturer's designation and proposed rate, location, and method of addition; and
2. Material Safety Data Sheets.

The proposed asphalt concrete mix design submittal will be considered complete only when the mix design letter, test results, plots, and samples have been received by the Engineer.

39-3.02 ENGINEER REVIEW OF ASPHALT CONCRETE MIX DESIGN

The Engineer will review the proposed aggregate and asphalt concrete mixture for conformance with this Section 11-1, "Quality Control / Quality Assurance." The proposed asphalt concrete mixture will be reviewed at the proposed target values for aggregate grading and asphalt content. The Engineer will have 14 days to review each submittal of a proposed mix design. Production of asphalt concrete shall not begin until written notification has been received from the Engineer that the aggregates and proposed mix design meet the quality requirements of this Section 11-1.

The Engineer will reject a proposed asphalt concrete mixture that, during review, fails to meet the quality requirements of Table 39-2, "Aggregate Quality Requirements," and Table 39-3, "Asphalt Concrete Mixture Requirements," of this Section 11-1. The Contractor shall resubmit a mix design letter providing new test results, plots, and material samples.

Disagreements in mix design review shall be resolved in conformance with Section 39-6, "Dispute Resolution," of this Section 11-1. The Contractor shall use a mix design on the project only after the Engineer concurs that the aggregate and asphalt concrete represented by the proposed mix design conforms to the provisions of this Section 11-1.

The Engineer will review one proposed asphalt concrete mix design for each asphalt concrete type and aggregate size from each plant proposed for use on this project at the State's expense. Costs for additional reviews due to failure to conform to the quality requirements of this Section 11-1 and for reviewing other proposed asphalt concrete mix designs will be deducted from moneys due or to become due the Contractor. The cost for each review will be $1,500. Costs for reviewing changes in a mix design that are initiated by the Engineer will be waived. Contractor's retesting due to errors in the Engineer's testing will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications. Costs for reviewing mix designs not used in this project will be deducted from moneys due or to become due the Contractor.

39-4 CONTRACTOR QUALITY CONTROL

39-4.01 GENERAL

The Contractor shall be responsible for the quality of the asphalt concrete entering into the work and of the work performed. In addition, the Contractor shall be responsible for the quality of asphalt concrete or ingredients procured from

subcontractors or vendors. A quality control system shall be established, maintained, and modified, if needed, that will provide assurance that materials and completed work conform to contract requirements.

At least 14 days prior to the start of production of asphalt concrete, the Contractor shall submit a written Quality Control Plan. At the request of the Engineer or the Contractor, the Contractor shall discuss the Quality Control Plan with the Engineer.

39-4.02 QUALITY CONTROL PLAN

The Quality Control Plan shall describe the organization and procedures that will be used to administer the quality control system including the procedures used to control the production process, the procedures used to determine when changes to the production process are needed, and the procedures proposed to be used to implement the required changes. The Quality Control Plan shall meet the minimum standards set forth in the Department's "Manual for Quality Control and Quality Assurance for Asphalt Concrete," available as specified in "Asphalt Concrete" in Section 10-1, "General," of these special provisions.

Asphalt concrete production and placement shall not begin until the Quality Control Plan has been approved by the Engineer. Approval of the Quality Control Plan does not imply a warranty by the Engineer that adherence to the plan will result in production of asphalt concrete that complies with this Section 11-1. It shall remain the responsibility of the Contractor to demonstrate such compliance.

The Quality Control Plan shall include the name and qualifications of a Quality Control Manager. The Quality Control Manager shall be responsible for the administration of the Quality Control Plan, including compliance with the plan and plan modifications. The Quality Control Manager shall be responsible to the Contractor, shall have the authority to make decisions concerning quality of the work or product, and shall be available to the project within less than 3 hours during paving. Except in cases of emergency and with the approval of the Engineer, the Quality Control Manager cannot be a foreman, member of the production or paving crew, an inspector or tester on this project during pavement production and placement.

The Quality Control Plan shall identify personnel, equipment and documentation required for a complete inspection, sampling and testing program. The Quality Control Plan shall include, but not be limited to, a list of inspectors, samplers and testers, their duties, their certifications if required, and their experience if no certification is required. It shall also list the name and location of laboratories that shall be providing information to the Engineer, the testers who conducted the tests and their certifications and the name of the Laboratory Quality Control Manager responsible for oversight of the testing program. It shall also show examples of the test result forms (if different from those in the Department's "Manual for Quality Control and Quality Assurance for Asphalt Concrete"), the roadway and plant inspection forms, the Quality Control Manager's daily summary form, and the compliance charts. It shall include the method by which random sampling shall be determined, a list of the testing and sampling equipment to be used and the current calibration dates and calibration charts, and copies of nuclear gauge licenses.

The Quality Control Plan shall include the name and certification of a testing consultant to be an Independent Third Party in dispute resolution. By mutual agreement during dispute resolution, the Independent Third Party may be a District Independent Assurance Sampler and Tester, the testing consultant or both. The proficiency of the testing consultant shall be reviewed and certified in conformance with the requirements of the Department's Quality Assurance Program before the test consultant participates in dispute resolution. Attention is directed to Section 39-6, "Dispute Resolution," of this Section 11-1.

The Quality Control Plan may be modified as work progresses. A supplement shall be submitted whenever there are changes to quality control procedures or personnel. Asphalt concrete production and placement shall not resume or continue until revisions to the Quality Control Plan or quality control personnel have been approved by the Engineer.

39-4.03 CONTRACTOR QUALITY CONTROL INSPECTION, SAMPLING, AND TESTING

The Contractor shall perform process and quality control sampling and testing, provide inspection, and exercise management control to ensure that asphalt concrete production and placement conforms to the provisions of this Section 11-1. Staffing for process and quality control shall meet the minimum requirements outlined in the Department's "Manual for Quality Control and Quality Assurance for Asphalt Concrete."

Process and quality control, sampling, testing, and inspection shall be provided during the asphalt concrete work. Sampling, testing, and inspection shall be performed at a rate sufficient to ensure that asphalt concrete conforms to the provisions of this Section 11-1.

A roadway inspector shall be provided while asphalt concrete paving operations are in progress. The roadway inspector shall ensure that asphalt concrete placement conforms to industry standards and to the spreading, compacting, and finishing requirements of this Section 11-1, "Quality Control / Quality Assurance." Plant inspection shall be performed as necessary to maintain control of the asphalt concrete production.

Minimum sampling and testing requirements for process and quality control are specified in Table 39-4, "Minimum Process Control Requirements," and Table 39-9, "Minimum Quality Control Requirements," of this Section 11-1. Sampling shall be statistically based and random.

During production start-up evaluation, the Contractor shall sample and test in conformance with the provisions in Section 39-10.02A, "Production Start-Up Evaluation," of this Section 11-1.

A testing laboratory and personnel shall be provided for the performance of process and quality control testing. The Engineer shall have unrestricted access to mix design, sampling, and testing.

The proficiency of testing laboratories and sampling and testing personnel shall be reviewed, qualified, and certified by the Department's Independent Assurance Sampler and Tester before providing services to the project. Inspectors shall meet the standards set forth in the Department's "Manual for Quality Control and Quality Assurance for Asphalt Concrete."

39-4.04 CONTRACTOR PROCESS CONTROL

Process control sampling and testing shall be performed and control shall be exercised to ensure that asphalt concrete production conforms with this Section 11-1.

Minimum process control sampling and testing shall be performed in compliance with the following:

Table 39-4 - MINIMUM PROCESS CONTROL REQUIREMENTS

Quality Characteristic	Action Limit	California Test	Minimum Sampling and Testing Frequency	Point of Sampling ‡	Reporting Time Allowance
Sand Equivalent (Min)	47 (Type A) 42 (Type B)	217	One sample per 2500 tonnes	Batch plant - from hot bins. Drum plant - from cold feed.	24 hours
		(Reported value shall be the average of 3)[1]	Not less than one sample per 2 days		
Stability	37 (Type A) 35 (Type B)	366[2]	See Note 4	Mat behind paver	48 hours
		(Reported value shall be the average of 3)[1,3,5]	Not less than one sample per 5 days		

Notes:

‡ In conformance with the requirements of California Test 125.

1. Samples used for the 3 tests to be averaged shall be from a single split sample.
2. Reheat for sample preparation shall be 2 hours maximum.
   Do not place sample or briquette in oven for 15-hour cure.
3. Briquettes shall be fabricated from a single, combined sample obtained from at least 4 locations across the mat behind the paver in conformance with the requirements of California Test 125.
   If the range of stability for the three briquettes is more than 12 points, the samples shall be discarded and new samples shall be obtained before the end of the following shift of paving and tested in conformance with the requirements of Table 39-3, "Asphalt Concrete Mixture Requirements."
4. Asphalt concrete will be sampled and tested each of the first 5 days of production and may be decreased to one for each 5 days thereafter unless stability falls below the action limit.
   When stability falls below the action limit, sampling will be increased to one sample for each of the first 5 days of production and may be decreased to one for each 5 days thereafter.
   The sequence of the first 5 test results shall not be broken by more than 7 days of suspended operations.
5. During production start-up evaluation, a correlation factor for cured vs. uncured specimens shall be established in conformance with the requirements of Section 39-10.02A, "Production Start-Up Evaluation."

The process control test results shall be plotted on specification compliance charts indicating the action limits for the quality characteristic. When one test result falls below the action limit for an individual measurement, the Contractor shall notify the Engineer, take corrective action, and sample and test within the next 500 tonnes of production. When 2 consecutive test results for an individual characteristic fall below the action limit, the asphalt concrete represented by the 2 tests shall be considered not in compliance. When 2 consecutive test results for an individual characteristic fall below the action limit, the Contractor shall suspend production, notify the Engineer, and take corrective action. With the approval of the Engineer, up to 1000 tonnes of asphalt concrete may be placed to demonstrate that the asphalt concrete is once again in compliance with the provisions of this Section 11-1. Production shall begin only after the Engineer has received test results confirming compliance.

Asphalt concrete that has 2 consecutive stability test results less than or equal to 26 for Type A asphalt concrete or less than or equal to 24 for Type B asphalt concrete shall be removed at the Contractor's expense. Asphalt concrete placed to demonstrate compliance that does not meet the provisions of this Section 11-1 shall be removed at the Contractor's expense.

39-4.05 CONTRACTOR QUALITY CONTROL

Quality control, sampling, testing, and inspection shall be provided during asphalt concrete work. Sampling, testing, and inspection shall be performed at a rate sufficient to ensure that the asphalt concrete product conforms to the requirements in this Section 11-1. Sampling for testing to be reported to the Engineer shall be performed at the minimum frequency specified in Table 39-9, "Minimum Quality Control Requirements," of this Section 11-1, "Quality Control / Quality Assurance."

Quality control samples of aggregates and asphalt concrete mixture shall be obtained and split. One split portion of each sample shall be used for quality control testing and the other portion shall be reserved for possible retest during dispute resolution, in conformance with Section 39-6, "Dispute Resolution," of this Section 11-1. Quality control samples shall be stored in a location listed in the Quality Control Plan until disposal has been approved by the Engineer.

The Contractor shall obtain a one-liter sample of the asphalt binder in conformance with Section 39-7.01C, "Asphalt Binder Storage," of this Section 11-1 for each day of asphalt concrete production. The sample containers shall be labeled as shown in the "Manual for Quality Control and Quality Assurance for Asphalt Concrete" and shall be sent by the Contractor to the Transportation Laboratory on a weekly basis, except for modified asphalts that shall be shipped daily. A copy of the transmittal form shall be attached to the daily report of inspection.

When test results for a single quality characteristic deviate beyond the limits specified in Table 39-9, "Minimum Quality Control Requirements," of this Section 11-1 the Contractor shall take corrective action and shall bring the asphalt concrete within the specification limits. The corrective action taken shall be documented in the records of inspection in conformance with Section 39-4.06B, "Records of Inspection and Testing," of this Section 11-1. When a single quality characteristic deviates 3 consecutive times beyond the limits specified in Table 39-9, "Minimum Quality Control Test Requirements," of this Section 11-1, the Contractor shall suspend production, shall notify the Engineer, and shall take corrective action. With the approval of the Engineer, up to 1000 tonnes of asphalt concrete may be placed and the requirements of Section 39-10.02A, "Production Start-Up Evaluation," of this Section 11-1 shall be used to demonstrate that the asphalt concrete is once again in compliance with this Section 11-1. Production of asphalt concrete shall start only after the Engineer has received test results confirming compliance. When an individual quality characteristic deviates 3 consecutive times beyond the specification limits and production of asphalt concrete has been suspended, the lot shall be terminated.

If an ignition oven is used for asphalt content in conformance with the requirements of California Test 382, gradations of the remaining aggregates shall be provided for each 5000 tonnes of production. Testing of the aggregates shall be in conformance with the requirements of California Test 202, Sections F and G, "Sieve Analysis of Fine and Coarse Aggregates." Test results from these gradings shall be provided prior to completion of the project. Gradings from the aggregates recovered from the ignition oven will not be used in the statistical analysis for quality or for pay. Payment for these gradings will be made as extra work as provided in Section 4-1.03D of the Standard Specifications at the rate of $150 per test result for the cost of the additional testing.

39-4.06 CHARTS AND RECORDS

The Contractor shall record sampling and testing results for both process control and for quality control on forms as provided in the Department's "Manual for Quality Control and Quality Assurance for Asphalt Concrete" or on forms approved by the Engineer. Complete testing records shall be maintained and posted in the Contractor's laboratory. Models of forms that are different from those in the Department's "Manual for Quality Control and Quality Assurance for Asphalt Concrete," locations of postings, and times and means of submissions shall be provided in the Quality Control Plan.

For every 5000 tonnes of asphalt concrete produced, the Contractor shall provide an electronic copy of the process and quality control test results using the Department's statistical evaluation program "ACPay" available as specified in "Asphalt Concrete" in Section 10-1, "General," of these special provisions.

Compliance charts and inspection and testing records, except stability test results used for process control, shall be submitted within 24 hours after completion of that shift of asphalt concrete production. If the record is incomplete or in error, a copy of the record will be returned with the deficiencies noted by the Engineer. The Contractor shall correct deficiencies and return the updated record by the start of the following working day. When errors or omissions in the inspection or testing records repeatedly occur, asphalt concrete production and placement shall be suspended and the procedures by which the records are produced shall be corrected before production and placement will be restarted.

39-4.06A Compliance Charts

The Contractor shall develop and maintain time linear specification compliance charts. The compliance charts shall identify the project, test number, test parameter, applicable upper and lower specification limits, and test results.

Compliance charts shall be kept current and shall be posted at a location designated in the Quality Control Plan. Compliance charts shall be updated each day of asphalt concrete production, and up-to-date copies shall be included in the submittals to the Engineer of each day's test results.

39-4.06B Records of Inspection and Testing

For each day of asphalt concrete production, the Contractor shall prepare an "Asphalt Concrete Construction Daily Record of Inspection," on forms provided in the Department's "Manual for Quality Control and Quality Assurance for Asphalt Concrete." A form shall be submitted for inspection at the plant and at the roadway.

For each day of asphalt concrete production, the Contractor shall prepare an "Asphalt Concrete Inspection and Testing Summary" on a form provided in the Department's "Manual for Quality Control and Quality Assurance for Asphalt Concrete." Plant and roadway inspection forms documenting the day's plant production and roadway placement shall be completed. Deviations from the specifications or the Contractor's regular practice shall be listed and explained. Individual inspection forms shall be signed by the inspector and initialed by the Quality Control Manager and attached to the summary at submittal. Test forms documenting test results shall be complete, signed by the tester, checked and initialed by the Quality Control Manager, and attached to the summary at submittal. Sampling and testing data and calculations that support a test result shall be made available to the Engineer within 48 hours when requested.

The "Asphalt Concrete Inspection and Testing Summary" shall include the following certification signed by the Quality Control Manager:

> It is hereby certified that the information contained in this record is accurate, and that information, tests or calculations documented herein comply with the requirements of the contract and the standards set forth in the testing procedures. Exceptions to this certification are documented as a part of this record.

39-5 ENGINEER QUALITY ASSURANCE

39-5.01 GENERAL

The Engineer will assure conformance to contract specifications by review of the Contractor's mix design proposal, by inspection of the Contractor's procedures, by oversight of the Contractor's quality control inspection and records, by splitting and testing samples with the Contractor during evaluation of the plant production start-up and the nuclear density test strip, and by independent verification sampling and testing of the asphalt concrete and aggregates during asphalt concrete production.

The Contractor may witness assurance sampling and testing. However, the Engineer will not be required to notify the Contractor of anticipated sampling schedules or locations and will not delay sampling or testing if the Contractor is unable to attend. The Contractor shall not use samples taken for assurance testing for testing and submittal as a quality control test result.

The Engineer will provide the Contractor with copies of the assurance test results not more than 2 working days after receipt of the results. Sampling and testing data and calculations that support a test result shall be made available to the Contractor within 48 hours when requested.

The Engineer may test the asphalt, aggregates or asphalt concrete mixture to determine conformance with this Section 11-1, "Quality Control / Quality Assurance," whenever an asphalt concrete mixture or ingredient appears defective or inconsistent or whenever a test result indicates a change in the characteristics of the asphalt concrete mixture or an ingredient. Asphalt, aggregates or asphalt concrete that does not conform with this Section 11-1 will be rejected in conformance with Section 39-11, "Acceptance of Work," of this Section 11-1.

The Contractor, when directed by the Engineer, shall obtain representative samples of the asphalt concrete mixture or ingredients that appear defective or inconsistent. The samples shall be split into 4 portions. The Contractor shall retain 1 portion for testing if the Contractor chooses and 3 portions shall be delivered to the Engineer. The asphalt concrete or ingredient need not be sampled if the Contractor elects to remove and replace the asphalt concrete, at the Contractor's expense, or if the Contractor uses a method of correcting the situation that has been approved by the Engineer. Test results from these additional samples shall not be used as a basis for a calculated pay factor.

39-5.02 SAMPLING AND TESTING FOR VERIFICATION

Independent of the Contractor's quality control testing, the Engineer will obtain random samples of the aggregate and asphalt concrete mixture and test for in-place density.

Samples of aggregates and asphalt concrete will be obtained during asphalt concrete production and placement, and will be split into at least 4 portions. One of the split portions will be tested by the Engineer and used to verify quality control test results, one portion will be provided to the Contractor, and 2 portions will be reserved and stored for testing in conformance with the provisions in Section 39-6, "Dispute Resolution," of this Section 11-1. When verifying the relative compaction, the Engineer will obtain a sample of a sample of asphalt concrete from the mat behind the paver, will split the sample and apportion the sample as described above, and will test the sample for test maximum density.

The Engineer will test for material quality characteristics specified in Table 39-9, "Minimum Quality Control Requirements," of this Section 11-1. Verification tests will be at a frequency of not less than 10 percent of the minimum quality control sampling and testing frequency and will be performed in conformance with the test methods specified in Table 39-9, "Minimum Quality Control Requirements," of this Section 11-1. Verification tests will be performed using the same test methods used for quality control testing.

During the Engineer's verification of the relative compaction, the Engineer will determine the location of 500 tonnes of asphalt concrete to be tested using a random number, will obtain an asphalt concrete sample from within this location for determination of the test maximum density, and will determine the relative compaction of the in-place asphalt concrete as specified in California Test 375. The Contractor shall obtain one of the split samples of asphalt concrete for determination of test maximum density and shall determine the relative compaction of the 500 tonnes of asphalt tested by the Engineer using the same testing sites determined by the Engineer. The results of this common testing will be compared to the allowable testing difference defined in Table 39-6, "Allowable Testing Differences," of this Section 11-1. If the test maximum density or the relative compaction does not comply with the allowable testing difference, then the Engineer and Contractor will use the first 500 tonnes of the next day's production to re-correlate the nuclear gauges used in testing as defined by California Test 375.

During production start-up evaluation, the Engineer will witness the sampling of asphalt concrete and aggregates and will perform tests on the materials in conformance with Section 39-10.02A, "Production Start-Up Evaluation," of this Section 11-1.

39-5.03 VERIFICATION

The Engineer will determine the acceptability of the quality control test results by using the *t*-test for sample means to test whether or not the means of the quality control test results and verification test results are within an allowable testing difference. Quality control test results and verification test results for each indexed quality characteristic will be used in the verification process.

The *t*-value of the group of test data to be verified is computed as follows:

$$t = \frac{\left|\overline{X_c} - \overline{X_v}\right|}{S_p\sqrt{\frac{1}{n_c} + \frac{1}{n_v}}} \qquad \text{and} \qquad S_p^2 = \frac{S_c^2(n_c - 1) + S_v^2(n_v - 1)}{n_c + n_v - 2}$$

where:

n_c	=	Number of Contractor's quality control tests (minimum of 2 required)
n_v	=	Number of Verification tests (minimum of 1 required)
$\overline{X}_c$	=	Mean of the Contractor's quality control tests
$\overline{X}_v$	=	Mean of the Verification tests
S_p	=	Pooled standard deviation (When $n_v = 1$, $S_p = S_c$)
S_c	=	Standard deviation of the Contractor's quality control tests
S_v	=	Standard deviation of the Verification tests (when $n_v > 1$)

The comparison of quality control test results and verification test results will be considered at a level of significance, $\alpha = 0.01$. Compute *t* using the equation above and compare to the critical *t*-value, t_{crit} , from the following table:

Table 39-5 - CRITICAL t-VALUE FOR VERIFICATION OF QUALITY CONTROL TESTING

degrees of freedom (nc+nv-2)	t_{crit} (for $\alpha = 0.01$)	degrees of freedom (nc+nv-2)	t_{crit} (for $\alpha = 0.01$)
1	63.657	18	2.878
2	9.925	19	2.861
3	5.841	20	2.845
4	4.604	21	2.831
5	4.032	22	2.819
6	3.707	23	2.807
7	3.499	24	2.797
8	3.355	25	2.787
9	3.250	26	2.779
10	3.169	27	2.771
11	3.106	28	2.763
12	3.055	29	2.756
13	3.012	30	2.750
14	2.977	40	2.704
15	2.947	60	2.660
16	2.921	120	2.617
17	2.898	∞	2.576

Quality control test results are verified if the *t*-value computed is less than or equal to t_{crit} ($t \leq t_{crit}t$), and the difference between the means of the quality control test results and verification test results are within an allowable testing difference. Quality control test results are not verified if the *t*-value computed is greater than *tcrit* ($t > t_{crit}$), and the difference between the means exceeds the allowable testing difference. The allowable testing difference shall be as follows:

Table 39-6 - ALLOWABLE TESTING DIFFERENCE

Quality	California Test	Allowable Testing Difference
Sand Equivalent (min.)	217	8
Hveem Stabilometer Value (min.)	366	10
Percent Air Voids	367	1.5
Asphalt Content	379 or 382	0.3%
Gradation	202	
19 or 12.5 mm		2
9.5 mm		4
4.75 mm		3
2.36 mm		2
600 µm		2
75 µm		1.0
Relative Compaction	375	0.8%
Test Maximum Density		0.03 g/cc

If quality control test results are not verified, the Contractor will be notified of the difference. The Engineer will sample asphalt concrete production at a more frequent interval. Resolution of the problem shall be in conformance with the provisions in Section 39-6, "Dispute Resolution," of this Section 11-1.

39-6 DISPUTE RESOLUTION

39-6.01 GENERAL

The Contractor and the Engineer shall work together to avoid potential conflicts and to resolve differences that may arise from a disagreement regarding test result comparisons.

Should the results of the testing fail to meet the criteria of the stage at which the disagreement arose, production shall be suspended. Production shall not start or resume nor shall asphalt concrete be accepted until the differences have been resolved and the Engineer is assured that the asphalt concrete conforms to this Section 11-1, "Quality Control / Quality Assurance."

When the Engineer and the Contractor, together or separately, are unable to determine the source of error, an Independent Third Party shall act as witness and referee.

In disagreements, if the Engineer's testing process meets the requirements of this Section 11-1, costs related to the review shall be borne by the Contractor. The Contractor's sampling and testing program shall be modified as necessary. New test results shall be submitted to the Engineer. Test results judged to be in error shall be removed from consideration and the new test results shall be substituted. If split samples are not available and retesting is not possible, that portion of the asphalt concrete produced or placed prior to and during the disagreement will be evaluated based on the results of the Engineer's verification test results.

In disagreements, if the Engineer's testing process fails to meet the requirements of this Section 11-1, costs related to the review shall be borne by the State. The Engineer's sampling and testing program will be modified as necessary. Test results judged to be in error shall be removed from consideration and the new test results shall be substituted. Contractor's retesting due to errors in the Engineer's testing will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications. If, in the opinion of the Engineer, the Contractor's controlling operation is delayed or interfered with by reason of delays or errors in the Engineer's testing, the delay will be considered a right of way delay as provided in Section 8-1.09, "Right of Way Delays," of the Standard Specifications.

In disagreements, if both the Contractor's and the Engineer's testing processes have failed to meet the requirements of this Section 11-1 or if the cause cannot be determined, each party will bear the costs related to their own review. When appropriate, the Contractor's and the Engineer's sampling and testing programs shall be modified as necessary, split samples of the Contractor's quality control samples or the Engineer's verification samples shall be retested, and the new quality control test results shall be submitted to the Engineer. Test results judged to be in error shall be removed from consideration and the new test results shall be substituted. If split samples of aggregates or asphalt concrete mixture from the Contractor's testing are not available where retesting is required, that portion of the asphalt concrete produced prior to and during the disagreement will be evaluated based on the results of the Engineer's verification test results.

39-6.02 DURING THE ASPHALT CONCRETE MIX DESIGN REVIEW

During the asphalt concrete mix design review, if the Engineer's review does not confirm that one or more of the aggregate or the asphalt concrete mixture qualities comply with this Section 11-1, "Quality Control / Quality Assurance," both parties will review their sampling, testing, and test results and shall share their findings. Testers and laboratories shall be made available for witnessing. Calculations and test results shall be made available for review. If an error in the Contractor's testing is detected during this review, the Contractor shall, as is appropriate, recalculate or retest. The new test results shall be submitted to the Engineer. If an error in the Engineer's testing is detected, the Engineer will, as is appropriate, recalculate or retest.

If the Contractor's and Engineer's review does not reveal the source of conflict, the Contractor's and the Engineer's sampling and testing processes shall be witnessed by the Independent Third Party. Testing to resolve the dispute in results for the mix design shall be performed using samples that were obtained and split while being witnessed by the Independent Third Party. Review of sample preparation and testing will be performed at both the Contractor's and the Engineer's laboratory on a portion of the split material while being witnessed by the Independent Third Party. The resulting mix design shall be used for production.

39-6.03 DURING THE PRODUCTION START-UP EVALUATION

When the Contractor's and Engineer's test results during production start-up fail to meet the provisions in Section 39-10.02, "Production Start-Up Evaluation and Nuclear Density Test Strips," both parties will review their sampling, testing, and test results, and shall share their findings. Testers and laboratories shall be made available for witnessing. Calculations and test results shall be made available for review. If an error in the Contractor's testing is detected during this review, the Contractor shall, as is appropriate, recalculate or retest. The new test results shall be submitted to the Engineer. If an error in the Engineer's testing is detected, the Engineer will, as is appropriate, recalculate or retest.

If the Contractor's and the Engineer's review does not resolve the differences, the Contractor's and the Engineer's testing processes shall be witnessed by the Independent Third Party using the 2 remaining portions of the split samples. If necessary, a 250-tonne to 500-tonne quantity of asphalt concrete shall be placed at a location agreed to by the Engineer to provide asphalt concrete and ingredients for sampling and testing for the Independent Third Party review.

If an error in the Contractor's testing is detected by the Independent Third Party, the Contractor shall take corrective action and, as appropriate, recalculate or retest the split portion of the trial quantity of asphalt concrete in question. The new test results shall be submitted to the Engineer. If an error in the Engineer's testing is detected by the Independent Third Party, the Engineer will take corrective action and, as appropriate, recalculate or retest the split portion of the first trial quantity.

Production shall not start nor shall asphalt concrete be accepted until the differences have been resolved and the test results meet the provisions in Section 39-10.02, "Production Start-Up Evaluation and Nuclear Density Test Strips," of this Section 11-1.

39-6.04 DURING PRODUCTION

When it is determined that the quality control test results could not be verified, both parties will review their sampling, testing, and test results, and shall share their findings. Testers and laboratories will be made available for witnessing. Calculations and results will be made available for review.

If an error in the quality control sampling or testing is detected during the Contractor's or the Engineer's review, the Contractor shall either recalculate or, if appropriate, retest using the reserved split portions of the quality control samples. These new test results shall be submitted to the Engineer. If an error in the verification sampling or testing is detected, the Engineer will recalculate or, if appropriate, retest using a reserved split portion of the verification samples. Using the new test results, the Engineer will repeat the calculation of the *t*-test and will determine if the means of the quality control tests and the verification test results are within the allowable testing difference as specified in Section 39-5.03, "Verification," of this Section 11-1.

When the verification test results do not verify the quality control test results 3 consecutive times, both the Contractor's and the Engineer's testers shall be witnessed by the Independent Third Party while sampling, splitting, and testing samples from the production unit or from the mat. The Contractor may produce and place up to 1000 tonnes of asphalt concrete to provide materials and sampling opportunities. Production and placement of asphalt concrete will be suspended until the Independent Third Party has completed the review of the Contractor's and the Engineer's sampling and testing and resolved the differences.

If an error in the Contractor's testing is detected by the Independent Third Party, the Contractor shall take corrective action and, as appropriate, recalculate or retest the split portion of the quality control samples. The new test results shall be submitted to the Engineer. If an error in the Engineer's testing is detected by the Independent Third Party, the Engineer will take corrective action and, as appropriate, recalculate or retest a split portion of the verification samples. When the error has been detected and corrected, production shall resume and the services of the Independent Third Party will be discontinued.

If a problem is not identified during the Independent Third Party review, the Independent Third Party shall be retained for the duration of the project or until a problem has been identified. Until all asphalt concrete has been produced and placed, the Contractor shall sample and split quality control samples in the presence of the Independent Third Party. One portion of each sample shall be tested by the Contractor in conformance with the intervals specified in Table 39-9, "Minimum Quality Control Requirements," of this Section 11-1, and the other portion shall be delivered to the Engineer by the Independent Third Party. The Engineer will test at least one of every 5 of the split samples for verification purposes. A new lot will be designated for asphalt concrete produced since the Independent Third Party was consulted. The pay factor for this lot will be determined in conformance with Section 39-11.02, "Statistical Evaluation and Determination of Pay Factor," of this Section 11-1 with the exception that both the Contractor's quality control test results and the Engineer's verification test results will be combined and will be the basis for acceptance of that portion of the work. The pay factor for the lot of asphalt concrete which brought about the dispute resolution shall be determined in conformance with Section 39-11.02, "Statistical Evaluation and Determination of Pay Factor," of this Section 11-1 with the exception that both the Contractor's quality control test results and the Engineer's verification test results will be combined and will be the basis for acceptance of that portion of the work.

39-7 STORING, PROPORTIONING AND MIXING MATERIALS

39-7.01 STORAGE

The Contractor shall store the aggregate for asphalt concrete so that separately sized aggregates will not be intermingled and shall store asphalt binder so that different grades of asphalt will not be intermingled. Aggregate that has been intermingled with aggregate of another size shall be removed by the Contractor and replaced with aggregate of specified grading.

When the Contractor adds supplemental fine aggregate, each supplemental fine aggregate used shall be stored separately and kept thoroughly dry.

The measurement and storage provisions of this Section shall not apply to the dust collected in skimmers and expansion chambers (knock-out boxes) or to the dust collected in centrifugal (cyclone) collectors. Dust from these collectors may be returned to the aggregate without being measured or stored separately, provided the dust is returned uniformly at a point in advance of the sampling device in batch-mixing plants or is returned at or before mixing in continuous mixing plants.

Aggregate and asphalt binder shall be stored in conformance with the following requirements.

39-7.01A Aggregate Cold Storage

Material shall be fed from storage with a mechanical feeder. Before being fed to the drier, aggregate shall be separated into 3 or more sizes and stored separately.

39-7.01B Aggregate Hot Storage

Aggregate for asphalt concrete to be mixed in batch mixing plants shall be stored, after being dried, in conformance with the following requirements:

1. Aggregates for asphalt concrete shall be separated into 3 or more sizes.
2. After the aggregate is separated, each size shall be stored in a separate bin, and shall be recombined in conformance with the provisions in Section 39-7.03A, "Proportioning for Batch Mixing," of this Section 11-1 in order to conform to the gradings specified in Section 39-2, "Materials," of this Section 11-1. Storage bins shall be provided with chutes to prevent overflow into adjacent bins.

39-7.01C Asphalt Binder Storage

Asphalt to be used as a binder for asphalt concrete shall be stored in heated tanks.

A suitable sampling device shall be provided in asphalt feed lines connecting plant storage tanks to the asphalt weighing system or spray bar. The sampling device shall consist of a valve with a nominal diameter between 10 mm and 20 mm, constructed in such a manner that a one-liter sample may be slowly withdrawn during plant operations. The valve shall be maintained in good condition and, if the valve fails to function properly, the valve shall be replaced. The sampling device shall be readily accessible and in an area free of dangerous obstructions and shall be between 600 mm and 750 mm above the platform. A drainage receptacle shall be provided for flushing the device prior to sampling.

The discharge end of the asphalt binder circulating pipe shall be maintained below the surface of the asphalt binder in the storage tank to prevent discharging hot asphalt binder into open air.

A temperature sensing device shall be installed in the asphalt feed line. The device shall measure the temperature of the asphalt and shall be accurate to 5˚C increments. An automatic, continuous recording device shall be provided and used to maintain accurate records of the asphalt temperature during production. Where the plant controller has the capability of capturing production data electronically, including ingredient temperatures, and when this data represents the temperature at the time of production and is captured at intervals of not greater than 5 minutes, this process will be considered to be continuous recording. Captured data shall be retained for the duration of the contract and shall be submitted to the Engineer on request.

39-7.02 DRYING

Aggregate shall be fed directly to a drier-drum mixer or to a drier at a uniform rate.

Aggregate shall be dried such that, at the time of spreading, the moisture content of the completed asphalt concrete mixture shall not exceed 1.0 percent and the minimum and maximum asphalt concrete mixture temperatures are not exceeded. Moisture content will be determined in conformity with the requirements of California Test 370.

The drier or drier-drum mixer shall be provided with a device that senses the temperature of the material leaving the drier or the drier-drum mixer. The temperature-sensing device shall be accurate to the nearest 5˚C. The indicator shall be located and maintained at the point where the proportioning operations are controlled. An automatic continuous recording device shall be provided and used to maintain accurate records of the temperatures during production. Where the plant controller has the capability of capturing production data electronically, including ingredient temperatures, and when this data represents the temperature at the time of production and is captured at intervals of not greater than 5 minutes, this process will be considered to be continuous recording. Captured data shall be retained for the duration of the contract and shall be submitted to the Engineer on request.

The burner used for heating the aggregate shall achieve complete combustion of the fuel.

39-7.03 PROPORTIONING

Proportioning shall be either by hot-feed control or cold-feed control. Hot-feed control and cold-feed control indicate the location of the measuring devices or controls.

The Contractor's mixing equipment shall be equipped with a suitable, safe sampling device that will provide a sample, representative of actual production, of the aggregate being incorporated into the asphalt concrete. The delivery point of samples shall be safe and convenient. When samples are taken from a location above ground level, a means shall be provided for lowering the aggregate samples to the ground.

39-7.03A Proportioning for Batch Mixing

When the Contractor elects to use batch mixing equipment, each aggregate hot storage bin shall be equipped with a sampling device that will provide a sample of the aggregate discharged into the weigh hopper.

Fine material collected in dust control systems, other than centrifugal collectors or knock-out boxes, shall be considered to be supplemental fine aggregate. When supplemental fine aggregate is used, it shall be proportioned by mass.

A sampling device for supplemental fine aggregate shall be installed in each feed line or surge tank preceding the weigh hopper.

39-7.03A(1) Batching Tolerances

Aggregate and asphalt shall be proportioned by mass as follows:

A. The zero tolerance for aggregate scales shall be 0.5-percent of the total batch mass of the aggregate. The zero tolerance for separate scales for weighing supplemental fine aggregate or asphalt binder shall be 0.05-percent of the total batch mass of the aggregate.
B. Unless otherwise approved by the Engineer, the indicated mass of material drawn from storage shall not vary from the preselected scale setting as defined by target values of the approved mix design by more than the following percentages of the total batch mass of the aggregate:

    1. Aggregate shall be within one percent, except that when supplemental fine aggregate is used and is weighed cumulatively with the aggregate, the draft of aggregate drawn immediately before the supplemental fine aggregate shall be within 0.5-percent.
    2. Supplemental fine aggregate shall be within 0.5-percent.
    3. Asphalt binder shall be within 0.1-percent.

The asphalt binder shall be measured by a tank scale.

39-7.03A(2) Automatic Controls

Batch proportioning shall be by an automatic plant controller. The proportioning devices shall be automatic to the extent that the only manual operation required for proportioning materials for one batch shall be a single operation of a switch or starter.

Proportioning devices shall be of a type in which materials discharged from the several bins are controlled by gates or by mechanical conveyors. The batching devices shall be so interlocked that no new batch may be started until weigh hoppers are empty, the scales are at zero, and the discharge gates are closed. The means of withdrawal from the bins and of discharge from the weigh box shall be interlocked so that not more than one bin can discharge onto a given scale at one time, and so that the weigh box cannot be tripped until the required quantity from each of the bins has been deposited therein. In addition, automatic proportioning devices shall be interlocked so that the weighing cycle will be interrupted whenever the amount of material drawn from storage varies from the pre-selected amount by more than the tolerances specified in this Section 11-1. Whenever the weighing cycle is interrupted, that specific batch shall not be used in the work unless it can be manually adjusted to meet the specified tolerances based on the total mass of the batch. When partial batches are batched, the interlock tolerances, except the zero tolerance, shall apply to the total mass of aggregate in the partial batch.

Proportioning devices shall be operated so that all mass increments required for a batch are preset at the same time. Controls shall be designed so that these settings may be changed without delay and the order of discharge from the several bins can be changed.

Proportioning controls shall be equipped with the means for inspection of the interlock tolerance settings. Instructions for performing the inspection shall be available at the point of operation.

The necessary means shall be provided to check the mass of various proportioned amounts on a separate vehicle scale located at the plant site.

39-7.03B Proportioning for Continuous Mixing

Asphalt binder shall be introduced into the mixer through a meter conforming to the provisions in Section 9-1.01, "Measurement of Quantities," of the Standard Specifications. The asphalt meter shall automatically compensate for changes in the asphalt temperature, unless the meter is the mass flow, coriolis effect, type. The system shall be capable of varying the rate of delivery of binder proportionate with the delivery of aggregate. During a day's run, the temperature of asphalt binder shall not vary more than 30˚C. The meter and lines shall be heated and insulated. The binder storage shall be equipped with a device for automatic plant cut-off when the level of binder is lowered sufficiently to expose the pump suction line.

When supplemental fine aggregate is used, it shall be proportioned by a method that uniformly feeds the material within 2 percent of the required amount. Supplemental fine aggregate shall be discharged from the proportioning device directly into the mixer.

The supplemental fine aggregate proportioning system shall function with a degree of accuracy such that, when operated between 30 percent and 100 percent of maximum operating capacity, the average difference between the indicated mass of material delivered and the actual mass delivered shall not exceed one percent of the actual mass for three individual 15-minute runs. For the 3 individual 15-minute runs, the indicated mass of material delivered shall not vary from the actual mass delivered by more than 2 percent of the actual mass.

The fine material collected in dust control systems may be returned to the aggregate production stream without proportioning if returned at a rate commensurate with overall plant production, and if returned at or before the mixer. A return rate of less than 100 percent of the collection rate shall be metered as specified above for supplemental fine aggregate.

The asphalt feeder, each of the aggregate feeders, the supplemental fine aggregate feeder, if used, and the combined aggregate feeder shall be equipped with devices by which the rate of feed can be determined while the plant is in full operation.

The combined aggregate shall be weighed using a belt scale. The belt scale shall be of such accuracy that, when the plant is operating between 30 percent and 100 percent of belt capacity, the average difference between the indicated mass of material delivered and the actual mass delivered shall not exceed one percent of the actual mass for three individual 3-minute runs. For the 3 individual 3-minute runs, the indicated mass of material delivered shall not vary from the actual mass delivered by more than 2 percent of the actual mass.

The actual mass of material delivered for proportioning device calibrations shall be determined by a vehicle scale located at the plant site conforming to the provisions in Section 9-1.01, "Measurement of Quantities," of the Standard Specifications. The vehicle scale shall be error checked within 24 hours of checking the plant's proportioning devices. The plant shall be equipped so that this accuracy check can be made prior to the first production operation for a project and at other times when requested by the Engineer.

The belt scale for the combined aggregate, the proportioning devices for supplemental fine aggregate, if used, and the asphalt proportioning meter shall be interlocked so that the rates of feed of the aggregates and asphalt will be adjusted automatically (at all production rates and production rate changes) to maintain the asphalt ratio (kilograms of asphalt per 100 kg of dry aggregate including supplemental fine aggregate, if used) designated in the mix design in conformance with the provisions in Section 39-2.03, "Asphalt Concrete Mixture," of this Section 11-1. The plant shall not be operated unless this automatic system is functioning and in good working condition.

Asphalt meters and aggregate belt scales used for proportioning aggregates and asphalt shall be equipped with rate-of-flow indicators to show the rates of delivery of asphalt and aggregate. Meters and scales shall be equipped with resettable totalizers so that the total amounts of asphalt and aggregate introduced into the asphalt concrete mixture can be determined. Rate-of-flow indicators and totalizers for like materials shall be accurate within one percent when compared directly. The asphalt cement totalizer shall not register when the asphalt metering system is not delivering material to the mixer.

The bin or bins containing the fine aggregate and supplemental fine aggregate, if used, shall be equipped with vibrating units or other equipment that will prevent hang-up of material while the plant is operating. Each belt feeder shall be equipped with a device to monitor the depth of aggregate between the troughing rollers. The device for monitoring depth of aggregate shall automatically shut down the plant whenever the depth of aggregate is less than 70 percent of the target depth. To avoid erroneous shut down by normal fluctuations, a delay between sensing less than 70 percent flow and shutdown of the plant will be permitted, as determined by the Engineer, at the time of the initial California Test 109. A second device shall be located either in the stream of aggregate beyond the belt or where it will monitor movement of the belt by detecting revolutions of the tail pulley on the belt feeder. The device for monitoring no-flow or belt movement, as the case may be, shall stop the plant automatically and immediately when there is no flow. The plant shall not be operated unless both low-flow and no-flow monitoring devices are in good working condition and functioning properly.

For continuous pugmill mixing plants, an aggregate sampling device that will provide a 25-kg to 40-kg sample of the combined aggregate while the plant is in full operation shall be provided in advance of the point where the aggregate enters the mixer.

For drier-drum mixing plants, an aggregate sampling device that will provide a 25-kg to 40-kg sample of the combined aggregate while the plant is in full operation shall be provided in advance of the point where the aggregate enters the drier-drum mixer.

When supplemental fine aggregate is used, a sampling device shall be installed in each feed line or surge tank preceding the proportioning device for the supplemental fine aggregate.

39-7.04 (BLANK)

39-7.05 MIXING

Aggregate, supplemental fine aggregate, and asphalt binder shall be mixed in a batch mixer, continuous mixing pugmill mixer, or continuous mixing drier-drum. The charge in a batch mixer, or the rate of feed to a continuous mixer, shall not exceed that which will permit complete mixing of the material. Dead areas in the mixer, in which the material does not move or is not sufficiently agitated, shall be corrected by a reduction in the volume of material or by other adjustments.

Asphalt binder shall be at a temperature of not less than 120°C nor more than 190°C when added to the aggregate.

The temperature of the aggregate before adding the binder shall not be more than 165°C.

39-7.05A Batch Mixing

When asphalt concrete is produced by batch mixing, the mixer shall be equipped with a sufficient number of paddles of a type and arrangement so as to produce a properly mixed batch.

The binder shall be introduced uniformly into the mixer along the center of the mixer parallel to the mixer shafts, or by pressure spraying. When a pan is used, it shall be equipped with movable vanes in order that the flow of binder may be directed across the width of the pan, as desired. The vanes shall be equipped with a means for quick adjustment, and a positive lock to prevent shifting.

The mixer platform shall be of ample size to provide safe and convenient access to the mixer and other equipment. The mixer housing and weighbox housing shall be equipped with gates of ample size to permit ready sampling of the discharge of aggregate from each of the plant bins and from each feed line or surge tank of supplemental fine aggregate, if used. The Contractor shall provide a sampling device capable of delivering a representative sample of sufficient size to permit the required tests.

The mixer shall be equipped with a timing device that will indicate by a definite audible or visual signal the expiration of the mixing period. The device shall measure the time of mixing within 2 seconds.

The time of mixing a batch shall begin on the charging stroke of the weighhopper dumping mechanism and shall end when discharge is started. Mixing shall continue until a homogeneous asphalt concrete mixture of uniformly distributed and properly coated aggregates of unchanging appearance is produced. The time of mixing shall be not less than 30 seconds.

An interval timer shall control the time of mixing. The interval timer shall be interlocked so that the mixer cannot be discharged until the materials have been mixed for the full amount of time specified.

39-7.05B Continuous Mixing

Continuous mixing plants shall utilize pugmill or drier-drum mixers.

When asphalt concrete is produced by pugmill mixing, the mixer shall be equipped with paddles of a type and arrangement to provide sufficient mixing action and movement to the asphalt concrete mixture to produce properly mixed asphalt concrete. The combined aggregate shall be fed directly from the drier to the mixer at a uniform and controlled rate.

Mixing shall continue until a homogeneous asphalt concrete mixture of thoroughly and uniformly coated aggregates of unchanging appearance is produced at the discharge point from the mixer.

The temperature of the completed asphalt concrete mixture shall not exceed 165°C upon discharge from the mixer.

The mixer shall discharge into a storage silo with a capacity of not less than that specified in Section 39-7.06, "Asphalt Concrete Storage," of this Section 11-1. The Contractor shall provide a means of diverting the flow of asphalt concrete away from the silo to prevent incompletely mixed portions of the asphalt concrete mixture from entering the silo.

39-7.06 ASPHALT CONCRETE STORAGE

When asphalt concrete is stored, it shall be stored only in silos. Asphalt concrete shall not be stockpiled. The minimum quantity of asphalt concrete in a silo during mixing shall be 18 tonnes except for the period immediately following a shut-down of the plant of 2 hours or more. A means shall be provided to indicate that storage in each silo is being maintained as required.

Storage silos shall be equipped with a surge-batcher sized to hold a minimum of 1800 kg of material. A surge-batcher consists of equipment placed at the top of the storage silo that catches the continuous delivery of the completed asphalt concrete mix and changes it to individual batch delivery to prevent the segregation of product ingredients as the completed asphalt concrete mix is placed into storage. The surge-batcher shall be center loading and shall be constructed to prevent material buildup. Rotary chutes shall not be used as surge-batchers.

The surge-batcher shall be independent and distinct from conveyors or chutes used to collect or direct the completed asphalt concrete mixture being discharged into storage silos and shall be the last device to handle the material before it enters the silo. Multiple storage silos shall be served by an individual surge-batcher for each silo. Material handling shall be free of oblique movement between the highest elevation (conveyor outfall) and subsequent placement in the silo. Discharge gates on surge-batchers shall be automatic in operation and shall discharge only after a minimum of 1800 kg of material has been collected and shall close before the last collected material leaves the device. Discharge gate design shall prevent the deflection of material during the opening and closing operation.

Asphalt concrete stored in excess of 18 hours shall not be used in the work. Asphalt concrete mixture containing hardened lumps shall not be used. A storage facility that contained the material with the hardened lumps shall not be used for further storage until the cause of the lumps is corrected.

39-7.07 ASPHALT CONCRETE PLANTS

Plants, including commercial plants, that produce asphalt concrete subject to these specifications shall conform to the provisions in Section 7-1.01F, "Air Pollution Control," of the Standard Specifications, and shall be equipped with a wet-tube dust washer or equal and other devices that will reduce the dust emission to the degree that adjacent property is not damaged. The washer and other equipment shall function efficiently when the plant is in operation.

During production, petroleum products such as diesel fuel and kerosene shall not be used as a release agent on belts, conveyors, hoppers, or hauling equipment.

Plants shall be equipped with an inspection dock constructed so that a quality control technician or inspector standing on the dock can inspect the completed asphalt concrete mixture and take samples, as necessary, from the hauling vehicle before the vehicle leaves the plant site. This inspection dock shall allow the hauling vehicle to pull alongside and shall meet applicable safety requirements of the California Division of Occupational Safety and Health. Haul vehicle drivers shall be instructed to stop at the dock whenever a quality control technician or inspector is on the dock and to remain there until directed to leave by that individual.

39-8 SUBGRADE, PRIME COAT, PAINT BINDER (TACK COAT), AND PAVEMENT REINFORCING FABRIC

39-8.01 SUBGRADE

Immediately prior to applying prime coat or paint binder (tack coat), or immediately prior to placing the asphalt concrete when a prime coat or paint binder (tack coat) is not required, the subgrade to receive asphalt concrete shall conform to the compaction requirement and elevation tolerances specified for the material involved and shall be free of loose or extraneous material. If the asphalt concrete is to be placed on an existing base or pavement that was not constructed as part of the contract, the surface shall be cleaned by sweeping, flushing or other means to remove loose particles of paving, dirt, and other extraneous material immediately before applying the prime coat or paint binder (tack coat).

39-8.02 PRIME COAT AND PAINT BINDER (TACK COAT)

A prime coat of liquid asphalt shall be applied to the areas to be surfaced when there is a contract item for the work or when the work is required in "Asphalt Concrete" in Section 10-1, "General," of these special provisions.

Prime coat shall be applied only to those areas designated by the Engineer.

Prime coat shall be applied at the approximate total rate of 1.15 L per square meter of surface covered. The exact rate and number of applications will be determined by the Engineer.

Prime coat shall be applied at a temperature conforming to the range of temperatures specified in Section 93-1.03, "Mixing and Applying," of the Standard Specifications for distributor application of the grade of liquid asphalt being used.

Prime coat or paint binder (tack coat) shall be applied in advance of placing the surfacing only as far as shall be approved by the Engineer. When asphaltic emulsion is used as paint binder (tack coat), asphalt concrete shall not be placed until the applied asphaltic emulsion has completely changed color from brown to black.

Immediately in advance of placing asphalt concrete, additional prime coat or paint binder (tack coat) shall be applied as directed by the Engineer to areas where the prime coat or paint binder (tack coat) has been damaged. Loose or extraneous material shall be removed and no additional compensation will be allowed therefor.

39-8.03 PAVEMENT REINFORCING FABRIC

Pavement reinforcing fabric shall be placed on existing pavement to be surfaced or between layers of asphalt concrete when such work is shown on the plans, or specified in "Asphalt Concrete" in Section 10-1, of these special provisions, or ordered by the Engineer.

Immediately prior to placing binder, pavement reinforcing fabric, and asphalt concrete surfacing, the pavement shall be cleaned of loose and extraneous materials such as, but not limited to, vegetation, sand, dirt, gravel and water.

Before placing the pavement reinforcing fabric, a binder of paving asphalt Grade PG 70-10 shall be applied uniformly to the surface to receive the pavement reinforcing fabric at a rate of not less than 1.15 L per square meter of surface covered. Pavement reinforcing fabric shall not be placed in areas of conform tapers when the thickness of the overlying asphalt concrete will be 40 mm or less. When pavement reinforcing fabric is placed in areas of conform tapers the binder shall be spread at the approximate rate of 1.4 L per square meter of surface covered. The exact rate will be determined by the Engineer. The binder shall be applied to a width equal to the width of the fabric mat plus 75 mm on each side.

Asphaltic emulsion shall not be substituted for paving asphalt binder for pavement reinforcing fabric.

Before applying binder, large cracks, spalls, and depressions in existing pavement shall be repaired as directed by the Engineer and, if not included in the item, the repair work will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications.

The pavement reinforcing fabric shall be aligned and placed with no wrinkles that lap. The test for lapping shall be made by gathering together the pavement reinforcing fabric in a wrinkle. If the height of the doubled portion of extra fabric is 15 mm or more, the fabric shall be cut to remove the wrinkle, then lapped in the direction of paving. Lap in excess of 50 mm shall be removed.

If manual laydown methods are used, the pavement reinforcing fabric shall be unrolled, aligned, and placed in increments of approximately 9 m.

Adjacent borders of the pavement reinforcing fabric shall be lapped 50 mm to 100 mm. The preceding roll shall be lapped 50 mm to 100 mm over the following roll in the direction of paving at ends of rolls or at a break. At pavement reinforcing fabric overlays, both the binder and the fabric shall overlap previously placed fabric by the same amount.

Seating of the pavement reinforcing fabric with rolling equipment after placing will be permitted. Turning of the paving machine and other vehicles shall be gradual and kept to a minimum to avoid damage to the fabric.

A small quantity of asphalt concrete, to be determined by the Engineer, may be spread over the pavement reinforcing fabric immediately in advance of placing asphalt concrete surfacing in order to prevent fabric from being damaged by construction equipment.

Pavement reinforcing fabric shall not be exposed to public traffic, Contractor's equipment or elements that will damage the fabric prior to placement of asphalt concrete surfacing, as determined by the Engineer. Public access cross traffic may be allowed to cross the fabric under traffic control after the Contractor has placed a small quantity of asphalt concrete over the fabric.

Care shall be taken to avoid tracking binder material onto the pavement reinforcing fabric or distorting the fabric during seating of the fabric with rolling equipment. If necessary to protect the pavement reinforcing fabric, exposed binder material may be covered lightly with sand.

39-9 SPREADING AND COMPACTING EQUIPMENT

39-9.01 SPREADING EQUIPMENT

Asphalt pavers shall be self-propelled mechanical spreading and finishing equipment provided with a screed or strike-off assembly capable of distributing the material to not less than the full width of a traffic lane unless otherwise approved by the Engineer. Screed action shall include cutting, crowding or other practical action that is effective on the asphalt concrete mixture without tearing, shoving or gouging and that produces a surface texture of uniform appearance. The screed shall be adjustable to the required section and thickness. The screed shall be provided with a suitable full width compacting device. Pavers that leave ridges, indentations or other marks in the surface shall not be used unless the ridges, indentations or marks are eliminated by rolling or prevented by adjustment in the operation.

When end dump haul vehicles are used, the asphalt paver shall operate independently of the vehicle being unloaded or shall be capable of propelling the vehicle being unloaded. The load of the haul vehicle shall be limited to that which will insure satisfactory spreading. While being unloaded, the haul vehicle shall be in contact with the machine and the brakes on the haul vehicle shall not be depended upon to maintain contact between the vehicle and the machine.

No portion of the mass of hauling or loading equipment, other than the connection, shall be supported by the asphalt paver. No vibrations or other motions of the loader that could have a detrimental effect on the riding quality of the completed pavement shall be transmitted to the paver.

When asphalt concrete is placed directly upon asphalt treated permeable base, the asphalt concrete shall be placed in a manner and with equipment that will not disturb or displace the asphalt treated permeable base.

39-9.02 COMPACTING EQUIPMENT

A sufficient number of rollers shall be provided to obtain the specified compaction and surface finish required by this Section 11-1. Rollers shall be sized to achieve the required results.

Rollers shall be equipped with pads and water systems that prevent sticking of the asphalt concrete mixtures to the pneumatic or steel-tired wheels. A parting agent that will not damage the asphalt concrete mixture may be used to aid in preventing the asphalt concrete mixture from sticking to the wheels.

39-10 SPREADING AND COMPACTING

39-10.01 GENERAL REQUIREMENTS

Asphalt concrete shall be handled, spread, and compacted in a manner which is in conformance with this Section 11-1, "Quality Control / Quality Assurance."

Asphalt concrete shall be placed in such a manner that cracking, shoving, and displacement will be avoided.

Type A and Type B asphalt concrete shall be placed only when the ambient temperature is above 10°C.

Asphalt concrete shall not be placed when the underlying layer or surface is frozen or not dry or when weather conditions will prevent proper handling, finishing or compaction of the mixture.

Asphalt concrete shall be spread and compacted in the layers and thicknesses indicated in the following table:

Asphalt Concrete Layers and Thickness

Total Thickness Shown on the Plans*	Number of Layers	Top Layer Thickness (Millimeters)		Next Lower Layer Thickness (Millimeters)		All Other Lower Layers Thickness (Millimeters)	
		Min.	Max.	Min.	Max.	Min.	Max.
75 mm or less	1	----	-----	----	----	----	----
76 through 89 mm	2	35	45	35	45	----	----
90 through 135 mm	2	45	60	45	75	—	—
136 mm or more	**	45	60	45	75	45	120

Notes:
*When pavement reinforcing fabric is shown to be placed between layers of asphalt concrete, the thickness of asphalt concrete above the pavement reinforcing fabric shall be considered to be the "Total Thickness Shown on the Plans" for the purpose of spreading and compacting the asphalt concrete above the pavement reinforcing fabric.
**At least 3 layers if total thickness is more than 135 mm and less than 255 mm. At least 4 layers if total thickness is 255 mm or more.

A layer shall not be placed over a layer that exceeds 75 mm in compacted thickness until the temperature of the layer being covered is less than 70°C at mid-depth unless approved by the Engineer.

Asphalt concrete to be placed on shoulders, and on other areas off the traveled way having a width of 1.50 m or more, shall be spread in the same manner as specified above.

The completed mixture shall be deposited on the roadbed at a uniform quantity per linear meter, as necessary to provide the required compacted thickness without resorting to spotting, picking-up or otherwise shifting the mixture. During transporting, spreading and compacting, petroleum products such as diesel fuel and kerosene shall not be used as a release agent on trucks, spreaders or compactors in contact with the asphalt concrete.

Segregation shall be avoided. Surfacing shall be free from pockets of coarse or fine material. Asphalt concrete containing hardened lumps shall not be used.

Longitudinal joints in the top layer of Type A or Type B asphalt concrete shall correspond with the edges of planned traffic lanes. Longitudinal joints in other layers shall be offset not less than 150 mm alternately each side of the edges of traffic lanes.

Unless otherwise provided herein or approved by the Engineer, the top layer of asphalt concrete for shoulders, tapers, transitions, road connections, private drives, curve widenings, chain control lanes, turnouts, left-turn pockets, and other areas shall not be spread before the top layer of asphalt concrete for the adjoining through lane has been spread and compacted. At locations where the number of lanes is changed, the top layer for the through lanes shall be paved first. When existing pavement is to be surfaced and the specified thickness of asphalt concrete to be spread and compacted on the existing pavement is 75 mm or less, the shoulders or other adjoining areas may be spread simultaneously with the through lane provided the completed surfacing conforms to the requirement of this Section 11-1. Tracks or wheels of spreading equipment shall not be operated on the top layer of asphalt concrete until final compaction has been completed.

At those locations shown on the plans, as specified in "Asphalt Concrete" in Section 10-1, "General," of these special provisions, or as directed by the Engineer, the asphalt concrete shall be tapered or feathered to conform to existing surfacing or to other highway and non-highway facilities.

At locations where the asphalt concrete is to be placed over areas inaccessible to spreading and rolling equipment, the asphalt concrete shall be spread by practical means to obtain the specified results and shall be compacted thoroughly to the required lines, grades, and cross sections by means of pneumatic tampers or by other methods that will produce the same degree of compaction as pneumatic tampers.

39-10.02 PRODUCTION START-UP EVALUATION AND NUCLEAR DENSITY TEST STRIPS

The Contractor shall demonstrate that the proposed asphalt concrete mixture is being produced and placed on the roadway in conformance with this Section 11-1, "Quality Control / Quality Assurance." The production start-up evaluation shall demonstrate that the aggregates and asphalt concrete mixture conform to the requirements of Table 39-3, "Asphalt Concrete Mixture Requirements," and of Table 39-9, "Minimum Quality Control Requirements," of this Section 11-1 when produced using the plant proposed for this project. The nuclear density test strip serves to provide the Contractor with a location to develop a correlation between cores taken from the test strip and the Contractor's and Engineer's nuclear density gage readings taken from the same locations on the test strip and for the Contractor to demonstrate the ability to achieve a minimum of 96 percent relative compaction.

Production start-up evaluation and the nuclear density test strip may be constructed separately or at the same time to serve both purposes. Asphalt concrete used in the nuclear density test strip shall be representative of the asphalt concrete that shall be placed in the project.

Should the test results or testing program fail to meet these criteria, production will be suspended and the Contractor shall resolve the problem in conformance with the provisions in Section 39-6, "Dispute Resolution," of this Section 11-1.

Attention is directed to longitudinal and transverse construction joint requirements specified in "Asphalt Concrete" in Section 10-1, "General," of these special provisions.

Test data used for the production start up evaluation and the nuclear gage test strips shall not be included with the test data used for acceptance of the work in conformance with the provisions in Section 39-11, "Acceptance of Work," of this Section 11-1.

A production start-up evaluation and a nuclear density test strip shall be used when production of asphalt concrete has been resumed following a suspension of production due to unsatisfactory material quality as specified in Section 39-4.04, "Contractor Process Control," Section 39-4.05, "Contractor Quality Control," and Section 39-11.02A, "General" of this Section 11-1.

39-10.02A Production Start-Up Evaluation

Before or on the first day of asphalt concrete production, the Contractor shall produce a trial quantity of between 250 tonnes and 500 tonnes of asphalt concrete to demonstrate that asphalt concrete produced for this project conforms to the quality characteristics of this Section 11-1. The location of the production start-up evaluation shall be approved by the Engineer.

Asphalt concrete shall be produced by production procedures intended for the entire project. Production of asphalt concrete shall stop after placement of the trial quantity of asphalt concrete. Asphalt concrete production and placement may resume after the quality characteristics of the asphalt concrete mixture have been tested and found to be in conformance with the quality requirements of this Section 11-1.

The Contractor shall randomly obtain 3 aggregate samples from the plant and 3 asphalt concrete mixture samples from the mat behind the paver. Each sample from the plant shall be split into 4 portions; each sample from the mat shall be split into 4 portions. One portion of each sample shall be tested by the Contractor and one portion of each sample shall be provided to the Engineer for testing. The remaining portions shall be delivered to the Engineer and stored for dispute resolution should the test results not conform to this Section 11-1. The Contractor and the Engineer shall evaluate the samples for conformance to the requirements for sand equivalent, stability, percent air voids, and the quality characteristics designated in Table 39-9, "Minimum Quality Control Requirements," of this Section 11-1. The percent air voids of the asphalt concrete mixture shall be within ± 1.0 percent of the percent air voids designated in the Contractor's mix design.

The trial quantity of asphalt concrete will be accepted if:

A. Not more than 3 of the test results from the combined 6 test results from the Contractor's and Engineer's samples for quality characteristics indexed 2, 3, 4, and 5 in Table 39-9, "Minimum Quality Control Requirements," of this Section 11-1 are outside the specified limits.
B. Not more than one of the test results from the combined 6 test results from the Contractor's and the Engineer's samples for sand equivalent, stability, percent air voids or critical start-up characteristics designated in Table 39-9, "Minimum Quality Control Requirements," of this Section 11-1 are outside the specified limits.

If the test results from the combined 6 test results fail to meet the conditions above, corrective action shall be taken, and a new trial quantity of asphalt concrete shall be placed and evaluated in conformance with the provisions in this section to demonstrate conformance. If the test results from the combined 6 test results fail to meet the requirements above, then the trial quantity of asphalt concrete will be rejected.

The testing program will be considered adequate only if the average of the Contractor's test results and the average of the Engineer's test results for sand equivalent, stability, percent air voids, and the quality characteristics designated in Table 39-9, "Minimum Quality Control Requirements," of this Section 11-1 are within the allowable testing difference designated in Table 39-6, "Allowable Testing Difference," of this Section 11-1.

The Contractor shall not proceed to regular production until the requirements of this Section 39-10.02A, "Production Start-Up Evaluation" have been met. At the request of the Contractor, the Engineer may elect to leave the asphalt concrete which does not meet the requirements of this Section 39-10.02A in place if mitigation at the Contractor's expense can be agreed to. If this quantity of asphalt concrete is left in place, the Contractor will be paid 75 percent of the contract price paid per tonne for asphalt concrete.

The Contractor shall establish a correlation factor for stability of cured versus uncured briquettes. From a single split sample of asphalt concrete, 6 briquettes shall be fabricated. Three of the 6 briquettes shall be cured for 15 hours in conformance with the requirements of California Test 366 and 3 briquettes shall not be cured. The difference between the average stability value determined for the cured and the uncured specimens shall be considered the correlation factor, and shall be applied to stability values determined on uncured samples throughout the life of the project. The correlation factor may range from zero to 4. If the correlation factor is less than zero, a factor of zero shall be applied. If the factor is greater than 4, the correlation factor shall be approved by the Engineer.

39-10.02B Nuclear Density Test Strip

On the first day of placement of each layer of asphalt concrete the Contractor shall place a test strip in conformance with the requirements of California Test 375. The purpose of the test strip is to determine a correlation between cores taken from the test strip and the nuclear density gage readings taken at the core locations and to demonstrate that the asphalt concrete can be placed and compacted to the standards of this Section 11-1, "Quality Control / Quality Assurance." Asphalt concrete used in the nuclear density test strip shall be representative of the asphalt concrete that shall be placed in the project. The location for the nuclear density test strip shall be approved by the Engineer.

The Contractor shall place nuclear density test strips until conditions of the test method and this Section 11-1 have been met. The requirements of this section and the test method shall apply for the correlation of each gage that is used to determine relative compaction for this project. Relative compaction results will not be accepted if they have been determined using a nuclear gage that has not been correlated using a test strip.

Asphalt concrete in test strips may be left in place under the following conditions:

A. If the relative compaction for the test strip is determined to be 96 percent or greater, the Contractor will be paid at the contract price per tonne of asphalt concrete.
B. If the relative compaction for the test strip is determined to be less than 96 percent but greater than 93 percent, the Contractor will be paid at 75 percent of the contract price per tonne of asphalt concrete. A new test strip will be required, and mitigation measures shall be at Contractor's expense.

Asphalt concrete in test strips will be rejected when the relative compaction for the test strip is below 93 percent. Production and placement shall not begin until the Contractor has demonstrated the ability to achieve 96 percent relative compaction in conformance with this Section 11-1.

39-10.03 SPREADING

Layers shall be spread with an asphalt paver, unless otherwise specified or approved by the Engineer. Asphalt pavers shall be operated in such a manner as to insure continuous and uniform movement of the paver.

In advance of spreading asphalt concrete over an existing base, surfacing or bridge deck, if there is a contract item for asphalt concrete (leveling) or if ordered by the Engineer, asphalt concrete shall be spread by mechanical means that will produce a uniform smoothness and texture. Asphalt concrete (leveling) shall include, but not be limited to, the filling and leveling of irregularities and ruts. Asphalt concrete used to change the cross slope or profile of an existing surface shall not be considered as asphalt concrete (leveling).

Paint binder (tack coat) shall be applied to each layer in advance of spreading the next layer.

Before placing the top layer adjacent to cold transverse construction joints, the joints shall be trimmed to a vertical face on a neat line. Transverse joints shall be tested with a 3.6-m ± 0.06-m straightedge and shall be cut back for surface smoothness as required in conformance with Section 39-10.04, "Compacting," of this Section 11-1. Connections to existing surfacing shall be feathered to conform to the requirements for smoothness. Longitudinal joints shall be trimmed to a vertical face and on a neat line if the edges of the previously laid surfacing are, in the opinion of the Engineer, in such a condition that the quality of the completed joint will be affected.

39-10.04 COMPACTING

Compacting equipment shall conform to the provisions in Section 39-9.02, "Compacting Equipment," of this Section 11-1, "Quality Control / Quality Assurance."

Rolling shall commence at the lower edge and shall progress toward the highest portion. When compacting layers that exceed 75 mm in compacted thickness, rolling shall commence at the center and shall progress outwards.

Asphalt concrete shall be compacted to a relative compaction of not less than 96 percent and shall be finished to the lines, grades, and cross sections shown on the plans. In-place density of asphalt concrete will be determined prior to opening the pavement to public traffic. No rolling will be permitted after the asphalt concrete temperature is below 60°C.

Asphalt concrete placed in dig outs, as a leveling course, for slope correction, for detours not included in the finished roadway prism, in areas where in the judgment of the Engineer compaction or compaction measurement by conventional methods is impeded or on the uppermost lift of shoulders with rumble strips shall be compacted by a method approved by the Engineer.

Relative compaction shall be determined in conformance with the requirements of California Test 375 except that only a nuclear gauge with thin lift capability shall be used for asphalt concrete layer of 30 mm to 59 mm in thickness. Laboratory specimens shall be compacted in conformance with the requirements of California Test 304. Test locations will be established for asphalt concrete areas to be tested, as specified in California Test 375. If the Contractor compacts the asphalt concrete in any form or quantity after sites for testing have been chosen in conformance with the requirements of California

Test 375 or after California Test 375 has begun, the quality control tester shall choose a new set of random numbers for locating test sites.

Upon completion of rolling operations, if ordered by the Engineer, the asphalt concrete shall be cooled by applying water. Applying water shall conform to the provisions in Section 17, "Watering," of the Standard Specifications.

The completed surfacing shall be thoroughly compacted, smooth, and free from ruts, humps, depressions, or irregularities. Ridges, indentations or other objectionable marks left in the surface of the asphalt concrete by blading or other equipment shall be eliminated by rolling or other suitable means. The use of equipment that leaves ridges, indentations or other objectionable marks in the asphalt concrete shall be discontinued.

When a straightedge 3.6 m ± 0.06-m long is laid on the finished surface and parallel with the centerline, the surface shall not vary more than 3-mm from the lower edge of the straightedge. The transverse slope of the finished surface shall be uniform to a degree such that no depressions greater than 6 mm are present when tested with a straightedge 3.6 m ± 0.06-m long in a direction transverse to the centerline and extending from edge to edge of a 3.6-m traffic lane.

Pavement within 15 m of a structure or approach slab shall conform to the smoothness tolerances specified in Section 51-1.17, "Finishing Bridge Decks," of the Standard Specifications.

39-11 ACCEPTANCE OF WORK

39-11.01 GENERAL

The Engineer shall select the procedure used to determine the quantities of asphalt concrete for acceptance and payment determination in conformance with the provisions of this Section 11-1, "Quality Control / Quality Assurance."

Quality control test results that have been verified shall form the basis for statistical evaluation of the work in conformance with Section 39-11.02, "Statistical Evaluation and Determination of Pay Factor," of this Section 11-1. The quality requirements on which statistical evaluation will be based are specified in Table 39-9, "Minimum Quality Control Requirements," of this Section 11-1.

Work determined to be in conformance with the provisions of this Section 11-1 will be accepted and paid for at the contract price per tonne for asphalt concrete and may be subject to compensation adjustment in conformance with Section 39-11.02C, "Pay Factor Determination and Compensation Adjustment," of this Section 11-1.

Work that is not in compliance with the provisions of this Section 11-1 may be rejected by the Engineer and shall be removed and replaced at the Contractor's expense.

When there are fewer than 5 verified quality control tests, the work will be accepted or rejected based on whether the individual test results meet the quality requirements specified in Table 39-9, "Minimum Quality Control Requirements," of this Section 11-1. Section 39-11.02, "Statistical Evaluation and Pay Factor Determination," of this Section 11-1 shall not apply.

Aggregates, asphalt binder, and asphalt concrete mixtures that do not conform to this Section 11-1 shall not be used.

The Engineer may reject a quantity of material that is determined to be defective based on visual inspection or noncompliance with the provisions of this Section 11-1.

39-11.02 STATISTICAL EVALUATION AND DETERMINATION OF PAY FACTOR

Statistical evaluation of the work shall be used to verify the Contractor's quality control test results to determine compliance with this Section 11-1, "Quality Control / Quality Assurance."

39-11.02A General

The quality characteristics to be evaluated and the specification limits are specified in Table 39-9, "Minimum Quality Control Requirements," of this Section 11-1. Asphalt content, aggregate gradation (600-µm and 75-µm sieves), and relative compaction shall be considered for purposes of this Section 11-1 to be critical quality characteristics.

A lot represents the total quantity of asphalt concrete placed. More than one lot will occur if changes in the target values, material sources or mix design are requested by the Contractor and made in conformance with this Section 11-1 or if production of asphalt concrete is suspended due to unsatisfactory performance. However, asphalt concrete placed in dig outs, as a leveling course, for slope correction, for detours not to be included in the finished roadway prism, in areas where in the judgment of the Engineer compaction or compaction measurement by conventional methods is impeded or on the uppermost lift of shoulders with rumble strips shall be considered as a separate lot from other asphalt concrete. In addition, a new lot may be designated by the Engineer if the production and placement have been suspended for longer than 30 days due to seasonal suspension of phases of work.

A minimum of 5 samples shall be required to perform a statistical evaluation. The maximum obtainable pay factor with the 5 samples shall be 1.01. A minimum of 8 samples shall be required to obtain a pay factor of 1.05. If the sampling frequencies and quantity of work would otherwise result in fewer than 8 samples, the Contractor may submit a written request to increase the sampling frequency to provide a minimum of 8 samples. The request shall be included in the Quality Control Plan.

The lot will be accepted and a final pay factor determined when the Contractor's sampling, inspection, and test results are completed, have been submitted and evaluated, and the Engineer has visually inspected the pavement. Quality control test results shall be verified using the *t*-test in conformance with the provisions of Section 39-5.03, "Verification," of this Section 11-1 before the results will be used in considering the acceptance of asphalt concrete.

If the current composite pay factor of a lot is greater than 0.90, the lot will be accepted, provided the lowest single pay factor is not within the reject portion of Table 39-8, "Pay Factors," of this Section 11-1. If the lowest single pay factor is within the reject portion of Table 39-8, "Pay Factors," of this Section 11-1, the lot will be rejected. Rejected asphalt concrete shall be removed from the project site at the Contractor's expense.

If the current composite pay factor of a lot is less than 0.90, production of asphalt concrete shall be terminated and corrective action taken. Upon approval of the Engineer, up to 1000 tonnes of asphalt concrete may be placed to demonstrate that the asphalt concrete is once again in conformance with this Section 11-1. Production of asphalt concrete shall not start until the Engineer has received test results confirming conformance with this Section 11-1. A new lot will be established when production resumes.

If a pay factor for a critical quality characteristic designated in Table 39-9, "Minimum Quality Control Requirements," of this Section 11-1 is less than 0.90 for the lot or is within the rejection range for the last 5 tests, production of asphalt concrete shall be terminated and corrective action taken. Upon approval of the Engineer, up to 1000 tonnes of asphalt concrete may be placed to demonstrate that the asphalt concrete is once again in conformance with this Section 11-1. Production of asphalt concrete shall not start until the Engineer has received test results confirming conformance with this Section 11-1. A new lot will be established when production resumes.

Defective asphalt concrete may be voluntarily removed and replaced with new asphalt concrete to avoid a low pay factor. New material will be sampled, tested, and evaluated in conformance with this Section 11-1.

39-11.02B Statistical Evaluation

The Variability-Unknown/Standard Deviation Method will be used to determine the estimated percentage of the lot that is outside specification limits. The number of significant figures used in the calculations will be in conformance with the requirements of AASHTO Designation R-11, Absolute Method.

The estimated percentage of work that is outside of the specification limits for each quality characteristic will be determined as follows:

1. Calculate the arithmetic mean ($\overline{X}$) of the test values;

$$\overline{X} = \frac{\Sigma x}{n}$$

where:

$\sum$	=	summation of
x	=	individual test values
n	=	total number of test values

2. Calculate the standard deviation (s);

$$s = \sqrt{\frac{n\Sigma\,(x^2)-(\,\Sigma x)^2}{n(n-1)}}$$

where:

$\sum(x^2)$	=	summation of the squares of individual test values
$(\sum x)^2$	=	summation of the individual test values squared
n	=	total number of test values

3. Calculate the upper quality index (Q_u);

$$Q_u = \frac{USL - \overline{X}}{s}$$

where:

USL	=	upper specification limit

s = standard deviation
$\overline{X}$ = arithmetic mean

(Note: The USL is equal to the upper specification limit or the target value plus the production tolerance.)

4. Calculate the lower quality index (Q_L);

$$Q_L = \frac{\overline{X} - LSL}{s}$$

where:
LSL= lower specification limit or target value minus production tolerance
s = standard deviation
$\overline{X}$ = arithmetic mean

5. From Table 39-7, "Estimated Percent of Work Outside Specification Limits," of this Section 11-1, determine P*U* ;

where:
P_U = the estimated percentage of work outside the USL.
(P_U = 0, when USL is not specified.)

6. From Table 39-7, "Estimated Percent of Work Outside Specification Limits," of this Section 11-1, determine P_L;

where:
P_L = the estimated percentage of work outside the LSL.
(P_L = 0, when LSL is not specified.)

7. Calculate the total estimated percentage of work outside the USL and LSL, Percent Defective;

Percent Defective = $P_U + P_L$

where:
P_U = the estimated percentage of work outside the USL
P_L = the estimated percentage of work outside the LSL

8. Repeat Steps 1 through 7 for each quality characteristic listed for acceptance.

39-11.02C Pay Factor Determination and Compensation Adjustment

The pay factor and compensation adjustment for a lot will be determined as follows:

1. From Table 39-8, "Pay Factors," of this Section 11-1, determine the pay factor for each quality characteristic, (PF_{QC}), using the total number of test result values and the total estimated percentage outside the specification limits ($P_U + P_L$) from Step 7 in Section 39-11.02B, "Statistical Evaluation," of this Section 11-1.
2. The pay factor for the lot is a composite of single pay factors determined for each quality characteristic designated in Table 39-9, "Minimum Quality Control Requirements," of this Section 11-1. The following formula is used:

$$PF_C = \sum_{i=1}^{8} w_i \, PF_{QC_i}$$

where:
PF_C = the composite pay factor for the lot,
PF_{QC} = the pay factor for the individual quality characteristic,
w = the weighting factor listed in Table 39-9, and
i = the quality characteristic index number in Table 39-9.

3. Payment to the Contractor for the lot of asphalt concrete will be subject to a compensation adjustment. The Compensation Adjustment Factor (CAF) will be determined as follows:

   $CAF = PF_C - 1$

4. The amount of the compensation adjustment will be calculated as the product of:

   a. the Compensation Adjustment Factor (CAF)
   b. the total tonnes represented in the lot, and
   c. the contract price paid per tonne for the item of asphalt concrete involved.

If the compensation adjustment is a negative value, the compensation adjustment will be deducted from moneys due, or that may become due, the Contractor under the contract. If the compensation adjustment is a positive value, the compensation adjustment will be added to moneys due, or that may become due, the Contractor under the contract.

Table 39-7.—ESTIMATED PERCENT OF WORK OUTSIDE SPECIFICATION LIMITS

P_U and/or P_L	Sample Size (n)												
	5	6	7	8	9	10-11	12-14	15-17	18-22	23-29	30-42	43-66	>66
	Upper Quality Index Q_U or Lower Quality Index Q_L												
0	1.72	1.88	1.99	2.07	2.13	2.20	2.28	2.34	2.39	2.44	2.48	2.51	2.56
1	1.64	1.75	1.82	1.88	1.91	1.96	2.01	2.04	2.07	2.09	2.12	2.14	2.16
2	1.58	1.66	1.72	1.75	1.78	1.81	1.84	1.87	1.89	1.91	1.93	1.94	1.95
3	1.52	1.59	1.63	1.66	1.68	1.71	1.73	1.75	1.76	1.78	1.79	1.80	1.81
4	1.47	1.52	1.56	1.58	1.60	1.62	1.64	1.65	1.66	1.67	1.68	1.69	1.70
5	1.42	1.47	1.49	1.51	1.52	1.54	1.55	1.56	1.57	1.58	1.59	1.59	1.60
6	1.38	1.41	1.43	1.45	1.46	1.47	1.48	1.49	1.50	1.50	1.51	1.51	1.52
7	1.33	1.36	1.38	1.39	1.40	1.41	1.41	1.42	1.43	1.43	1.44	1.44	1.44
8	1.29	1.31	1.33	1.33	1.34	1.35	1.35	1.36	1.36	1.37	1.37	1.37	1.38
9	1.25	1.27	1.28	1.28	1.29	1.29	1.30	1.30	1.30	1.31	1.31	1.31	1.31
10	1.21	1.23	1.23	1.24	1.24	1.24	1.25	1.25	1.25	1.25	1.25	1.26	1.26
11	1.18	1.18	1.19	1.19	1.19	1.19	1.20	1.20	1.20	1.20	1.20	1.20	1.20
12	1.14	1.14	1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15	1.15
13	1.10	1.10	1.10	1.10	1.10	1.10	1.11	1.11	1.11	1.11	1.11	1.11	1.11
14	1.07	1.07	1.07	1.06	1.06	1.06	1.06	1.06	1.06	1.06	1.06	1.06	1.06
15	1.03	1.03	1.03	1.03	1.02	1.02	1.02	1.02	1.02	1.02	1.02	1.02	1.02
16	1.00	0.99	0.99	0.99	0.99	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98
17	0.97	0.96	0.95	0.95	0.95	0.95	0.94	0.94	0.94	0.94	0.94	0.94	0.94
18	0.93	0.92	0.92	0.92	0.91	0.91	0.91	0.91	0.90	0.90	0.90	0.90	0.90
19	0.90	0.89	0.88	0.88	0.88	0.87	0.87	0.87	0.87	0.87	0.87	0.87	0.87
20	0.87	0.86	0.85	0.85	0.84	0.84	0.84	0.83	0.83	0.83	0.83	0.83	0.83
21	0.84	0.82	0.82	0.81	0.81	0.81	0.80	0.80	0.80	0.80	0.80	0.80	0.79
22	0.81	0.79	0.79	0.78	0.78	0.77	0.77	0.77	0.76	0.76	0.76	0.76	0.76
23	0.77	0.76	0.75	0.75	0.74	0.74	0.74	0.73	0.73	0.73	0.73	0.73	0.73
24	0.74	0.73	0.72	0.72	0.71	0.71	0.70	0.70	0.70	0.70	0.70	0.70	0.70
25	0.71	0.70	0.69	0.69	0.68	0.68	0.67	0.67	0.67	0.67	0.67	0.67	0.66

Table continues below

Table 39-7 (cont.).—ESTIMATED PERCENT OF WORK OUTSIDE SPECIFICATION LIMITS

P_U and/or P_L	Sample Size (n)												
	5	6	7	8	9	10-11	12-14	15-17	18-22	23-29	30-42	43-66	>66
	Upper Quality Index Q_U or Lower Quality Index Q_L												
26	0.68	0.67	0.67	0.65	0.65	0.65	0.64	0.64	0.64	0.64	0.64	0.64	0.63
27	0.65	0.64	0.63	0.62	0.62	0.62	0.61	0.61	0.61	0.61	0.61	0.61	0.60
28	0.62	0.61	0.60	0.59	0.59	0.59	0.58	0.58	0.58	0.58	0.58	0.58	0.57
29	0.59	0.58	0.57	0.57	0.56	0.56	0.55	0.55	0.55	0.55	0.55	0.55	0.54
30	0.56	0.55	0.54	0.54	0.53	0.53	0.52	0.52	0.52	0.52	0.52	0.52	0.52
31	0.53	0.52	0.51	0.51	0.50	0.50	0.50	0.49	0.49	0.49	0.49	0.49	0.49
32	0.50	0.49	0.48	0.48	0.48	0.47	0.47	0.47	0.46	0.46	0.46	0.46	0.46
33	0.47	0.48	0.45	0.45	0.45	0.44	0.44	0.44	0.44	0.43	0.43	0.43	0.43
34	0.45	0.43	0.43	0.42	0.42	0.42	0.41	0.41	0.41	0.41	0.41	0.41	0.40
35	0.42	0.40	0.40	0.39	0.39	0.39	0.38	0.38	0.38	0.38	0.38	0.38	0.38
36	0.39	0.38	0.37	0.37	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36	0.36
37	0.36	0.35	0.34	0.34	0.34	0.33	0.33	0.33	0.33	0.33	0.33	0.33	0.32
38	0.33	0.32	0.32	0.31	0.31	0.31	0.30	0.30	0.30	0.30	0.30	0.30	0.30
39	0.30	0.30	0.29	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28
40	0.28	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.25
41	0.25	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23	0.23
42	0.23	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
43	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18
44	0.16	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15
45	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13
46	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10	0.10
47	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08
48	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
49	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.03
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Notes:

1. If the value of Q_U or Q_L does not correspond to a value in the table, use the next lower value.
2. If Q_U or Q_L are negative values, P_U or P_L is equal to 100 minus the table value for P_U or P_L.

Table 39-8.—PAY FACTOR

Pay Factor	Sample Size (n)												
	5	6	7	8	9	10-11	12-14	15-17	18-22	23-29	30-42	43-66	>66
	Maximum Allowable Percent of Work Outside Specification Limits for A Given Pay Factor ($P_U + P_L$)												
1.05				0	0	0	0	0	0	0	0	0	0
1.04			0	1	3	5	4	4	4	3	3	3	3
1.03		0	2	4	6	8	7	7	6	5	5	4	4
1.02		1	3	6	9	11	10	9	8	7	7	6	6
1.01	0	2	5	8	11	13	12	11	10	9	8	8	7
1.00	22	20	18	17	16	15	14	13	12	11	10	9	8
0.99	24	22	20	19	18	17	16	15	14	13	11	10	9
0.98	26	24	22	21	20	19	18	16	15	14	13	12	10
0.97	28	26	24	23	22	21	19	18	17	16	14	13	12
0.96	30	28	26	25	24	22	21	19	18	17	16	14	13
0.95	32	29	28	26	25	24	22	21	20	18	17	16	14
0.94	33	31	29	28	27	25	24	22	21	20	18	17	15
0.93	35	33	31	29	28	27	25	24	22	21	20	18	16
0.92	37	34	32	31	30	28	27	25	24	22	21	19	18
0.91	38	36	34	32	31	30	28	26	25	24	22	21	19
0.90	39	37	35	34	33	31	29	28	26	25	23	22	20
0.89	41	38	37	35	34	32	31	29	28	26	25	23	21
0.88	42	40	38	36	35	34	32	30	29	27	26	24	22
0.87	43	41	39	38	37	35	33	32	30	29	27	25	23
0.86	45	42	41	39	38	36	34	33	31	30	28	26	24
0.85	46	44	42	40	39	38	36	34	33	31	29	28	25
0.84	47	45	43	42	40	39	37	35	34	32	30	29	27
0.83	49	46	44	43	42	40	38	36	35	33	31	30	28
0.82	50	47	46	44	43	41	39	38	36	34	33	31	29
0.81	51	49	47	45	44	42	41	39	37	36	34	32	30
0.80	52	50	48	46	45	44	42	40	38	37	35	33	31
0.79	54	51	49	48	46	45	43	41	39	38	36	34	32
0.78	55	52	50	49	48	46	44	42	41	39	37	35	33
0.77	56	54	52	50	49	47	45	43	42	40	38	36	34
0.76	57	55	53	51	50	48	46	44	43	41	39	37	35
0.75	58	56	54	52	51	49	47	46	44	42	40	38	36
	60	57	55	53	52	51	48	47	45	43	41	40	37
	61	58	56	55	53	52	50	48	46	44	43	41	38
Reject	62	59	57	56	54	53	51	49	47	45	44	42	39
	63	61	58	57	55	54	52	50	48	47	45	43	40
	64	62	60	58	57	55	53	51	49	48	46	44	41
Reject Values Greater Than Those Shown Above													

Notes:

1. To obtain a pay factor when the estimated percent outside specification limits from Table 39-7, "Estimated Percent of Work Outside Specification Limits," does not correspond to a value in the table, use the next larger value.
2. The maximum obtainable pay factor is 1.05 (with a minimum of 8 test values).

Table 39-9.—MINIMUM QUALITY CONTROL REQUIREMENTS

Index (i)	Quality Characteristic	Specification Limits	Weighting Factor (w)	California Test	Minimum Sampling and Testing Frequency	Point of Sampling
1	**Asphalt Content** [2,3]	TV ± 0.5%	0.30	379 or 382	One sample per 500 tonnes or part thereof Not less than one sample per day	Mat behind paver
	Gradation			202	One sample per 500 tonnes or part thereof Not less than one sample per day	Batch Plant - from hot bins Drum Plant - from cold feed
2	19 or 12.5 mm [4]	TV ± 5	0.01			
3	9.5 mm	TV ± 6	0.01			
4	4.75 mm	TV ± 7	0.05			
5	2.36 mm	TV ± 5	0.05			
6	600 µm [2,3]	TV ± 4	0.08			
7	75 µm [2]	TV ± 2	0.10			
8	**Relative Compaction** [2]	96%	0.40	375 [5]	One sample per 500 tonnes or part thereof Not less than one test per day	Finished mat after final rolling
	Test Maximum Density			375	Per Test Method	Mat behind the paver
9	**Mix Moisture Content**	≤1%		370	One sample per 1000 tonnes or part thereof Not less than one sample per day	
	Asphalt and Mix Temperature	120ºC to 190ºC (Asphalt) ≤165ºC (Mix)			Continuous using an automated recording device	Plant

Notes:

1. TV = Target Value from contractor's proposed mix design.
2. Depending on aggregate gradation specified.
3. Quality characteristics 1, 6, 7, and 8 are defined as critical quality characteristics in the verification testing process.
4. Quality characteristics 1, 6, and 7 are defined as critical start-up characteristics in the Production Start-Up Evaluation.
5. California Test 375, Part 3, Section B, "Testing Frequency," is revised to change 450 tonnes to 500 tonnes and 45 tonnes to 50 tonnes.

39-12 MEASUREMENT AND PAYMENT

39-12.01 MEASUREMENT

Asphalt concrete will be measured by mass. The quantity to be paid for will be the combined mass of the mixture for the various types of asphalt concrete, as designated in the Engineer's Estimate.

The mass of the materials will be determined in conformance with the provisions in Section 9-1.01, "Measurement of Quantities," of the Standard Specifications.

Quantities of paving asphalt, liquid asphalt, and asphaltic emulsion to be paid for as contract items of work will be determined in conformance with the methods provided in Section 92, "Asphalts," Section 93, "Liquid Asphalts," or Section 94, "Asphaltic Emulsions," of the Standard Specifications, as the case may be.

When recorded batch masses are printed automatically, these masses may be used for determining pay quantities provided the following requirements are complied with:

A. Total aggregate and supplemental fine aggregate mass per batch shall be printed. When supplemental fine aggregate is weighed cumulatively with the aggregate, the total batch mass of aggregate shall include the supplemental fine aggregate.
B. The total bitumen mass per batch shall be printed.
C. Zero-tolerance mass shall be printed prior to weighing the first batch and after weighing the last batch of each truckload.
D. The time, date, mix number, load number, and truck identification shall be correlated with the load slip.
E. A copy of the recorded batch masses shall be certified by a licensed weighmaster and submitted to the Engineer.

Pavement reinforcing fabric will be measured and paid for by the square meter for the actual pavement area covered.

39-12.02 PAYMENT

Asphalt concrete placed in the work, unless otherwise specified, will be paid for at the contract price per tonne for asphalt concrete of the types designated in the Engineer's Estimate.

Compensation adjustment for asphalt concrete will be in conformance with Section 39-11.02C, "Pay Factor Determination and Compensation Adjustment," of this Section 11-1, "Quality Control / Quality Assurance."

When there is a contract item for asphalt concrete (leveling), quantities of asphalt concrete placed for leveling will be paid for at the contract price per tonne for asphalt concrete (leveling). When there is no contract item for asphalt concrete (leveling), and leveling is ordered by the Engineer, asphalt concrete so used will be paid for as extra work as provided in Section 4-1.03D of the Standard Specifications.

For asphalt concrete placed in dig outs, as a leveling course, for slope correction, for detours not included in the finished roadway prism, in areas where in the judgment of the Engineer compaction or compaction measurement by conventional methods is impeded or on the uppermost lift of shoulders with rumble strips the relative compaction provisions of Section 39-11.02, "Statistical Evaluation and Determination of Pay Factor," of this Section 11-1, shall not apply. In the computation of the composite pay factor (PF_C) for the lot composed of this asphalt concrete, an individual pay factor of 1.0 for the relative compaction (PF_{QC8}) shall be used.

Full compensation for the Contractor's Quality Control Plan, including furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in developing, implementing, modifying, and fulfilling the requirements of the Quality Control Plan shall be considered as included in the contract price paid per tonne for asphalt concrete of the types designated in the Engineer's Estimate and no additional compensation will be allowed therefor.

Full compensation for Contractor sampling, testing, inspection, testing facilities, and preparation and submission of results shall be considered as included in the contract price paid per tonne for asphalt concrete of the types designated in the Engineer's Estimate and no additional compensation will be allowed therefor.

Quantities of pavement reinforcing fabric placed and paving asphalt applied as a binder for the pavement reinforcing fabric will be paid for at the contract price per square meter for pavement reinforcing fabric and per tonne for paving asphalt (binder-pavement reinforcing fabric). Full compensation for furnishing and spreading sand to cover exposed binder material, if necessary, shall be considered as included in the contract price paid per tonne for paving asphalt (binder-pavement reinforcing fabric) and no separate payment will be made therefor.

Small quantities of asphalt concrete placed on pavement reinforcing fabric to prevent the fabric from being displaced by construction equipment or to allow public traffic to cross over the fabric shall be considered as part of the layer of asphalt concrete to be placed over the fabric and will be measured and paid for by the tonne as asphalt concrete of the types designated in the Engineer's Estimate.

When there is a contract item for liquid asphalt (prime coat), the quantity of prime coat will be paid for at the contract price per tonne for the designated grade of liquid asphalt (prime coat). When there is no contract item for liquid asphalt (prime coat) and the special provisions require the application of a prime coat, full compensation for furnishing and applying

the prime coat shall be considered as included in the contract price paid per tonne for asphalt concrete of the types designated in the Engineer's Estimate and no separate payment will be made therefor.

When there is a contract item for asphaltic emulsion (paint binder), the quantity of asphaltic emulsion or paving asphalt used as paint binder (tack coat) will be paid for at the contract price per tonne for asphaltic emulsion (paint binder). When there is no contract item for asphaltic emulsion (paint binder), full compensation for furnishing and applying paint binder (tack coat) shall be considered as included in the contract price paid per tonne for asphalt concrete of the types designated in the Engineer's Estimate and no separate payment will be made therefor.

Fog seal coat will be paid for as provided in Section 37-1, "Seal Coats," of the Standard Specifications.

No adjustment of compensation will be made for an increase or decrease in the quantities of paint binder (tack coat) or fog seal coat required, regardless of the reason for such increase or decrease. The provisions in Section 4-1.03B, "Increased or Decreased Quantities," of the Standard Specifications shall not apply to the items of paint binder or fog seal coat.

The above contract prices and payments shall include full compensation for furnishing all labor, materials, tools, equipment, and incidentals, and for doing all the work involved in placing asphalt concrete, complete in place, as shown on the plans, as specified in this Section 11-1, "Quality Control / Quality Assurance," and "Asphalt Concrete" in Section 10-1, "General," of these special provisions, and as directed by the Engineer.

SECTION 12. (BLANK)

SECTION 13. (BLANK)

SECTION 14 FEDERAL REQUIREMENTS FOR FEDERAL-AID CONSTRUCTION PROJECTS

GENERAL.—The work herein proposed will be financed in whole or in part with Federal funds, and therefore all of the statutes, rules and regulations promulgated by the Federal Government and applicable to work financed in whole or in part with Federal funds will apply to such work. The "Required Contract Provisions, Federal-Aid Construction Contracts, "Form FHWA 1273, are included in this Section 14. Whenever in said required contract provisions references are made to "SHA contracting officer," "SHA resident engineer," or "authorized representative of the SHA," such references shall be construed to mean "Engineer" as defined in Section 1-1.18 of the Standard Specifications.

PERFORMANCE OF PREVIOUS CONTRACT.—In addition to the provisions in Section II, "Nondiscrimination," and Section VII, "Subletting or Assigning the Contract," of the required contract provisions, the Contractor shall comply with the following:

The bidder shall execute the CERTIFICATION WITH REGARD TO THE PERFORMANCE OF PREVIOUS CONTRACTS OR SUBCONTRACTS SUBJECT TO THE EQUAL OPPORTUNITY CLAUSE AND THE FILING OF REQUIRED REPORTS located in the proposal. No request for subletting or assigning any portion of the contract in excess of $10,000 will be considered under the provisions of Section VII of the required contract provisions unless such request is accompanied by the CERTIFICATION referred to above, executed by the proposed subcontractor.

NON-COLLUSION PROVISION.—The provisions in this section are applicable to all contracts except contracts for Federal Aid Secondary projects.

Title 23, United States Code, Section 112, requires as a condition precedent to approval by the Federal Highway Administrator of the contract for this work that each bidder file a sworn statement executed by, or on behalf of, the person, firm, association, or corporation to whom such contract is to be awarded, certifying that such person, firm, association, or corporation has not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of free competitive bidding in connection with the submitted bid. A form to make the non-collusion affidavit statement required by Section 112 as a certification under penalty of perjury rather than as a sworn statement as permitted by 28, USC, Sec. 1746, is included in the proposal.

PARTICIPATION BY MINORITY BUSINESS ENTERPRISES IN SUBCONTRACTING.—Part 23, Title 49, Code of Federal Regulations applies to this Federal-aid project. Pertinent sections of said Code are incorporated in part or in its entirety within other sections of these special provisions.

Schedule B—Information for Determining Joint Venture Eligibility

(This form need not be filled in if all joint venture firms are minority owned.)

1. Name of joint venture _____
2. Address of joint venture _____
3. Phone number of joint venture _____
4. Identify the firms which comprise the joint venture. (The MBE partner must complete Schedule A.) _____
   _____

   a. Describe the role of the MBE firm in the joint venture. _____
      _____
   b. Describe very briefly the experience and business qualifications of each non-MBE joint venturer: _____
      _____

5. Nature of the joint venture's business _____
   _____
6. Provide a copy of the joint venture agreement.
7. What is the claimed percentage of MBE ownership? _____
8. Ownership of joint venture: (This need not be filled in if described in the joint venture agreement, provided by question 6.).

   a. Profit and loss sharing.
   b. Capital contributions, including equipment.
   c. Other applicable ownership interests.

9. Control of and participation in this contract. Identify by name, race, sex, and "firm" those individuals (and their titles) who are responsible for day-to-day management and policy decision making, including, but not limited to, those with prime responsibility for:

   a. Financial decisions _____
   b. Management decisions, such as:

      (1) Estimating _____
      (2) Marketing and sales _____
      (3) Hiring and firing of management personnel _____
      _____
      (4) Purchasing of major items or supplies _____
      _____

   c. Supervision of field operations _____

Note.—If, after filing this Schedule B and before the completion of the joint venture's work on the contract covered by this regulation, there is any significant change in the information submitted, the joint venture must inform the grantee, either directly or through the prime contractor if the joint venture is a subcontractor.

Affidavit

"The undersigned swear that the foregoing statements are correct and include all material information necessary to identify and explain the terms and operation of our joint venture and the intended participation by each joint venturer in the undertaking. Further, the undersigned covenant and agree to provide to grantee current, complete and accurate information regarding actual joint venture work and the payment therefor and any proposed changes in any of the joint venture arrangements and to permit the audit and examination of the books, records and files of the joint venture, or those of each joint venturer relevant to the joint venture, by authorized representatives of the grantee or the Federal funding agency. Any material misrepresentation will be grounds for terminating any contract which may be awarded and for initiating action under Federal or State laws concerning false statements."

Name of Firm	Name of Firm
Signature	Signature
Name	Name
Title	Title
Date	Date

Date _____

State of _____

County of _____

On this ____ day of _____, 20___, before me appeared (Name) _____, to me personally known, who, being duly sworn, did execute the foregoing affidavit, and did state that he or she was properly authorized by (Name of firm) _____ to execute the affidavit and did so as his or her free act and deed.

Notary Public _____

Commission expires _____

[Seal]

Date _____

State of _____

County of _____

On this ___ day of _____, 20___, before me appeared (Name) _____ to me personally known, who, being duly sworn, did execute the foregoing affidavit, and did state that he or she was properly authorized by (Name of firm) _____ to execute the affidavit and did so as his or her free act and deed.

Notary Public _____

Commission expires _____

[Seal]

REQUIRED **CONTRACT PROVISIONS**
FEDERAL-AID CONSTRUCTION CONTRACTS

I. GENERAL

1. These contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

2. Except as otherwise provided for in each section, the contractor shall insert in each subcontract all of the stipulations contained in these Required Contract Provisions, and further require their inclusion in any lower tier subcontract or purchase order that may in turn be made. The Required Contract Provisions shall not be incorporated by reference in any case. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with these Required Contract Provisions.

3. A breach of any of the stipulations contained in these Required Contract Provisions shall be sufficient grounds for termination of the contract.

4. A breach of the following clauses of the Required Contract Provisions may also be grounds for debarment as provided in 29 CFR 5.12:

   Section I, paragraph 2;
   Section IV, paragraphs 1, 2, 3, 4, and 7;
   Section V, paragraphs 1 and 2a through 2g.

5. Disputes arising out of the labor standards provisions of Section IV (except paragraph 5) and Section V of these Required Contract Provisions shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the U.S. Department of Labor (DOL) as set forth in 29 CFR 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the DOL, or the contractor's employees or their representatives.

6. Selection of Labor - During the performance of this contract, the contractor shall not:

   a. discriminate against labor from any other State, possession, or territory of the United States (except for employment preference for Appalachian contracts, when applicable, as specified in Attachment A), or

   b. employ convict labor for any purpose within the limits of the project unless it is labor performed by convicts who are on parole, supervised release, or probation.

II. NONDISCRIMINATION

(Applicable to all Federal-aid construction contracts and to all related subcontracts of $10,000 or more.)

1. **Equal Employment Opportunity: Equal** employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630, and 41 CFR 60) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under this contract. The Equal Opportunity Construction Contract Specifications set forth under 41 CFR 60-4.3 and the provisions of the American Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

   a. The contractor will work with the State highway agency (SHA) and the Federal Government in carrying out EEO obligations and in their review of his/her activities under the contract.

   b. The contractor will accept as his operating policy the following statement:

      "It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action

shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, preapprenticeship, and/or on-the-job training."

2. **EEO Officer: The** contractor will designate and make known to the SHA contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active contractor program of EEO and who must be assigned adequate authority and responsibility to do so.

3. **Dissemination of Policy: All** members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

   a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.

   b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.

   c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minority group employees.

   d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.

   e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4. **Recruitment: When** advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minority groups in the area from which the project work force would normally be derived.

   a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minority group applicants. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority group applicants may be referred to the contractor for employment consideration.

   b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, he is expected to observe the provisions of that agreement to the extent that the system permits the contractor's compliance with EEO contract provisions. (The DOL has held that where implementation of such agreements have the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Executive Order 11246, as amended.)

   c. The contractor will encourage his present employees to refer minority group applicants for employment. Information and procedures with regard to referring minority group applicants will be discussed with employees.

5. **Personnel Actions: Wages,** working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:

   a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.

b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.

c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.

d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with his obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of his avenues of appeal.

6. **Training and Promotion:**

a. The contractor will assist in locating, qualifying, and increasing the skills of minority group and women employees, and applicants for employment.

b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. Where feasible, 25 percent of apprentices or trainees in each occupation shall be in their first year of apprenticeship or training. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision.

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d. The contractor will periodically review the training and promotion potential of minority group and women employees and will encourage eligible employees to apply for such training and promotion.

7. **Unions: If** the contractor relies in whole or in part upon unions as a source of employees, the contractor will use his/her best efforts to obtain the cooperation of such unions to increase opportunities for minority groups and women within the unions, and to effect referrals by such unions of minority and female employees. Actions by the contractor either directly or through a contractor's association acting as agent will include the procedures set forth below:

a. The contractor will use best efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minority group members and women for membership in the unions and increasing the skills of minority group employees and women so that they may qualify for higher paying employment.

b. The contractor will use best efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.

c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the SHA and shall set forth what efforts have been made to obtain such information.

d. In the event the union is unable to provide the contractor with a reasonable flow of minority and women referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minority group persons and women. (The DOL has held that it shall be no excuse that the union with which the contractor has a collective bargaining agreement providing for exclusive referral failed to refer minority employees.) In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the SHA.

8. **Selection of Subcontractors, Procurement of Materials and Leasing of Equipment: The** contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment.

   a. The contractor shall notify all potential subcontractors and suppliers of his/her EEO obligations under this contract.

   b. Disadvantaged business enterprises (DBE), as defined in 49 CFR 23, shall have equal opportunity to compete for and perform subcontracts which the contractor enters into pursuant to this contract. The contractor will use his best efforts to solicit bids from and to utilize DBE subcontractors or subcontractors with meaningful minority group and female representation among their employees. Contractors shall obtain lists of DBE construction firms from SHA personnel.

   c. The contractor will use his best efforts to ensure subcontractor compliance with their EEO obligations.

9. **Records and Reports: The** contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following completion of the contract work and shall be available at reasonable times and places for inspection by authorized representatives of the SHA and the FHWA.

   a. The records kept by the contractor shall document the following:

      (1) The number of minority and non-minority group members and women employed in each work classification on the project;

      (2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women;

      (3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minority and female employees; and

      (4) The progress and efforts being made in securing the services of DBE subcontractors or subcontractors with meaningful minority and female representation among their employees.

   b. The contractors will submit an annual report to the SHA each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form FHWA-1391. If on-the-job training is being required by special provision, the contractor will be required to collect and report training data.

III. NONSEGREGATED FACILITIES

(Applicable to all Federal-aid construction contracts and to all related subcontracts of $10,000 or more.)

a. By submission of this bid, the execution of this contract or subcontract, or the consummation of this material supply agreement or purchase order, as appropriate, the bidder, Federal-aid construction contractor, subcontractor, material supplier, or vendor, as appropriate, certifies that the firm does not maintain or provide for its employees any segregated facilities at any of its establishments, and that the firm does not permit its employees to perform their services at any location, under its control, where segregated facilities are maintained. The firm agrees that a breach of this certification is a violation of the EEO provisions of this contract. The firm further certifies that no employee will be denied access to adequate facilities on the basis of sex or disability.

b. As used in this certification, the term "segregated facilities" means any waiting rooms, work areas, restrooms and washrooms, restaurants and other eating areas, time clocks, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing facilities provided for employees which are segregated by explicit directive, or are, in fact, segregated on the basis of race, color, religion, national origin, age or disability, because of habit, local custom, or otherwise. The only exception will be for the disabled when the demands for accessibility override (e.g. disabled parking).

c. The contractor agrees that it has obtained or will obtain identical certification from proposed subcontractors or material suppliers prior to award of subcontracts or consummation of material supply agreements of $10,000 or more and that it will retain such certifications in its files.

IV. PAYMENT OF PREDETERMINED MINIMUM WAGE

(Applicable to all Federal-aid construction contracts exceeding $2,000 and to all related subcontracts, except for projects located on roadways classified as local roads or rural minor collectors, which are exempt.)

1. **General:**

a. All mechanics and laborers employed or working upon the site of the work will be paid unconditionally and not less often than once a week and without subsequent deduction or rebate on any account [except such payroll deductions as are permitted by regulations (29 CFR 3)] issued by the Secretary of Labor under the Copeland Act (40 U.S.C. 276c) the full amounts of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment. The payment shall be computed at wage rates not less than those contained in the wage determination of the Secretary of Labor (hereinafter "the wage determination") which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor or its subcontractors and such laborers and mechanics. The wage determination (including any additional classifications and wage rates conformed under paragraph 2 of this Section IV and the DOL poster (WH-1321) or Form FHWA-1495) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers. For the purpose of this Section, contributions made or costs reasonably anticipated for bona fide fringe benefits under Section 1(b)(2) of the Davis-Bacon Act (40 U.S.C. 276a) on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of Section IV, paragraph 3b, hereof. Also, for the purpose of this Section, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs, which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in paragraphs 4 and 5 of this Section IV.

b. Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein, provided, that the employer's payroll records accurately set forth the time spent in each classification in which work is performed.

c. All rulings and interpretations of the Davis-Bacon Act and related acts contained in 29 CFR 1, 3, and 5 are herein incorporated by reference in this contract.

2. **Classification:**

a. The SHA contracting officer shall require that any class of laborers or mechanics employed under the contract, which is not listed in the wage determination, shall be classified in conformance with the wage determination.

b. The contracting officer shall approve an additional classification, wage rate and fringe benefits only when the following criteria have been met:

(1) the work to be performed by the additional classification requested is not performed by a classification in the wage determination;

(2) the additional classification is utilized in the area by the construction industry;

(3) the proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination; and

(4) with respect to helpers, when such a classification prevails in the area in which the work is performed.

c. If the contractor or subcontractors, as appropriate, the laborers and mechanics (if known) to be employed in the additional classification or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be

sent by the contracting officer to the DOL, Administrator of the Wage and Hour Division, Employment Standards Administration, Washington, D.C. 20210. The Wage and Hour Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

d. In the event the contractor or subcontractors, as appropriate, the laborers or mechanics to be employed in the additional classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. Said Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary

e. The wage rate (including fringe benefits where appropriate) determined pursuant to paragraph 2c or 2d of this Section IV shall be paid to all workers performing work in the additional classification from the first day on which work is performed in the classification.

3. **Payment of Fringe Benefits:**

a. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor or subcontractors, as appropriate, shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly case equivalent thereof.

b. If the contractor or subcontractor, as appropriate, does not make payments to a trustee or other third person, he/she may consider as a part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, provided, that the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

4. **Apprentices and Trainees (Programs of the U.S. DOL) and Helpers:**

a. Apprentices:

(1) Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the DOL, Employment and Training Administration, Bureau of Apprenticeship and Training, or with a State apprenticeship agency recognized by the Bureau, or if a person is employed in his/her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Bureau of Apprenticeship and Training or a State apprenticeship agency (where appropriate) to be eligible for probationary employment as an apprentice.

(2) The allowable ratio of apprentices to journeyman-level employees on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any employee listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate listed in the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor or subcontractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman-level hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

(3) Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeyman-level hourly rate specified in

the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator for the Wage and Hour Division determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

(4) In the event the Bureau of Apprenticeship and Training, or a State apprenticeship agency recognized by the Bureau, withdraws approval of an apprenticeship program, the contractor or subcontractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the comparable work performed by regular employees until an acceptable program is approved.

b. Trainees:

(1) Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the DOL, Employment and Training Administration.

(2) The ratio of trainees to journeyman-level employees on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

(3) Every trainee must be paid at not less than the rate specified in the approved program for his/her level of progress, expressed as a percentage of the journeyman-level hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman-level wage rate on the wage determination which provides for less than full fringe benefits for apprentices, in which case such trainees shall receive the same fringe benefits as apprentices.

(4) In the event the Employment and Training Administration withdraws approval of a training program, the contractor or subcontractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Helpers:

Helpers will be permitted to work on a project if the helper classification is specified and defined on the applicable wage determination or is approved pursuant to the conformance procedure set forth in Section IV.2. Any worker listed on a payroll at a helper wage rate, who is not a helper under an approved definition, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed.

5. **Apprentices and Trainees (Programs of the U.S. DOT):**
Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

6. **Withholding:**
The SHA shall upon its own action or upon written request of an authorized representative of the DOL withhold, or cause to be withheld, from the contractor or subcontractor under this contract or any other Federal contract with the same prime contractor, or any other Federally-assisted contract subject to Davis-Bacon prevailing wage

requirements which is held by the same prime contractor, as much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the SHA contracting officer may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

7. **Overtime Requirements:**
No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers, mechanics, watchmen, or guards (including apprentices, trainees, and helpers described in paragraphs 4 and 5 above) shall require or permit any laborer, mechanic, watchman, or guard in any workweek in which he/she is employed on such work, to work in excess of 40 hours in such workweek unless such laborer, mechanic, watchman, or guard receives compensation at a rate not less than one-and-one-half times his/her basic rate of pay for all hours worked in excess of 40 hours in such workweek.

8. **Violation:**
Liability for Unpaid Wages; Liquidated Damages: In the event of any violation of the clause set forth in paragraph 7 above, the contractor and any subcontractor responsible thereof shall be liable to the affected employee for his/her unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory) for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer, mechanic, watchman, or guard employed in violation of the clause set forth in paragraph 7, in the sum of $10 for each calendar day on which such employee was required or permitted to work in excess of the standard work week of 40 hours without payment of the overtime wages required by the clause set forth in paragraph 7.

9. **Withholding for Unpaid Wages and Liquidated Damages:**
The SHA shall upon its own action or upon written request of any authorized representative of the DOL withhold, or cause to be withheld, from any monies payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other Federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph 8 above.

V. STATEMENTS AND PAYROLLS

(Applicable to all Federal-aid construction contracts exceeding $2,000 and to all related subcontracts, except for projects located on roadways classified as local roads or rural collectors, which are exempt.)

1. **Compliance with Copeland Regulations (29 CFR 3):**

The contractor shall comply with the Copeland Regulations of the Secretary of Labor which are herein incorporated by reference.

2. **Payrolls and Payroll Records:**

a. Payrolls and basic records relating thereto shall be maintained by the contractor and each subcontractor during the course of the work and preserved for a period of 3 years from the date of completion of the contract for all laborers, mechanics, apprentices, trainees, watchmen, helpers, and guards working at the site of the work.

b. The payroll records shall contain the name, social security number, and address of each such employee; his or her correct classification; hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalent thereof the types described in Section 1(b)(2)(B) of the Davis Bacon Act); daily and weekly number of hours worked; deductions made; and actual wages paid. In addition, for Appalachian contracts, the payroll records shall contain a notation indicating whether the employee does, or does not, normally reside in the labor area as defined in Attachment A, paragraph 1. Whenever the Secretary of Labor, pursuant to Section IV, paragraph 3b, has found that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in Section 1(b)(2)(B) of the Davis Bacon Act, the contractor and each subcontractor shall maintain records which show

that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, that the plan or program has been communicated in writing to the laborers or mechanics affected, and show the cost anticipated or the actual cost incurred in providing benefits. Contractors or subcontractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprentices and trainees, and ratios and wage rates prescribed in the applicable programs.

c. Each contractor and subcontractor shall furnish, each week in which any contract work is performed, to the SHA resident engineer a payroll of wages paid each of its employees (including apprentices, trainees, and helpers, described in Section IV, paragraphs 4 and 5, and watchmen and guards engaged on work during the preceding weekly payroll period). The payroll submitted shall set out accurately and completely all of the information required to be maintained under paragraph 2b of this Section V. This information may be submitted in any form desired. Optional Form WH-347 is available for this purpose and may be purchased from the Superintendent of Documents (Federal stock number 029-005-0014-1), U.S. Government Printing Office, Washington, D.C. 20402. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors.

d. Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his/her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

(1) that the payroll for the payroll period contains the information required to be maintained under paragraph 2b of this Section V and that such information is correct and complete;

(2) that such laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in the Regulations, 29 CFR 3;

(3) that each laborer or mechanic has been paid not less that the applicable wage rate and fringe benefits or cash equivalent for the classification of worked performed, as specified in the applicable wage determination incorporated into the contract.

e. The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 2d of this Section V.

f. The falsification of any of the above certifications may subject the contractor to civil or criminal prosecution under 18 U.S.C. 1001 and 31 U.S.C. 231.

g. The contractor or subcontractor shall make the records required under paragraph 2b of this Section V available for inspection, copying, or transcription by authorized representatives of the SHA, the FHWA, or the DOL, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the SHA, the FHWA, the DOL, or all may, after written notice to the contractor, sponsor, applicant, or owner, take such actions as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

VI. RECORD OF MATERIALS, SUPPLIES, AND LABOR

1. On all Federal-aid contracts on the National Highway System, except those which provide solely for the installation of protective devices at railroad grade crossings, those which are constructed on a force account or direct labor basis, highway beautification contracts, and contracts for which the total final construction cost for roadway and bridge is less than $1,000,000 (23 CFR 635) the contractor shall:

a. Become familiar with the list of specific materials and supplies contained in Form FHWA-47, "Statement of Materials and Labor Used by Contractor of Highway Construction Involving Federal Funds," prior to the commencement of work under this contract.

b. Maintain a record of the total cost of all materials and supplies purchased for and incorporated in the work, and also of the quantities of those specific materials and supplies listed on Form FHWA-47, and in the units shown on Form FHWA-47.

c. Furnish, upon the completion of the contract, to the SHA resident engineer on Form FHWA-47 together with the data required in paragraph 1b relative to materials and supplies, a final labor summary of all contract work indicating the total hours worked and the total amount earned.

2. At the prime contractor's option, either a single report covering all contract work or separate reports for the contractor and for each subcontract shall be submitted.

VII. SUBLETTING OR ASSIGNING THE CONTRACT

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the State. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635).

   a. "Its own organization" shall be construed to include only workers employed and paid directly by the prime contractor and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor, assignee, or agent of the prime contractor.

   b. "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid on the contract as a whole and in general are to be limited to minor components of the overall contract.

2. The contract amount upon which the requirements set forth in paragraph 1 of Section VII is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the SHA contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the SHA contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the SHA has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

VIII. SAFETY - ACCIDENT PREVENTION

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the SHA contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 333).

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of

compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 333).

IX. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, the following notice shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

Notice To All Personnel Engaged On Federal-Aid Highway Projects

18 U.S.C. 1020 READS AS FOLLOWS:

"Whoever being an officer, agent, or employee of the United States, or any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined not more that $10,000 or imprisoned not more than 5 years or both."

X. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

(Applicable to all Federal-aid construction contracts and to all related subcontracts of $100,000 or more.)

By submission of this bid or the execution of this contract, or subcontract, as appropriate, the bidder, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1. That any facility that is or will be utilized in the performance of this contract, unless such contract is exempt under the Clean Air Act, as amended (42 U.S.C. 1857 et seq., as amended by Pub.L. 91-604), and under the Federal Water Pollution Control Act, as amended (33 U.S.C. 1251 et seq., as amended by Pub.L. 92-500), Executive Order 11738, and regulations in implementation thereof (40 CFR 15) is not listed, on the date of contract award, on the U.S. Environmental Protection Agency (EPA) List of Violating Facilities pursuant to 40 CFR 15.20.

2. That the firm agrees to comply and remain in compliance with all the requirements of Section 114 of the Clean Air Act and Section 308 of the Federal Water Pollution Control Act and all regulations and guidelines listed thereunder.

3. That the firm shall promptly notify the SHA of the receipt of any communication from the Director, Office of Federal Activities, EPA, indicating that a facility that is or will be utilized for the contract is under consideration to be listed on the EPA List of Violating Facilities.

4. That the firm agrees to include or cause to be included the requirements of paragraph 1 through 4 of this Section X in every nonexempt subcontract, and further agrees to take such action as the government may direct as a means of enforcing such requirements.

XI. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

1. **Instructions for Certification - Primary Covered Transactions:**

(Applicable to all Federal-aid contracts - 49 CFR 29)

a. By signing and submitting this proposal, the prospective primary participant is providing the certification set out below.

b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective primary participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.

c. The certification in this clause is a material representation of fact upon which reliance was placed when the department or agency determined to enter into this transaction. If it is later determined that the prospective primary participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause of default.

d. The prospective primary participant shall provide immediate written notice to the department or agency to whom this proposal is submitted if any time the prospective primary participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.

e. The terms "covered transaction," "debarred," "suspended," "ineligible," "lower tier covered transaction," "participant," "person," "primary covered transaction," "principal," "proposal," and "voluntarily excluded," as used in this clause, have the meanings set out in the Definitions and Coverage sections of rules implementing Executive Order 12549. You may contact the department or agency to which this proposal is submitted for assistance in obtaining a copy of those regulations.

f. The prospective primary participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.

g. The prospective primary participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," provided by the department or agency entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions.

h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant may decide the method and frequency by which it determines the eligibility of its principals. Each participant may, but is not required to, check the nonprocurement portion of the "Lists of Parties Excluded From Federal Procurement or Nonprocurement Programs" (Nonprocurement List) which is compiled by the General Services Administration.

i. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph f of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

2. **Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion — Primary Covered Transactions:**

a. The prospective primary participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal department or agency;

(2) Have not within a 3-year period preceding this proposal been convicted of or had a civil judgement rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph 1b of this certification; and

(4) Have not within a 3-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

b. Where the prospective primary participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

3. **Instructions for Certification - Lower Tier Covered Transactions:**
(Applicable to all subcontracts, purchase orders and other lower tier transactions of $25,000 or more - 49 CFR 29)

a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "primary covered transaction," "participant," "person," "principal," "proposal," and "voluntarily excluded," as used in this clause, have the meanings set out in the Definitions and Coverage sections of rules implementing Executive Order 12549. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations.

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant may decide the method and frequency by which it determines the eligibility of its principals. Each participant may, but is not required to, check the Nonprocurement List.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

4. **Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion — Lower Tier Covered Transactions:**

a. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participation in this transaction by any Federal department or agency.

b. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

XII. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

(Applicable to all Federal-aid construction contracts and to all related subcontracts which exceed $100,000 - 49 CFR 20)

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than $10,000 and not more than $100,000 for each such failure.

3. The prospective participant also agrees by submitting his or her bid or proposal that he or she shall require that the language of this certification be included in all lower tier subcontracts, which exceed $100,000 and that all such recipients shall certify and disclose accordingly.

FEDERAL-AID FEMALE AND MINORITY GOALS

In accordance with Section II, "Nondiscrimination," of "Required Contract Provisions Federal-aid Construction Contracts" the following are the goals for female utilization:

Goal for Women (applies nationwide).....(percent) 6.9

The following are goals for minority utilization:

CALIFORNIA ECONOMIC AREA

		Goal (Percent)
174	**Redding, CA:**	
	Non-SMSA Counties	6.8
	CA Lassen; CA Modoc;CA Plumas;CA Shasta; CA Siskiyou; CA Tehama.	
175	**Eureka, CA**	
	Non-SMSA Counties	6.6
	CA Del Norte; CA Humboldt; CA Trinity.	
176	**San Francisco-Oakland-San Jose, CA:**	
	SMSA Counties:	
	7120 Salinas-Seaside-Monterey, CA	28.9
	CA Monterey.	
	7360 San Francisco-Oakland	25.6
	CA Alameda; CA Contra Costa; CA Marin; CA San Francisco; CA San Mateo.	
	7400 San Jose, CA	19.6
	CA Santa Clara.	
	7485 Santa Cruz, CA.	14.9
	CA Santa Cruz.	
	7500 Santa Rosa, CA	9.1
	CA Sonoma.	
	8720 Vallejo-Fairfield- Napa, CA	17.1
	CA Napa; CA Solano	
	Non-SMSA Counties	23.2
	CA Lake; CA Mendocino; CA San Benito	
177	**Sacramento, CA:**	
	SMSA Counties:	
	6920 Sacramento, CA	16.1
	CA Placer; CA Sacramento; CA Yolo.	
	Non-SMSA Counties	14.3
	CA Butte; CA Colusa; CA El Dorado; CA Glenn; CA Nevada; CA Sierra; CA Sutter; CA Yuba.	
178	**Stockton-Modesto, CA:**	
	SMSA Counties:	
	5170 Modesto, CA	12.3
	CA Stanislaus.	
	8120 Stockton, CA	24.3
	CA San Joaquin.	
	Non-SMSA Counties	19.8
	CA Alpine; CA Amador; CA Calaveras; CA Mariposa;CA Merced; CA Tuolumne.	

		Goal (Percent)
179	**Fresno-Bakersfield, CA**	
	SMSA Counties:	
	0680 Bakersfield, CA	19.1
	CA Kern.	
	2840 Fresno, CA	26.1
	CA Fresno.	
	Non-SMSA Counties	23.6
	CA Kings; CA Madera; CA Tulare.	
180	**Los Angeles, CA:**	
	SMSA Counties:	
	0360 Anaheim-Santa Ana-Garden Grove, CA	11.9
	CA Orange.	
	4480 Los Angeles-Long Beach, CA	28.3
	CA Los Angeles.	
	6000 Oxnard-Simi Valley-Ventura, CA	21.5
	CA Ventura.	
	6780 Riverside-San Bernardino-Ontario, CA.	19.0
	CA Riverside; CA San Bernardino.	
	7480 Santa Barbara-Santa Maria-Lompoc, CA	19.7
	CA Santa Barbara.	
	Non-SMSA Counties	24.6
	CA Inyo; CA Mono; CA San Luis Obispo.	
181	**San Diego, CA:**	
	SMSA Counties	
	7320 San Diego, CA.	16.9
	CA San Diego.	
	Non-SMSA Counties	18.2
	CA Imperial.	

In addition to the reporting requirements set forth elsewhere in this contract the Contractor and subcontractors holding subcontracts, not including material suppliers, of $10,000 or more, shall submit for every month of July during which work is performed, employment data as contained under Form FHWA PR-1391 (Appendix C to 23 CFR, Part 230), and in accordance with the instructions included thereon.

FEDERAL REQUIREMENT TRAINING SPECIAL PROVISIONS

As part of the Contractor's equal employment opportunity affirmative action program, training shall be provided as follows:

The Contractor shall provide on-the-job training to develop full journeymen in the types of trades or job classification involved.

The goal for the number of trainees or apprentices to be trained under the requirements of this special provision will be 16.

In the event the Contractor subcontracts a portion of the contract work, he shall determine how many, if any, of the trainees or apprentices are to be trained by the subcontractor, provided however, that the Contractor shall retain the primary responsibility for meeting the training requirements imposed by this special provision. The Contractor shall also insure that this Training Special Provision is made applicable to such subcontract. Where feasible, 25 percent of trainees or apprentices in each occupation shall be in their first year of apprenticeship or training.

The number of trainees or apprentices shall be distributed among the work classifications on the basis of the Contractor's needs and the availability of journeymen in the various classifications within a reasonable area of recruitment. Prior to commencing work, the Contractor shall submit to the Department for approval the number of trainees or apprentices to be trained in each selected classification and training program to be used. Furthermore, the Contractor shall specify the starting time for training in each of the classifications. The Contractor will be credited for each trainee or apprentice employed by him on the contract work who is currently enrolled or becomes enrolled in an approved program and will be reimbursed for such trainees or apprentices as provided hereinafter.

Training and upgrading of minorities and women toward journeymen status is a primary objective of this Training Special Provision. Accordingly, the Contractor shall make every effort to enroll minority and women trainees or apprentices (e.g., by conducting systematic and direct recruitment through public and private sources likely to yield minority and women trainees or apprentices) to the extent such persons are available within a reasonable area of recruitment. The Contractor will be responsible for demonstrating the steps that he has taken in pursuance thereof, prior to a determination as to whether the Contractor is in compliance with this Training Special Provision. This training commitment is not intended, and shall not be used, to discriminate against any applicant for training, whether a member of a minority group or not.

No employee shall be employed as a trainee or apprentice in any classification in which he has successfully completed a training course leading to journeyman status or in which he has been employed as a journeyman. The Contractor should satisfy this requirement by including appropriate questions in the employee application or by other suitable means. Regardless of the method used the Contractor's records should document the findings in each case.

The minimum length and type of training for each classification will be as established in the training program selected by the Contractor and approved by both the Department and the Federal Highway Administration. The Department and the Federal Highway Administration will approve a program if it is reasonably calculated to meet the equal employment opportunity obligations of the Contractor and to qualify the average trainee or apprentice for journeyman status in the classification concerned by the end of the training period. Furthermore, apprenticeship programs registered with the U.S. Department of Labor, Bureau of Apprenticeship and Training, or with the State of California, Department of Industrial Relations, Division of Apprenticeship Standards recognized by the Bureau and training programs approved but not necessarily sponsored by the U.S. Department of Labor, Manpower Administration, Bureau of Apprenticeship and Training shall also be considered acceptable provided it is being administered in a manner consistent with the equal employment obligations of Federal-aid highway construction contracts. Approval or acceptance of a training program shall be obtained from the State prior to commencing work on the classification covered by the program. It is the intention of these provisions that training is to be provided in the construction crafts rather than clerk-typists or secretarial-type positions. Training is permissible in lower level management positions such as office engineers, estimators, timekeepers, etc., where the training is oriented toward construction applications. Training in the laborer classification may be permitted provided that significant and meaningful training is provided and approved by the division office. Some offsite training is permissible as long as the training is an integral part of an approved training program and does not comprise a significant part of the overall training.

Except as otherwise noted below, the Contractor will be reimbursed 80 cents per hour of training given an employee on this contract in accordance with an approved training program. As approved by the Engineer, reimbursement will be made for training of persons in excess of the number specified herein. This reimbursement will be made even though the Contractor receives additional training program funds from other sources, provided such other source does not specifically prohibit the Contractor from receiving other reimbursement. Reimbursement for offsite training indicated above may only be made to the Contractor where he does one or more of the following and the trainees or apprentices are concurrently employed on a Federal-aid project; contributes to the cost of the training, provides the instruction to the trainee or apprentice or pays the trainee's or apprentice's wages during the offsite training period.

No payment shall be made to the Contractor if either the failure to provide the required training, or the failure to hire the trainee or apprentice as a journeyman, is caused by the Contractor and evidences a lack of good faith on the part of the Contractor in meeting the requirements of this Training Special Provision. It is normally expected that a trainee or apprentice

will begin his training on the project as soon as feasible after start of work utilizing the skill involved and remain on the project as long as training opportunities exist in his work classification or until he has completed his training program. It is not required that all trainees or apprentices be on board for the entire length of the contract. A Contractor will have fulfilled his responsibilities under this Training Special Provision if he has provided acceptable training to the number of trainees or apprentices specified. The number trained shall be determined on the basis of the total number enrolled on the contract for a significant period.

Only trainees or apprentices registered in a program approved by the State of California's State Administrator of Apprenticeship may be employed on the project and said trainees or apprentices shall be paid the standard wage specified under the regulations of the craft or trade at which they are employed.

The Contractor shall furnish the trainee or apprentice a copy of the program he will follow in providing the training. The Contractor shall provide each trainee or apprentice with a certification showing the type and length of training satisfactorily completed.

The Contractor will provide for the maintenance of records and furnish periodic reports documenting his performance under this Training Special Provision.