


ELEVATION

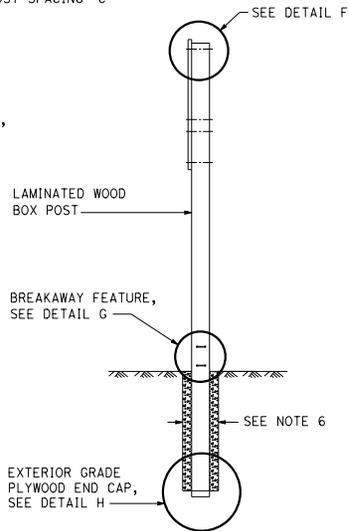

SIDE VIEW


SIGN PANEL LENGTH (SEE NOTE 1)	SIGN PANEL OVERHANG	MOUNTING HOLE SPACING
"A"	"B"	"C"
8'-0"	1'-6"	5'-0"
9'-0"	1'-10"	5'-4"
10'-0"	2'-0"	6'-0"
11'-0"	2'-0"	7'-0"
12'-0"	2'-6"	7'-0"
13'-0"	2'-6"	8'-0"
14'-0"	2'-6"	9'-0"
15'-0"	3'-0"	9'-0"
16'-0"	3'-3"	9'-6"
17'-0"	3'-3"	10'-6"
18'-0"	3'-6"	11'-0"
19'-0"	3'-9"	11'-6"
20'-0"	4'-0"	12'-0"
21'-0"	4'-3"	12'-6"
22'-0"	4'-3"	13'-6"
23'-0"	4'-6"	14'-0"
24'-0"	4'-9"	14'-6"

TABLE 1


"h _L " OR "h _R " (IN FEET)	TOTAL SIGN AREA SQFT				
	40 TO 90	90+ TO 140	140+ TO 190	190+ TO 240	240+ TO
9'-0" TO 13'-0"	6'	6.5'	7.5'	8.5'	9'
13'-0"+ TO 17'-0"	6'	7'	8'	9'	10'
17'-0"+ TO 21'-0"	6'	7.5'	8'	9'	9'
21'-0"+ TO 26'-0"	7'	8'	9'		

TABLE 2


See Note 8

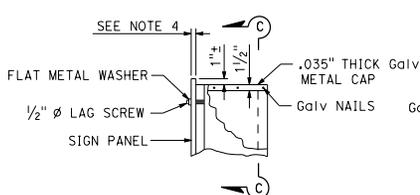

DETAIL F

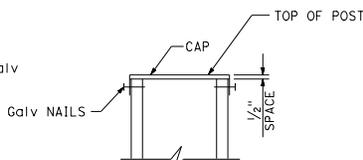


SECTION C-C

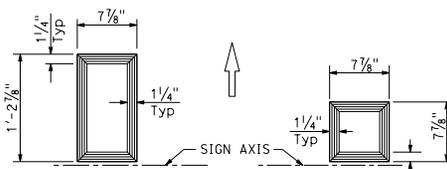


TYPE L POST

TYPE M POST


SECTION A-A

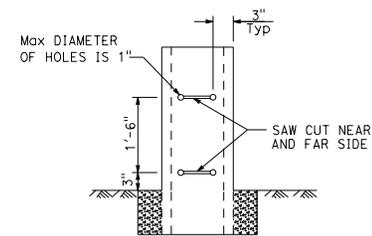

DETAIL G

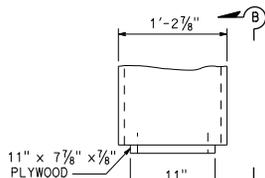


TYPE L POST




TYPE M POST

DETAIL H



SECTION B-B



GALV METAL CAP

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
ROADSIDE SIGNS
LAMINATED WOOD BOX POST
TYPICAL INSTALLATION
DETAILS No. 3

NO SCALE

RSP RS3 DATED OCTOBER 30, 2015 SUPERSEDES STANDARD PLAN RS3
DATED MAY 20, 2011 - PAGE 332 OF THE STANDARD PLANS BOOK DATED 2010.

REVISED STANDARD PLAN RSP RS3

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS

Stanley P. Johnson
REGISTERED CIVIL ENGINEER
No. C67935
Exp. 3-31-16
CIVIL
STATE OF CALIFORNIA

October 30, 2015
PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

- NOTES:
- See Project Plans for:
Location of each sign.
Length of sign panel "A".
Depth of sign "D".
Height "h_L" and "h_R" of centerline of sign above ground line at each post.
Type of post, L and M.
See Standard Plan RS1 for other details.
 - "e" Indicates location of 1/2" lag screws and existing holes in panels. Lag screws are to be embedded at least 1" into post using 3/8" diameter pilot holes.
 - "x" Indicates location of additional 1/2" lag screws required when the depth of sign panel (d) and the length of sign panel (A) are as follows:
- | A | d |
|------------------|-------|
| 17'-0" to 24'-0" | 5'-0" |
| 19'-0" to 24'-0" | 4'-6" |
| 21'-0" to 24'-0" | 4'-0" |
| 24'-0" | 3'-6" |
- Type B laminated sign panels are 1" nominal thick for sign lengths of 15'-0" and less. Panels over 15'-0" in length and Type H laminated sign panels are 2 1/2" nominal thick.
 - Embedment "E" for Type L post shall conform to the requirements in Table 2. Embedment for Type M posts shall be 6'-0" minimum.
 - Diameter of post holes for Type L posts shall be at least 2'-6". Diameter of post holes for Type M posts shall be at least 2'-0".
 - Dimensions shown on project plans are for fabrication. During installation adjust these dimensions to provide A level sign approximately 7'-0" above roadway shoulder.
 - Minimum post embedment "E" for Type L post.

2010 REVISED STANDARD PLAN RSP RS3