



DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

Jeffrey B. Woody
 REGISTERED CIVIL ENGINEER
 No. C41260
 Exp. 3-31-17
 CIVIL
 STATE OF CALIFORNIA


October 30, 2015
 PLANS APPROVAL DATE
 THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

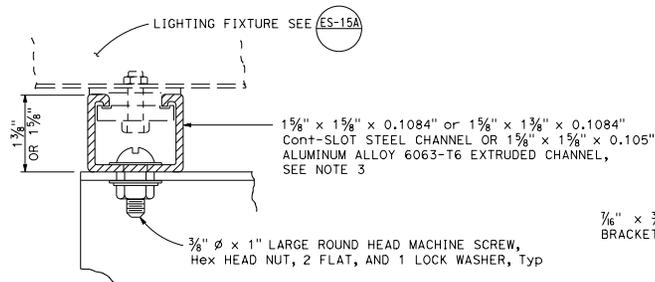

LIGHTING FIXTURE MOUNTING CHANNEL DETAILS 1

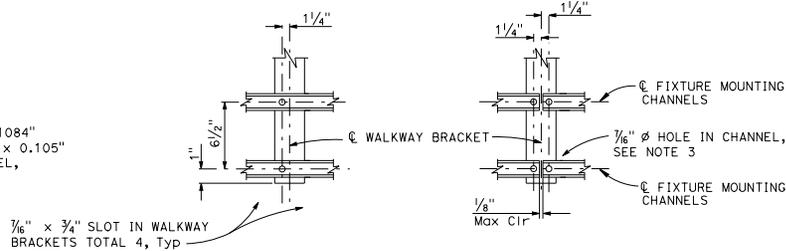


LIGHTING FIXTURE MOUNTING CHANNEL DETAILS 2

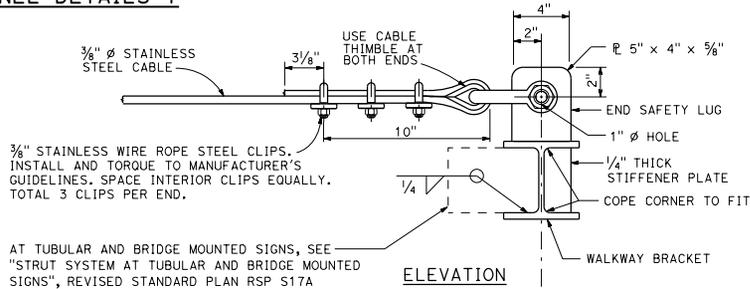


NOTES:


1. Welded type grating shall have 1/4" x 1/8" bearing bars at 1 3/8" centers with 1/4" diameter (or equal) cross bars at 4" centers. If mechanical lock grating is used, it shall be equal in strength to the welded type. Alternate hold-down clips may be submitted for approval.
2. Walkway grating and light fixture mounting channels to be continuous (no splices) over as many walkway brackets as practical and consistent with fabrication, ease of handling and assembly.
3. Contractor may substitute 1 5/8" x 1 5/8" x .1084" cont-slot steel channel with pre-punched slots not larger than 1/2" x 3". Slots shall be at bottom of channel and shall be parallel to channel. Slots shall be spaced not closer than 4" center to center.
4. Place an equal amount of washers on each side to align cable with end lug without restricting shackle bolt rotation or contacting cable.

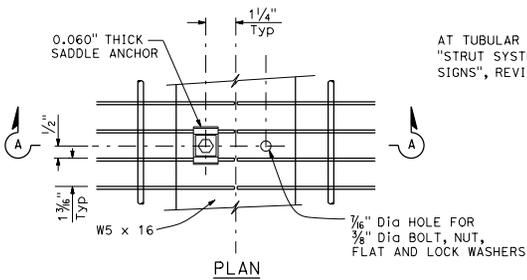

SECTION A-A
WALKWAY GRATING DETAILS
Shown at splice

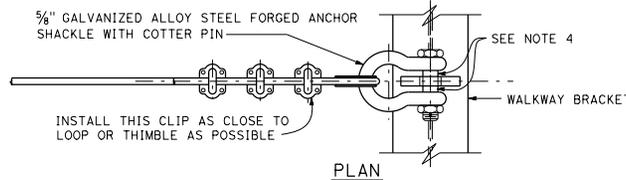

END SAFETY CABLE DETAIL

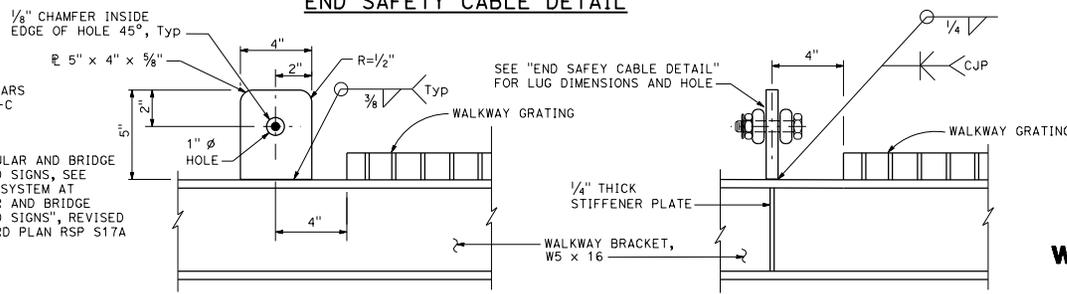

INTERIOR SAFETY LUG DETAIL
(At every walkway bracket between exterior walkway brackets)

END SAFETY LUG DETAIL
(At exterior walkway brackets)

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
OVERHEAD SIGNS
WALKWAY DETAILS No. 2
NO SCALE

RSP S17 DATED OCTOBER 30, 2015 SUPERSEDES
STANDARD PLAN S17 DATED MAY 20, 2011 -
PAGE 350 OF THE STANDARD PLANS BOOK DATED 2010.

REVISED STANDARD PLAN RSP S17

2010 REVISED STANDARD PLAN RSP S17