


DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS

Stanley P. Johnson
REGISTERED CIVIL ENGINEER

May 20, 2011
PLANS APPROVAL DATE

Stanley P. Johnson
No. C5735
Exp. 3-31-12
CIVIL
REGISTERED PROFESSIONAL ENGINEER
STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

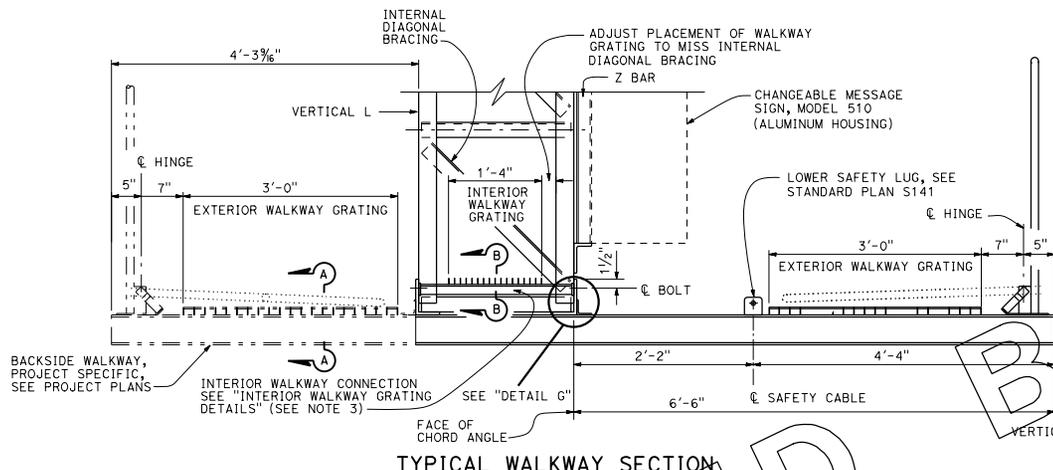


TYPICAL WALKWAY SECTION

NOTES:


1. Welded type grating shall have 1/4" x 1/8" bearing bars at 1 3/8" centers with 1/4" diameter (or equal) cross bars at 4" centers. If mechanical lock grating is used, it shall be equal in strength to the welded type. Alternate hold-down clips may be submitted for approval.
2. Walkway grating to be continuous (no splices) over as many walkway brackets as practical and consistent with fabrication, ease of handling and assembly.
3. Interior grating shall be installed only for projects requiring backside walkways.

419

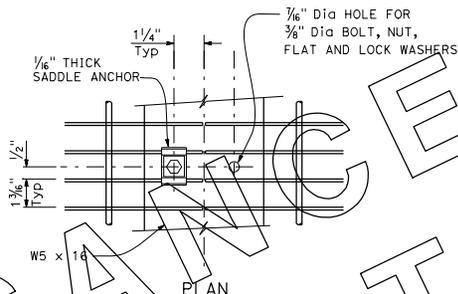


EXTERIOR WALKWAY GRATING DETAILS

Shown at splice

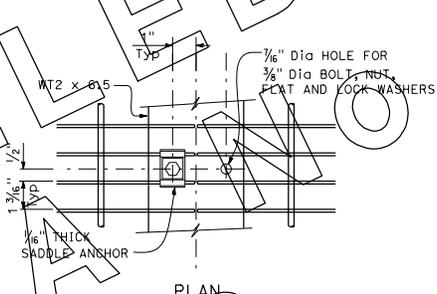


INTERIOR WALKWAY GRATING DETAILS


Shown at splice

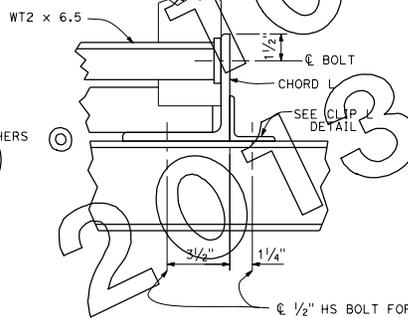

DETAIL G

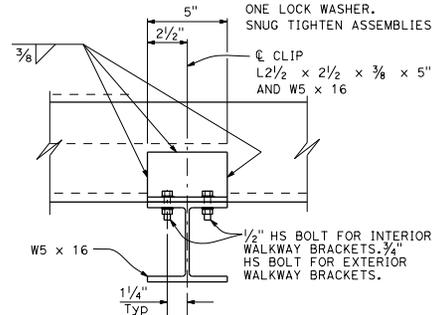

CLIP L DETAIL

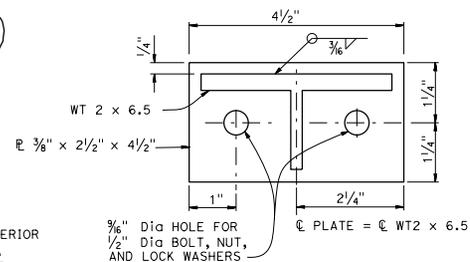

END PLATE CONNECTOR DETAIL

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
**OVERHEAD SIGN-TRUSS
SINGLE POST TYPE
WALKWAY DETAILS
CHANGEABLE MESSAGE SIGNS
MODEL 510**
NO SCALE

S133

2010 STANDARD PLAN S133