





DIST	COUNTY	ROUTE	POST MILES	SHEET TOTAL
			TOTAL PROJECT	SHEETS


 REGISTERED CIVIL ENGINEER
 No. CS793
 Exp. 3-31-16
 CIVIL
 STATE OF CALIFORNIA

October 30, 2015
 PLANS APPROVAL DATE
 THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

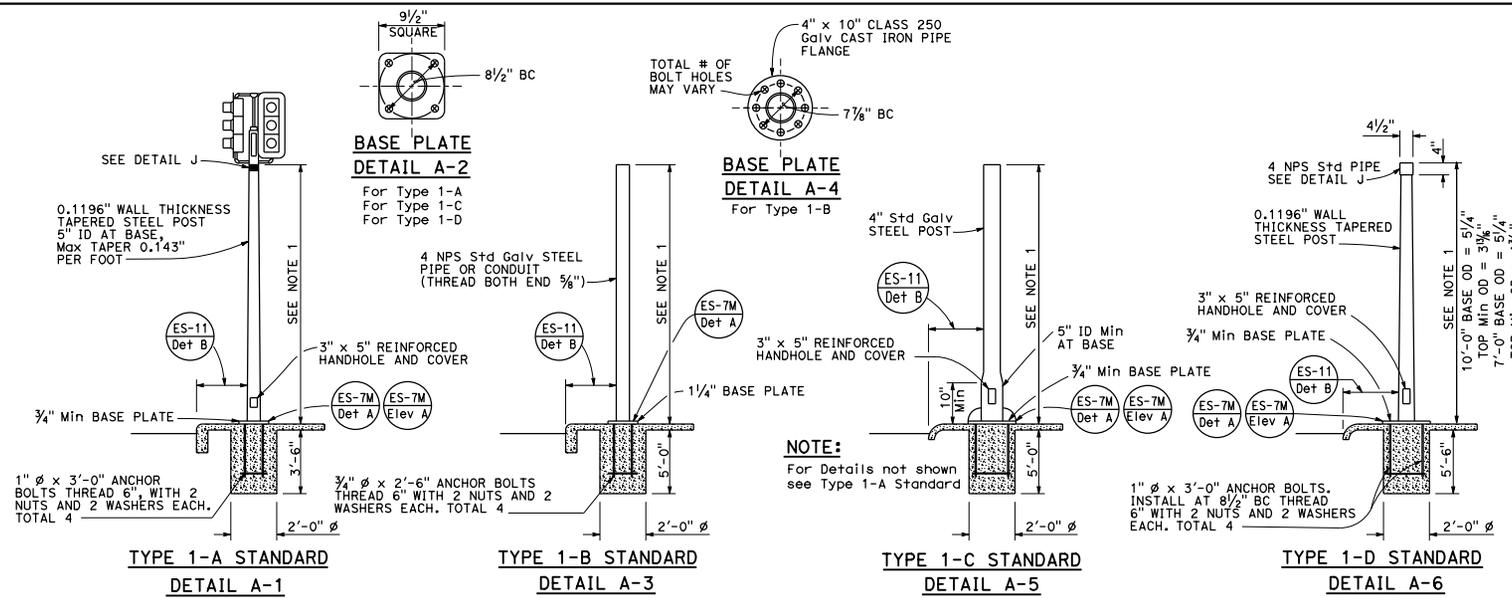

- NOTES:**
- Standards shall be 10'-0" ± 2" for vehicle signals and 7'-0" ± 2" for pedestrian signals unless shorter pole is noted on project plans.
 - Top of standards shall be 4 1/2" OD.
 - Conduits shall extend 2" maximum above finished surface of foundation and for Types 1-A, 1-C and 1-D shall be sloped toward handhole.
 - Anchor bolts shall be bonded to conduit or grounding conductor.
 - For additional notes and details, see Standard Plans ES-7M and ES-7N.
 - Pour foundation concrete against undisturbed soil.
 - For standards with handhole, locate in the downstream side of traffic.
 - Coupling nuts to be used only when shown or specified on project plans.

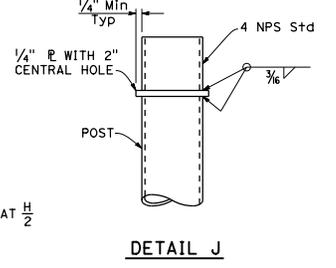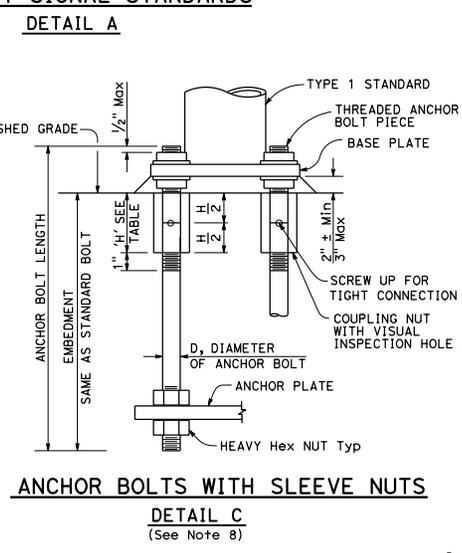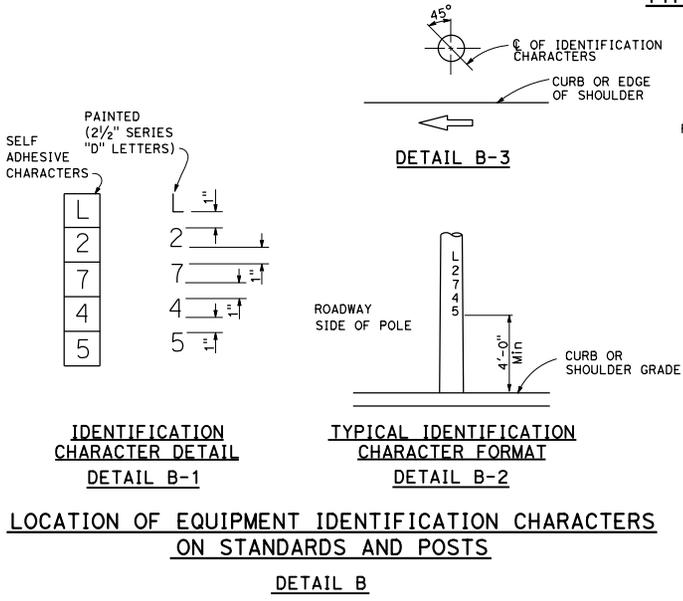

BOLT DIAMETER	NUT TABLE THICKNESS 'H'
3/4"	2 1/4"
1"	3"

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

**ELECTRICAL SYSTEMS
(SIGNAL AND LIGHTING STANDARD, TYPE 1
AND EQUIPMENT IDENTIFICATION CHARACTERS)**

NO SCALE

ES-7B