




**TYPICAL WALKWAY SECTION**

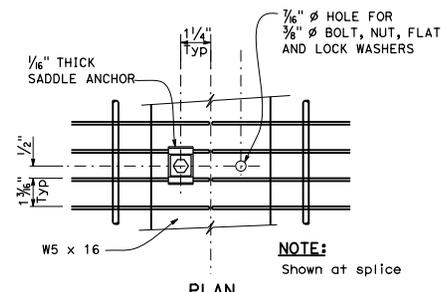

**EXTERIOR WALKWAY GRATING DETAILS**

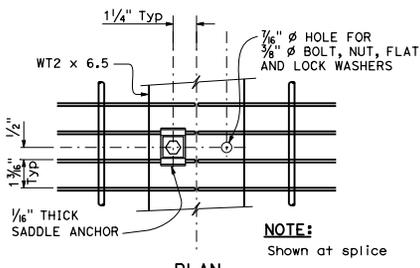


**INTERIOR WALKWAY GRATING DETAILS**

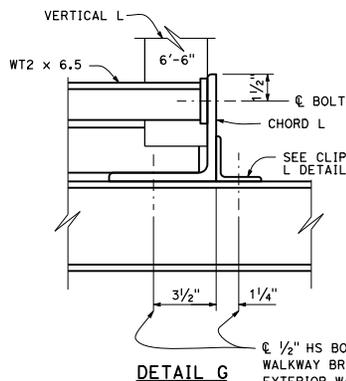


**DETAIL G**

**NOTES:**


1. Welded type grating shall have 1/4" x 1/8" bearing bars at 1 3/8" centers with 1/4" diameter (or equal) cross bars at 4" centers. If mechanical lock grating is used, it shall be equal in strength to the welded type. Alternate hold-down clips may be submitted for approval.
2. Walkway grating to be continuous (no splices) over as many walkway brackets as practical and consistent with fabrication, ease of handling and assembly.
3. Interior grating shall be installed for project requiring backside walkways.

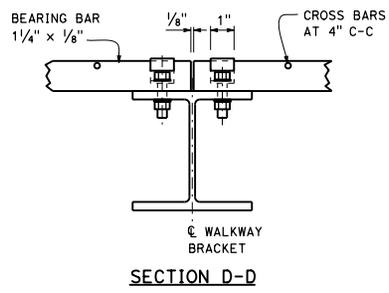


**SECTION D-D**

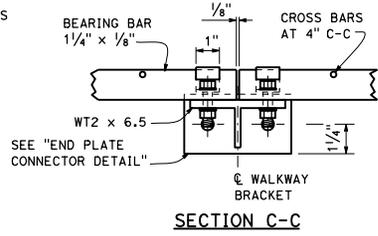

**SECTION C-C**

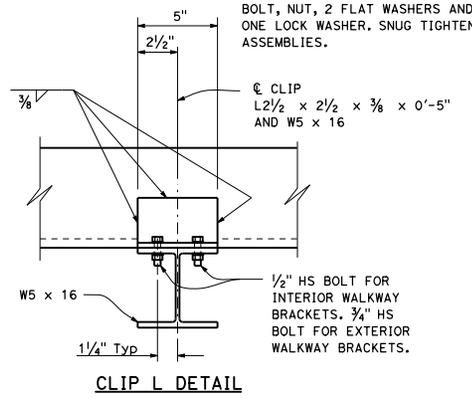

**CLIP L DETAIL**

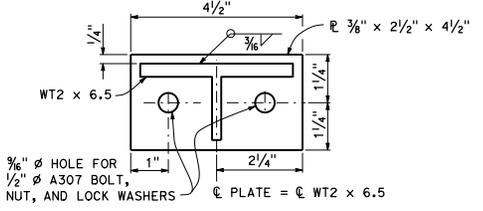

**END PLATE CONNECTOR DETAIL**

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION  
**OVERHEAD SIGN-TRUSS  
SINGLE POST TYPE  
WALKWAY DETAILS  
CHANGEABLE MESSAGE SIGNS  
MODEL 500**  
NO SCALE

D16+	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET TOTAL SHEETS

October 30, 2015  
PLANS APPROVAL DATE

REGISTERED CIVIL ENGINEER  
Jeffrey B. Woody  
No. C41260  
Exp. 3-31-17  
CIVIL  
STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.