Reference Sheet 789C OF 1204
Reference Note# 7

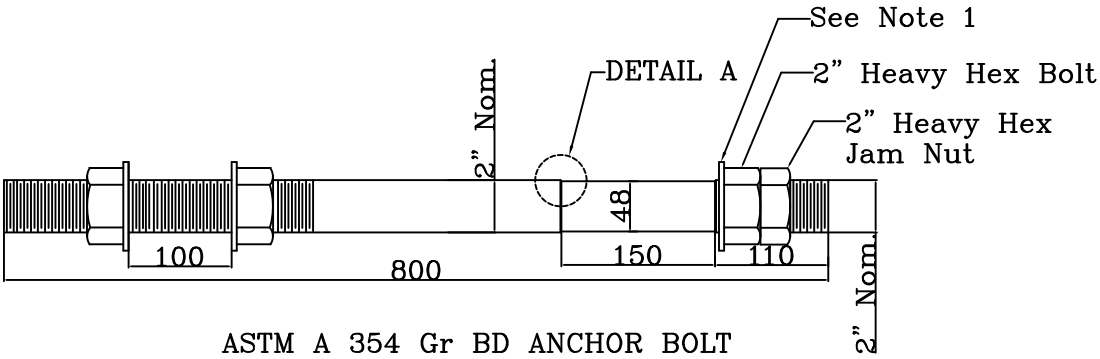

ASTM A 354 Gr BD ANCHOR BOLT

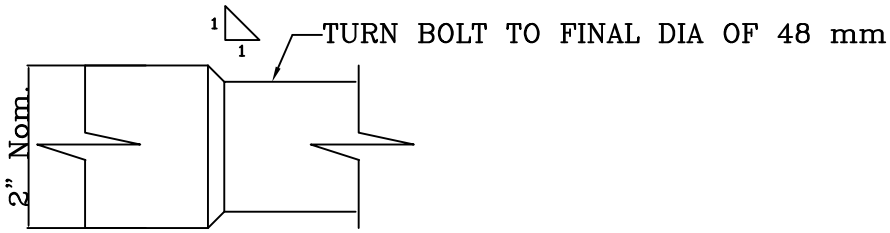

DETAIL A

Note

1. The Contractor shall ensure that the washer is located at the start of taper.

2. The Contractor shall apply organic zinc rich primer after machining.

SFOBB SAS (SAS) Project #04-0120F4

Date: 2010-03-31
File Name: Risk Mitigation-East Saddle Anchor Rod