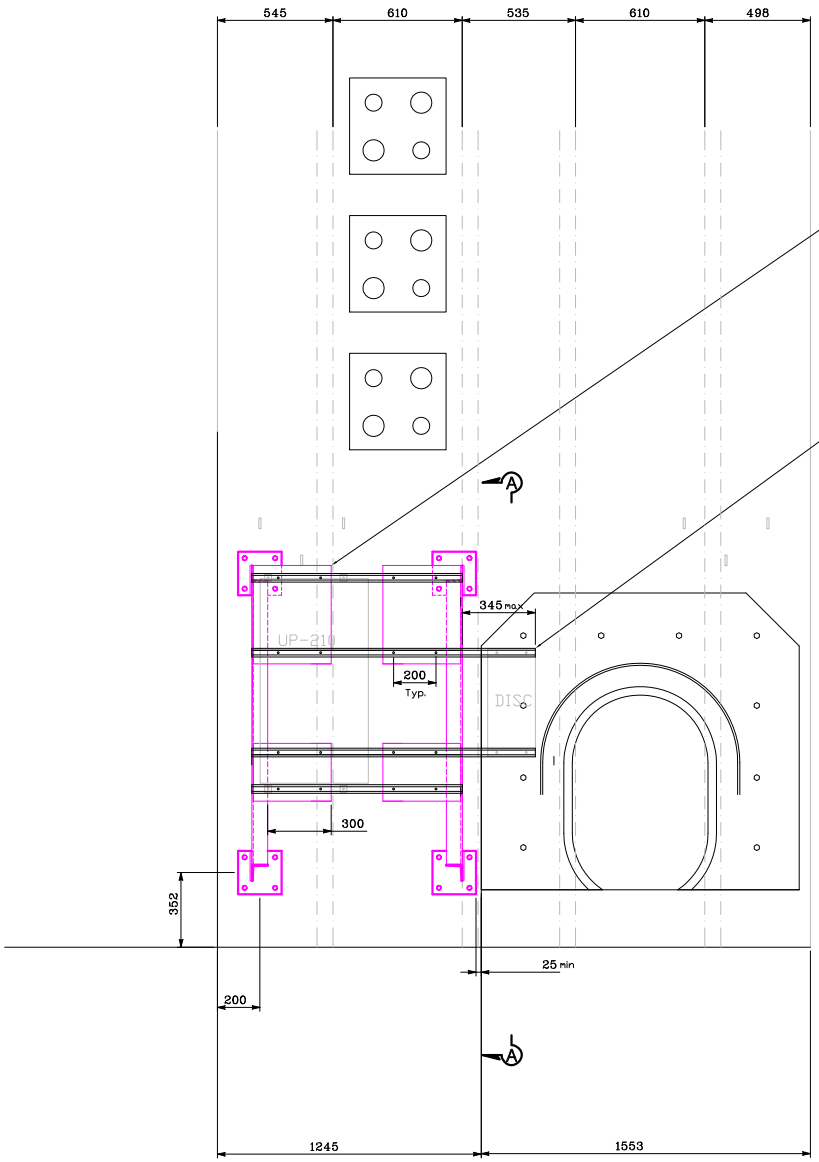

Split rack by cutting plates, trim plates to 300mm from edge of L76x76. Repair finish of cut edges using approved method. Mount in locations shown.

41 Unistrut, HDG. Mount each piece with min two 13mm dia. bolts on each side of rack, min 200mm spacing. Cantilever as needed to mount circuit breaker, up to 345mm, to provide adequate spacing for conduit routing.

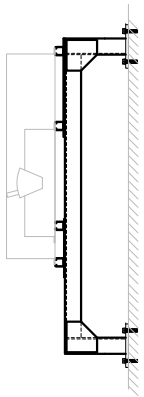

SECTION A–A

RFI 3155 Sketch
Reference Sheet E-264C