

Dist	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS
08	Riv	371	56.3/60.2	5	8

W.E. Wasser 11-3-14
 REGISTERED CIVIL ENGINEER DATE


11-3-14
 PLANS APPROVAL DATE

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

REGISTERED PROFESSIONAL ENGINEER
W.E. WASSER
 No. 37378
 Exp. 6/30/16
 CIVIL
 STATE OF CALIFORNIA

NOTE:
 THE LOCATION OF CONSTRUCTION AREA SIGNS AND DELINEATORS ON THIS PLAN ARE APPROXIMATE.
 THE EXACT LOCATION SHALL BE DETERMINED BY THE ENGINEER.

LEGEND:
 WORK AREA

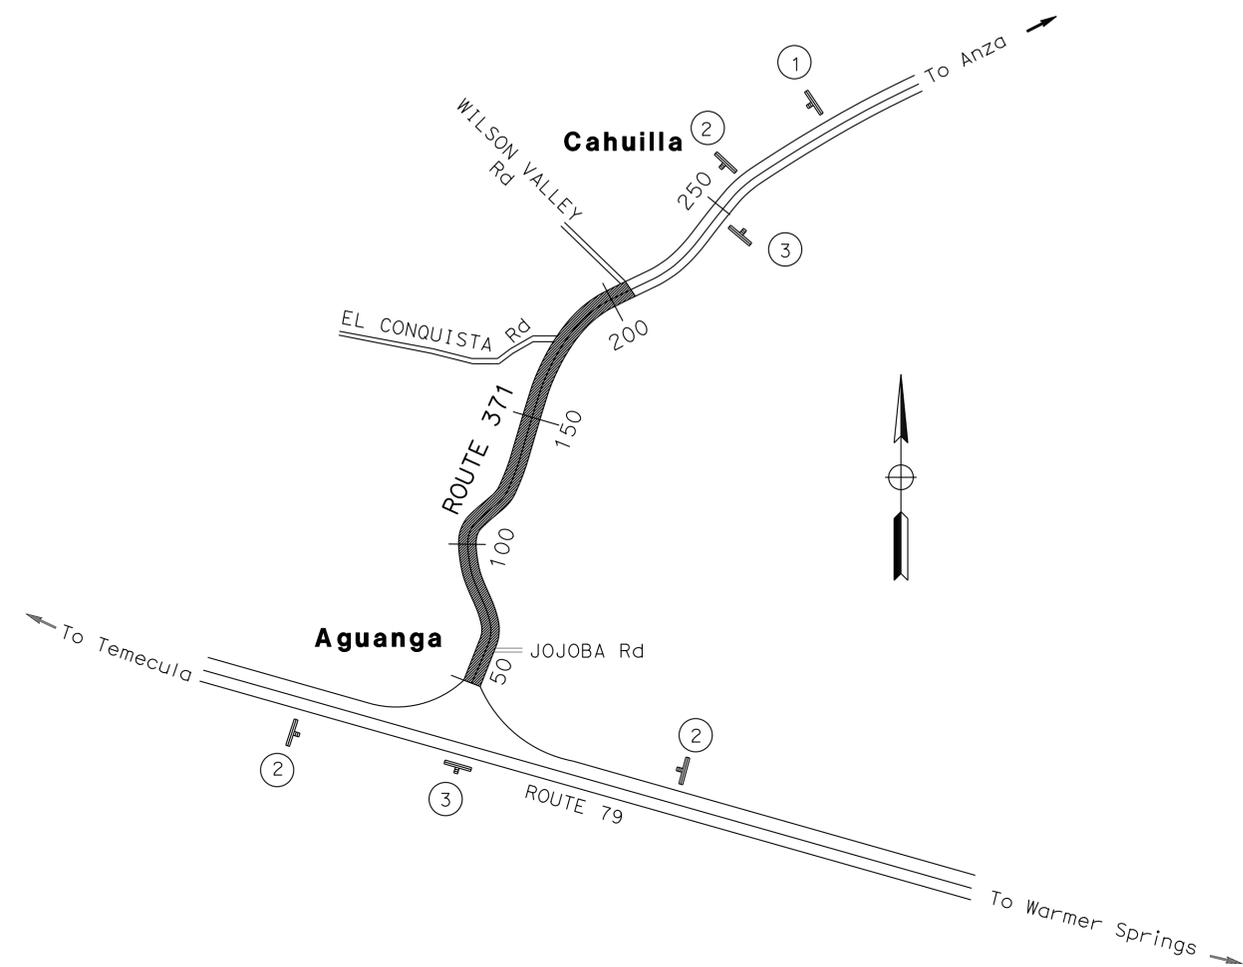

STATIONARY MOUNTED CONSTRUCTION AREA SIGNS

SIGN No. (X)	SIGN CODE		PANEL SIZE	SIGN MESSAGE	NUMBER OF POSTS AND SIZE	NUMBER OF SIGNS
	FEDERAL	CALIFORNIA				
①	G20-1		60" X 36"	ROAD WORK NEXT 4 MILES	2 - 4" X 6"	1
②	W20-1		48" X 48"	ROAD WORK AHEAD	1 - 6" X 6"	3
③	G20-2		36" X 18"	END ROAD WORK	1 - 4" X 4"	2

PORTABLE CHANGEABLE MESSAGE SIGNS (PCMS)

(EA)
3

PAVEMENT DELINEATION QUANTITIES

DETAIL No.	REMOVE PAVEMENT MARKER (EA)	THERMOPLASTIC TRAFFIC STRIPE (SPRAYABLE) (FT)		PAVEMENT MARKER RETRO-REFLECTIVE RECESSED TYPE D (EA)
		WHITE	YELLOW	
27B		41200		
22	1640		36490 18425	1520
6			4710	120
SUBTOTAL		41200	41200 23135	
TOTAL	1640		82400 64335	1640

DELINEATORS

TYPE	(EA)
CLASS 1	100

4 REPLACED PER ADDENDUM No. 4 DATED JANUARY 16, 2015

4

CONSTRUCTION AREA SIGNS AND PAVEMENT DELINEATION QUANTITIES

APPROVED FOR CONSTRUCTION AREA SIGN WORK AND DELINEATION QUANTITIES ONLY

NO SCALE

CS-1

STATE OF CALIFORNIA - DEPARTMENT OF TRANSPORTATION
Caltrans
 TRAFFIC DESIGN
 FUNCTIONAL SUPERVISOR: W.E. WASSER
 CHECKED BY: W.I. WASSER
 CALCULATED/DESIGNED BY: W.I. WASSER
 SHAHRAM MOKHTARI
 WILLIAM WASSER
 REVISED BY: W.I. WASSER
 DATE REVISED: 11-3-14

LAST REVISION DATE PLOTTED => 16-JAN-2015 09-02-14 TIME PLOTTED => 13:06