

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

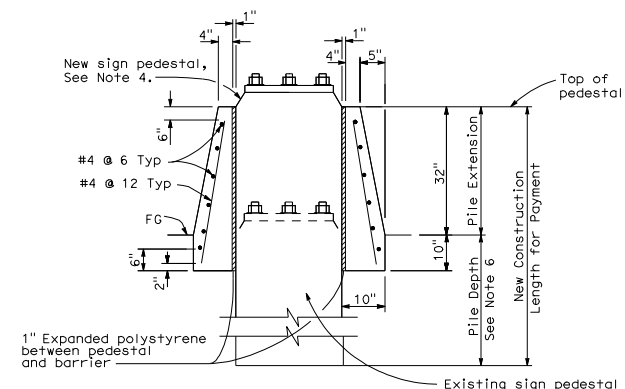
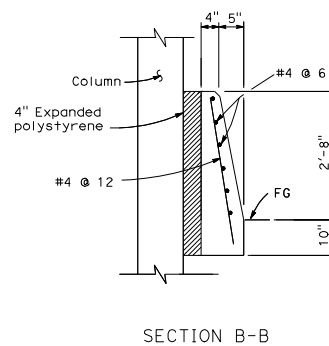
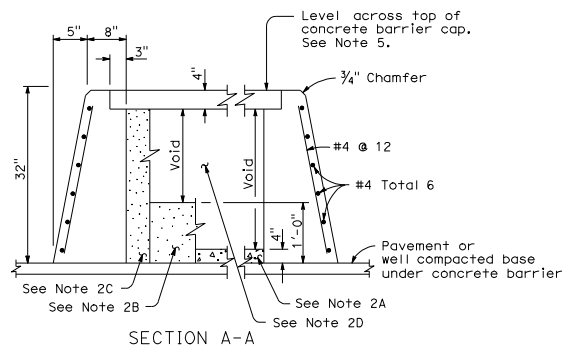
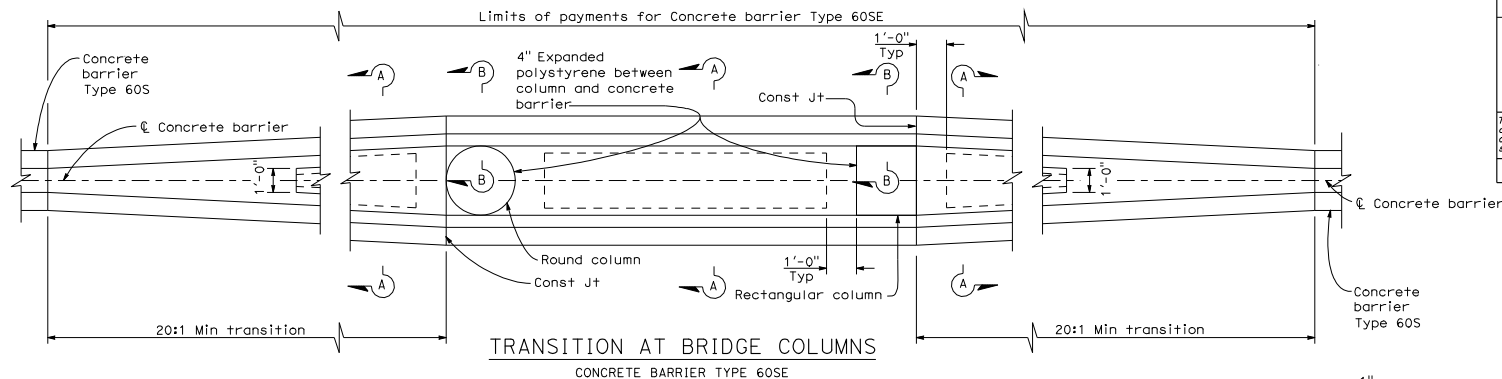
*Randell D. Hiatt*  
REGISTERED CIVIL ENGINEER

May 1, 2006  
PLANS APPROVAL DATE

*Randell D. Hiatt*  
No. CS0200  
Exp. 6-30-07  
CIVIL  
STATE OF CALIFORNIA

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

To get to the Caltrans web site, go to <http://www.dot.ca.gov>

**NOTES:**

- See Standard Plan A76G for Concrete Barrier Type 60S.
- Contractor options for fill between concrete barrier walls:
  - Place 4" PCC at base between concrete barrier walls.
  - Place 1'-0" of granular material at base between walls.
  - Place granular material from base to bottom of 4" cap.
  - Monolithic concrete with foam blockouts is not permitted.
- Reinforcing steel shall extend continuous through construction joints.
- See "Overhead Sign" plans for sign pedestal elevations on new construction.
- Adjust height of concrete barrier wall on low side of offset or superelevated roadways to provide level grade across top of concrete barrier cap.
- See Overhead Signs Standard Plan Pile Foundation Tables.

STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

**CONCRETE BARRIER TYPE 60SE**

NO SCALE

**A76I**