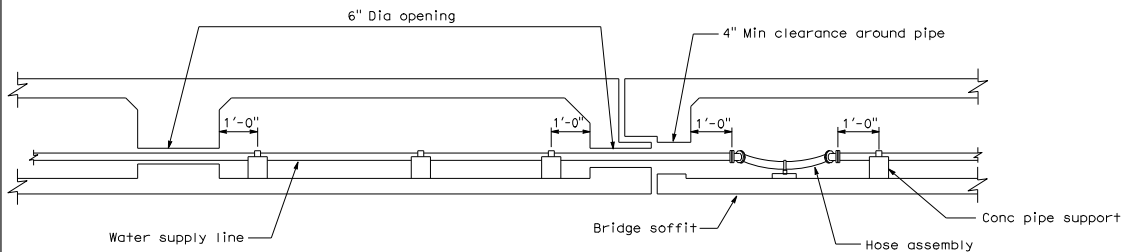
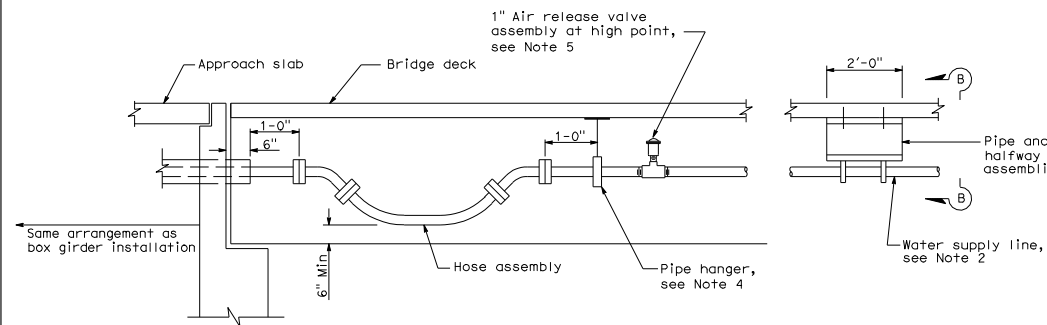
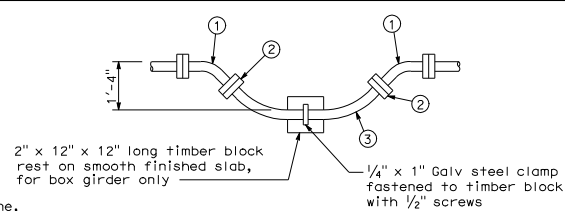


BOX GIRDER INSTALLATION

PIPE INSTALLATION AT HINGE
Same for hanger type installation

INSTALLATION FOR OTHER STRUCTURE TYPES


VIEW A-A
HOSE ASSEMBLY

NUMBERED ITEM

- ① 45° flanged elbow with insulated flange connection
- ② Flanged hose fitting
- ③ Hose 6'-6" in length (size shall be same as pipe)

NOTES:

1. Extend pipe 5'-0" or beyond the edge of shoulder or as shown on bridge plans. Terminate in a pull box as shown on Standard Plan B14-3, Detail B.
2. Water supply line shall be installed parallel to bridge soffit or deck.
3. For concrete pipe support, pipe shall be tightly clamped at the pipe support located halfway between hose assemblies. At all other supports, pipe clamp shall be shimmed with steel washer plate to provide 1/4" clearance between pipe and clamp.
4. Maximum spacing between pipe hangers or supports shall be 10'-0" unless otherwise detailed on the plans.
5. Install air release valve using threaded tee or pipe saddle.
6. Openings through diaphragm and bent caps shall be 6" diameter unless otherwise detailed on the plans.
7. For details of pipe hanger and concrete pipe support see Standard Plan B14-5.

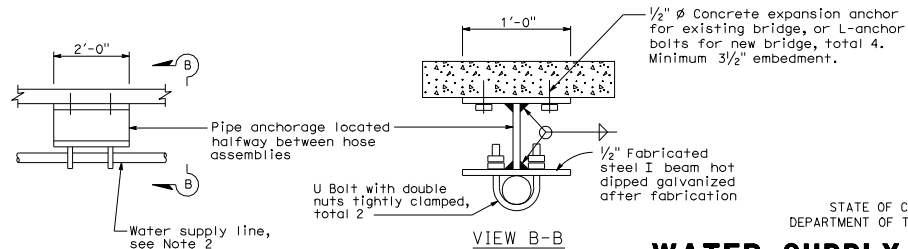

VIEW B-B

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION**WATER SUPPLY LINE (BRIDGE)
(PIPE SIZES LESS THAN 4")**

NO SCALE

B14-4

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

REGISTERED MECHANICAL ENGINEER
Hao T. Phan
No. M20269
May 1, 2006
PLANS APPROVAL DATE
The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.
To get to the Caltrans web site, go to <http://www.dot.ca.gov>

REGISTERED PROFESSIONAL ENGINEER
Hao T. Phan
No. M20269
Exp. 9-30-06
MECHANICAL
STATE OF CALIFORNIA