Caltrans Metric

DIST	COUNTY	ROUTE	KILOMETER POST TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

Ellis K. Hirst
REGISTERED CIVIL ENGINEER

July 1, 2004
PLANS APPROVAL DATE

REGISTERED PROFESSIONAL ENGINEER
Ellis K.Hirst
No. C17926
Exp. 6-30-05
CIVIL
STATE OF CALIFORNIA

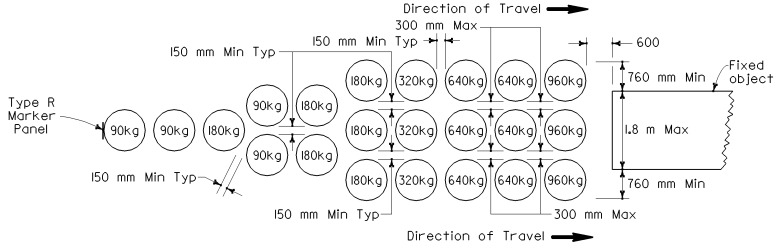

ARRAY 'U2I'

Approach speed 100 km/h or less

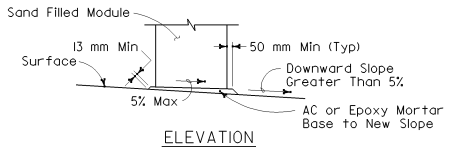

ELEVATION

SLOPED SEAT DETAIL

(See Note 4)



PAINTING DETAIL

(See Note 5)

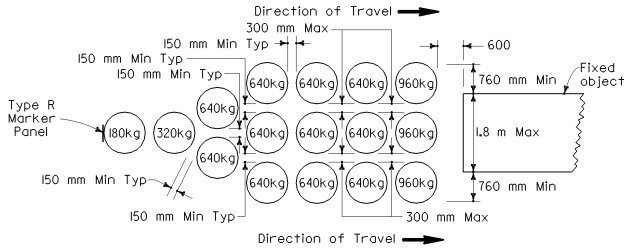

ARRAY 'UI6'

Approach speed 70 km/h or less

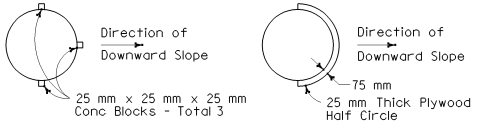

PLAN

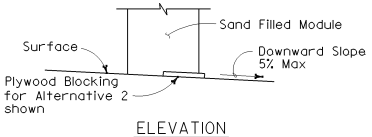

ELEVATION

BRIDGE DECK MODULE BLOCKING DETAILS

(See Note 6)

NOTES

1. (XXX) indicates module location and mass of sand in kilograms for each module. Module spacing is based on the greater diameter of the modules.
2. All sand masses are nominal.
3. Each module is to contain amount of sand indicated, supported according to the manufacturer's instructions.
4. Modules shall be placed on asphalt concrete, epoxy mortar or concrete surface. Modules to be placed on surfacing with greater than 5% downward slope shall be seated as shown.
5. Mass of sand and outline of each module shall be painted on the surface at each module location.
6. Module blocking, epoxied to the deck surface, is required for all modules placed on bridge decks. Two acceptable alternatives are shown. Other alternatives recommended by the manufacturer and approved by the Engineer will be accepted.
7. Place the top of the Type R marker panel 25 mm below the module lid.

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

CRASH CUSHION, SAND FILLED (UNIDIRECTIONAL)

NO SCALE

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SHOWN

A81B