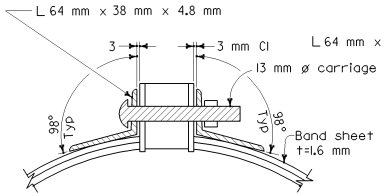

SECTION B-B

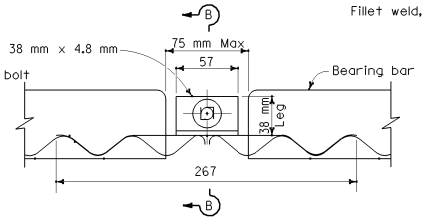

ELEVATION

MODIFIED HUGGER BAND



PART PLAN



HEEL GUARD

See Note 11



PARTIAL SECTION A-A



NOTE

As an alternate to swagged end an oversized bridge clip may be used.

SIDE VIEW

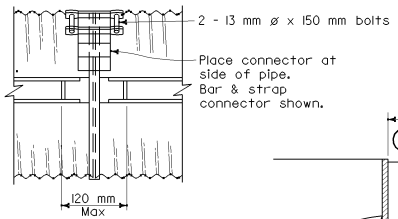

PART PLAN

SECTION E-E



SECTION F-F

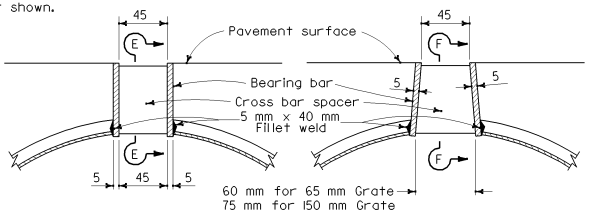

RECTANGULAR SPACER

TAPERED SPACER

GRATE SLOT-SECTION



ELEVATION

BAR & STRAP CONNECTOR

See Standard Plan D97A

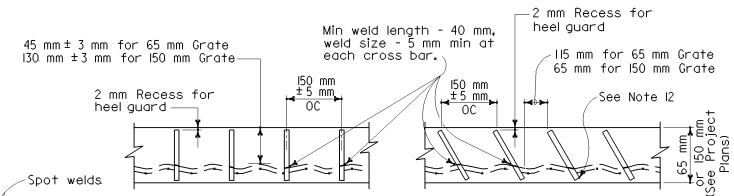

RECTANGULAR SPACER

TAPERED SPACER

GRATE SLOT-LONGITUDINAL ELEVATION VIEW

See Note 13

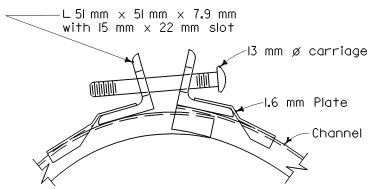

SIDE VIEW



PART PLAN

ANGLE CONNECTOR

CHANNEL COUPLING BAND



SLOTTED CORRUGATED STEEL PIPE

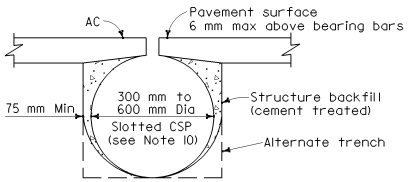

BACKFILL

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

DIST	COUNTY	ROUTE	KILOMETER POST TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

Caltrans Metric

REGISTERED CIVIL ENGINEER

July 1, 2004
PLANS APPROVAL DATE

REGISTERED PROFESSIONAL ENGINEER Glenn DeCou No. C34547 Exp. 9-30-05 CIVIL STATE OF CALIFORNIA

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

To get to the Caltrans web site, go to: http://www.dot.ca.gov

NOTES

1. Drain pipe seams may be continuous helical lock seam or helical weld seam.
2. Drain sections shall be assembled with either of the coupling bands shown.
3. The cross bar spacer shall be welded to the bearing bars in such a manner as to develop a minimum tensile strength of 55,000 N normal to the longitudinal axis of the bearing bars.
4. The maximum variance from a straight line between the extreme top corners of the bearing bars shall be 12 mm in 6.0 m.
5. All coupling band connections shall be galvanized or coated in accordance with the Standard Specifications.
6. Spot welds shall develop minimum required strength of strap.
7. Dimensions shown are minimums.
8. Contractor to provide an adequate method of keeping the asphalt concrete out of pipe, during paving operations.
9. Minimum pipe wall thickness is 1.6 mm.
10. 600 mm Diameter will not support normal highway wheel loads.
11. Use heel guard when specified.
12. Bottom edge of cross bar spacer offset in direction of flow.
13. Unless otherwise shown on the plans or specified in the special provisions, cross bar spacers shall be either rectangular or tapered at the contractor's option.

SLOTTED CORRUGATED STEEL PIPE DRAIN DETAILS

NO SCALE

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SHOWN

D98B

2004 Std PLAN D98B

05-04-04