





DIST.	COUNTY	ROUTE	KILOMETER POST TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
04	SF	80	13.2/13.9	769R1	1204

*John Sun*  
REGISTERED ENGINEER - CIVIL  
12-6-04  
PLANS APPROVAL DATE  
The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.



T.Y. LIN / MOFFATT & NICHOL  
825 BATTERY STREET  
SAN FRANCISCO, CA 94111  
Caltrans now has a web site! To get to the web site, go to: <http://www.dot.ca.gov>

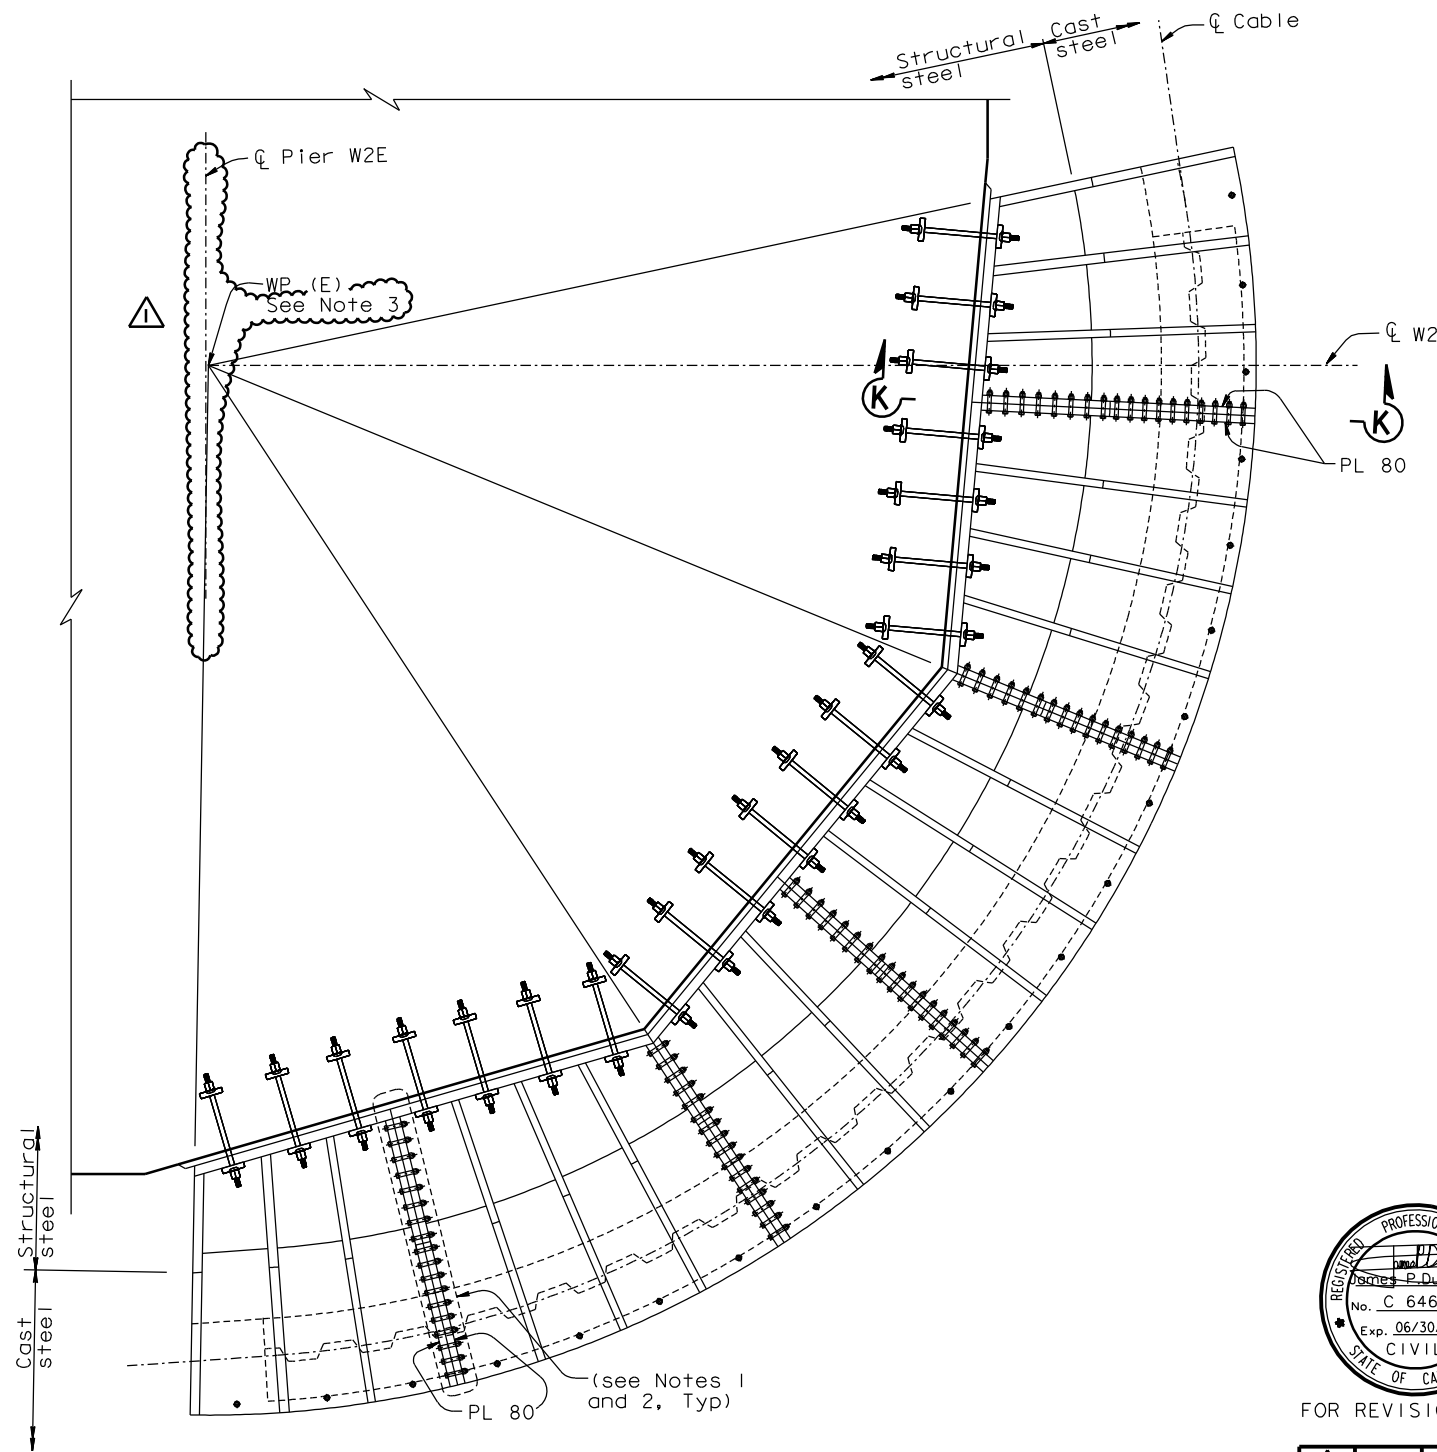

WEST DEVIATION SADDLE SPLICE ALTERNATE


PLAN VIEW (In the plan of the Deviation saddle)  
1:40



FOR REVISIONS ONLY

MARK	DATE	DESCRIPTIONS	BY	CH'D	CCO*
1	01/31/07	WEST DEVIATION SADDLE GEOMETRY	NV	JD	15
REVISIONS					

CONTRACT CHANGE ORDER NO. \_\_\_\_\_  
SHEET \_\_\_\_ OF \_\_\_\_

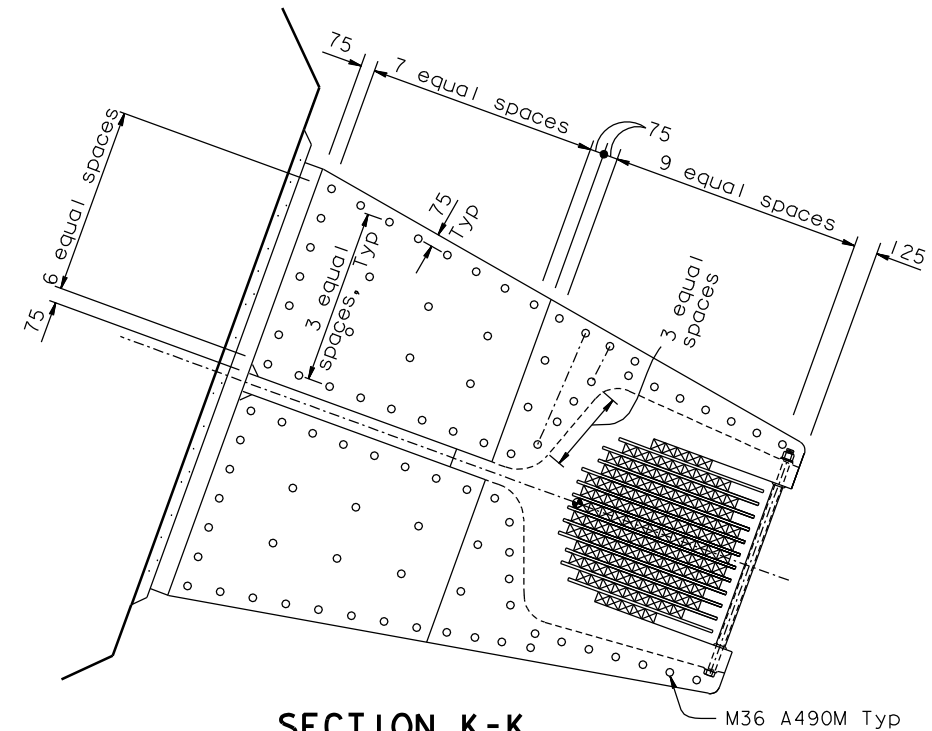

SECTION K-K  
1:20  
(Anchor rods not shown for clarity)

NOTES:

1. West deviation saddle segments shall be bolted together prior to tightening anchor rods.
2. In the bolted splices the flatness of the faying surfaces shall be +0.5 mm per meter, and the gap between them shall not exceed 0.5 mm per meter. The perimeters of faying surfaces shall be caulked.
3. WP(E) and WP(W) do not coincide with C of Pier W2, C of Pier W2E nor C of Pier W2W.

R. Valizadeh/V. Toan/Y.L./W.L./F.C.  
DESIGN OVERSIGHT  
*R. Valizadeh / V. Toan / Y. Liu*  
SIGN OFF DATE 01/31/07

DESIGN	BY J. Sun	CHECKED T. McMeans
DETAILS	BY J. Duxbury	CHECKED T. McMeans
QUANTITIES	BY J. Duxbury	CHECKED S. Shi

PREPARED FOR THE  
STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

R. Manzanarez  
PROJECT ENGINEER

BRIDGE NO.	34-0006L/R
KILOMETER POST	13.2/13.9

SAN FRANCISCO OAKLAND BAY BRIDGE EAST SPAN SEISMIC SAFETY PROJECT SELF-ANCHORED SUSPENSION BRIDGE (SUPERSTRUCTURE & TOWER)					
WEST DEVIATION SADDLE DETAILS NO.5					
REVISION DATES (PRELIMINARY STAGE ONLY)				SHEET	OF
01/27/04	08/06/04	12/07/05		352R1	

Rev. Date: 5-18-98

ORIGINAL SCALE IN MILLIMETERS  
FOR REDUCED PLANS

CU 04  
EA 0120F1

DISREGARD PRINTS BEARING  
EARLIER REVISION DATES

FILE => I:\bb\04-012001\sas\contract plans and cco\cco\in progress\cco\*15\agsdd05.dgn

100 % P S & E  
USERNAME => vjgnatovsky DATE PLOTTED => 15 MAR 2007 TIME PLOTTED => 15:39:03