

STATE OF CALIFORNIA - DEPARTMENT OF TRANSPORTATION  
**Caltrans**  
 DESIGN OVERSIGHT  
 BEHZAD GOLEMOHAMMADI

DIST	COUNTY	ROUTE	KILOMETER TOTAL PROJECT	POST TOTAL PROJECT	SHEET No	TOTAL SHEETS
04	SF	80	13.2/13.9		344R1	1204

**Caltrans**  
**Metric**








*Jens Erlingsson* 12/19/02  
 REGISTERED ELECTRICAL ENGINEER DATE

12-6-04  
 PLANS APPROVAL DATE

PB POWER, Inc.  
 A Parsons Brinckerhoff Company  
 303 Second St., Suite 700N  
 San Francisco, CA 94107-1317

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

Caltrans now has a web site! To get to the web site, go to <http://www.dot.ca.gov>

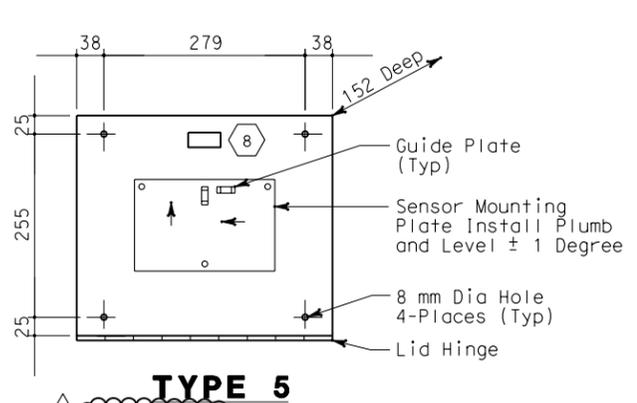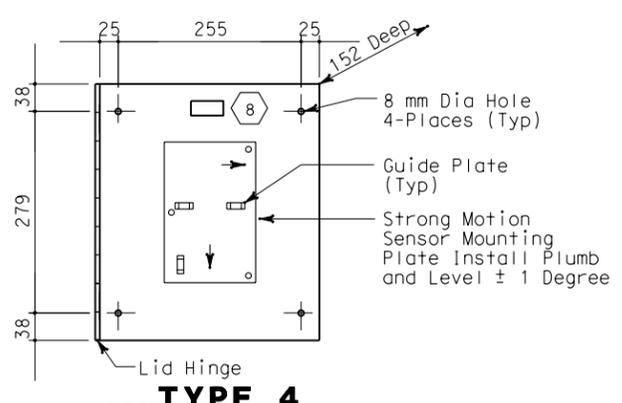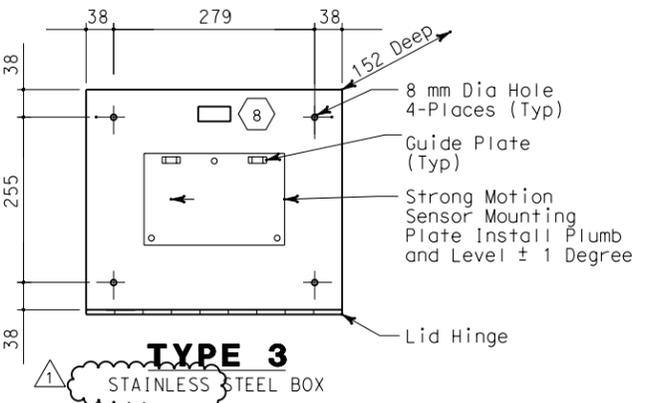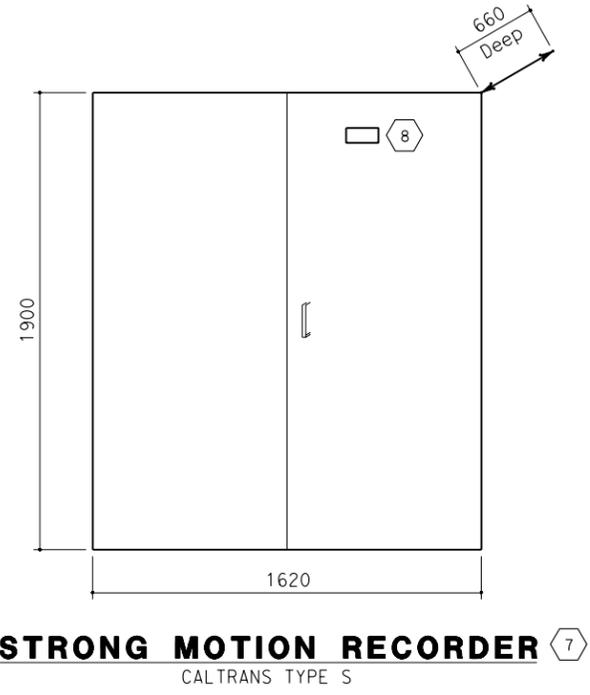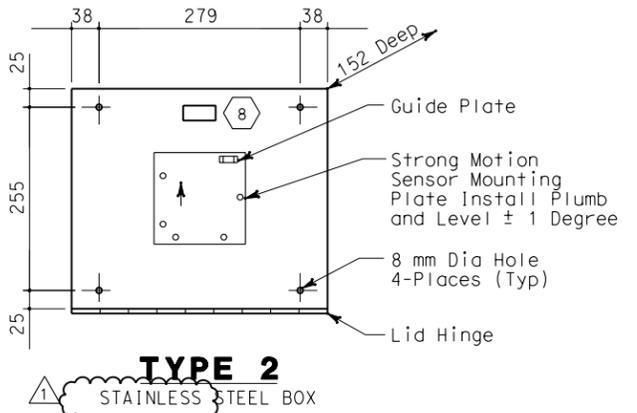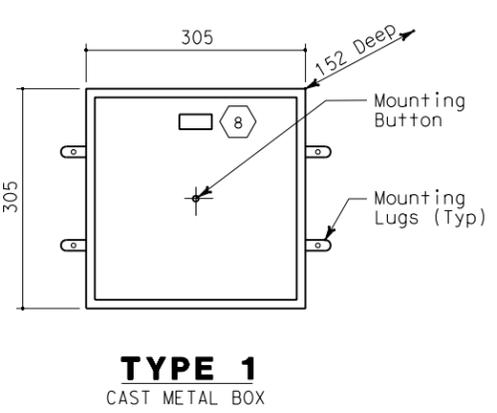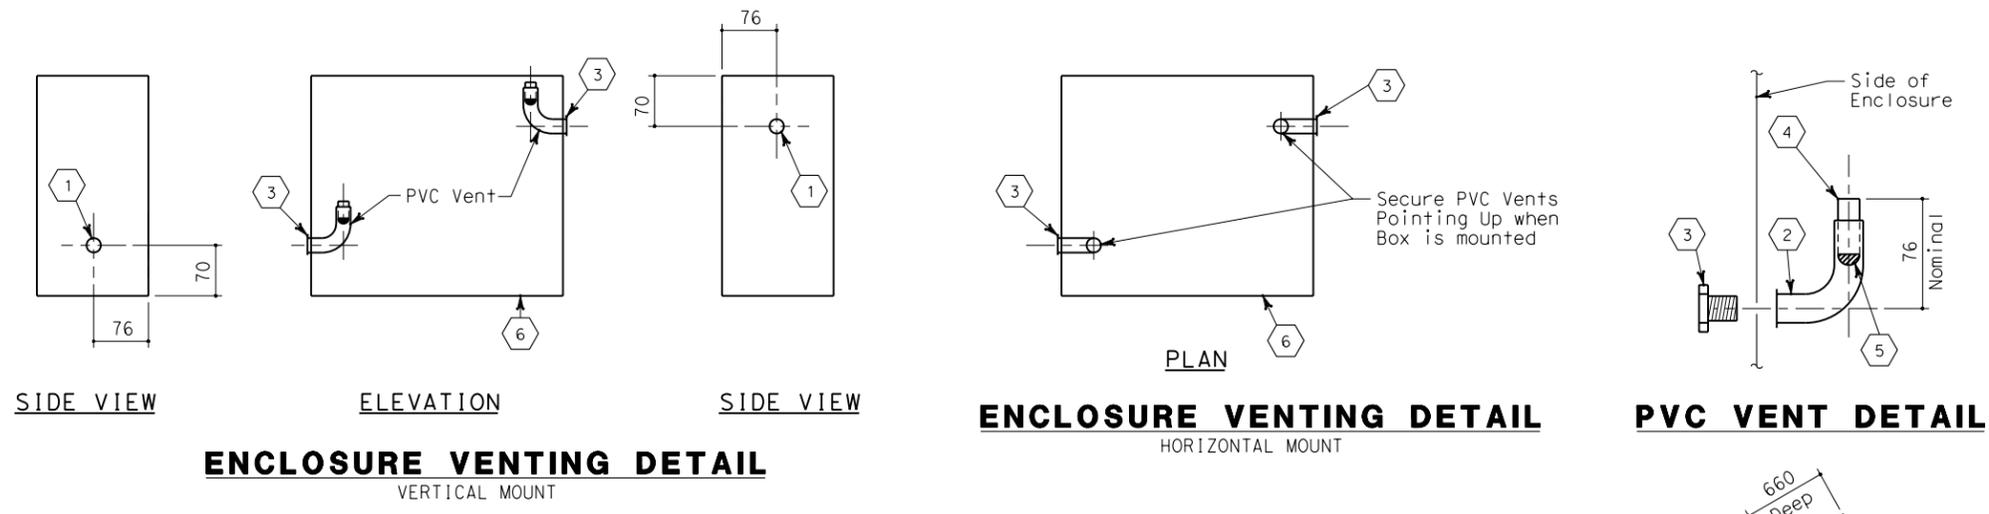

**ENCLOSURE DETAILS**  
 FRONT VIEW

**SHEET NOTES:**

- ① Punch hole for 27C.
- ② 27C, schedule 40 PVC, 90° elbow (female threaded-female slip).
- ③ 27 chase nipple, zinc.
- ④ 27C, schedule 40 PVC. Secure item in place with PVC cement (length as required, cut after installation).
- ⑤ Hose screen, Stainless steel screen material (used in washing machine).
- ⑥ 3.2 mm diameter drain hole. Drill at the lowest point of the box to drain any moisture.
- ⑦ Enclosures for Strong Motion Recorders #3 and #2 shall be Caltrans Type S, corrosion resistant without shelves or police panels.
- ⑧ See nameplate schedule for engravings and materials.

**NOTES:**


- 1. The high and low vent sides shall be selected as required to facilitate conduit entrances and mounting location.
- 2. Strong motion sensor enclosures and mounting plates shall be installed level, plumb, parallel and perpendicular to the structure unless otherwise noted.
- 3. Strong motion enclosures shall be mounted to concrete wall with concrete fasteners, 6.35 dia, 40 mm depth embedment and allowable working load of tension at 1.223 kN and shear 2.91 kN. Enclosures mounted on structural steel shall be drill and tap. The strong motion sensor mounting plate shall be bolted through the enclosure to the structural steel. All hardware except fasteners shall be stainless steel.
- 4. For Downhole Enclosures details, see Sheet E-379.



FOR REVISION ONLY

REQUEST FOR INFORMATION NOT ADDRESSED IN THIS CCO REMAIN IN FORCE					
MARK	DATE	DESCRIPTIONS	BY	CH'D	CCO#
①	02/19/08	ELECTRICAL MODIFICATIONS	MP	RR	42
		REVISIONS			

CONTRACT CHANGE ORDER NO. \_\_\_\_\_  
 SHEET \_\_\_\_\_ OF \_\_\_\_\_



**DETAILS**  
**STRONG MOTION DETECTION SYSTEM**  
**SENSOR AND RECORDER ENCLOSURES**  
 NO SCALE

**E-378**

DATE PLOTTED => 4/4/2008  
 TIME PLOTTED => 5:02:12 PM