




DIST.	COUNTY	ROUTE	KILOMETER POST TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
04	SF, Ala	80	13.9/14.3, 0.0/2.7	116454	1204

*Tien Hung Ho*  
REGISTERED ENGINEER - CIVIL  
03-28-11  
PLANS APPROVAL DATE  
The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.




T.Y. LIN / MOFFATT & NICHOL  
TWO HARRISON STREET  
SAN FRANCISCO, CA 94105

Caltrans now has a web site! To get to the web site, go to: <http://www.dot.ca.gov>

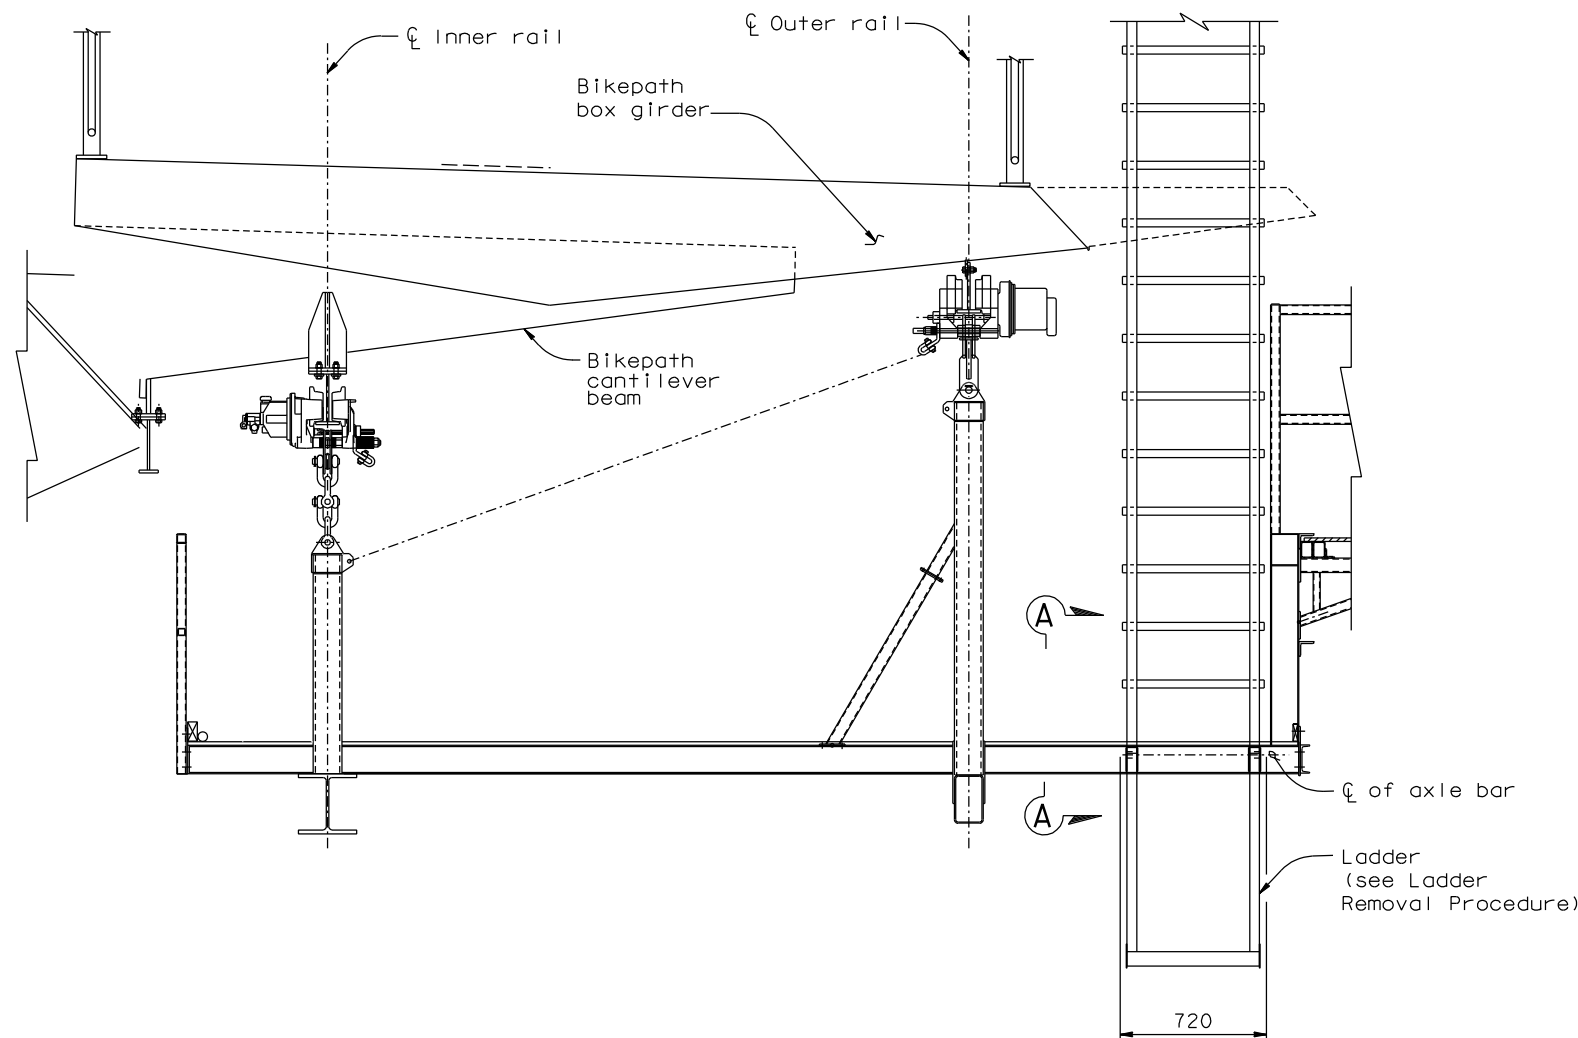

SKYWAY BIKEPATH TRAVELER  
1:20

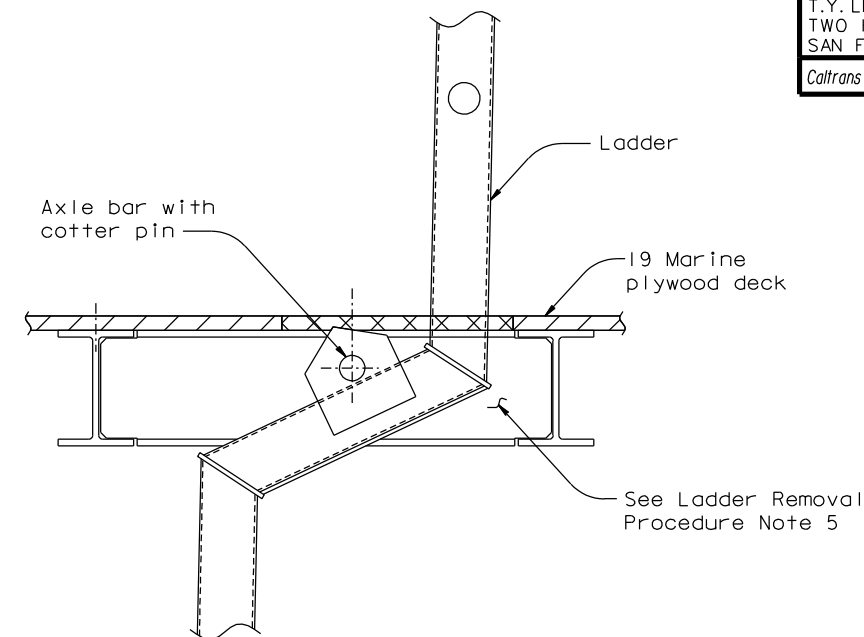

SECTION A-A  
1:5

LADDER REMOVAL PROCEDURE:

1. Remove cotter pin and axle bar.
2. Remove existing fold down ladder and all of its attached components.
3. Plywood decking and toeboards shall be replaced in their entirety. Plywood decking shall conform to or exceed the requirements of U.S. Product Standard PS-1-95 for APA Structural I AB Marine Grade. Plywood shall be pressure treated. Plywood decking shall be painted on all sides.

Wooden toeboards shall be pressure treated S4S Douglas Fir. Toeboards shall be painted on all sides.

4. Plywood decking shall be attached using blind rivets. Blind rivets shall be stainless steel, 4.8 mm diameter and shall be installed at 305 mm maximum on center.
5. Areas with damaged paint or with no paint shall be cleaned and painted. Any damage to the galvanized surfaces shall be repaired with zinc rich primer. Galvanized surfaces shall be finish painted.

NOTES:

1. Total Units: 2 Travelers.
2. Contractor shall field verify all dimensions.

CONTRACT CHANGE ORDER NO. \_\_\_\_  
SHEET \_\_\_\_ OF \_\_\_\_

REQUESTS FOR INFORMATION NOT ADDRESSED IN THIS CCO REMAIN IN FORCE

W. Long, Y. Liu  
DESIGN OVERSIGHT  
*Wang Long*  
SIGN OFF DATE 03/28/11

MARK	DATE	DESCRIPTIONS	BY	CH'D	CCO#
△	03/28/11	SKYWAY BIKEPATH TRAVELER COMPLETION WORK	TH	JD	178

DESIGN	BY T. Ho	CHECKED J. Duxbury
DETAILS	BY T. Ho	CHECKED J. Duxbury
QUANTITIES	BY T. Ho	CHECKED J. Duxbury

PREPARED FOR THE  
STATE OF CALIFORNIA  
DEPARTMENT OF TRANSPORTATION

R. Manzanarez  
PROJECT ENGINEER

BRIDGE NO.	34-0006L/R
KILOMETER POST	13.9/14.3, 0.0/2.7

SAN FRANCISCO OAKLAND BAY BRIDGE  
EAST SPAN SEISMIC SAFETY PROJECT

SKYWAY CLEANUP ITEMS  
LADDER REMOVAL

Rev. Date: 5-18-98

ORIGINAL SCALE IN MILLIMETERS  
FOR REDUCED PLANS

CU 04  
EA 0120FI

DISREGARD PRINTS BEARING  
EARLIER REVISION DATES

REVISION DATES (PRELIMINARY STAGE ONLY)	SHEET	OF
03/28/11	74754	

FILE => I:\bb\04-012001\sas\contract plans and cco\cco\cco\*178\1-original 03-28-11\dgn\aktpd08\_3.dgn

100 % P&E

USERNAME => DWInrow