DIST	COUNTY	ROUTE	KILOMETER POST TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

REGISTERED CIVIL ENGINEER

July 1, 2002
PLANS APPROVAL DATE

REGISTERED PROFESSIONAL ENGINEER
Jeffrey B. Woody
No. C41260
EXP. 3-31-03
CIVIL
STATE OF CALIFORNIA

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

Caltrans now has a web site! To get to the web site, go to: http://www.dot.ca.gov

NOTES:

1. Plates shall conform to ASTM A36M, A-36, except as noted.
2. In lieu of the torque requirements for high strength bolts, cap screws shall be tightened by the turn-of-nut method 1/3 turn from snug tight condition. No washer will be required.
3. Handhole shall be located on downstream side of traffic unless otherwise noted on the plans.

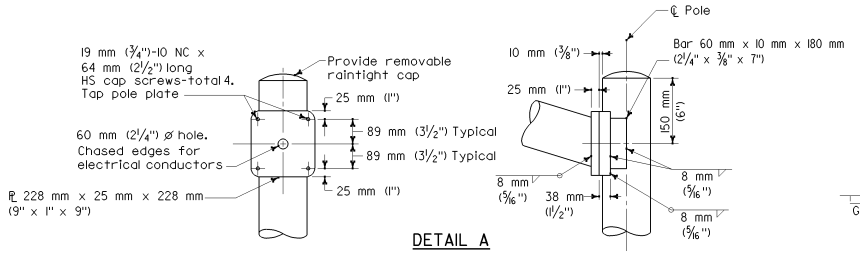

DETAIL A



POLE SPLICE

HIGH STRENGTH CAP SCREWS

16 mm (5/8") - 11NC - 45 mm (1 3/4")

- Length mm (inches)
- Threads (per inch)
- Size mm (inch)



This detail shall be used for 2 ply poles.

ELEVATION



ELEVATION

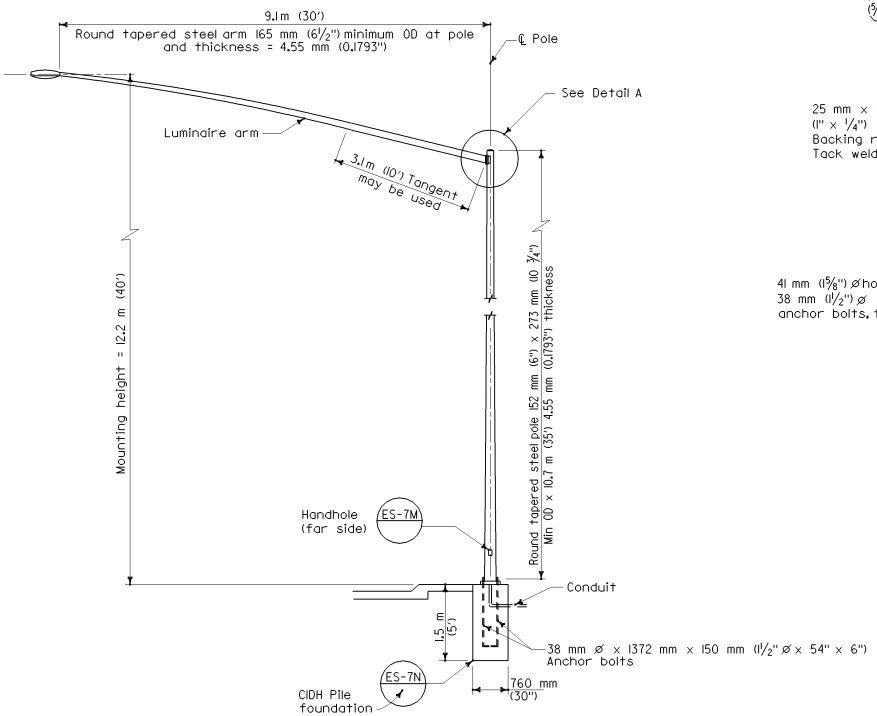

ELEVATION

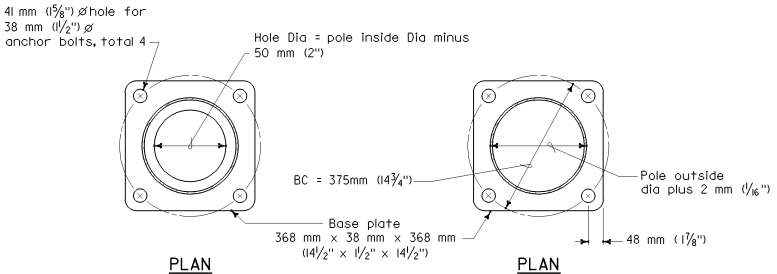

PLAN PLAN

ALTERNATIVE BASE PLATE DETAILS

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

LIGHTING STANDARDS TYPE 32

These "Standard Plans for Construction of Local Streets and Roads" contain units in two systems of measurement: International System of Units (SI or "metric") and United States Standard Measures shown in the parentheses ( ). The measurements expressed in the two systems are not necessarily equal or interchangeable. See the "Foreword" at the beginning of this publication.

NO SCALE

ES-6G

2002 DUAL UNITS STD PLAN ES-6G