DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

Daniel T. Adams
REGISTERED CIVIL ENGINEER

October 20, 2006
PLANS APPROVAL DATE

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

REGISTERED PROFESSIONAL ENGINEER — Daniel T. Adams — No. C46476 — Exp. 06-30-07 — CIVIL — STATE OF CALIFORNIA

To accompany plans dated _____



SECTION W-W
PP = Steel pipe pile



SECTION X-X



SECTION Y-Y

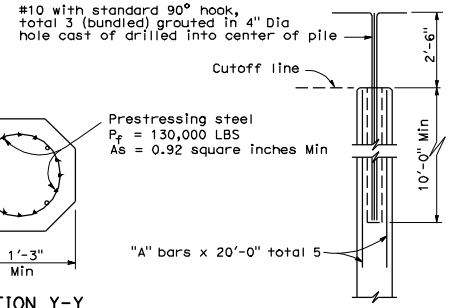

ALTERNATIVE PILE ANCHOR FOR PRESTRESSED PILE

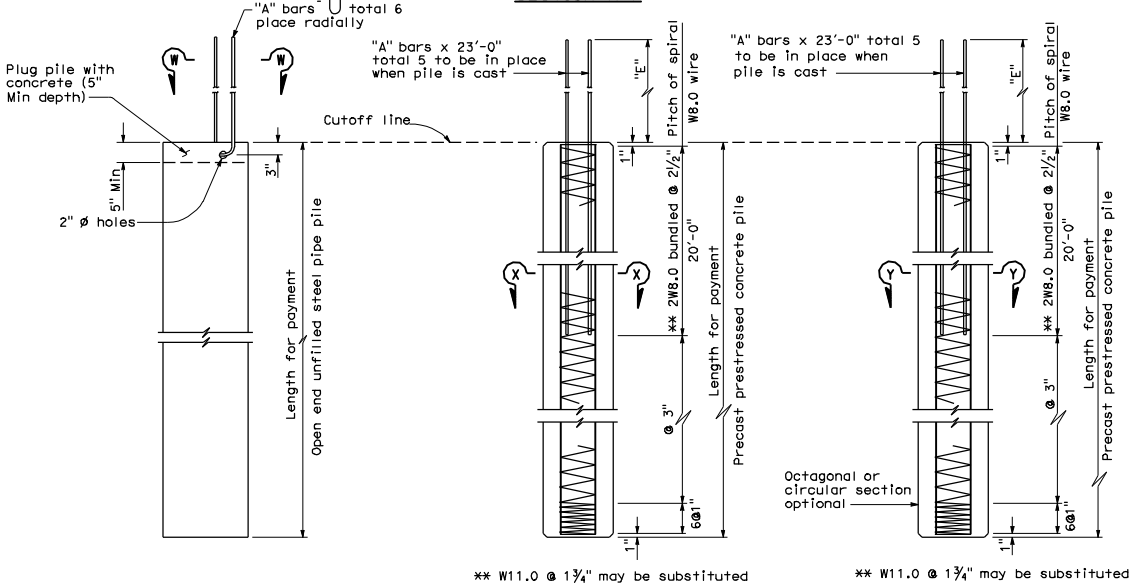

ALTERNATIVE "W"

ALTERNATIVE "X"

ALTERNATIVE "Y"

	Nominal Resistance (Tension) *	
	Not Required	Required
"A" bars	#6	#8
"E" Dimension	2'-0"	2'-10"

* See Pile Data Table in the Project Plans for Nominal Resistance (Tension) Requirements



PILE EMBEDMENT

DESIGN NOTES:

DESIGN CAPACITY :

Compression = 200 kip (Service state)
= 400 kip (Nominal axial strength)
Tension = 80 kip (Service state)
= 200 kip (Nominal axial strength)

REINFORCED CONCRETE

f'_c = 4,000 psi
f_y = 60,000 psi

PRECAST PRESTRESSED PILES

P_f = Prestress Force (After losses)
Concrete Strength f'_c @ 28 days = 7,000 psi
f'_{ci} @ transfer = 4,000 psi

STEEL PIPE PILE

Fy (minimum yield strength) = 45,000 psi
Fu (minimum tensile strength) = 66,000 psi

NOTES:

1. Pile reinforcement extending into footing shall be hooked as required to provide clearance to top of footing.
2. Lapped splices in spiral pile reinforcement shall be lapped 80 wire diameters minimum. Spiral pile reinforcement at splices and at ends shall be terminated by a 135° hook with 6" tail hooked around a longitudinal bar or strand.
3. At the Contractor's option, alternative steel pipe with at least the diameter and wall thickness shown on these plans may be used. The diameter shall not exceed 1'-6".
4. Alternative "W" piles shall not be used for corrosive environments.
5. Maximum cut-off length at the top of the Alternative "X" and Alternative "Y" piles is 10'-0".

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

PILE DETAILS CLASS 200

NO SCALE

RSP B2-8 DATED OCTOBER 20, 2006 SUPERSEDES STANDARD PLAN B2-8 DATED MAY 1, 2006-PAGE 242 OF THE STANDARD PLANS BOOK DATED MAY 2006.

REVISED STANDARD PLAN RSP B2-8

10-5-06