DIST.	COUNTY	ROUTE	KILOMETER POST TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
04	SF	80	13.2/13.9	955S2R1	1204

REGISTERED ENGINEER - CIVIL

03-25-11

PLANS APPROVAL DATE

REGISTERED PROFESSIONAL ENGINEER James P.Duxbury No. C 64677 Exp. 06/30/11 CIVIL STATE OF CALIFORNIA

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

T.Y. LIN / MOFFATT & NICHOL
825 BATTERY STREET
SAN FRANCISCO, CA 94111

Caltrans now has a web site! To get to the web site, go to: http://www.dot.ca.gov

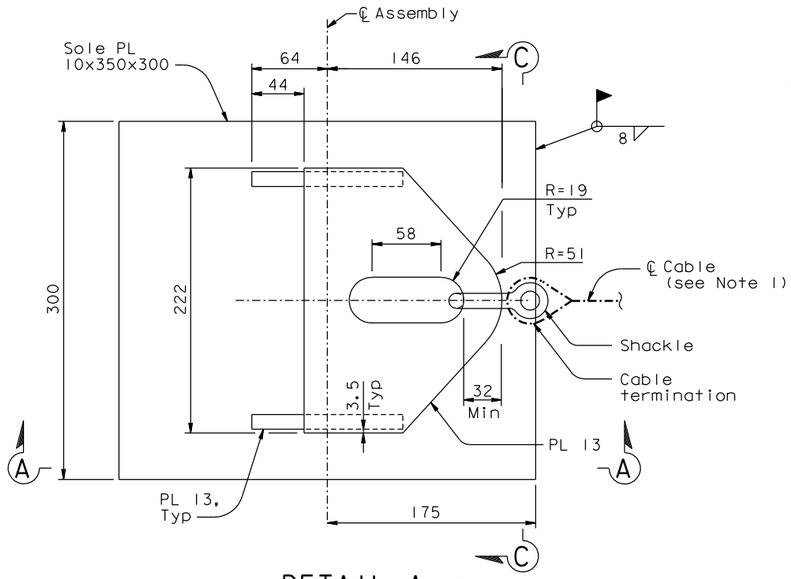

DETAIL A (Detail A' opposite)
1:2.5

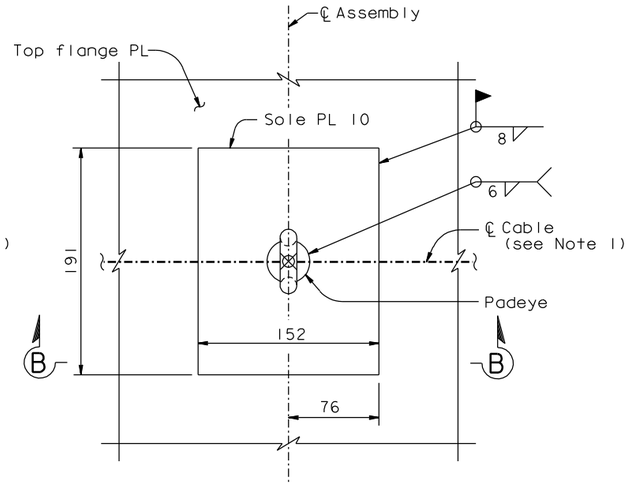

DETAIL B (Intermediate Padeye)
1:2.5

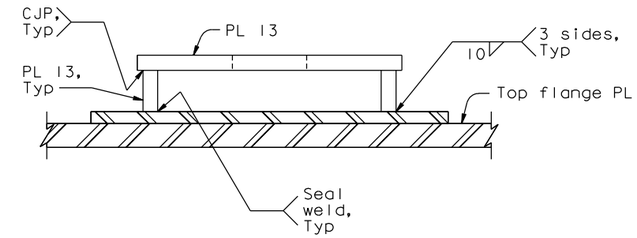

SECTION C-C (Shackle and Cable not shown for clarity)
1:2.5

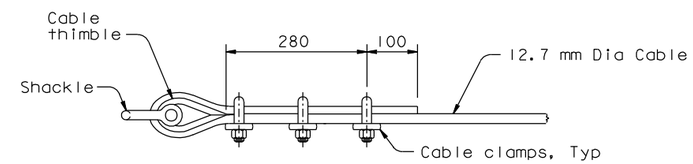

CABLE TERMINATION DETAIL
NTS

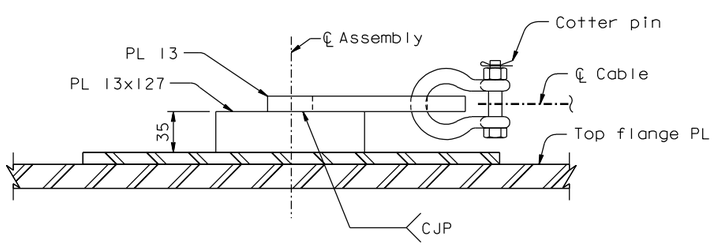

SECTION A-A
1:2.5

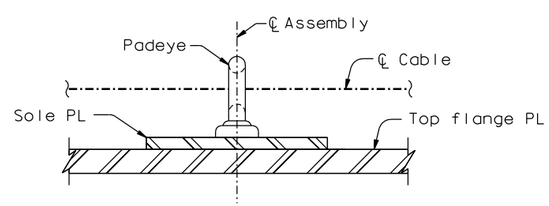

SECTION B-B
1:2.5

NOTES:

1. For layout of cable, see "Crossbeam Access Details No. 3A" sheet. △1
2. Provide thimbles at all cable loops per manufacturer's recommendations.
3. Padeye shall be Crosby size No.5 or equivalent.
4. Sole plates and anchor plates shall have a minimum yield strength of Fy=50 ksi (345 MPa) and shall be A572 or equivalent.
5. Shackle shall be 0.5 in (12.7 mm) Crosby bolt type anchor shackle or equivalent, with a working load limit of at least 2 metric tons (19.6kN). Shackle shall be galvanized.
6. Assemblies shall be galvanized and painted. △1

100% PS&E

USERNAME => arivera DATE PLOTTED => 22 APR 2011 TIME PLOTTED => 13:42:35

CONTRACT CHANGE ORDER NO. ____
SHEET ____ OF ____

REQUESTS FOR INFORMATION NOT ADDRESSED IN THIS CCO REMAIN IN FORCE

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SHOWN

R. Valizadeh/V. Toan/Y.L./W.L./F.C.
DESIGN OVERSIGHT
SIGN OFF DATE 04/22/11

MARK	DATE	DESCRIPTIONS	BY	CH'D	CCO#
1	04/22/11	W2-OBG SAFETY CABLE	CC	JD	188
0	03/25/11	W2-OBG SAFETY CABLE	CC	JD	188

REVISIONS

	BY	CHECKED
DESIGN	C. Choi	J. Duxbury
DETAILS	L. Motal	C. Choi
QUANTITIES	L. Motal	C. Choi

PREPARED FOR THE STATE OF CALIFORNIA DEPARTMENT OF TRANSPORTATION

R. Manzanarez
PROJECT ENGINEER

BRIDGE NO. 34-0006L/R
KILOMETER POST 13.2/13.9

SAN FRANCISCO OAKLAND BAY BRIDGE
EAST SPAN SEISMIC SAFETY PROJECT
SELF-ANCHORED SUSPENSION BRIDGE
(SUPERSTRUCTURE & TOWER)

CROSSBEAM ACCESS DETAILS NO. 3B

Rev. Date: 5-18-98

ORIGINAL SCALE IN MILLIMETERS FOR REDUCED PLANS 0 10 20 30 40 50 60 70 80 90 100

CU 04
EA 0120F1

DISREGARD PRINTS BEARING EARLIER REVISION DATES → 03/25/11

REVISION DATES (PRELIMINARY STAGE ONLY)

SHEET 538S2R1 OF

FILE => I:\bb\04-012001\sas\contract plans and cco\cco\cco#188\2-revision 04-22-11\dgn\akcad03b.dgn