Ferguson Slide Restoration Project

Alternative T-3

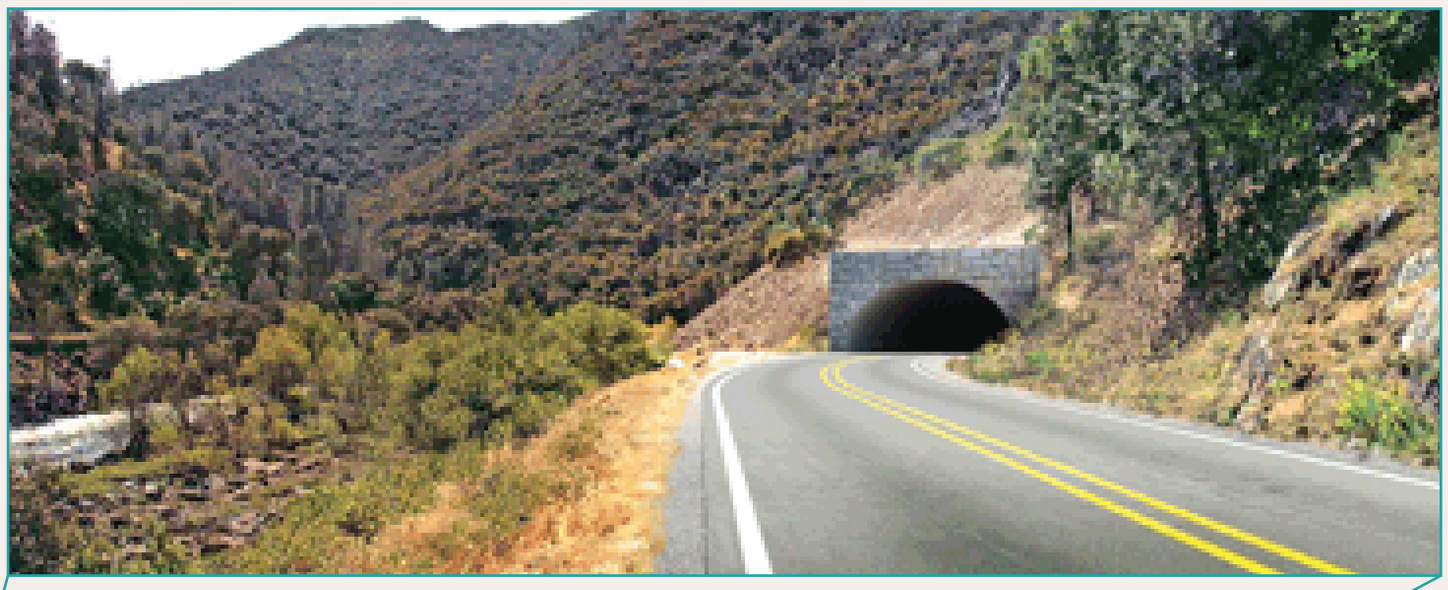

Construct a tunnel on a new alignment, tunneling into the west canyon wall, under the rockslide, and realigning with the existing highway. The approximate length of the tunnel would be 2200 feet. The tunnel would provide two 12-foot lanes, 8-foot outside shoulders, a 4-foot emergency walkway, and a 20-foot wide at grade clearing for rock fall.

Cost – $180 million

Caltrans

10-0P9200_jcl_eeb_12-2010