

Attachment 5 - Sample CCO—On-Street Parking



CITY	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

H. David Carlson
 REGISTERED CIVIL ENGINEER

June 6, 2008
 PLANS APPROVAL DATE

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

Hector David Kardava
 S-31-10
 STATE OF CALIFORNIA

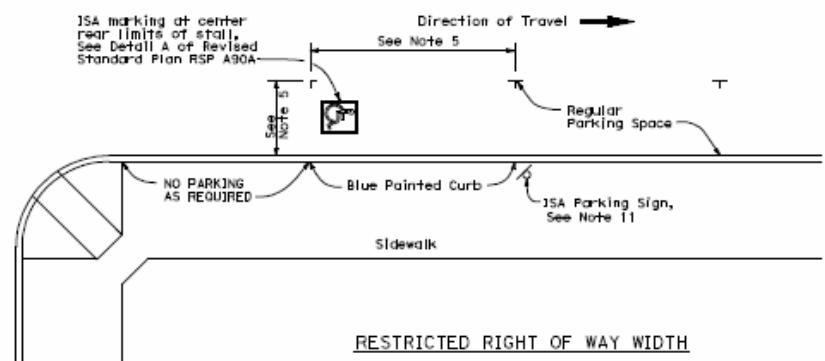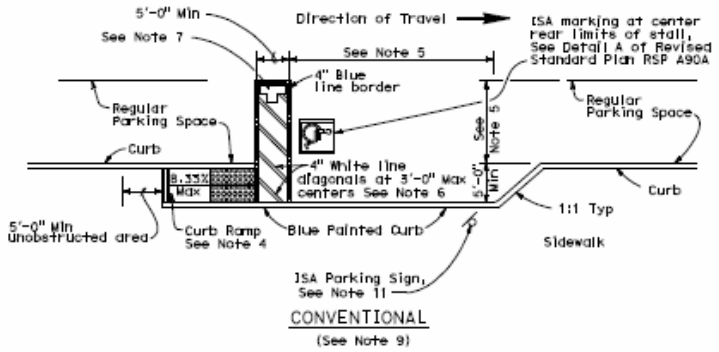

**NO
 PARKING**

PAVEMENT MARKING
 See Note 7

RESTRICTED RIGHT OF WAY WIDTH
ON-STREET PARKING
 (Parallel parking)
 (See Note 10)



SGN R99 (CA)



SGN R99C (CA)
 See Note 3



PLAQUE R99B (CA)
 SGN R99 (CA) with PLAQUE R99B (CA)
 See Note 3

NOTES:

1. Parking spaces shall be so located that persons with disabilities are not compelled to wheel or walk behind parked cars other than their own.
2. Surface slopes of accessible on-street parking spaces shall be the minimum feasible.
3. Where Plaque R99B (CA) or Sign R99C (CA) are installed, the bottom of the sign or plaque panel shall be a minimum of 7'-0" above the surrounding surface.
4. Curb ramps shall conform to the details shown on Revised Standard Plan RSP A88A.
5. Accessible on-street parking spaces shall not be smaller in length or width than that specified by the local jurisdiction for other parking spaces, but not less than 20'-0" in length and not less than 8'-0" in width.
6. Blue paint, instead of white may be used for marking accessibility aisles in areas where snow may cause white markings to not be visible.
7. The words "NO PARKING", shall be painted in white letters no less than 1'-0" high on a contrasting background and located so that it is visible to traffic enforcement officials. See Standard Plan A24E for square foot area for painting the words "NO PARKING".
8. There shall be no obstructions on the sidewalk adjacent to and for the full length of the parking space, except for the ISA parking sign shown.
9. The Conventional detail should be the primary choice of accessible on-street parking. However, if the sidewalk lacks adequate space to construct a standard curb ramp, the Restricted Right of Way detail should be used.
10. If the Restricted Right of Way width detail is selected and it conflicts with a bus stop or other uses, this detail may apply to the other end of the block.
11. Accessible Parking Only Sign shall be Sign R99C (CA) or Sign R99 (CA) with Plaque R99B (CA).

STATE OF CALIFORNIA
 DEPARTMENT OF TRANSPORTATION
**ACCESSIBLE PARKING
 ON-STREET**

NO SCALE
 RSP A90B DATED JUNE 6, 2008 SUPERSEDES STANDARD PLAN A90B
 DATED MAY 1, 2006 - PAGE 118 OF THE STANDARD PLANS BOOK DATED MAY 2006.

REVISED STANDARD PLAN RSP A90B

ISA = International Symbol of Accessibility