





DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS
 REGISTERED CIVIL ENGINEER					
May 20, 2011 PLANS APPROVAL DATE					
					
<small>THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.</small>					

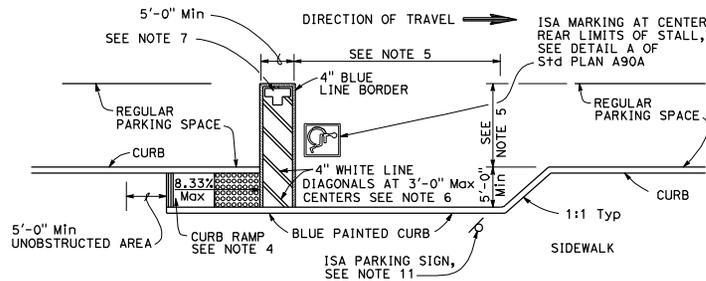

CONVENTIONAL
(See Note 9)

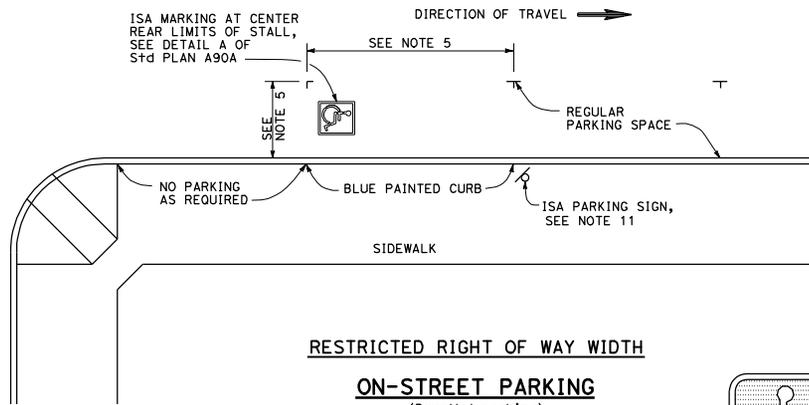

RESTRICTED RIGHT OF WAY WIDTH
ON-STREET PARKING
(Parallel parking)
(See Note 10)

**NO
PARKING**

PAVEMENT MARKING
See Note 7



SIGN R99 (CA)



PLAQUE R99B (CA)
SIGN R99 (CA) with PLAQUE R99B (CA)
See Note 3



SIGN R99C (CA)
See Note 3

NOTES:

- Parking spaces shall be so located that persons with disabilities are not compelled to wheel or walk behind parked cars other than their own.
- Surface slopes of accessible on-street parking spaces shall be the minimum feasible.
- Where Plaque R99B (CA) or Sign R99C (CA) are installed, the bottom of the sign or plaque panel shall be a minimum of 7'-0" above the surrounding surface.
- Curb ramps shall conform to the details shown on Standard Plan A88A.
- Accessible on-street parking spaces shall not be smaller in length or width than that specified by the local jurisdiction for other parking spaces, but not less than 20'-0" in length and not less than 8'-0" in width.
- Blue paint, instead of white may be used for marking accessibility aisles in areas where snow may cause white markings to not be visible.
- The words "NO PARKING", shall be painted in white letters no less than 1'-0" high on a contrasting background and located so that it is visible to traffic enforcement officials. See Standard Plan A24E for square foot area for painting the words "NO PARKING".
- There shall be no obstructions on the sidewalk adjacent to and for the full length of the parking space, except for the ISA parking sign shown.
- The Conventional detail should be the primary choice of accessible on-street parking. However, if the sidewalk lacks adequate space to construct a standard curb ramp, the Restricted Right of Way detail should be used.
- If the Restricted Right of Way width detail is selected and it conflicts with a bus stop or other uses, this detail may apply to the other end of the block.
- Accessible Parking Only Sign shall be Sign R99C (CA) or Sign R99 (CA) with Plaque R99B (CA).

LEGEND

ISA = International Symbol of Accessibility

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
**ACCESSIBLE PARKING
ON-STREET**

NO SCALE

A90B

2010 STANDARD PLAN A90B